DOD-STD-35-139(MI)

5 January 1979

Superseding
Section 2.0
MIL-STD-35-67
7 January 1974

MILITARY STANDARD

WIRE, ELECTRICAL

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U.S ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Wire, Electrical
Automated Engineering
Document Preparation System

DOD-STD-35-139(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-139(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Wire, Electrical.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirement Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE Formats	11
	5.3	Referenced documents	11
	5.4	Tabulation	11
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.5.1	Interrelationship of Codes	13
	5.5.2	Automatic MSE Data	13
	5.5.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	3
	II.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	117
	B.	Characteristic Code Index	125
		Index	129

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for electrical wire.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
WIRE, ELECTRICAL	035003	J-C-145	WEATHER RESIST.
		MIL-W-76	HOOKUP
		MIL-W-438	PRIMER
		MIL-W-3795	TINSEL
		MIL-W-5086	PVC OR COPPER
		MIL-W-5845	THERMOCOUPLE
		MIL-W-5846	THERMOCOUPLE
		MIL-W-5908	THERMOCOUPLE
		MIL-W-6370	ANTENNA
		MIL-W-7072	ALUMINUM
		MIL-W-7500	WS-31-U
		MIL-W-8777	SILICONE INSUL.
		MIL-W-12995	ANTENNA W-120
		MIL-W-13074	W-27 AND 19
		MIL-W-13075	W-124, 125, 128
		MIL-W-13154	ANTENNA
		MIL-W-13169	TEST LEADS
		MIL-W-13241	ANT. WS-12, 13
		MIL-W-13276	ANT. W-28
		MIL-W-16878	HIGH TEMP.
		MIL-W-17211	ANTENNA
		MIL-W-19150	HARD COPPER

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
WIRE, ELECTRICAL	035003 (CONT)	MIL-W-22759	TFE OR FEP INS.
		MIL-W-23740	SWITCHBOARD
		MIL-W-25038	HIGH TEMP.
		MIL-W-25136	W-106
		MIL-W-47206	HIGH TEMP.
		MIL-W-50557	HIGH TEMP.
		MIL-W-60904	POLYIMIDE INS.
		MIL-W-81044	PLASTIC INSUL.
		MIL-W-81381	POLYIMIDE INS.
		MIL-W-81822	SOLDERLESS WRAP
		MIL-W-82599	CADMIUM ALLOY
		MS25471	SILICONE INSUL.
		MS27110	SILICONE INSUL.
WIRE, ELECTRICAL, MAGNET	035006	J-W-001177	MAGNET WIRE
		MIL-W-583	MAGNET WIRE
WIRE, ELECTRICAL, UNINSULATED	035011	QQ-W-343	COPPER ALLOY
		QQ-W-345	HIGH STRENGTH
		MIL-W-3314	GALV. IRON
		MIL-W-47205	GOLD PLTD KOVAR
		MIL-W-47237	NICKEL-IRON
		MIL-W-82598	CADMIUM ALLOY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-W-5086	Wire, Electric, Hookup and Interconnecting, Polyvinyl Chloride-Insulated, Copper or Copper Alloy Conductor
MIL-W-16878	Wire, Electrical, Insulated, High Temperature
MIL-W-22759	Wire, Electric, Fluorocarbon-Insulated, Copper or Copper Alloy
MIL-W-81044	Wire, Electric, Crosslinked Polyalkene Insulated Copper
MIL-W-81381	Wire, Electric, Polyimide-Insulated Copper and Copper Alloy
MIL-W-81822	Wire, Electrical, Solderless Wrap, Insulated and Uninsulated

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-104	Limit for Electrical Insulation Color
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Electronic Component Parts Test Methods
MIL-STD-681	Identification Coding and Application of Hookup and Lead Wire
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FEDERAL

FED-STD-228	Cable and Wire, Insulated; Methods of Testing

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMB33	Tinned Soft or Annealed Copper Wire for Electrical Purposes, Specification For
ASTMB298	Silver-Coated Soft or Annealed Copper Wire, Specification For
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Wire, Electrical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for electrical wire, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to electrical wire.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to electrical wire.

4.3.2 Illustrations. Illustrations applicable to electrical wire are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Electrical Cable, Wire characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1576	CONDUCTOR SIZE (AWG)	1578	CONDUCTOR CROSS SECT (CIR MILS)	1580	CONDUCTOR CROSS SECT (SQ MM)
1582	CONDUCTOR DIAMETER (INCH)	1584	CONDUCTOR DIAMETER (MM)	1850	STRAND SIZE (AWG)
1882	MAX DIA INSUL COND (IN.)	1598	MAX DIA INSUL COND (MM)	1618	MIN JACKET DIA (IN.)
1990	MAX JACKET DIA (IN.)	1620	MIN JACKET DIA (MM)	1622	MAX JACKET DIA (MM)
1804	INSUL COLOR	1807	INSUL COLOR (NO.)	1630	BRAID COLOR
1634	BRAID COLOR (NO.)	1638	JACKET COLOR	1642	JACKET COLOR (NO.)
2074	MAX COND RES (OHMS/ 1000 FT)	2075	MAX COND RES (OHMS/KM)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

•6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MINIMUM OPERATING (DEGREES CELSIUS)	5068
ELECTRICAL RATINGS	
MAXIMUM VOLTAGE (VOLTS)	1572
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
	ELECTRICAL RATINGS.
1572	THE VOLTAGE SHALL BE NOT GREATER THAN 1572 VOLTS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
CONDUCTOR	
TYPE (SELECT ONE)	
SOLID.	1562
STRANDED.	1564
CONDUCTOR SIZE (AWG NUMBER)	1576
CONDUCTOR CROSS-SECTIONAL AREA (SELECT ONE)	
(CIRCULAR MILS)	1578
(SQUARE MILLIMETERS)	1580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1562	THE CONDUCTOR SHALL BE SOLID.
1564	THE CONDUCTOR SHALL BE STRANDED.
1576	THE CONDUCTOR SIZE SHALL BE 1576 AWG.
1578	THE CONDUCTOR CROSS-SECTIONAL AREA SHALL BE 1578 CIRCULAR MIL(S).
1580	THE CONDUCTOR CROSS-SECTIONAL AREA SHALL BE 1580 SQUARE MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONDUCTOR (CONT)	
CONDUCTOR DIAMETER (SELECT ONE)	
(INCHES)	1582
(MILLIMETERS)	1584
STRANDS PER CONDUCTOR (NUMBER)	1848
STRAND SIZE (AWG NUMBER)	1850
STRAND CROSS-SECTIONAL AREA (SELECT ONE)	
(CIRCULAR MILS)	1849
(SQUARE MILLIMETERS)	1586
STRAND DIAMETER (SELECT ONE)	
(INCHES)	1854
(MILLIMETERS)	1588
STRANDING METHOD	
TYPE LAY (SELECT ONE)	
COMPACT ROUND.	1861
CONVENTIONAL CONCENTRIC.	1862
EQUIVALAY.	1863

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1582	THE CONDUCTOR DIAMETER SHALL BE 1582 INCH(S).
1584	THE CONDUCTOR DIAMETER SHALL BE 1584 MILLIMETER(S).
1848	THE CONDUCTOR SHALL CONTAIN 1848 STRANDS.
1850	THE STRAND SIZE SHALL BE 1850 AWG.
1849	THE STRAND CROSS-SECTIONAL AREA SHALL BE 1849 CIRCULAR MIL(S).
1586	THE STRAND CROSS-SECTIONAL AREA SHALL BE 1586 SQUARE MILLIMETER(S).
1854	THE STRAND DIAMETER SHALL BE 1854 INCH(S).
1588	THE STRAND DIAMETER SHALL BE 1588 MILLIMETER(S).
1861	THE STRANDING METHOD SHALL BE COMPACT ROUND LAY.
1862	THE STRANDING METHOD SHALL BE CONVENTIONAL CONCENTRIC LAY.
1863	THE STRANDING METHOD SHALL BE EQUIVALAY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TYPE LAY (CONT)	
PARALLEL CORE.	1864
ROPE.	1865
UNIDIRECTIONAL.	1866
UNILAY.	1867
BUNCHED.	1590
LAY DIRECTION (SELECT ONE)	
RIGHT HAND.	1868
LEFT HAND.	1869
LAY LENGTH (SELECT ONE)	
(INCHES)	1872
(MILLIMETERS)	1592
STRANDING SPECIFICATION (DOC DES)	1594
PRIMARY OR SINGLE LAYER INSULATION	
MINIMUM THICKNESS (SELECT ONE)	
(INCHES)	1884
(MILLIMETERS)	1596

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1864	THE STRANDING METHOD SHALL BE PARALLEL CORE LAY.
1865	THE STRANDING METHOD SHALL BE ROPE LAY.
1866	THE STRANDING METHOD SHALL BE UNIDIRECTIONAL LAY.
1867	THE STRANDING METHOD SHALL BE UNILAY.
1590	THE STRANDING METHOD SHALL BE BUNCHED LAY.
1868	THE LAY DIRECTION SHALL BE RIGHT HAND.
1869	THE LAY DIRECTION SHALL BE LEFT HAND.
1872	THE LAY LENGTH SHALL BE 1872 INCH(S).
1592	THE LAY LENGTH SHALL BE 1592 INCH(S).
1594	THE STRANDING SPECIFICATION SHALL BE 1594.
1884	THE PRIMARY OR SINGLE LAYER INSULATION THICKNESS SHALL BE NOT LESS THAN 1884 INCH(S).
1596	THE PRIMARY OR SINGLE LAYER INSULATION THICKNESS SHALL BE NOT LESS THAN 1596 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PRIMARY OR SINGLE LAYER INSULATION (CONT)	
MAXIMUM OUTSIDE DIAMETER (SELECT ONE)	
(INCHES)	1882
(MILLIMETERS)	1598
WRAP 1	
TAPE OVERLAP (PERCENT)	1892
THICKNESS (SELECT ONE)	
(INCHES)	1896
(MILLIMETERS)	1600
PRIMARY BRAID	
BRAID YARN SIZE (GAGE)	1908
SECONDARY INSULATION	
MINIMUM THICKNESS (SELECT ONE)	
(INCHES)	1918
(MILLIMETERS)	1602

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1882	THE PRIMARY OR SINGLE LAYER INSULATION OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1882 INCH(S).
1598	THE PRIMARY OR SINGLE LAYER INSULATION OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1598 MILLIMETER(S).
1892	THE WRAP 1 TAPE OVERLAP SHALL BE 1892 PERCENT.
1896	THE WRAP 1 THICKNESS SHALL BE 1896 INCH(S).
1600	THE WRAP 1 THICKNESS SHALL BE 1600 MILLIMETER(S).
1908	THE PRIMARY INSULATION BRAID SHALL BE YARN SIZE 1908 GAGE.
1918	THE SECONDARY INSULATION THICKNESS SHALL BE NOT LESS THAN 1918 INCH(S).
1602	THE SECONDARY INSULATION THICKNESS SHALL BE NOT LESS THAN 1602 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SECONDARY INSULATION (CONT)	
MAXIMUM OUTSIDE DIAMETER (SELECT ONE)	
(INCHES)	1916
(MILLIMETERS)	1604
WRAP 2	
TAPE OVERLAP (PERCENT)	1924
THICKNESS (SELECT ONE)	
(INCHES)	1928
(MILLIMETERS)	1606
SECONDARY BRAID	
BRAID YARN SIZE (GAGE)	1948
TERTIARY INSULATION	
MINIMUM THICKNESS (SELECT ONE)	
(INCHES)	1608
(MILLIMETERS)	1610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1916	THE SECONDARY INSULATION OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1916 INCH(S).
1604	THE SECONDARY INSULATION OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1604 MILLIMETER(S).
1924	THE WRAP 2 TAPE OVERLAP SHALL BE 1924 PERCENT.
1928	THE WRAP 2 THICKNESS SHALL BE 1928 INCH(S).
1606	THE WRAP 2 THICKNESS SHALL BE 1606 MILLIMETER(S).
1948	THE SECONDARY INSULATION BRAID SHALL BE YARN SIZE 1948 GAGE.
1608	THE TERTIARY INSULATION THICKNESS SHALL BE NOT LESS THAN 1608 INCH(S).
1610	THE TERTIARY INSULATION THICKNESS SHALL BE NOT LESS THAN 1610 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERTIARY INSULATION (CONT)	
MAXIMUM OUTSIDE DIAMETER (SELECT ONE)	
(INCHES)	1612
(MILLIMETERS)	1614
WRAP 3	
TAPE OVERLAP (PERCENT)	1964
THICKNESS (SELECT ONE)	
(INCHES)	1968
(MILLIMETERS)	1616
SHIELD	
MINIMUM COVERAGE (PERCENT)	2022
BRAID ANGLE (SELECT ONE)	
(DEGREES)	2024
(RADIANS)	2025
THICKNESS (SELECT ONE)	
(INCHES)	2026
(MILLIMETERS)	2027

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1612	THE TERTIARY INSULATION OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1612 INCH(S).
1614	THE TERTIARY INSULATION OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1614 MILLIMETER(S).
1964	THE WRAP 3 TAPE OVERLAP SHALL BE 1964 PERCENT.
1968	THE WRAP 3 THICKNESS SHALL BE 1968 INCH(S).
1616	THE WRAP 3 THICKNESS SHALL BE 1616 MILLIMETER(S).
2022	THE SHIELD COVERAGE SHALL BE NOT LESS THAN 2022 PERCENT.
2024	THE SHIELD BRAID ANGLE SHALL BE 2024 DEGREE(S).
2025	THE SHIELD BRAID ANGLE SHALL BE 2025 RADIAN(S).
2026	THE SHIELD THICKNESS SHALL BE 2026 INCH(S).
2027	THE SHIELD THICKNESS SHALL BE 2027 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
JACKET	
DIAMETER (SELECT ONE)	
U.S.	
MINIMUM (INCHES)	1618
MAXIMUM (INCHES)	1990
SI	
MINIMUM (MILLIMETERS)	1620
MAXIMUM (MILLIMETERS)	1622
MINIMUM THICKNESS (SELECT ONE)	
(INCHES)	1994
(MILLIMETERS)	1624
JACKET BRAID	
MAXIMUM DIAMETER (SELECT ONE)	
(INCHES)	2002
(MILLIMETERS)	1626

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1618	THE JACKET OUTSIDE DIAMETER SHALL BE NOT LESS THAN 1618 INCH(S).
1990	THE JACKET OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1990 INCH(S).
1620	THE JACKET OUTSIDE DIAMETER SHALL BE NOT LESS THAN 1620 MILLIMETER(S).
1622	THE JACKET OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1622 MILLIMETER(S).
1994	THE JACKET THICKNESS SHALL BE NOT LESS THAN 1994 INCH(S).
1624	THE JACKET THICKNESS SHALL BE NOT LESS THAN 1624 MILLIMETER(S).
2002	THE JACKET BRAID OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 2002 INCH(S).
1626	THE JACKET BRAID OUTSIDE DIAMETER SHALL BE NOT GREATER THAN 1626 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
JACKET BRAID (CONT)	
MAXIMUM THICKNESS (SELECT ONE)	
(INCHES)	2004
(MILLIMETERS)	1628
COLOR	
INSULATION (SELECT ONE)	
PER MIL-STD-104	
(NAME)	1804
*CLASS (NUMBER)	1806
PER MIL-STD-681 (IDENTIFICATION NUMBER)	1807
CLASS PER MIL-STD-104 (NUMBER)	1808
BRAID (SELECT ONE)	
PER MIL-STD-104	
(NAME)	1630
*CLASS (NUMBER)	1632

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2004	THE JACKET BRAID THICKNESS SHALL BE NOT GREATER THAN 2004 INCH(S).
1628	THE JACKET BRAID THICKNESS SHALL BE NOT GREATER THAN 1628 MILLIMETER(S).
1804	THE INSULATION COLOR SHALL BE 1804 IN ACCORDANCE WITH MIL-STD-104.
1806	THE INSULATION COLOR CLASS SHALL BE 1806.
1807	THE INSULATION COLOR NUMBER SHALL BE 1807 IN ACCORDANCE WITH MIL-STD-681.
1808	THE INSULATION COLOR CLASS SHALL BE 1808 IN ACCORDANCE WITH MIL-STD-104.
1630	THE BRAID COLOR SHALL BE 1630 IN ACCORDANCE WITH MIL-STD-104.
1632	THE BRAID COLOR CLASS SHALL BE 1632.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
BRAID (CONT)	
PER MIL-STD-681 (IDENTIFICATION NUMBER)	1634
CLASS PER MIL-STD-104 (NUMBER)	1636
JACKET (SELECT ONE)	
PER MIL-STD-104	
(NAME)	1638
*CLASS (NUMBER)	1640
PER MIL-STD-681 (IDENTIFICATION NUMBER)	1642
CLASS PER MIL-STD-104 (NUMBER)	1644
IDENTIFICATION	
COLOR CODE (DOC DES)	1646
MARKER THREAD.	1648

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1634	THE BRAID COLOR NUMBER SHALL BE 1634 IN ACCORDANCE WITH MIL-STD-681.
1636	THE BRAID COLOR CLASS SHALL BE 1636 IN ACCORDANCE WITH MIL-STD-104.
1638	THE JACKET COLOR SHALL BE 1638 IN ACCORDANCE WITH MIL-STD-104.
1640	THE JACKET COLOR CLASS SHALL BE 1640.
1642	THE JACKET COLOR NUMBER SHALL BE 1642 IN ACCORDANCE WITH MIL-STD-681.
1644	THE JACKET COLOR CLASS SHALL BE 1644 IN ACCORDANCE WITH MIL-STD-104.
1646	THE IDENTIFICATION COLOR CODE SHALL BE IN ACCORDANCE WITH 1646.
1648	THE IDENTIFICATION SHALL BE BY MARKER THREAD.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
IDENTIFICATION (CONT)	
SURFACE MARKING.	1650
MARKING (SPECIFY)	1652
INTERVAL (SELECT ONE)	
(INCHES)	1654
(MILLIMETERS)	1656
CHARACTER HEIGHT (SELECT ONE)	
(INCHES)	1658
(MILLIMETERS)	1660
SURFACE CONDITION SUITABLE FOR BONDING.	1662
WEIGHT	
MAXIMUM WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S.	
PER 1000 FEET (POUNDS)	7347

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1650	THE IDENTIFICATION SHALL BE BY SURFACE MARKING.
1652	THE IDENTIFICATION MARKING SHALL BE 1652.
1654	THE IDENTIFICATION MARKING INTERVAL SHALL BE 1654 INCH(S).
1656	THE IDENTIFICATION MARKING INTERVAL SHALL BE 1656 MILLIMETER(S).
1658	THE IDENTIFICATION MARKING CHARACTER HEIGHT SHALL BE 1658 INCH(S).
1660	THE IDENTIFICATION MARKING CHARACTER HEIGHT SHALL BE 1660 MILLIMETER(S).
1662	THE SURFACE CONDITION OF THE WIRE SHALL BE CLEAN, DRY, AND FREE OF ANY COATING, FILM, OR OTHER TREATMENT WHICH WOULD INTERFERE WITH BONDING TO ENCAPSULATING OR MOLDING MATERIALS NORMALLY USED IN SPLICING OR TERMINATING.
7347	MAXIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT GREATER THAN 7347 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT (CONT)	
MAXIMUM WEIGHT PER UNIT LENGTH (CONT)	
SI	
PER METER (GRAMS)	7400
MINIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S.	
PER 1000 FEET (POUNDS)	7059
SI	
PER METER (GRAMS)	7348
ABRASION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2338
MINIMUM ABRASION RESISTANCE (SELECT ONE)	
(INCHES OF TAPE)	2340
(MILLIMETERS OF TAPE)	2341

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
7400	MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).
7059	MINIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT LESS THAN 7059 POUND(S).
7348	MINIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT LESS THAN 7348 GRAM(S).
2338	ABRASION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2338.
2340	ABRASION RESISTANCE. THE ABRASION RESISTANCE SHALL BE NOT LESS THAN 2340 INCH(S) OF TAPE.
2341	ABRASION RESISTANCE. THE ABRASION RESISTANCE SHALL BE NOT LESS THAN 2341 MILLIMETER(S) OF TAPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ABRASION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2332
PER FED-STD-228, METHOD 2211.	2334
TENSION LOAD (SELECT ONE)	
(POUNDS)	2331
(KILOGRAMS)	2333
WEIGHT (SELECT ONE)	
(POUNDS)	2335
(KILOGRAMS)	2337
ABRASIVE TAPE (TYPE)	2339
NUMBER OF SPECIMENS (NUMBER)	2343
ACCELERATED AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2808
NO CRACKS, DIELECTRIC BREAKDOWN, PITTING.	2810

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2332	ABRASION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2332.
2334	ABRASION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2211 OF FED-STD-228.
2331	THE TENSION LOAD SHALL BE 2331 POUND(S).
2333	THE TENSION LOAD SHALL BE 2333 KILOGRAM(S).
2335	THE WEIGHT SHALL BE 2335 POUND(S).
2337	THE WEIGHT SHALL BE 2337 KILOGRAM(S).
2339	THE ABRASIVE TAPE SHALL BE TYPE 2339.
2343	THE NUMBER OF SPECIMENS SHALL BE 2343.
2808	ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2808.
2810	ACCELERATED AGING. THERE SHALL BE NO CRACKS, NO DIELECTRIC BREAKDOWN, NO PITTING, AND PRODUCT IDENTIFICATION SHALL BE LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED AGING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2790
PER MIL-W-81044.	2789
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2794
(MILLIMETERS)	2791
WEIGHT (SELECT ONE)	
(POUNDS)	2793
(KILOGRAMS)	2795
TEMPERATURE (DEGREES CELSIUS)	2800
DIELECTRIC VOLTAGE (VOLTS AC)	2801
BLOCKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2306
NO BLOCKING OF ADJACENT TURNS.	2308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2790	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2790.
2789	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81044.
2794	THE MANDREL DIAMETER SHALL BE 2794 INCH(S).
2791	THE MANDREL DIAMETER SHALL BE 2791 MILLIMETER(S).
2793	THE WEIGHT SHALL BE 2793 POUND(S).
2795	THE WEIGHT SHALL BE 2795 KILOGRAM(S).
2800	THE TEST TEMPERATURE SHALL BE 2800 DEGREES CELSIUS.
2801	THE DIELECTRIC VOLTAGE SHALL BE 2801 VOLT(S) AC.
2306	BLOCKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2306.
2308	BLOCKING. THERE SHALL BE NO BLOCKING OF ADJACENT TURNS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BLOCKING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2290
PER MIL-W-22759.	2291
BARREL DIAMETER (SELECT ONE)	
(INCHES)	2293
(MILLIMETERS)	2295
TENSION (SELECT ONE)	
(POUNDS)	2297
(KILOGRAMS)	2299
TEMPERATURE (DEGREES CELSIUS)	2300
CONCENTRICITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2624
AS FOLLOWS:	2625
MINIMUM PRIMARY INSULATION CONCENTRICITY (PERCENT)	2626

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2290	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2290.
2291	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2293	THE BARREL DIAMETER SHALL BE 2293 INCH(S).
2295	THE BARREL DIAMETER SHALL BE 2295 MILLIMETER(S).
2297	THE TENSION SHALL BE 2297 POUND(S).
2299	THE TENSION SHALL BE 2299 KILOGRAM(S).
2300	THE TEST TEMPERATURE SHALL BE 2300 DEGREES CELSIUS.
2624	CONCENTRICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2624.
2625	CONCENTRICITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2626	THE PRIMARY INSULATION CONCENTRICITY SHALL BE NOT LESS THAN 2626 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONCENTRICITY (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM SECONDARY INSULATION CONCENTRICITY (PERCENT)	2627
MINIMUM FINISHED WIRE CONCENTRICITY (PERCENT)	2629
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2618
PER MIL-W-5086.	2620
CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2422
PER ASTMB33.	2424
PER ASTMB298.	2426

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2627	THE SECONDARY INSULATION CONCENTRICITY SHALL BE NOT LESS THAN 2627 PERCENT.
2629	THE FINISHED WIRE CONCENTRICITY SHALL BE NOT LESS THAN 2629 PERCENT.
2618	CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2618.
2620	CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-5086.
2422	CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2422.
2424	CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH ASTMB33.
2426	CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH ASTMB298.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2414
PER ASTMB33.	2416
PER ASTMB298.	2418
CONDUCTOR ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2350
MINIMUM ELONGATION (PERCENT)	2352
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344
PER FED-STD-228.	2345
*METHOD (SELECT ONE)	
3211, SOFT.	2346

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2414	CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2414.
2416	CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB33.
2418	CONDUCTOR COATING OR PLATING CONTINUITY AND ADHERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB298.
2350	CONDUCTOR ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.
2352	CONDUCTOR ELONGATION. THE CONDUCTOR ELONGATION SHALL BE NOT LESS THAN 2352 PERCENT.
2344	CONDUCTOR ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.
2345	CONDUCTOR ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2346	TEST METHOD 3211 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR ELONGATION (CONT)	
METHOD (CONT)	
3212, HARD.	2347
NUMBER OF SPECIMENS (NUMBER)	2349
CONDUCTOR RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
MAXIMUM CONDUCTOR RESISTANCE (SELECT ONE)	
(OHMS PER 1000 FEET)	2074
(OHMS PER KILOMETER)	2075
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2064
PER FED-STD-228, METHOD 6021.	2065
TEST TYPE (SELECT ONE)	
FACTORY.	2068
LABORATORY.	2069
IMMERSION PERIOD (HOURS)	2066
NUMBER OF SPECIMENS (NUMBER)	2067

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2347	TEST METHOD 3212 SHALL APPLY.
2349	THE NUMBER OF SPECIMENS SHALL BE 2349.
2072	CONDUCTOR RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.
2074	CONDUCTOR RESISTANCE. THE CONDUCTOR RESISTANCE SHALL BE NOT GREATER THAN 2074 OHM(S) PER 1000 FEET.
2075	CONDUCTOR RESISTANCE. THE CONDUCTOR RESISTANCE SHALL BE NOT GREATER THAN 2075 OHM(S) PER KILOMETER.
2064	CONDUCTOR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2064.
2065	CONDUCTOR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6021 OF FED-STD-228.
2068	THE TEST TYPE SHALL BE FACTORY.
2069	THE TEST TYPE SHALL BE LABORATORY.
2066	THE IMMERSION PERIOD SHALL BE 2066 HOUR(S).
2067	THE NUMBER OF SPECIMENS SHALL BE 2067.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2362
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2364
(KILOPASCALS)	2365
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2356
PER FED-STD-228.	2357
*METHOD (SELECT ONE)	
3211, SOFT.	2358
3212, HARD.	2359
NUMBER OF SPECIMENS (NUMBER)	2361
CURL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2822

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2362	CONDUCTOR TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.
2364	CONDUCTOR TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2364 POUNDS PER SQUARE INCH.
2365	CONDUCTOR TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2365 KILOPASCAL(S).
2356	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2356.
2357	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2358	TEST METHOD 3211 SHALL APPLY.
2359	TEST METHOD 3212 SHALL APPLY.
2361	THE NUMBER OF SPECIMENS SHALL BE 2361.
2822	CURL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2822.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURL (CONT)	
REQUIREMENTS (CONT)	
MINIMUM CURL DIAMETER (SELECT ONE)	
(INCHES)	2824
(MILLIMETERS)	2825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2816
PER MIL-W-81822.	2817
NUMBER OR SPECIMENS (NUMBER)	2818
DIELECTRIC TANK TEST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2464
NO DIELECTRIC BREAKDOWN.	2466
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2824	CURL. THE CURL OF THE WIRE SHALL BE NOT LESS THAN 2824 INCH(S).
2825	CURL. THE CURL OF THE WIRE SHALL BE NOT LESS THAN 2825 MILLIMETER(S).
2816	CURL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2816.
2817	CURL. TESTING SHALL BE IN ACCORDANCE WITH MIL-W-81822.
2818	THE NUMBER OF SPECIMENS SHALL BE 2818.
2464	DIELECTRIC TANK TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2464.
2466	DIELECTRIC TANK TEST. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
2446	DIELECTRIC TANK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC TANK TEST (CONT)	
TEST METHODS (CONT)	
PER MIL-W-22759.	2447
WETTING AGENT (NAME)	2449
SOLUTION (PERCENT)	2450
PH (NUMBER)	2452
VOLTAGE (VOLTS AC)	2456
IMMERSION DURATION (HOURS)	2457
DURABILITY OF IDENTIFICATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2612
CYCLES (NUMBER)	2613
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2600
PER MIL-W-22759.	2601

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2447	DIELECTRIC TANK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2449	THE WETTING AGENT SHALL BE 2449.
2450	THE WETTING AGENT SOLUTION SHALL BE 2450 PERCENT.
2452	THE WETTING AGENT SOLUTION PH SHALL BE 2452.
2456	THE TEST VOLTAGE SHALL BE 2456 VOLT(S) AC.
2457	THE IMMERSION DURATION SHALL BE 2457 HOUR(S).
2612	DURABILITY OF IDENTIFICATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2612.
2613	DURABILITY OF IDENTIFICATION. THE NUMBER OF CYCLES REQUIRED TO REMOVE A CONTINUOUS LINE OF IDENTIFICATION SHALL BE NOT GREATER THAN 2613.
2600	DURABILITY OF IDENTIFICATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2600.
2601	DURABILITY OF IDENTIFICATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY OF IDENTIFICATION (CONT)	
PER MIL-W-22759. (CONT)	
WEIGHT (SELECT ONE)	
(OUNCES)	2603
(GRAMS)	2604
EXTRUDED INSULATION WRAP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2668
NO CRACKS.	2670
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2654
PER MIL-W-5086.	2655
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2656
(MILLIMETERS)	2657
AGING PERIOD (HOURS)	2662
OVEN TEMPERATURE (DEGREES CELSIUS)	2660

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2603	THE TEST WEIGHT SHALL BE 2603 OUNCE(S).
2604	THE TEST WIEGHT SHALL BE 2604 GRAM(S).
2668	EXTRUDED INSULATION WRAP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2668.
2670	EXTRUDED INSULATION WRAP. THERE SHALL BE NO EVIDENCE OF CRACKS.
2654	EXTRUDED INSULATION WRAP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2654.
2655	EXTRUDED INSULATION WRAP. TESTING SHALL BE IN ACCORDANCE WITH MIL-W-5086.
2656	THE MANDREL DIAMETER SHALL BE 2656 INCH(S).
2657	THE MANDREL DIAMETER SHALL BE 2657 MILLIMETER(S).
2662	THE AGING PERIOD SHALL BE 2662 HOUR(S).
2660	THE OVEN TEMPERATURE SHALL BE 2660 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2228
AS FOLLOWS:	2229
MAXIMUM FLAME DISTANCE (SELECT ONE)	
(INCHES)	2232
(MILLIMETERS)	2231
MAXIMUM FLAME DURATION (SECONDS)	2230
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2216
PER FED-STD-228.	2218
*METHOD (SELECT ONE)	
5211.	2217
5221.	2219
5231.	2221
HEATING DURATION (SECONDS)	2224
NUMBER OF SPECIMENS (NUMBER)	2225

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2228	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2228.
2229	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2232	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2232 INCH(S).
2231	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2231 MILLIMETER(S).
2230	THE FLAME DURATION SHALL BE NOT GREATER THAN 2230 SECOND(S).
2216	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2216.
2218	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2217	TEST METHOD 5211 SHALL APPLY.
2219	TEST METHOD 5221 SHALL APPLY.
2221	TEST METHOD 5231 SHALL APPLY.
2224	THE HEATING DURATION SHALL BE 2224 SECOND(S).
2225	THE NUMBER OF SPECIMENS SHALL BE 2225.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1670
NO BREAKING, FLAKING, CRACKING, OR DEGRADATION	1672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1674
PER FED-STD-228, METHOD 2041.	1676
NUMBER OF SPECIMENS (NUMBER)	1678
TEMPERATURE (DEGREES CELSIUS)	1680
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1670	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1670.
1672	FLEXIBILITY. THERE SHALL BE NO BREAKING, FLAKING, CRACKING, AND NO DEGRADATION.
1674	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.
1676	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2041 OF FED-STD-228.
1678	THE NUMBER OF SPECIMENS SHALL BE 1678.
1680	THE TEST TEMPERATURE SHALL BE 1680 DEGREES CELSIUS.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2282
MINIMUM INSULATION RESISTANCE (SELECT ONE)	
(OHMS PER 1000 FEET)	2286
(OHMS PER KILOMETER)	2287
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2260
PER MIL-W-22759.	2261
TEMPERATURE (DEGREES CELSIUS)	2264
HEATING DURATION (HOURS)	2268

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2282	HUMIDITY RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2282.
2286	HUMIDITY RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2286 OHM(S) PER 1000 FEET.
2287	HUMIDITY RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2287 OHM(S) PER KILOMETER.
2260	HUMIDITY RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2260.
2261	HUMIDITY RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2264	THE TEST TEMPERATURE SHALL BE 2264 DEGREES CELSIUS.
2268	THE HEATING DURATION SHALL BE 2268 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY RESISTANCE (CONT)	
PER MIL-W-22759. (CONT)	
COOLING DURATION (HOURS)	2269
TOTAL TEST DURATION (HOURS)	2270
TEST VOLTAGE (VOLTS DC)	2276
HYDROGEN EMBRITTLEMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2390
MINIMUM NUMBER OF BENDS (NUMBER)	2392
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2368
PER MIL-W-81822.	2369
HYDROGEN CONTENT (PERCENT)	2374
TEMPERATURE (DEGREES CELSIUS)	2380
DURATION (MINUTES)	2378
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2269	THE COOLING DURATION SHALL BE 2269 HOUR(S).
2270	THE TOTAL TEST DURATION SHALL BE 2270 HOUR(S).
2276	THE TEST VOLTAGE SHALL BE 2276 VOLT(S) DC.
2390	HYDROGEN EMBRITTLEMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2390.
2392	HYDROGEN EMBRITTLEMENT. THE NUMBER OF BENDS SHALL BE NOT LESS THAN 2392.
2368	HYDROGEN EMBRITTLEMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2368.
2369	HYDROGEN EMBRITTLEMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81822.
2374	THE HYDROGEN CONTENT SHALL BE 2374 PERCENT.
2380	THE TEST TEMPERATURE SHALL BE 2380 DEGREES CELSIUS.
2378	THE HEATING DURATION SHALL BE 2378 MINUTE(S).
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM DIAMETER INCREASE (PERCENT)	2762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-W-22759.	2745
FLUIDS (NAME)	2746
IMMERSION PERIODS (HOURS)	2748
TEMPERATURES (DEGREES CELSIUS)	2750
IMPULSE DIELECTRIC TEST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2490
NO DIELECTRIC BREAKDOWN.	2492
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2470
PER MIL-W-22759.	2471

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2762	IMMERSION. THE DIAMETER INCREASE SHALL BE NOT GREATER THAN 2762 PERCENT.
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
2745	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2746	THE FLUID(S) SHALL BE 2746.
2748	THE IMMERSION PERIOD(S) SHALL BE 2748 HOUR(S).
2750	THE TEST TEMPERATURE(S) SHALL BE 2750 DEGREES CELSIUS.
2490	IMPULSE DIELECTRIC TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2490.
2492	IMPULSE DIELECTRIC TEST. THERE SHALL BE NO DIELECTRIC BREAKDOWN.
2470	IMPULSE DIELECTRIC TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2470.
2471	IMPULSE DIELECTRIC TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPULSE DIELECTRIC TEST (CONT)	
PER MIL-W-22759. (CONT)	
VOLTAGE (KILOVOLTS PEAK)	2484
PULSE DURATION (MICROSECONDS)	2485
REPETITION RATE (PULSES PER SECOND)	2487
INSULATION COLD FLOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2910
NO ELECTRICAL BREAKDOWN.	2912
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2894
PER MIL-W-81822.	2895
CUTTING LOAD (SELECT ONE)	
(OUNCES)	2897
(GRAMS)	2902
TEST PERIOD (HOURS)	2904
DIELECTRIC VOLTAGE (VOLTS AC)	2899

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2484	THE TEST VOLTAGE SHALL BE 2484 KILOVOLT(S) PEAK.
2485	THE PULSE DURATION SHALL BE 2485 MICROSECOND(S).
2487	THE PULSE REPETITION RATE SHALL BE 2487 PULSE(S) PER SECOND.
2910	INSULATION COLD FLOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2910.
2912	INSULATION COLD FLOW. THE CUTTING EDGE SHALL NOT PENETRATE TO THE CONDUCTOR AND THERE SHALL BE NO ELECTRICAL BREAKDOWN.
2894	INSULATION COLD FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2894.
2895	INSULATION COLD FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81822.
2897	THE CUTTING LOAD SHALL BE 2897 OUNCE(S).
2902	THE CUTTING LOAD SHALL BE 2902 GRAM(S).
2904	THE TEST PERIOD SHALL BE 2904 HOUR(S).
2899	THE DIELECTRIC TEST VOLTAGE SHALL BE 2899 VOLT(S) AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION CORROSIVE EFFECT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2580
MAXIMUM RESISTANCE INCREASE (PERCENT)	2582
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2574
PER MIL-W-5086.	2576
TEST DURATION (HOURS)	2584
INSULATION CUT-THROUGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2888
NO ELECTRICAL BREAKDOWN.	2890
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2580	INSULATION CORROSIVE EFFECT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2580.
2582	INSULATION CORROSIVE EFFECT. THE RESISTANCE INCREASE SHALL BE NOT GREATER THAN 2582 PERCENT.
2574	INSULATION CORROSIVE EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2574.
2576	INSULATION CORROSIVE EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-5086.
2584	THE TEST DURATION SHALL BE 2584 HOUR(S).
2888	INSULATION CUT-THROUGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2888.
2890	INSULATION CUT-THROUGH. THE CUTTING EDGE SHALL NOT PENETRATE TO THE CONDUCTOR AND THERE SHALL BE NO ELECTRICAL BREAKDOWN.
2870	INSULATION CUT-THROUGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION CUT-THROUGH (CONT)	
TEST METHODS (CONT)	
PER MIL-W-81822.	2871
CUTTING LOAD (SELECT ONE)	
(OUNCES)	2873
(GRAMS)	2878
TEST PERIOD (MINUTES)	2880
DIELECTRIC VOLTAGE (VOLTS AC)	2882
INSULATION DIELECTRIC CONSTANT AND POWER FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2048
MAXIMUM POWER FACTOR (NUMBER)	2049
*MAXIMUM DIELECTRIC CONSTANT (NUMBER)	2050
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2039
PER MIL-W-81822.	2046

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2871	INSULATION CUT-THROUGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81822.
2873	THE CUTTING LOAD SHALL BE 2873 OUNCE(S).
2878	THE CUTTING LOAD SHALL BE 2878 GRAM(S).
2880	THE TEST PERIOD SHALL BE 2880 MINUTE(S).
2882	THE DIELECTRIC TEST VOLTAGE SHALL BE 2882 VOLT(S) AC.
2048	INSULATION DIELECTRIC CONSTANT AND POWER FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2048.
2049 2050	INSULATION DIELECTRIC CONSTANT AND POWER FACTOR. THE POWER FACTOR SHALL BE NOT GREATER THAN 2049 AND THE DIELECTRIC CONSTANT SHALL BE NOT GREATER THAN 2050.
2039	INSULATION DIELECTRIC CONSTANT AND POWER FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2039.
2046	INSULATION DIELECTRIC CONSTANT AND POWER FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81822.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION DIELECTRIC CONSTANT AND POWER FACTOR (CONT)	
PER MIL-W-81822. (CONT)	
TEST FREQUENCY (HERTZ)	2044
INSULATION HEAT DISTORTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1690
MAXIMUM CHANGE IN THICKNESS (PERCENT)	1692
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1694
PER FED-STD-228, METHOD 5021.	1696
TEMPERATURE (DEGREES CELSIUS)	1698
TEST PERIOD (HOURS)	1700
WEIGHT (SELECT ONE)	
(OUNCES)	1702
(GRAMS)	1704
NUMBER OF SPECIMENS (NUMBER)	1706

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2044	THE TEST FREQUENCY SHALL BE 2044 HERTZ.
1690	INSULATION HEAT DISTORTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1690.
1692	INSULATION HEAT DISTORTION. THE CHANGE IN THICKNESS SHALL BE NOT GREATER THAN 1692 PERCENT.
1694	INSULATION HEAT DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1694.
1696	INSULATION HEAT DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5021 OF FED-STD-228.
1698	THE TEST TEMPERATURE SHALL BE 1698 DEGREES CELSIUS.
1700	THE TEST PERIOD SHALL BE 1700 HOUR(S).
1702	THE WEIGHT SHALL BE 1702 OUNCE(S).
1704	THE WEIGHT SHALL BE 1704 GRAM(S).
1706	THE NUMBER OF SPECIMENS SHALL BE 1706.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION HEAT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2242
NO PHYSICAL DAMAGE, ELECTRICAL BREAKDOWN, OR DISCOLORATION.	2247
MAXIMUM SHRINKAGE (SELECT ONE)	
(INCHES)	2244
(MILLIMETERS)	2245
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2236
PER MIL-W-81822.	2237
TEMPERATURE (DEGREES CELSIUS)	2239
DIELECTRIC VOLTAGE (VOLTS AC)	2241
TEST PERIOD (HOURS)	2243
INSULATION OR JACKET AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2528

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2242	INSULATION HEAT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2247	INSULATION HEAT RESISTANCE. THERE SHALL BE NO PHYSICAL DAMAGE, NO ELECTRICAL BREAKDOWN, AND NO DISCOLORATION.
2244	THE SHRINKAGE SHALL BE NOT GREATER THAN 2244 INCH(S).
2245	THE SHRINKAGE SHALL BE NOT GREATER THAN 2245 MILLIMETER(S).
2236	INSULATION HEAT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2236.
2237	INSULATION HEAT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81822.
2239	THE TEST TEMPERATURE SHALL BE 2239 DEGREES CELSIUS.
2241	THE DIELECTRIC TEST VOLTAGE SHALL BE 2241 VOLT(S) AC.
2243	THE TEST PERIOD SHALL BE 2243 HOUR(S).
2528	INSULATION OR JACKET AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2528.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION OR JACKET AGING (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM CHANGE IN CHARACTERISTIC (PERCENT)	2530
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2520
PER FED-STD-228, METHOD 4031.	2524
TEMPERATURE (DEGREES CELSIUS)	2521
TEST PERIOD (HOURS)	2523
NUMBER OF SPECIMENS (NUMBER)	2525
INSULATION OR JACKET ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2514
MINIMUM ELONGATION (PERCENT)	2516
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2508

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2530	INSULATION OR JACKET AGING. THE CHANGE IN CHARACTERISTIC SHALL BE NOT GREATER THAN 2530 PERCENT.
2520	INSULATION OR JACKET AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2520.
2524	INSULATION OR JACKET AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4031 OF FED-STD-228.
2521	THE TEST TEMPERATURE SHALL BE 2521 DEGREES CELSIUS.
2523	THE TEST PERIOD SHALL BE 2523 HOUR(S).
2525	THE NUMBER OF SPECIMENS SHALL BE 2525.
2514	INSULATION OR JACKET ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2514.
2516	INSULATION OR JACKET ELONGATION. THE ELONGATION SHALL BE NOT LESS THAN 2516 PERCENT.
2508	INSULATION OR JACKET ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2508.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION OR JACKET ELONGATION (CONT)	
TEST METHODS (CONT)	
PER FED-STD-228, METHOD 3031.	2510
NUMBER OR SPECIMENS (NUMBER)	2509
INSULATION OR JACKET TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2568
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2570
(KILOPASCALS)	2569
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2562
PER FED-STD-228, METHOD 3021.	2564
NUMBER OF SPECIMENS (NUMBER)	2563

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2510	INSULATION OR JACKET ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3031 OF FED-STD-228.
2509	THE NUMBER OF SPECIMENS SHALL BE 2509.
2568	INSULATION OR JACKET TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2568.
2570	INSULATION OR JACKET TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2570 POUND(S) PER SQUARE INCH.
2569	INSULATION OR JACKET TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2569 KILOPASCAL(S).
2562	INSULATION OR JACKET TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2562.
2564	INSULATION OR JACKET TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3021 OF FED-STD-228.
2563	THE NUMBER OF SPECIMENS SHALL BE 2563.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION PULL-OFF FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2594
AS FOLLOWS:	2592
PULL-OFF FORCE (SELECT ONE)	
U.S.	
MINIMUM (POUNDS)	2593
MAXIMUM (POUNDS)	2595
SI	
MINIMUM (KILOGRAMS)	2597
MAXIMUM (KILOGRAMS)	2599
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2588
PER MIL-W-81822.	2587
LENGTH OF SPECIMEN (SELECT ONE)	
(INCHES)	2589
(MILLIMETERS)	2591

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2594	INSULATION PULL-OFF FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2594.
2592	INSULATION PULL-OFF FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2593	THE PULL-OFF FORCE SHALL BE NOT LESS THAN 2593 POUND(S).
2595	THE PULL-OFF FORCE SHALL BE NOT GREATER THAN 2595 POUND(S).
2597	THE PULL-OFF FORCE SHALL BE NOT LESS THAN 2597 KILOGRAM(S).
2599	THE PULL-OFF FORCE SHALL BE NOT GREATER THAN 2599 KILOGRAM(S).
2588	INSULATION PULL-OFF FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2588.
2587	INSULATION PULL-OFF FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81822.
2589	THE LENGTH OF THE SPECIMEN SHALL BE 2589 INCH(S).
2591	THE LENGTH OF THE SPECIMEN SHALL BE 2591 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
MINIMUM RESISTANCE (SELECT ONE)	
(MEGOHMS PER 1000 FEET)	2086
(MEGOHMS PER KILOMETER)	2085
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER FED-STD-228, METHOD 6031.	2079
TEST VOLTAGE (VOLTS DC)	2080
PERIOD AFTER CIRCUIT CLOSED (MINUTES)	2081
IMMERSION MEDIUM (NAME)	2083
TEMPERATURE (DEGREES CELSIUS)	2087
IMMERSION PERIOD (HOURS)	2089
LAMINATION SEALING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2738

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
2086	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2086 MEGOHM(S) PER 1000 FEET.
2085	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2085 MEGOHM(S) PER KILOMETER.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2079	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6031 OF FED-STD-228.
2080	THE TEST VOLTAGE SHALL BE 2080 VOLT(S) DC.
2081	THE PERIOD AFTER THE CIRCUIT IS CLOSED SHALL BE 2081 MINUTE(S).
2083	THE IMMERSION MEDIUM SHALL BE 2083.
2087	THE TEST TEMPERATURE SHALL BE 2087 DEGREES CELSIUS.
2089	THE IMMERSION PERIOD SHALL BE 2089 HOUR(S).
2738	LAMINATION SEALING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2738.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LAMINATION SEALING (CONT)	
REQUIREMENTS (CONT)	
NO SEPARATION.	2740
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2728
PER MIL-W-81381.	2729
TEST TEMPERATURE (DEGREES CELSIUS)	2732
TEST PERIOD (HOURS)	2734
LIFE CYCLE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2158
NO EFFECT ON COLOR, NO CRACKING, NO DIELECTRIC BREAKDOWN, AND NO PITTING.	2160
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2108
PER MIL-W-22759.	2109

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2740	LAMINATION SEALING. THERE SHALL BE NO SEPARATION OF LAYERS ALONG THE INSULATION OR AT THE ENDS.
2728	LAMINATION SEALING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2728.
2729	LAMINATION SEALING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81381.
2732	THE TEST TEMPERATURE SHALL BE 2732 DEGREES CELSIUS.
2734	THE TEST PERIOD SHALL BE 2734 HOUR(S).
2158	LIFE CYCLE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2158.
2160	LIFE CYCLE. THERE SHALL BE NO EFFECT ON COLOR, NO CRACKING IN BEND TEST, NO DIELECTRIC BREAKDOWN, AND NO PITTING.
2108	LIFE CYCLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2108.
2109	LIFE CYCLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE CYCLE (CONT)	
PER MIL-W-22759. (CONT)	
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2112
(MILLIMETERS)	2111
LOAD (SELECT ONE)	
(POUNDS)	2114
(KILOGRAMS)	2113
OVEN TEMPERATURE (DEGREES CELSIUS)	2116
TEST PERIOD (HOURS)	2118
BEND LOAD (SELECT ONE)	
(POUNDS)	2130
(KILOGRAMS)	2129
IMMERSION PERIOD (HOURS)	2146
TEST VOLTAGE (VOLTS AC)	2148
LOW TEMPERATURE FLEXIBILITY (COLD BEND)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2208
NO CRACKS OR BREAKS.	2209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2112	THE MANDREL DIAMETER SHALL BE 2112 INCH(S).
2111	THE MANDREL DIAMETER SHALL BE 2111 MILLIMETER(S).
2114	THE LOAD SHALL BE 2114 POUND(S).
2113	THE LOAD SHALL BE 2113 KILOGRAM(S).
2116	THE OVEN TEMPERATURE SHALL BE 2116 DEGREES CELSIUS.
2118	THE TEST PERIOD SHALL BE 2118 HOUR(S).
2130	THE BEND LOAD SHALL BE 2130 POUND(S).
2129	THE BEND LOAD SHALL BE 2129 KILOGRAM(S).
2146	THE IMMERSION PERIOD SHALL BE 2146 HOUR(S).
2148	THE TEST VOLTAGE SHALL BE 2148 VOLT(S) AC.
2208	LOW TEMPERATURE FLEXIBILITY (COLD BEND). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2208.
2209	LOW TEMPERATURE FLEXIBILITY (COLD BEND). THERE SHALL BE NO CRACKS OR BREAKS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE FLEXIBILITY (COLD BEND) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2192
PER FED-STD-228.	2191
*METHOD (SELECT ONE)	
2011.	2193
2043.	2195
TEST TEMPERATURE (DEGREES CELSIUS)	2194
TEST PERIOD (HOURS)	2202
NUMBER OF SPECIMENS (NUMBER)	2197
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2203
(MILLIMETERS)	2205
TEST LOAD (SELECT ONE)	
(POUNDS)	2206
(KILOGRAMS)	2207

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2192	LOW TEMPERATURE FLEXIBILITY (COLD BEND). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.
2191	LOW TEMPERATURE FLEXIBILITY (COLD BEND). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2193	TEST METHOD 2011 SHALL APPLY.
2195	TEST METHOD 2043 SHALL APPLY.
2194	THE TEST TEMPERATURE SHALL BE 2194 DEGREES CELSIUS.
2202	THE TEST PERIOD SHALL BE 2202 HOUR(S).
2197	THE NUMBER OF SPECIMENS SHALL BE 2197.
2203	THE MANDREL DIAMETER SHALL BE 2203 INCH(S).
2205	THE MANDREL DIAMETER SHALL BE 2205 MILLIMETER(S).
2206	THE TEST LOAD SHALL BE 2206 POUND(S).
2207	THE TEST LOAD SHALL BE 2207 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POLYIMIDE CURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2722
NO CRACKS.	2724
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2710
PER MIL-W-81381.	2711
TEST PERIOD (HOURS)	2714
RESISTANCE TO ACID	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2784
MAXIMUM ABSORPTION (PERCENT)	2785
NO DIELECTRIC BREAKDOWN.	2786
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2768

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2722	POLYIMIDE CURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2722.
2724	POLYIMIDE CURE. THERE SHALL BE NO EVIDENCE OF CRACKS.
2710	POLYIMIDE CURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2710.
2711	POLYIMIDE CURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-81381.
2714	THE TEST PERIOD SHALL BE 2714 HOUR(S).
2784	RESISTANCE TO ACID. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2784.
2785	RESISTANCE TO ACID. THE ABSORPTION SHALL BE NOT GREATER THAN 2785 PERCENT.
2786	RESISTANCE TO ACID. THERE SHALL BE NO DIELECTRIC BREAKDOWN.
2768	RESISTANCE TO ACID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2768.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO ACID (CONT)	
TEST METHODS (CONT)	
PER FED-STD-228, METHOD 7011.	2777
SOLUTION (NAME)	2772
TEST TEMPERATURE (DEGREES CESLIUS)	2773
TEST PERIOD (HOURS)	2776
PER MIL-W-22759.	2769
TEST VOLTAGE (VOLTS AC)	2779
SHRINKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2702
MAXIMUM SHRINKAGE AT EITHER END (SELECT ONE)	
(INCHES)	2706
(MILLIMETERS)	2703
MAXIMUM TOTAL SHRINKAGE (SELECT ONE)	
(INCHES)	2705
(MILLIMETERS)	2707

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2777	RESISTANCE TO ACID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 7011 OF FED-STD-228.
2772	THE SOLUTION SHALL BE 2772.
2773	THE TEST TEMPERATURE SHALL BE 2773 DEGREES CELSIUS.
2776	THE TEST PERIOD SHALL BE 2776 HOUR(S).
2769	RESISTANCE TO ACID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2779	THE TEST VOLTAGE SHALL BE 2779 VOLT(S) AC.
2702	SHRINKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2702.
2706	SHRINKAGE. THE SHRINKAGE AT EITHER END OF THE SPECIMEN SHALL BE NOT GREATER THAN 2706 INCH(S).
2703	SHRINKAGE. THE SHRINKAGE AT EITHER END OF THE SPECIMEN SHALL BE NOT GREATER THAN 2703 MILLIMETER(S).
2705	SHRINKAGE. THE TOTAL SHRINKAGE (BOTH ENDS OF THE SPECIMEN) SHALL BE NOT GREATER THAN 2705 INCH(S).
2707	SHRINKAGE. THE TOTAL SHRINKAGE (BOTH ENDS OF THE SPECIMEN) SHALL BE NOT GREATER THAN 2707 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHRINKAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2694
PER MIL-W-22759.	2695
TEST TEMPERATURE (DEGREES CELSIUS)	2700
TEST PERIOD (HOURS)	2698
SMOKE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2326
NO VISIBLE SMOKE.	2328
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2312
PER MIL-W-22759.	2313
CONDUCTOR TEMPERATURE (DEGREES CELSIUS)	2320
TEST PERIOD (HOURS)	2322
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2694	SHRINKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2694.
2695	SHRINKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2700	THE TEST TEMPERATURE SHALL BE 2700 DEGREES CELSIUS.
2698	THE TEST PERIOD SHALL BE 2698 HOUR(S).
2326	SMOKE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2326.
2328	SMOKE. THERE SHALL BE NO VISIBLE SMOKE.
2312	SMOKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2312.
2313	SMOKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2320	THE CONDUCTOR TEMPERATURE SHALL BE 2320 DEGREES CELSIUS.
2322	THE TEST PERIOD SHALL BE 2322 HOUR(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
NO FLARING, NO OPENING AND MAXIMUM SHRINK BACK (SELECT ONE)	
(INCHES)	2866
(MILLIMETERS)	2867
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
2866	SOLDERABILITY. THERE SHALL BE NO FLARING AND NO OPENING OF THE INSULATION AND THE SHRINK BACK SHALL BE NOT GREATER THAN 2866 INCH(S).
2867	SOLDERABILITY. THERE SHALL BE NO FLARING AND NO OPENING OF THE INSULATION AND THE SHRINK BACK SHALL BE NOT GREATER THAN 2867 MILLIMETER(S).
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPARK TEST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2440
NO BREAKDOWN.	2442
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2430
PER FED-STD-228, METHOD 6211.	2431
TEST VOLTAGE (VOLTS AC)	2434
SURFACE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2058
MINIMUM SURFACE RESISTANCE (SELECT ONE)	
(OHMS PER INCH)	2060
(OHMS PER MILLIMETER)	2061
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2440	SPARK TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2440.
2442	SPARK TEST. THERE SHALL BE NO ELECTRICAL BREAKDOWN.
2430	SPARK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2430.
2431	SPARK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6211 OF FED-STD-228.
2434	THE TEST VOLTAGE SHALL BE 2434 VOLT(S) AC.
2058	SURFACE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2058.
2060	SURFACE RESISTANCE. THE SURFACE RESISTANCE SHALL BE NOT LESS THAN 2060 OHM(S) PER INCH.
2061	SURFACE RESISTANCE. THE SURFACE RESISTANCE SHALL BE NOT LESS THAN 2061 OHM(S) PER MILLIMETER.
2052	SURFACE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER FED-STD-228, METHOD 6041.	2054
NUMBER OF SPECIMENS (NUMBER)	2055
THERMAL SHOCK RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2186
NO FLARING AND MAXIMUM SHRINKAGE (SELECT ONE)	
(INCHES)	2188
(MILLIMETERS)	2189
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2164
PER MIL-W-22759.	2165
HIGH TEST TEMPERATURE (DEGREES CELSIUS)	2170
LOW TEST TEMPERATURE (DEGREES CELSIUS)	2174

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2054	SURFACE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6041 OF FED-STD-228.
2055	THE NUMBER OF SPECIMENS SHALL BE 2055.
2186	THERMAL SHOCK RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2186.
2188	THERMAL SHOCK RESISTANCE. THERE SHALL BE NO FLARING OF THE INSULATION AND THE SHRINKAGE SHALL BE NOT GREATER THAN 2188 INCH(S).
2189	THERMAL SHOCK RESISTANCE. THERE SHALL BE NO FLARING OF THE INSULATION AND THE SHRINKAGE SHALL BE NOT GREATER THAN 2189 MILLIMETER(S).
2164	THERMAL SHOCK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2164.
2165	THERMAL SHOCK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2170	THE HIGH TEST TEMPERATURE SHALL BE 2170 DEGREES CELSIUS.
2174	THE LOW TEST TEMPERATURE SHALL BE 2174 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE WITHSTAND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1710
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	1712
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1714
PER FED-STD-228, METHOD 6111.	1716
TEST VOLTAGE	
(VOLTS AC)	1718
(VOLTS DC)	1720
IMMERSION PERIOD (HOURS)	1722
VOLTAGE APPLICATION PERIOD (MINUTES)	1724
WATERTIGHTNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2408
NO LEAKS.	2410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1710	VOLTAGE WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1710.
1712	VOLTAGE WITHSTAND. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
1714	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1714.
1716	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6111 OF FED-STD-228.
1718	THE TEST VOLTAGE SHALL BE 1718 VOLT(S) AC.
1720	THE TEST VOLTAGE SHALL BE 1720 VOLT(S) DC.
1722	THE IMMERSION PERIOD SHALL BE 1722 HOUR(S).
1724	THE VOLTAGE APPLICATION PERIOD SHALL BE 1724 MINUTE(S).
2408	WATERTIGHTNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2408.
2410	WATERTIGHTNESS. THERE SHALL BE NO LEAKING AT OPPOSITE END OR THROUGH VOIDS IN DIELECTRIC WALL.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERTIGHTNESS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2396
PER MIL-W-16878.	2397
WATER PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2400
(KILOPASCALS)	2401
TEST PERIOD (HOURS)	2402
WICKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2644
MAXIMUM WEIGHT INCREASE (PERCENT)	2646
MAXIMUM DYE TRAVEL (SELECT ONE)	
(INCHES)	2650
(MILLIMETERS)	2651

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2396	WATERTIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2396.
2397	WATERTIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-16878.
2400	THE WATER PRESSURE SHALL BE 2400 POUND(S) PER SQUARE INCH.
2401	THE WATER PRESSURE SHALL BE 2401 KILOPASCAL(S).
2402	THE TEST PERIOD SHALL BE 2402 HOUR(S).
2644	WICKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2644.
2646	WICKING. THE WEIGHT INCREASE SHALL BE NOT GREATER THAN 2646 PERCENT.
2650	THE DYE TRAVEL SHALL BE NOT GREATER THAN 2650 INCH(S).
2651	THE DYE TRAVEL SHALL BE NOT GREATER THAN 2651 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WICKING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2630
PER MIL-W-22759.	2631
IMMERSION FLUID (NAME)	2636
IMMERSION PERIOD (HOURS)	2638
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2630	WICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2630.
2631	WICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-22759.
2636	THE IMMERSION FLUID SHALL BE 2636.
2638	THE IMMERSION PERIOD SHALL BE 2638 HOUR(S).
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
END SEALS	1664

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.
1664	END SEALS. ALL WIRE SHALL HAVE BOTH ENDS OF EACH SHIPPING LENGTH SEALED.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A294)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




035-01-1

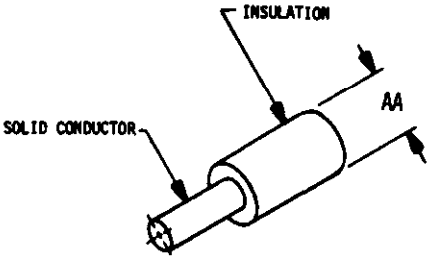

(SHIELD OPTIONAL)


035-02-1

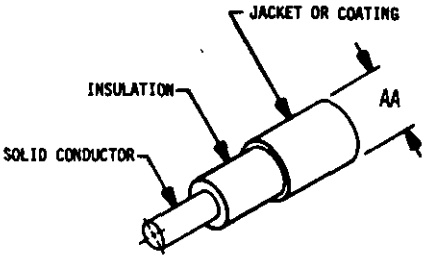

(SHIELD OPTIONAL)


035-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

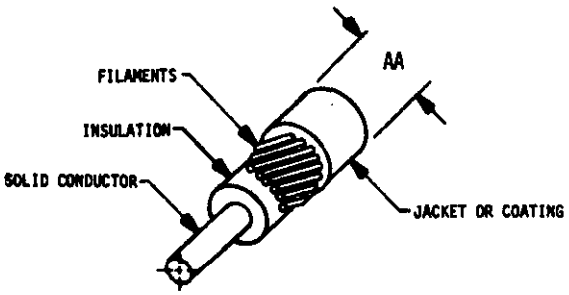


(SHIELD OPTIONAL)

035-03-2

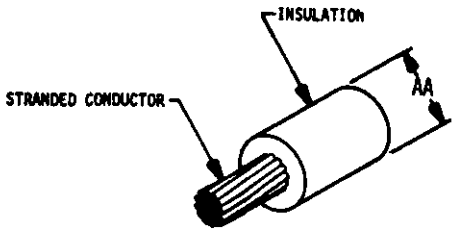

(SHIELD OPTIONAL)


035-04-1

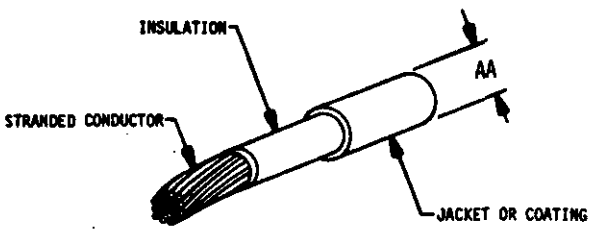

(SHIELD OPTIONAL)


035-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

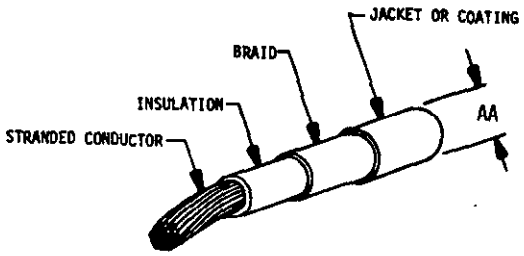

(SHIELD OPTIONAL)


035-05-2

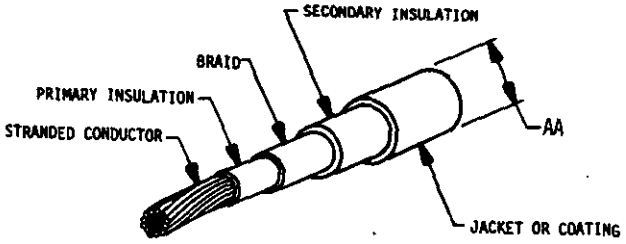


(SHIELD OPTIONAL)


035-05-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

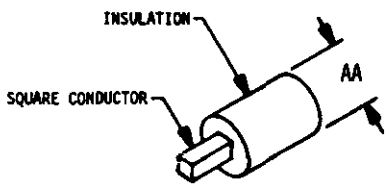



035-06-1

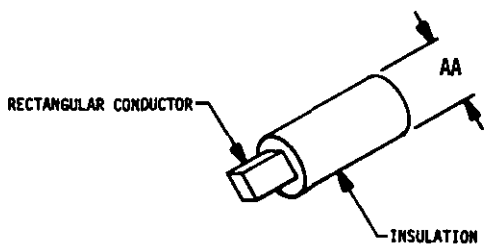



035-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1616	30	1710	108	2002	32
0102	14	1618	32	1712	108	2004	34
0103	14	1620	32	1714	108	2022	30
0104	14	1622	32	1716	108	2024	30
0105	14	1624	32	1718	108	2025	30
0107	16	1626	32	1720	108	2026	30
0108	16	1628	34	1722	108	2027	30
0700	14	1630	34	1724	108	2039	76
0800	14	1632	34	1804	34	2044	78
1003	14	1634	36	1806	34	2046	76
1004	14	1636	36	1807	34	2048	76
1005	14	1638	36	1808	34	2049	76
1006	14	1640	36	1848	22	2050	76
1008	14	1642	36	1849	22	2052	104
1009	18	1644	36	1850	22	2054	106
1371	88	1646	36	1854	22	2055	106
1380	88	1648	36	1861	22	2058	104
1562	20	1650	38	1862	22	2060	104
1564	20	1652	38	1863	22	2061	104
1572	18	1654	38	1864	24	2064	52
1576	20	1656	38	1865	24	2065	52
1578	20	1658	38	1866	24	2066	52
1580	20	1660	38	1867	24	2067	52
1582	22	1662	38	1868	24	2068	52
1584	22	1664	114	1869	24	2069	52
1586	22	1670	64	1872	24	2072	52
1588	22	1672	64	1882	26	2074	52
1590	24	1674	64	1884	24	2075	52
1592	24	1676	64	1892	26	2079	88
1594	24	1678	64	1896	26	2080	88
1596	24	1680	64	1908	26	2081	88
1598	26	1690	78	1916	28	2083	88
1600	26	1692	78	1918	26	2085	88
1602	26	1694	78	1924	28	2086	88
1604	28	1696	78	1928	28	2087	88
1606	28	1698	78	1948	28	2089	88
1608	28	1700	78	1964	30	2108	90
1610	28	1702	78	1968	30	2109	90
1612	30	1704	78	1990	32	2111	92
1614	30	1706	78	1994	32	2112	92

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2113	92	2231	62	2335	42	2424	48
2114	92	2232	62	2337	42	2426	48
2116	92	2236	80	2338	40	2430	104
2118	92	2237	80	2339	42	2431	104
2129	92	2239	80	2340	40	2434	104
2130	92	2241	80	2341	40	2440	104
2146	92	2242	80	2343	42	2442	104
2148	92	2243	80	2344	50	2446	56
2158	90	2244	80	2345	50	2447	58
2160	90	2245	80	2346	50	2449	58
2164	106	2247	80	2347	52	2450	58
2165	106	2260	66	2349	52	2452	58
2170	106	2261	66	2350	50	2456	58
2174	106	2264	66	2352	50	2457	58
2186	106	2268	66	2356	54	2464	56
2188	106	2269	68	2357	54	2466	56
2189	106	2270	68	2358	54	2470	70
2191	94	2276	68	2359	54	2471	70
2192	94	2282	66	2361	54	2484	72
2193	94	2286	66	2362	54	2485	72
2194	94	2287	66	2364	54	2487	72
2195	94	2290	46	2365	54	2490	70
2197	94	2291	46	2368	68	2492	70
2202	94	2293	46	2369	68	2508	82
2203	94	2295	46	2374	68	2509	84
2205	94	2297	46	2378	68	2510	84
2206	94	2299	46	2380	68	2514	82
2207	94	2300	46	2390	68	2516	82
2208	92	2306	44	2392	68	2520	82
2209	92	2308	44	2396	110	2521	82
2216	62	2312	100	2397	110	2523	82
2217	62	2313	100	2400	110	2524	82
2218	62	2320	100	2401	110	2525	82
2219	62	2322	100	2402	110	2528	80
2221	62	2326	100	2408	108	2530	82
2224	62	2328	100	2410	108	2562	84
2225	62	2331	42	2414	50	2563	84
2228	62	2332	42	2416	50	2564	84
2229	62	2333	42	2418	50	2568	84
2230	62	2334	42	2422	48	2569	84

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2573	84	2657	60	2789	44	4683	102
2574	74	2660	60	2790	44	4754	66
2576	74	2662	60	2791	44	4755	66
2580	74	2668	60	2793	44	4756	66
2582	74	2670	60	2794	44	4760	64
2584	74	2694	100	2795	44	4761	64
2587	86	2695	100	2800	44	4762	64
2588	86	2698	100	2801	44	4809	70
2589	86	2700	100	2808	42	4819	68
2591	86	2702	98	2810	42	4950	18
2592	86	2703	98	2816	56	5068	18
2593	86	2705	98	2817	56	5069	18
2594	86	2706	98	2818	56	6369	14
2595	86	2707	98	2822	54	6372	112
2597	86	2710	96	2824	56	6870	112
2599	86	2711	96	2825	56	6873	14
2600	58	2714	96	2866	102	6874	16
2601	58	2722	96	2867	102	6941	16
2603	60	2724	96	2870	74	6942	16
2604	60	2728	90	2871	76	6991	114
2612	58	2729	90	2873	76	6992	114
2613	58	2732	90	2878	76	6993	114
2618	48	2734	90	2880	76	6994	114
2620	48	2738	88	2882	76	6995	114
2624	46	2740	90	2888	74	7001	112
2625	46	2745	70	2890	74	7002	112
2626	46	2746	70	2894	72	7003	112
2627	48	2748	70	2895	72	7004	112
2629	48	2750	70	2897	72	7005	112
2630	112	2762	70	2899	72	7059	40
2631	112	2768	96	2902	72	7347	38
2636	112	2769	98	2904	72	7348	40
2638	112	2772	98	2910	72	7400	40
2644	110	2773	98	2912	72	7580	20
2646	110	2776	98	4662	102	7629	112
2650	110	2777	98	4663	102		
2651	110	2779	98	4667	102		
2654	50	2784	96	4672	102		
2655	50	2785	96	4674	100		
2656	50	2786	96	4675	102		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Abrasion Resistance	40
Accelerated Aging	42
Additional Part Marking	114
Additional Requirements	112
Aperture Cards Required	16
Applicable Documents	114
Base Document	14
Blocking	44
City, State, Zip	14
Color	34
Company Name/Command	14
Concentricity	46
Conductor	20
Conductor Coating or Plating Continuity and Adherence	48
Conductor Elongation	50
Conductor Resistance	52
Conductor Tensile Strength	54
Configuration	18
Contract Number/Office Symbol	14
Control	14
Curl	54
Date	14
Design and Construction	20
Dielectric Tank Test	56
Durability of Identification	58
Electrical Ratings	18
End Seals	114
Extruded Insulation Wrap	60
Finishes	20
Flammability	62
Flexibility	64
Format	14
Fungus	64
Government Design Activity FSCM	14
Humidity Resistance	66
Hydrogen Embrittlement	68
Identification	36
Illustrations	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Immersion	68
Impulse Dielectric Test	70
Insulation Cold Flow	72
Insulation Cut-Through	74
Insulation Dielectric Constant and Power Factor	76
Insulation Heat Distortion	78
Insulation Heat Resistance	80
Insulation or Jacket Aging	80
Insulation or Jacket Elongation	82
Insulation or Jacket Tensile Strength	84
Insulation Pull-Off Force	86
Insulation Resistance	88
Jacket	32
Jacket Braid	32
Lamination Sealing	88
Life Cycle	90
Low Temperature Flexibility (Cold Bend)	92
Materials	20
Metals	20
Nomenclature	114
Notes	114
Packaging	114
Part Marking	112
Part Number	16
Part Number Cross-Reference	114
Phone Number	14
Polyimide Cure	96
Primary Braid	26
Primary or Single Layer Insulation	24
Quality Assurance Provisions	114
Resistance to Acid	96
Requester FSCM	14
Requester's Name	14
Revision of AEDPS Document (Number)	16
Scope	16
Secondary Braid	28
Secondary Insulation	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Shield	30
Shrinkage	98
Smoke	100
Solderability	100
Source Table	16
Spark Test	104
Street/Building	14
Superseded Documents	114
Surface Condition Suitable for Bonding	38
Surface Resistance	104
System Application	14
Tabulated Characteristics	18
Temperature Rating	18
Tertiary Insulation	28
Thermal Shock Resistance	106
Units of Measure	16, 18
Voltage Withstand	108
Watertightness	108
Weight	38
Wicking	110
Workmanship	112
Wrap 1	26
Wrap 2	28
Wrap 3	30

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/1970

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.