DOD-STD-35-141(MI)
2 February 1979
SUPERSEDING
SECTION 1
MIL-STD-35-68(MI)
7 JANUARY 1978

MILITARY STANDARD

CABLES, SPECIAL PURPOSE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Cable, Special Purpose
Automated Engineering
Document Preparation System

DOD-STD-35-141(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-141(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for special purpose cable.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	8
	4.1	Introduction	8
	4.2	Specification Requirement Sheet (SRS)	8
	4.3	Configuration	8
	4.3.1	Dimensions	8
	4.3.2	Illustrations	8
	4.4	Units of measure	8
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	9
	5.5	Tabulation	11
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.6.1	Interrelationship of Codes	13
	5.6.2	Automatic MSE Data	13
	5.6.3	DOD-STD-35 Tables	13

TABLES

Tables	I.	Title Index	2
	II.	Test Matrix	11
	III.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	130
	B.	Characteristic Code Index	169
		Index	175

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for special purpose cable.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CABLE, POWER, ELECTRICAL	037004	J-C-30	CABLE AND WIRE
		J-C-145	CABLE AND WIRE, WEATHER RES
		MIL-C-915	CABLE AND CORD, SHIPBOARD
		MIL-C-3702	IGNITION, HIGH TENSION
		MIL-C-5136	POLYCHLOROPRENE SHEATHED, BUNA INSUL
		MIL-C-5756	PORTABLE
		MIL-C-7078	AEROSPACE
		MIL-C-15479	SUBMARINE
		MIL-C-19638	SUBMARINE
		MIL-C-27212	AIRPORT LIGHT CONTROL
		MIL-C-38359	AIRPORT LIGHT, CROSS-LINKED POLYETHYLENE
		MIL-C-55483	WT-26
		MIL-C-82403	SUBMARINE POWER AND CONTROL
CABLE, TELEPHONE	037005	J-C-96	W-108-B
		J-C-110	2,3 AND 4 CONDUCTOR
		J-C-111	TWISTED PAIRS
		J-C-113	PARALLEL, DIRECT BURIAL
		J-C-114	DROP
		MIL-C-3093	INSIDE DISTRIBUTION
		MIL-C-3458	PAPER-OR-PULP INSUL, LEAD COVERED
		MIL-C-9660	VIDEO PAIR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CABLE, TELEPHONE	037005 (CONT)	MIL-C-10369	FIELD (MX-306A/G)
		MIL-C-10581	WF-8( )/G
		MIL-C-11097	W-50-A
		MIL-C-12423	WD-33/U
		MIL-C-13294	INFANTRY FIELD WIRE, TWISTED PAIR
		MIL-C-13892	FLEXIBLE, MULTIPAIR
		MIL-C-19654	SUBMARINE
		MIL-C-55036	WM130( )/G
		MIL-C-55134	INSIDE
		MIL-C-55357	SHLD, INSIDE
		MIL-C-55425	WF-16( )/U
		MIL-C-55446	SWITCHBOARD, PLASTIC DIEL
		MIL-C-55462	WD-36
		MIL-C-55480	WC-534
CABLE, SPECIAL PURPOSE	037006	MIL-C-442	TWO CNDCT, PARALLEL
		MIL-C-915	CABLE AND CORD, SHIPBOARD
		MIL-C-2486	WM-46/U
		MIL-C-3432	POWER AND CONTROL, FLEX
		MIL-C-10065	MULTIPAIR, AUDIO
		MIL-C-13077	WD-32/U
		MIL-C-13486	LOW TENSION, SINGLE AND MULTICNDCT
		MIL-C-13777	GENERAL SPEC 2 TO 78 CNDCT
		MIL-C-15452	COAX, LEAD SHEATHED
		MIL-C-16839	UNDERWATER USE
		MIL-C-19547	SHORE USE
		MIL-C-19787	TORPEDO, 65 CNDCT
		MIL-C-21609	SHLD, 600 VOLT (NONFLEX)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CABLE, SPECIAL PURPOSE	037006 (CONT)	MIL-C-22613	SHLD, SHIPBOARD
		MIL-C-22617	NON-SHLD, SHIPBOARD
		MIL-C-22667	BUOYANT, RG-298/U
		MIL-C-23437	SHLD PAIR
		MIL-C-23553	AUDIO SIGNAL
		MIL-C-23812	ELECTRONIC, TOW, SUBMARINE
		MIL-C-27072	GENERAL SPEC, MULTICNDCT
		MIL-C-27500	SHLD AND UNSHLD, AEROSPACE
		MIL-C-28661	HIGH VOLTAGE
		MIL-C-28781	SHORE USE
		MIL-C-28793	SHIP AND SHORE USE
		MIL-C-47206	HIGH TEMP, SINGLE CNDCT, TWISTED PAIR AND MULTICNDCT
		MIL-C-49055	FLAT FLEX ROUND CNDCT UNSHLD
		MIL-C-87101	FLAT, FLEX, ROUND CNDCT
		MIL-C-49059	FLAT, FLEX, FLAT CNDCT, UNSHLD
		MIL-C-55021	GENERAL SPEC, TWISTED PAIR AND TRIPLES
		MIL-C-55040	RETRACTIBLE
		MIL-C-55543	FLAT, MULTICNDCT, FLEX, UNSHLD
		MIL-C-60220	DATA TRANS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-915	Cable and Cord Electrical, for Shipboard Use, General Specification For
MIL-C-7078	Cable, Electric, Aerospace Vehicle, General Specification For
MIL-C-49055	Cables, Special Purpose, Electrical, (Flexible, Flat, Unshielded), (Round Conductor), General Specification For
MIL-C-49059	Cable, Electrical (Flexible, Flat, Unshielded), (Flat Conductor), General Specification For
MIL-C-55543	Cable, Electrical, Flat Multiconductor, Flexible, Unshielded
MIL-C-87101	Cables, Special Purpose, Electrical (Flexible, Flat, Coaxial) (Round Conductor), General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-104	Limit for Electrical Insulation Color
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Electronic Component Parts Test Methods
MIL-STD-681	Identification Coding and Application of Hookup and Lead Wire

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

MIL-STD-810	Environmental Test Methods

FEDERAL

FED-STD-228	Cable and Wire, Insulated; Methods of Testing

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to special purpose cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for special purpose cable, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to special purpose cable.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to special purpose cable.

4.3.2 Illustrations. Illustrations applicable to special purpose cable are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has a capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	1856	2740	1780	1650	2414	2660	2034	3110	2444	3198	2610
	TEST	Attenuation	Blocking	Capacitance	Continuity	Fluid Immersion	Folding	High Temperature Aging	Impedance	Low Pressure	Tear Groove Propagation	Twisting Endurance
MIL-C-915		X		X				X	X			X
MIL-C-7078					X			X				
MIL-C-49055							X	X			X	
MIL-C-49059			X		X	X	X	X		X	X	X
MIL-C-55543						X	X	X		X		
MIL-C-87101		X	X	X	X	X	X	X	X	X	X	

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for special purpose cable characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	TYPE	2900	MINIMUM IMPEDANCE (OHMS)	2902	MAXIMUM IMPEDANCE (OHMS)
1574	NOMINAL IMPEDANCE (OHMS)	2904	MAXIMUM POWER (WATTS)	1572	MAXIMUM FREQUENCY (MHZ)
2906	MAXIMUM FREQUENCY (GHZ)	1564	MAXIMUM VOLTAGE (VDC)	1563	MAXIMUM VOLTAGE (VRMS)
2908	WORKING VOLTAGE (VDC)	2910	WORKING VOLTAGE (VRMS)	3200	CONDUCTORS
3201	SIZE	3203	STRAND SIZE	3205	INSULATION DIAMETER
3207	INSULATION THICKNESS	3209	INSULATION COLOR	3210	CONDUCTORS PER GROUP
3211	GROUP DIAMETER	1590	COLOR	1598	MARKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist:dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
5941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
5942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
CABLE (TYPE)	1562
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1562	THE CABLE TYPE SHALL BE 1562.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS	
IMPEDANCE	
MINIMUM (OHMS)	2900
MAXIMUM (OHMS)	2902
NOMINAL (OHMS)	1574
MAXIMUM POWER (WATTS)	2904
MAXIMUM FREQUENCY (SELECT ONE)	
(MEGAHERTZ)	1572
(GIGAHERTZ)	2906
MAXIMUM VOLTAGE	
(VOLTS DC)	1564
(VOLTS RMS)	1563
WORKING VOLTAGE	
(VOLTS DC)	2908
(VOLTS RMS)	2910
SHIELD EFFECTIVENESS (DECIBELS)	2912
FREQUENCY (MEGAHERTZ)	2914

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ELECTRICAL RATINGS.
2900	THE CHARACTERISTIC IMPEDANCE SHALL BE NOT LESS THAN 2900 OHM(S).
2902	THE CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 2902 OHM(S).
1574	THE CHARACTERISTIC IMPEDANCE SHALL BE 1574 OHM(S).
2904	THE MAXIMUM POWER RATING SHALL BE 2904 WATT(S).
1572	THE MAXIMUM FREQUENCY RATING SHALL BE 1572 MEGAHERTZ.
2906	THE MAXIMUM FREQUENCY RATING SHALL BE 2906 GIGAHERTZ.
1564	THE MAXIMUM VOLTAGE RATING SHALL BE 1564 VOLT(S) DC.
1563	THE MAXIMUM VOLTAGE RATING SHALL BE 1563 VOLT(S) RMS.
2908	THE WORKING VOLTAGE SHALL BE 2908 VOLT(S) DC.
2910	THE WORKING VOLTAGE SHALL BE 2910 VOLT(S) RMS.
2912	THE SHIELD EFFECTIVENESS SHALL BE 2912 DECIBEL(S).
2914	THE FREQUENCY SHALL BE 2914 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL RATINGS	
MINIMUM BEND RADIUS (SELECT ONE)	
(INCHES)	2916
(MILLIMETERS)	2918
MAXIMUM PULLING TENSION (SELECT ONE)	
(POUNDS)	2920
(KILOGRAMS)	2922
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
(INCHES)	7572
SI	
(MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MECHANICAL RATINGS
2916	THE BEND RADIUS SHALL BE NOT LESS THAN 2916 INCH(S).
2918	THE BEND RADIUS SHALL BE NOT LESS THAN 2918 MILLIMETER(S).
2920	THE PULLING TENSION SHALL BE NOT GREATER THAN 2920 POUND(S).
2922	THE PULLING TENSION SHALL BE NOT GREATER THAN 2922 KILOGRAM(S).
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
CONFIGURATION TABLE	
SEE CONFIGURATION TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONFIGURATION.

CONFIGURATION TABLE. THE CONFIGURATION SHALL BE AS SPECIFIED IN THE CONFIGURATION TABLE.

CONFIGURATION TABLE

CONDUCTORS						
QUANTITY	3200	3230	3260	3290	3320	3350
SIZE	3201	3231	3261	3291	3321	3351
CIRCULAR AREA	3202	3232	3262	3292	3322	3352
STRAND SIZE	3203	3233	3263	3293	3323	3353
STRAND CIRCULAR AREA	3204	3234	3264	3294	3324	3354
INSULATION DIAMETER						
MIN	3205	3235	3265	3295	3325	3355
MAX	3206	3236	3266	3296	3326	3356
INSULATION THICKNESS						
MIN	3207	3237	3267	3297	3327	3357
MAX	3208	3238	3268	3298	3328	3358
INSULATION COLOR	3209	3239	3269	3299	3329	3359
GROUPING						
CONDUCTORS PER GROUP	3210	3240	3270	3300	3330	3360
DIAMETER						
MIN	3211	3241	3271	3301	3331	3361
MAX	3212	3242	3272	3302	3332	3362
LAY (LH OR RH)	3212	3243	3273	3303	3333	3363
LAY LENGTH	3214	3244	3274	3304	3334	3364
SHIELD OR BRAID						
STRAND SIZE	3216	3246	3276	3306	3336	3366
STRAND CIRCULAR AREA	3217	3247	3277	3307	3337	3367
COVERAGE (PCT MIN)	3218	3248	3278	3308	3338	3368
NO. OF CARRIERS	3219	3249	3279	3309	3339	3369
BRAID ANGLE (DEG)	3220	3250	3280	3310	3340	3370
ENDS PER CARRIER	3221	3251	3281	3311	3341	3371
PICKS/UNIT LENGTH	3222	3252	3282	3312	3342	3372
DIAMETER						
MIN	3223	3253	3283	3313	3343	3373
MAX	3224	3254	3284	3314	3344	3374
THICKNESS						
MIN	3225	3255	3285	3315	3345	3375
MAX	3226	3256	3286	3316	3346	3376
OVERLAP (PCT)	3227	3257	3287	3317	3347	3377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
COLOR	
PER MIL-STD-104	
(NAME)	1590
*CLASS (NUMBER)	1592
IDENTIFICATION (SELECT ONE)	
COLOR CODE (DOC DES)	1594
METHOD (SPECIFY)	1596

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

1590 COLOR. THE OUTER COVERING COLOR SHALL BE 1590 IN ACCORDANCE WITH MIL-STD-104.

1592 THE COLOR CLASS SHALL BE 1592.

IDENTIFICATION.

1594 THE IDENTIFICATION COLOR CODE SHALL BE IN ACCORDANCE WITH 1594.

1596 THE IDENTIFICATION METHOD SHALL BE 1596.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
IDENTIFICATION (CONT)	
SURFACE MARKING	
MARKING (SPECIFY)	1598
INTERVAL (SELECT ONE)	
(INCHES)	1600
(MILLIMETERS)	1602
CHARACTER HEIGHT (SELECT ONE)	
(INCHES)	1604
(MILLIMETERS)	1606
WEIGHT (SELECT ONE)	
U.S.	
MAXIMUM PER 1000 FEET (POUNDS)	7347
MINIMUM PER 1000 FEET (POUNDS)	7059
SI	
MAXIMUM PER KILOMETER (KILOGRAMS)	7407
MINIMUM PER KILOMETER (KILOGRAMS)	7403

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1598	THE IDENTIFICATION MARKING SHALL BE 1598.
1600	THE IDENTIFICATION MARKING INTERVAL SHALL BE 1600 INCH(S).
1602	THE IDENTIFICATION MARKING INTERVAL SHALL BE 1602 MILLIMETER(S).
1604	THE IDENTIFICATION MARKING CHARACTER HEIGHT SHALL BE 1604 INCH(S).
1606	THE IDENTIFICATION MARKING CHARACTER HEIGHT SHALL BE 1606 MILLIMETER(S).
7347	MAXIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT GREATER THAN 7347 POUND(S).
7059	MINIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT LESS THAN 7059 POUND(S).
7407	MAXIMUM WEIGHT PER KILOMETER. THE WEIGHT PER KILOMETER SHALL BE NOT GREATER THAN 7407 KILOGRAM(S).
7403	MINIMUM WEIGHT PER KILOMETER. THE WEIGHT PER KILOMETER SHALL BE NOT LESS THAN 7403 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AGING STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2924
NO EVIDENCE OF CRACKS, FLAWS, OR DAMAGE.	2926
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2928
PER MIL-C-7078.	2930
TEST TEMPERATURE (DEGREES CELSIUS)	2932
ABRASION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2086
MINIMUM ABRASION RESISTANCE (SELECT ONE)	
(INCHES OF TAPE)	2088
(MILLIMETERS OF TAPE)	2089
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
PER FED-STD-228, METHOD 2211.	2074

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2924	AGING STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2924.
2926	AGING STABILITY. THERE SHALL BE NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.
2928	AGING STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2928.
2930	AGING STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7078.
2932	THE TEST TEMPERATURE SHALL BE 2932 DEGREES CELSIUS.
2086	ABRASION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2086.
2088	ABRASION RESISTANCE. THE ABRASION RESISTANCE SHALL BE NOT LESS THAN 2088 INCH(S) OF TAPE.
2089	ABRASION RESISTANCE. THE ABRASION RESISTANCE SHALL BE NOT LESS THAN 2089 MILLIMETER(S) OF TAPE.
2072	ABRASION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.
2074	ABRASION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2211 OF FED-STD-228.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ABRASION RESISTANCE (CONT)	
PER FED-STD-228, METHOD 2211. (CONT)	
TENSION LOAD (SELECT ONE)	
(POUNDS)	2082
(KILOGRAMS)	2076
WEIGHT (SELECT ONE)	
(POUNDS)	2080
(KILOGRAMS)	2070
ABRASIVE TAPE (TYPE)	2078
NUMBER OF SPECIMENS (NUMBER)	2084
ADHESION OF CONDUCTORS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2934
AS FOLLOWS:	2936
MINIMUM INNER CONDUCTOR TO DIELECTRIC (SELECT ONE)	
(POUNDS)	2938
(NEWTONS)	2940

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2082	THE TENSION LOAD SHALL BE 2082 POUND(S).
2076	THE TENSION LOAD SHALL BE 2076 KILOGRAM(S).
2080	THE WEIGHT SHALL BE 2080 POUND(S).
2070	THE WEIGHT SHALL BE 2070 KILOGRAM(S).
2078	THE ABRASIVE TAPE SHALL BE TYPE 2078.
2084	THE NUMBER OF SPECIMENS SHALL BE 2084.
2934	ADHESION OF CONDUCTORS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2934.
2936	ADHESION OF CONDUCTORS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2938	THE ADHESION OF THE INNER CONDUCTOR TO THE DIELECTRIC SHALL BE NOT LESS THAN 2938 POUND(S).
2940	THE ADHESION OF THE INNER CONDUCTOR TO THE DIELECTRIC SHALL BE NOT LESS THAN 2940 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADHESION OF CONDUCTORS (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM OUTER CONDUCTOR TO DIELECTRIC (SELECT ONE)	
(POUNDS)	2942
(NEWTONS)	2944
MINIMUM CONDUCTOR TO INSULATION (SELECT ONE)	
(POUNDS)	2946
(NEWTONS)	2948
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2950
PER MIL-C-87101.	2952
ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2942	THE ADHESION OF THE OUTER CONDUCTOR TO THE DIELECTRIC SHALL BE NOT LESS THAN 2942 POUND(S).
2944	THE ADHESION OF THE OUTER CONDUCTOR TO THE DIELECTRIC SHALL BE NOT LESS THAN 2944 NEWTON(S).
2946	THE ADHESION OF THE CONDUCTOR TO THE INSULATION SHALL BE NOT LESS THAN 2946 POUND(S).
2948	THE ADHESION OF THE CONDUCTOR TO THE INSULATION SHALL BE NOT LESS THAN 2948 NEWTON(S).
2950	ADHESION OF CONDUCTORS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2950.
2952	ADHESION OF CONDUCTORS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
1872	ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
REQUIREMENTS (CONT)	
PER ATTENUATION TABLE	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1858
PER DOCUMENT (DOC DES)	1856
BLOCKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2744
NO STICKING OF ADJACENT TURNS OR LAYERS.	2746

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ATTENUATION TABLE.

ATTENUATION TABLE

MAXIMUM ATTENUATION PER 100 FEET (DECIBELS)	MAXIMUM ATTENUATION PER 100 METERS (DECIBELS)	FREQUENCY (MEGAHERTZ)	FREQUENCY (GIGAHERTZ)
3401	3431	3402	3403
3404	3432	3405	3406
3407	3433	3408	3409
3410	3434	3411	3412
3413	3435	3414	3415
3416	3436	3417	3418
3419	3437	3420	3421
3422	3438	3423	3424
3425	3439	3426	3427
3428	3440	3429	3430

2858 ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1858.

1856 ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1856.

2744 BLOCKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2744.

2746 BLOCKING. THERE SHALL BE NO STICKING OF ADJACENT TURNS OR LAYERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BLOCKING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2738
PER DOCUMENT (DOC DES)	2740
TEMPERATURE (DEGREES CELSIUS)	2736
PERIOD (HOURS)	2737
BREAKING STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2954
MINIMUM BREAKING STRENGTH (SELECT ONE)	
(POUNDS)	2956
(KILOGRAMS)	2958
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2960
PER MIL-C-915.	2962

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2738	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2738.
2740	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2740.
2736	THE TEST TEMPERATURE SHALL BE 2736 DEGREES CELSIUS.
2737	THE TEST PERIOD SHALL BE 2737 HOUR(S).
2954	BREAKING STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2954.
2956	BREAKING STRENGTH. THE BREAKING STRENGTH SHALL BE NOT LESS THAN 2956 POUND(S).
2958	BREAKING STRENGTH. THE BREAKING STRENGTH SHALL BE NOT LESS THAN 2958 KILOGRAM(S).
2960	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2960.
2962	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE DRIP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2384
NO DRIPPING, BUBBLES, OR EXUDATION.	2386
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2372
PER FED-STD-228, METHOD 5141.	2370
TEMPERATURE (DEGREES CELSIUS)	2376
TEST PERIOD (HOURS)	2374
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1788
AS FOLLOWS:	1789
MAXIMUM CONDUCTOR CAPACITANCE (SELECT ONE)	
(PICOFARADS PER FOOT)	1790
(PICOFARADS PER METER)	1791

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2384	CABLE DRIP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2384.
2386	CABLE DRIP. THERE SHALL BE NO DRIPPING, BUBBLES, OR EXUDATION.
2372	CABLE DRIP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2372.
2370	CABLE DRIP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5141 OF FED-STD-228.
2376	THE TEST TEMPERATURE SHALL BE 2376 DEGREES CELSIUS.
2374	THE TEST PERIOD SHALL BE 2374 HOUR(S).
1788	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1788.
1789	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1790	THE CONDUCTOR CAPACITANCE SHALL BE NOT GREATER THAN 1790 PICOFARAD(S) PER FOOT.
1791	THE CONDUCTOR CAPACITANCE SHALL BE NOT GREATER THAN 1791 PICOFARAD(S) PER METER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM MUTUAL CAPACITANCE FOR EACH PAIR (SELECT ONE)	
(PICOFARADS PER FOOT)	1792
(PICOFARADS PER METER)	1793
MAXIMUM CAPACITANCE UNBALANCE FOR SHIELDED PAIR (PERCENT)	1794
MAXIMUM MUTUAL CAPACITANCE FOR EACH SHIELDED GROUP (SELECT ONE)	
(PICOFARADS PER FOOT)	1796
(PICOFARADS PER METER)	1797
MAXIMUM CAPACITANCE UNBALANCE FOR SHIELDED GROUP (PERCENT)	1798
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1778
PER DOCUMENT (DOC DES)	1780
TEST FREQUENCY (KILOHERTZ)	1782

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1792	THE MUTUAL CAPACITANCE FOR EACH PAIR SHALL BE NOT GREATER THAN 1792 PICOFARAD(S) PER FOOT.
1793	THE MUTUAL CAPACITANCE FOR EACH PAIR SHALL BE NOT GREATER THAN 1793 PICOFARAD(S) PER METER.
1794	THE CAPACITANCE UNBALANCE FOR SHIELDED PAIRS SHALL BE NOT GREATER THAN 1794 PERCENT.
1796	THE MUTUAL CAPACITANCE FOR EACH SHIELDED GROUP SHALL BE NOT GREATER THAN 1796 PICOFARAD(S) PER FOOT.
1797	THE MUTUAL CAPACITANCE FOR EACH SHIELDED GROUP SHALL BE NOT GREATER THAN 1797 PICOFARAD(S) PER METER.
1798	THE CAPACITANCE UNBALANCE FOR EACH SHIELDED GROUP SHALL BE NOT GREATER THAN 1798 PERCENT.
1778	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1778.
1780	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1780.
1782	THE TEST FREQUENCY SHALL BE 1782 KILOHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD WORKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2517
NO CRACKS, FLAWS OR DAMAGE.	2521
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2506
PER MIL-C-915.	2511
TEMPERATURE (DEGREES CELSIUS)	2504
DURATION (HOURS)	2513
PULLEY DIAMETER (SELECT ONE)	
(INCHES)	2519
(MILLIMETERS)	2523
CONDUCTOR ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2996
MINIMUM ELONGATION (PERCENT)	2998
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3000

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2517	COLD WORKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2517.
2521	COLD WORKING. THERE SHALL BE NO CRACKS, FLAWS OR OTHER DAMAGE.
2506	COLD WORKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2506.
2511	COLD WORKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
2504	THE TEST TEMPERATURE SHALL BE 2504 DEGREES CELSIUS.
2513	THE TEST DURATION SHALL BE 2513 HOUR(S).
2519	THE PULLEY DIAMETER SHALL BE 2519 INCH(S).
2523	THE PULLEY DIAMETER SHALL BE 2523 MILLIMETER(S).
2996	CONDUCTOR ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2996.
2998	CONDUCTOR ELONGATION. THE CONDUCTOR ELONGATION SHALL BE NOT LESS THAN 2998 PERCENT.
3000	CONDUCTOR ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR ELONGATION (CONT)	
TEST METHODS (CONT)	
PER FED-STD-228	
*METHOD (SELECT ONE)	
3211, SOFT.	3002
3212, HARD.	3004
NUMBER OF SPECIMENS (NUMBER)	3006
CONDUCTOR RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1674
MAXIMUM CONDUCTOR RESISTANCE (SELECT ONE)	
(OHMS PER 1000 FEET)	1672
(OHMS PER KILOMETER)	1673
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1666
PER FED-STD-228, METHOD 6021.	1664
TEST TYPE (SELECT ONE)	
FACTORY.	1668

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONDUCTOR ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
3002	TEST METHOD 3211 SHALL APPLY.
3004	TEST METHOD 3212 SHALL APPLY.
3006	THE NUMBER OF SPECIMENS SHALL BE 3006.
1674	CONDUCTOR RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.
1672	CONDUCTOR RESISTANCE. THE CONDUCTOR RESISTANCE SHALL BE NOT GREATER THAN 1672 OHM(S) PER 1000 FEET.
1673	CONDUCTOR RESISTANCE. THE CONDUCTOR RESISTANCE SHALL BE NOT GREATER THAN 1673 OHM(S) PER KILOMETER.
1666	CONDUCTOR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1666.
1664	CONDUCTOR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6021 OF FED-STD-228.
1668	THE TEST TYPE SHALL BE FACTORY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR RESISTANCE (CONT)	
TEST TYPE (CONT)	
LABORATORY.	1669
IMMERSION PERIOD (HOURS)	1665
NUMBER OF SPECIMENS (NUMBER)	1670
CONDUCTOR TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3008
AS FOLLOWS:	3010
MINIMUM TENSILE STRENGTH OF INNER CONDUCTOR (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3012
(KILOPASCALS)	3014
MINIMUM TENSILE STRENGTH OF OUTER CONDUCTOR (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3016
(KILOPASCALS)	3018
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1669	THE TEST TYPE SHALL BE LABORATORY.
1665	THE IMMERSION PERIOD SHALL BE 1665 HOUR(S).
1670	THE NUMBER OF SPECIMENS SHALL BE 1670.
3008	CONDUCTOR TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3008.
3010	CONDUCTOR TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3012	THE TENSILE STRENGTH OF THE INNER CONDUCTOR SHALL BE NOT LESS THAN 3012 POUND(S) PER SQUARE INCH.
3014	THE TENSILE STRENGTH OF THE INNER CONDUCTOR SHALL BE NOT LESS THAN 3014 KILOPASCAL(S).
3016	THE TENSILE STRENGTH OF THE OUTER CONDUCTOR SHALL BE NOT LESS THAN 3016 POUND(S) PER SQUARE INCH.
3018	THE TENSILE STRENGTH OF THE OUTER CONDUCTOR SHALL BE NOT LESS THAN 3018 KILOPASCAL(S).
3020	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3020.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR TENSILE STRENGTH (CONT)	
TEST METHODS (CONT)	
PER FED-STD-228	3022
*METHOD	
INNER CONDUCTOR (SELECT ONE)	
3211, SOFT.	3024
3212, HARD.	3026
OUTER CONDUCTOR (SELECT ONE)	
3211, SOFT.	3028
3212, HARD.	3030
NUMBER OF SPECIMENS (NUMBER)	3032
CONTAMINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3034
MAXIMUM CHANGE IN Q (NUMBER)	3036
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3038
PER MIL-C-87101.	3040

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3022	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
3024	THE TEST METHOD FOR INNER CONDUCTOR TESTING SHALL BE 3211.
3026	THE TEST METHOD FOR INNER CONDUCTOR TESTING SHALL BE 3212.
3028	THE TEST METHOD FOR OUTER CONDUCTOR TESTING SHALL BE 3211.
3030	THE TEST METHOD FOR OUTER CONDUCTOR TESTING SHALL BE 3212.
3032	THE NUMBER OF SPECIMENS SHALL BE 3032.
3034	CONTAMINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3034.
3036	CONTAMINATION. THE CHANGE IN Q SHALL BE NOT GREATER THAN 3036.
3038	CONTAMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3038.
3040	CONTAMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTINUITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
CONDUCTORS SHALL HAVE CONTINUITY.	1662
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
PER DOCUMENT (DOC DES)	1650
TEST VOLTAGE (VOLTS)	1654
CORONA EXTINCTION VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3042
AS FOLLOWS:	3044
MINIMUM VOLTAGE (VOLTS RMS)	3046
AT ALTITUDE (VOLTS RMS)	3048
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1660	CONTINUITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1662	CONTINUITY. THE CONDUCTORS SHALL HAVE CONTINUITY.
1652	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1650	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1650.
1654	THE TEST VOLTAGE SHALL BE 1654 VOLT(S).
3042	CORONA EXTINCTION VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3042.
3044	CORONA EXTINCTION VOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3046	THE CORONA EXTINCTION VOLTAGE SHALL BE NOT LESS THAN 3046 VOLTS RMS.
3048	THE CORONA EXTINCTION VOLTAGE SHALL BE NOT LESS THAN 3048 VOLTS RMS AT THE SPECIFIED ALTITUDE.
3050	CORONA EXTINCTION VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3050.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA EXTINCTION VOLTAGE (CONT)	
TEST METHODS (CONT)	
PER MIL-C-87101.	3052
TEST VOLTAGE (VOLTS RMS)	3054
ALTITUDE (SELECT ONE)	
(FEET)	3056
(METERS)	3058
CRACK RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
NO VISIBLE DAMAGE OR PENETRATION OF FLUID.	2502
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2492
PER MIL-C-915.	2494
CROSSTALK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3060
AS FOLLOWS:	3062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3052	CORONA EXTINCTION VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
3054	THE TEST VOLTAGE SHALL BE 3054 VOLTS RMS.
3056	THE TEST ALTITUDE SHALL BE 3056 FEET.
3058	THE TEST ALTITUDE SHALL BE 3058 METERS.
2500	CRACK RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.
2502	CRACK RESISTANCE. THERE SHALL BE NO VISIBLE DAMAGE OR PENETRATION OF FLUID.
2492	CRACK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2492.
2494	CRACK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
3060	CROSSTALK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3060.
3062	CROSSTALK. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CROSSTALK (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CROSSTALK	
KF (NANOSECONDS PER FOOT)	3064
KB (PERCENT)	3066
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3068
PER MIL-C-87101.	3070
DRY DIELECTRIC STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3072
NO DIELECTRIC BREAKDOWN.	3074
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3076
PER MIL-C-7078.	3078
TEST VOLTAGE (VOLTS RMS)	3080

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3064	THE FORWARD CROSSTALK SHALL BE NOT GREATER THAN 3064 NANOSECOND(S) PER FOOT.
3066	THE REVERSE CROSSTALK SHALL BE NOT GREATER THAN 3066 PERCENT.
3068	CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3068.
3070	CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
3072	DRY DIELECTRIC STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3072.
3074	DRY DIELECTRIC STRENGTH. THERE SHALL BE NO DIELECTRIC BREAKDOWN.
3076	DRY DIELECTRIC STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3076.
3078	DRY DIELECTRIC STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7078.
3080	THE TEST VOLTAGE SHALL BE 3080 VOLTS RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2402
AS FOLLOWS:	2404
MAXIMUM FLAME DISTANCE (SELECT ONE)	
(INCHES)	2406
(MILLIMETERS)	2407
MAXIMUM FLAME DURATION (SECONDS)	2408
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2392
PER FED-STD-228	
*METHOD (SELECT ONE)	
5211.	2394
5221.	2396
5231.	2397
HEATING DURATION (SECONDS)	2398
NUMBER OF SPECIMENS (NUMBER)	2399

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2402	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2402.
2404	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2406	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2406 INCH(S).
2407	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2407 MILLIMETER(S).
2408	THE FLAME DURATION SHALL BE NOT GREATER THAN 2408 SECOND(S).
2392	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2392. FLAMMABILITY. TESTING SHALL BE IN ACCORDANCE WITH FED-STD-228.
2394	TEST METHOD 5211 SHALL APPLY.
2396	TEST METHOD 5221 SHALL APPLY.
2397	TEST METHOD 5231 SHALL APPLY.
2398	THE HEATING DURATION SHALL BE 2398 SECOND(S).
2399	THE NUMBER OF SPECIMENS SHALL BE 2399.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2650
NO BREAKING, FLAKING, CRACKING, OR DEGRADATION	2652
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2636
PER FED-STD-228	
*METHOD (SELECT ONE)	
2011.	2638
2021.	2640
2031.	2642
2041.	2644
2043.	2646
NUMBER OF SPECIMENS (NUMBER)	2634
TEMPERATURE (DEGREES CELSIUS)	2648
FLEXING ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3082

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2650	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2650.
2652	FLEXIBILITY. THERE SHALL BE NO BREAKING, FLAKING, CRACKING, AND NO DEGRADATION.
2636	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2636.
	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2638	TEST METHOD 2011 SHALL APPLY.
2640	TEST METHOD 2021 SHALL APPLY.
2642	TEST METHOD 2031 SHALL APPLY.
2644	TEST METHOD 2041 SHALL APPLY.
2646	TEST METHOD 2043 SHALL APPLY.
2634	THE NUMBER OF SPECIMENS SHALL BE 2634.
2648	THE TEST TEMPERATURE SHALL BE 2648 DEGREES CELSIUS.
3082	FLEXING ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXING ENDURANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3084
NO LOSS OF CONTINUITY.	3086
NO CRACKING OR SEPARATION.	3088
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3090
PER MIL-C-87101.	3092
LOAD (SELECT ONE)	
(POUNDS)	3094
(KILOGRAMS)	3096
CYCLES (NUMBER)	3098
FLUID IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2426
AS FOLLOWS:	2424
MAXIMUM THICKNESS INCREASE (PERCENT)	2428
NO DELAMINATION.	2430

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3084	FLEXING ENDURANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3086	THERE SHALL BE NO LOSS OF CONTINUITY.
3088	THERE SHALL BE NO CRACKING OR SEPARATION OF THE INSULATION.
3090	FLEXING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3090.
3092	FLEXING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
3094	THE TEST LOAD SHALL BE 3094 POUND(S).
3096	THE TEST LOAD SHALL BE 3096 KILOGRAM(S).
3098	THERE SHALL BE 3098 CYCLE(S).
2426	FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2424	FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2428	THE INCREASE IN THICKNESS SHALL BE NOT GREATER THAN 2428 PERCENT.
2430	THERE SHALL BE NO DELAMINATION, CRACKING, OR SEPARATION OF THE INSULATION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2412
PER DOCUMENT (DOC DES)	2414
FLUID ____	2415
TEST PERIOD (HOURS)	2418
TEMPERATURE (DEGREES CELSIUS)	2420
FOLDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2672
AS FOLLOWS:	2678
NO LOSS OF CONTINUITY.	2674
NO CRACKING OR SEPARATION.	2676
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2658
PER DOCUMENT (DOC DES)	2660
PRESSURE (SELECT ONE)	#
(POUNDS PER SQUARE INCH)	2662
(KILOPASCALS)	2663

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2412	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2412.
2414	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2414.
2415	THE FLUID(S) SHALL BE 2415.
2418	THE TEST PERIOD SHALL BE 2418 HOUR(S).
2420	THE TEST TEMPERATURE SHALL BE 2420 DEGREES CELSIUS.
2672	FOLDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2672.
2678	FOLDING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2674	THERE SHALL BE NO LOSS OF CONTINUITY.
2676	THERE SHALL BE NO CRACKING OR SEPARATION OF THE INSULATION.
2658	FOLDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2658.
2660	FOLDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2660.
2662	THE TEST PRESSURE SHALL BE 2662 POUND(S) PER SQUARE INCH.
2663	THE TEST PRESSURE SHALL BE 2663 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FOLDING (CONT)	
PER DOCUMENT (CONT)	
CYCLES (NUMBER)	2664
PERIOD (MINUTES)	2666
TEMPERATURE (DEGREES CELSIUS)	2668
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2664	THERE SHALL BE 2664 CYCLE(S).
2666	THE TEST PERIOD SHALL BE 2666 MINUTE(S).
2668	THE TEST TEMPERATURE SHALL BE 2668 DEGREES CELSIUS.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
GAS FLAME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2364
NO EXCESS CURRENT.	2366
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2352
PER MIL-C-915.	2350
TEST PERIOD (MINUTES)	2354
HIGH TEMPERATURE AGING (HEAT RESISTANCE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2038
NO CRACKING OF JACKET.	2040
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2032
PER DOCUMENT (DOC DES)	2034
TEST TEMPERATURE (DEGREES CELSIUS)	2033
DURATION (HOURS)	2035

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2364	GAS FLAME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2364.
2366	GAS FLAME. THERE SHALL BE NO EXCESS CURRENT.
2352	GAS FLAME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2350	GAS FLAME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
2354	THE TEST PERIOD SHALL BE 2354 MINUTE(S).
2038	HIGH TEMPERATURE AGING (HEAT RESISTANCE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2040	HIGH TEMPERATURE AGING (HEAT RESISTANCE). THERE SHALL BE NO CRACKING OF THE JACKET.
2032	HIGH TEMPERATURE AGING (HEAT RESISTANCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2032.
2034	HIGH TEMPERATURE AGING (HEAT RESISTANCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2034.
2033	THE TEST TEMPERATURE SHALL BE 2033 DEGREES CELSIUS.
2035	THE TEST DURATION SHALL BE 2035 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HYDROSTATIC (WATERTIGHTNESS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2286
AS FOLLOWS:	2287
LEAKAGE (SELECT ONE)	
NO LEAKAGE.	2288
MAXIMUM LEAKAGE (SELECT ONE)	
(CUBIC INCHES)	2290
(CUBIC CENTIMETERS)	2284
MAXIMUM SLIPPAGE (SELECT ONE)	
(INCHES)	2292
(MILLIMETERS)	2294
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2276
PER MIL-C-915.	2274
PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2280
(KILOPASCALS)	2278
DURATION (HOURS)	2282

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2286	HYDROSTATIC (WATERTIGHTNESS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2286.
2287	HYDROSTATIC (WATERTIGHTNESS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2288	THERE SHALL BE NO LEAKAGE.
2290	THE LEAKAGE SHALL BE NOT GREATER THAN 2290 CUBIC INCH(S).
2284	THE LEAKAGE SHALL BE NOT GREATER THAN 2284 CUBIC CENTIMETER(S).
2292	THE SLIPPAGE SHALL BE NOT GREATER THAN 2292 INCH(S).
2294	THE SLIPPAGE SHALL BE NOT GREATER THAN 2294 MILLIMETER(S).
2276	HYDROSTATIC (WATERTIGHTNESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2276.
2274	HYDROSTATIC (WATERTIGHTNESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
2280	THE TEST PRESSURE SHALL BE 2280 POUND(S) PER SQUARE INCH.
2278	THE TEST PRESSURE SHALL BE 2278 KILOPASCAL(S).
2282	THE TEST DURATION SHALL BE 2282 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3100
AS FOLLOWS:	3102
IMPEDANCE	
MAXIMUM (OHMS)	3104
MINIMUM (OHMS)	3106
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3108
PER DOCUMENT (DOC DES)	3110
INSULATION HEAT DISTORTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344
MAXIMUM CHANGE IN THICKNESS (PERCENT)	2346
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2333
PER FED-STD-228, METHOD 5021.	2335

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3100	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3100.
3102	IMPEDANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3104	THE IMPEDANCE SHALL BE NOT GREATER THAN 3104 OHM(S).
3106	THE IMPEDANCE SHALL BE NOT LESS THAN 3106 OHM(S).
3108	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3108.
3110	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3110.
2344	INSULATION HEAT DISTORTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.
2346	INSULATION HEAT DISTORTION. THE CHANGE IN THICKNESS SHALL BE NOT GREATER THAN 2346 PERCENT.
2333	INSULATION HEAT DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2333.
2335	INSULATION HEAT DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5021 OF FED-STD-228.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION HEAT DISTORTION (CONT)	
PER FED-STD-228, METHOD 5021. (CONT)	
TEMPERATURE (DEGREES CELSIUS)	2338
TEST PERIOD (HOURS)	2340
WEIGHT (SELECT ONE)	
(OUNCES)	2331
(GRAMS)	2342
NUMBER OF SPECIMENS (NUMBER)	2341
INSULATION HEAT SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2334
NO INTERNAL OR EXTERNAL CRACKS.	2336
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2316
PER FED-STD-228, METHOD 5011.	2318
TEMPERATURE (DEGREES CELSIUS)	2324
TEST PERIOD (HOURS)	2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2338	THE TEST TEMPERATURE SHALL BE 2338 DEGREES CELSIUS.
2340	THE TEST PERIOD SHALL BE 2340 HOUR(S).
2331	THE WEIGHT SHALL BE 2331 OUNCE(S).
2342	THE WEIGHT SHALL BE 2342 GRAM(S).
2341	THE NUMBER OF SPECIMENS SHALL BE 2341.
2334	INSULATION HEAT SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2334.
2336	INSULATION HEAT SHOCK. THERE SHALL BE NO INTERNAL OR EXTERNAL CRACKS.
2316	INSULATION HEAT SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2316.
2318	INSULATION HEAT SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5011 OF FED-STD-228.
2324	THE TEST TEMPERATURE SHALL BE 2324 DEGREES CELSIUS.
2330	THE TEST PERIOD SHALL BE 2330 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION OR JACKET ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2570
AS FOLLOWS:	2568
MINIMUM ELONGATION	
INSULATION (PERCENT)	2574
JACKET (PERCENT)	2572
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2562
PER FED-STD-228, METHOD 5011.	2564
NUMBER OR SPECIMENS (NUMBER)	2566

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2570	INSULATION OR JACKET ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2570.
2568	INSULATION OR JACKET ELONGATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2574	THE INSULATION ELONGATION SHALL BE NOT LESS THAN 2574 PERCENT.
2572	THE JACKET ELONGATION SHALL BE NOT LESS THAN 2572 PERCENT.
2562	INSULATION HEAT SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2562.
2564	INSULATION HEAT SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5011 OF FED-STD-228.
2566	THE NUMBER OF SPECIMENS SHALL BE 2566.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION OR JACKET TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2602
AS FOLLOWS:	2600
MINIMUM TENSILE STRENGTH	
INSULATION (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2604
(KILOPASCALS)	2605
JACKET (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2606
(KILOPASCALS)	2607
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2592
PER FED-STD-228, METHOD 3021.	2596
NUMBER OF SPECIMENS (NUMBER)	2598

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2602	INSULATION OR JACKET TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2602.
2600	INSULATION OR JACKET TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2604	THE INSULATION TENSILE STRENGTH SHALL BE NOT LESS THAN 2604 POUND(S) PER SQUARE INCH.
2605	THE INSULATION TENSILE STRENGTH SHALL BE NOT LESS THAN 2605 KILOPASCAL(S).
2606	THE JACKET TENSILE STRENGTH SHALL BE NOT LESS THAN 2606 POUND(S) PER SQUARE INCH.
2607	THE JACKET TENSILE STRENGTH SHALL BE NOT LESS THAN 2607 KILOPASCAL(S).
2592	INSULATION OR JACKET TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2592.
2596	INSULATION OR JACKET TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3021 OF FED-STD-228.
2598	THE NUMBER OF SPECIMENS SHALL BE 2598.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
MINIMUM RESISTANCE (SELECT ONE)	
(MEGOHMS PER 1000 FEET)	1692
(MEGOHMS PER KILOMETER)	1693
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER FED-STD-228, METHOD 6031.	1680
TEST VOLTAGE (VOLTS DC)	1684
PERIOD AFTER CIRCUIT CLOSED (MINUTES)	1687
IMMERSION MEDIUM (NAME)	1686
TEMPERATURE (DEGREES CELSIUS)	1688
IMMERSION PERIOD (HOURS)	1689
INSULATION SHRINKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2478

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
1692	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1692 MEGOHMS(S) PER 1000 FEET.
1693	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1693 MEGOHM(S) PER KILOMETER.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1680	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6031 OF FED-STD-228.
1684	THE TEST VOLTAGE SHALL BE 1684 VOLT(S) DC.
1687	THE PERIOD AFTER THE CIRCUIT IS CLOSED SHALL BE 1687 MINUTE(S).
1686	THE IMMERSION MEDIUM SHALL BE 1686.
1688	THE TEST TEMPERATURE SHALL BE 1688 DEGREES CELSIUS.
1689	THE IMMERSION PERIOD SHALL BE 1689 HOUR(S).
2478	INSULATION SHRINKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2478.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION SHRINKAGE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2476
NO FLARING.	2480
MAXIMUM SHRINKAGE (SELECT ONE)	
(INCHES)	2482
(MILLIMETERS)	2483
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2472
PER FED-STD-228, METHOD 8231.	2474
JACKET TEARING STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2688
MINIMUM TEARING STRENGTH (SELECT ONE)	
(POUNDS PER INCH THICKNESS)	2690
(NEWTONS PER MILLIMETER THICKNESS)	2691

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2476	INSULATION SHRINKAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2480	THERE SHALL BE NO FLARING OF THE INSULATION.
2482	THE SHRINKAGE SHALL BE NOT GREATER THAN 2482 INCH(S).
2483	THE SHRINKAGE SHALL BE NOT GREATER THAN 2483 MILLIMETER(S).
2472	INSULATION SHRINKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2472.
2474	INSULATION SHRINKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 8231 OF FED-STD-228.
2688	JACKET TEARING STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2688.
2690	JACKET TEARING STRENGTH. THE TEARING STRENGTH SHALL BE NOT LESS THAN 2690 POUND(S) PER INCH THICKNESS.
2691	JACKET TEARING STRENGTH. THE TEARING STRENGTH SHALL BE NOT LESS THAN 2691 NEWTON(S) PER MILLIMETER THICKNESS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
JACKET TEARING STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2682
PER FED-STD-228, METHOD 3111.	2684
LOW PRESSURE (ELEVATED TEMPERATURE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2458
AS FOLLOWS:	2456
MAXIMUM SHRINKAGE (SELECT ONE)	
(INCHES)	2460
(MILLIMETERS)	2461
NO BUBBLING, VOIDS OR DELAMINATION.	2462
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2442
PER DOCUMENT (DOC DES)	2444
TEMPERATURE (DEGREES CELSIUS)	2446
PRESSURE (SELECT ONE)	
(TORR)	2448
(PASCALS)	2449

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2682	JACKET TEARING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2682.
2684	JACKET TEARING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3111 OF FED-STD-228.
2458	LOW PRESSURE (ELEVATED TEMPERATURE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2458.
2456	LOW PRESSURE (ELEVATED TEMPERATURE). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2460	THE SHRINKAGE SHALL BE NOT GREATER THAN 2460 INCH(S).
2461	THE SHRINKAGE SHALL BE NOT GREATER THAN 2461 MILLIMETER(S).
2462	THERE SHALL BE NO BUBBLING, VOIDS, OR DELAMINATION.
2442	LOW PRESSURE (ELEVATED TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2442.
2444	LOW PRESSURE (ELEVATED TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2444.
2446	THE TEST TEMPERATURE SHALL BE 2446 DEGREES CELSIUS.
2448	THE TEST PRESSURE SHALL BE 2448 TORR.
2449	THE TEST PRESSURE SHALL BE 2449 PASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE FLEXIBILITY (COLD BEND)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2556
NO CRACKS OR BREAKS.	2558
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2532
PER FED-STD-228	
*METHOD (SELECT ONE)	
2011.	2534
2043.	2535
TEST TEMPERATURE (DEGREES CELSIUS)	2542
TEST PERIOD (HOURS)	2548
NUMBER OF SPECIMENS (NUMBER)	2538
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2536
(MILLIMETERS)	2537
TEST LOAD (SELECT ONE)	
(POUNDS)	2530
(KILOGRAMS)	2531

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2556	LOW TEMPERATURE FLEXIBILITY (COLD BEND). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2556.
2558	LOW TEMPERATURE FLEXIBILITY (COLD BEND). THERE SHALL BE NO CRACKS OR BREAKS.
2532	LOW TEMPERATURE FLEXIBILITY (COLD BEND). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2532.
	LOW TEMPERATURE FLEXIBILITY (COLD BEND). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2534	TEST METHOD 2011 SHALL APPLY.
2535	TEST METHOD 2043 SHALL APPLY.
2542	THE TEST TEMPERATURE SHALL BE 2542 DEGREES CELSIUS.
2548	THE TEST PERIOD SHALL BE 2548 HOUR(S).
2538	THE NUMBER OF SPECIMENS SHALL BE 2538.
2536	THE MANDREL DIAMETER SHALL BE 2536 INCH(S).
2537	THE MANDREL DIAMETER SHALL BE 2537 MILLIMETER(S).
2530	THE TEST LOAD SHALL BE 2530 POUND(S).
2531	THE TEST LOAD SHALL BE 2531 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OF PHYSICAL DAMAGE.	1396
NO DIELECTRIC OR INSULATION BREAKDOWN.	1394
REQUIREMENTS AFTER TEST SHALL BE ____	2991
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
INITIAL MEASUREMENTS SHALL BE ____	2990
LOADING VOLTAGE (VOLTS)	2992
FINAL MEASUREMENTS SHALL BE ____	2994
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MUTUAL INDUCTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1754

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO DIELECTRIC OR INSULATION BREAKDOWN.
2991	THE REQUIREMENT(S) AFTER TEST SHALL BE 2991.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
2990	THE INITIAL MEASUREMENTS SHALL BE 2990.
2992	THE LOADING VOLTAGE SHALL BE 2992 VOLT(S).
2994	THE FINAL MEASUREMENTS SHALL BE 2994.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1754	MUTUAL INDUCTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1754.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MUTUAL INDUCTANCE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM INDUCTANCE (MICROHENRYS)	1756
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1744
PER MIL-C-915.	1746
TEST FREQUENCY (HERTZ)	1750
NOTCH SENSITIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3112
AS FOLLOWS:	3114
NO PROPAGATION OF NOTCH PAST SECOND CONDUCTOR.	3116
LOAD (SELECT ONE)	
(POUNDS)	3118
(NEWTONS)	3120
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3122
PER MIL-C-87101.	3124

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1756	MUTUAL INDUCTANCE. THE INDUCTANCE SHALL BE NOT GREATER THAN 1756 MICROHENRY(S).
1744	MUTUAL INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1744.
1746	MUTUAL INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
1750	THE TEST FREQUENCY SHALL BE 1750 HERTZ.
3112	NOTCH SENSITIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3112.
3114	NOTCH SENSITIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3116	THERE SHALL BE NO PROPAGATION OF THE NOTCH PAST THE SECOND CONDUCTOR.
3118	THE LOAD SHALL BE NOT LESS THAN 3118 POUND(S).
3120	THE LOAD SHALL BE NOT LESS THAN 3120 NEWTON(S).
3122	NOTCH SENSITIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3122.
3124	NOTCH SENSITIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERMANENCE OF PRINTING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
PRINTING LEGIBLE.	1954
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1938
PER MIL-C-915.	1940
CYCLES (NUMBER)	1946
PHASE STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3126
MAXIMUM COEFFICIENT OF CHANGE IN ELECTRICAL LENGTH (PARTS PER MILLION PER DEGREES CELSIUS)	3128
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3130
PER MIL-C-87101.	3132
TEST FREQUENCY (MEGAHERTZ)	3134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1952	PERMANENCE OF PRINTING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	PERMANENCE OF PRINTING. THE PRINTING SHALL BE LEGIBLE.
1938	PERMANENCE OF PRINTING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1938.
1940	PERMANENCE OF PRINTING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
1946	THERE SHALL BE 1946 CYCLE(S).
3126	PHASE STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3126.
3128	PHASE STABILITY. THE COEFFICIENT OF CHANGE IN ELECTRICAL LENGTH SHALL BE NOT GREATER THAN 3128 PART(S) PER MILLION PER DEGREE CELSIUS.
3130	PHASE STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3130.
3132	PHASE STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
3134	THE TEST FREQUENCY SHALL BE 3134 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PHASE STABILITY (CONT)	
PER MIL-C-87101. (CONT)	
TEST TEMPERATURES	
HIGH (DEGREES CELSIUS)	3136
*LOW (DEGREES CELSIUS)	3138
PRESSURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2252
AS FOLLOWS:	2250
MINIMUM INSULATION RESISTANCE (SELECT ONE)	
(MEGOHMS PER 1000 FEET)	2254
(MEGOHMS PER KILOMETER)	2251
MAXIMUM CAPACITANCE (SELECT ONE)	
(PICOFARADS PER FOOT)	2256
(PICOFARADS PER METER)	2253
MEASURE BETWEEN ____	2255

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3136	THE HIGH TEST TEMPERATURE SHALL BE 3136 DEGREES CELSIUS.
3138	THE LOW TEST TEMPERATURE SHALL BE 3138 DEGREES CELSIUS.
2252	PRESSURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2252.
2250	PRESSURE CYCLING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2254	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2254 MEGOHM(S) PER 1000 FEET.
2251	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2251 MEGOHM(S) PER KILOMETER.
2256	THE CAPACITANCE SHALL BE NOT GREATER THAN 2256 PICOFARAD(S) PER FOOT.
2253	THE CAPACITANCE SHALL BE NOT GREATER THAN 2253 PICOFARAD(S) PER METER.
2255	MEASUREMENTS SHALL BE MADE BETWEEN 2255.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE CYCLING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2232
PER MIL-C-915.	2234
PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2236
(KILOPASCALS)	2230
PROPAGATION DELAY	
REQUIREMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3140
MAXIMUM PROPAGATION DELAY (SELECT ONE)	
(NANOSECONDS PER FOOT)	3142
(NANOSECONDS PER METER)	3144
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3146
PER MIL-C-87101.	3148

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2232	PRESSURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2232.
2234	PRESSURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
2236	THE TEST PRESSURE SHALL BE 2236 POUND(S) PER SQUARE INCH.
2230	THE TEST PRESSURE SHALL BE 2230 KILOPASCAL(S).
3140	PROPAGATION DELAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3140.
3142	PROPAGATION DELAY. THE PROPAGATION DELAY SHALL BE NOT GREATER THAN 3142 NANOSECOND(S) PER FOOT.
3144	PROPAGATION DELAY. THE PROPAGATION DELAY SHALL BE NOT GREATER THAN 3144 NANOSECOND(S) PER METER.
3146	PROPAGATION DELAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3146.
3148	PROPAGATION DELAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PULSE RESPONSE TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1732
AS FOLLOWS:	1733
MAXIMUM RISE TIME (SELECT ONE)	
(NANOSECONDS)	1734
(MICROSECONDS)	1736
MAXIMUM FALL TIME (SELECT ONE)	
(NANOSECONDS)	1738
(MICROSECONDS)	1740
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1722
PER MIL-C-915.	1724
RESISTANCE TO ACID AND ALKALI	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2064
MAXIMUM ABSORPTION (PERCENT)	2066
NO DIELECTRIC BREAKDOWN.	2065

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1732	PULSE RESPONSE TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
1733	PULSE RESPONSE TIME. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1734	THE RISE TIME SHALL BE NOT GREATER THAN 1734 NANOSECOND(S).
1736	THE RISE TIME SHALL BE NOT GREATER THAN 1736 MICROSECOND(S).
1738	THE FALL TIME SHALL BE NOT GREATER THAN 1738 NANOSECOND(S).
1740	THE FALL TIME SHALL BE NOT GREATER THAN 1740 MICROSECOND(S).
1722	PULSE RESPONSE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1724	PULSE RESPONSE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
2064	RESISTANCE TO ACID AND ALKALI. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2064.
2066	RESISTANCE TO ACID AND ALKALI. THE ABSORPTION SHALL BE NOT GREATER THAN 2066 PERCENT.
2065	RESISTANCE TO ACID AND ALKALI. THERE SHALL BE NO DIELECTRIC BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO ACID AND ALKALI (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
PER FED-STD-228, METHOD 7011.	2054
SOLUTION (NAME)	2060
TEST TEMPERATURE (DEGREES CELSIUS)	2058
TEST PERIOD (HOURS)	2056
RESISTANCE TO LIGHT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2116
AS FOLLOWS:	2117
NO CRACKING OR CHECKING.	2118
JACKET	
MAXIMUM CHANGE IN TENSILE STRENGTH (PERCENT)	2120
MAXIMUM CHANGE IN ELONGATION (PERCENT)	2122
INSULATION	
MAXIMUM CHANGE IN TENSILE STRENGTH (PERCENT)	2124

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2052	RESISTANCE TO ACID AND ALKALI. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
2054	RESISTANCE TO ACID AND ALKALI. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 7011 OF FED-STD-228.
2060	THE SOLUTION SHALL BE 2060.
2058	THE TEST TEMPERATURE SHALL BE 2058 DEGREES CELSIUS.
2056	THE TEST PERIOD SHALL BE 2056 HOUR(S).
2116	RESISTANCE TO LIGHT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2116.
2117	RESISTANCE TO LIGHT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2118	THERE SHALL BE NO CRACKING OR CHECKING.
2120	THE CHANGE IN JACKET TENSILE STRENGTH SHALL BE NOT GREATER THAN 2120 PERCENT.
2122	THE CHANGE IN JACKET ELONGATION SHALL BE NOT GREATER THAN 2122 PERCENT.
2124	THE CHANGE IN INSULATION TENSILE STRENGTH SHALL BE NOT GREATER THAN 2124 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO LIGHT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2092
PER FED-STD-228, METHOD 4131.	2094
EXPOSURE (HOURS)	2106
RESISTANCE TO OIL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2160
AS FOLLOWS:	2161
JACKET	
MAXIMUM CHANGE IN TENSILE STRENGTH (PERCENT)	2162
MAXIMUM CHANGE IN ELONGATION (PERCENT)	2164
INSULATION	
MAXIMUM CHANGE IN TENSILE STRENGTH (PERCENT)	2166
MAXIMUM CHANGE IN ELONGATION (PERCENT)	2168

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2092	RESISTANCE TO LIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2094	RESISTANCE TO LIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4131 OF FED-STD-228.
2106	THE EXPOSURE SHALL BE 2106 HOUR(S).
2160	RESISTANCE TO OIL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2161	RESISTANCE TO OIL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2162	THE CHANGE IN JACKET TENSILE STRENGTH SHALL BE NOT GREATER THAN 2162 PERCENT.
2164	THE CHANGE IN JACKET ELONGATION SHALL BE NOT GREATER THAN 2164 PERCENT.
2166	THE CHANGE IN INSULATION TENSILE STRENGTH SHALL BE NOT GREATER THAN 2166 PERCENT.
2168	THE CHANGE IN INSULATION ELONGATION SHALL BE NOT GREATER THAN 2168 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO OIL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2132
PER FED-STD-228	
*METHOD (SELECT ONE)	
4221.	2134
4223.	2136
IMMERSION PERIOD (HOURS)	2140
TEMPERATURE (DEGREES CELSIUS)	2146
RESISTANCE TO OZONE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2186
NO CRACKING.	2188
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2172
PER FED-STD-228, METHOD 4111.	2174
EXPOSURE PERIOD (HOURS)	2176
TEMPERATURE (DEGREES CELSIUS)	2178

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2132	RESISTANCE TO OIL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2132.
	RESISTANCE TO OIL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2134	TEST METHOD 4221 SHALL APPLY.
2136	TEST METHOD 4223 SHALL APPLY.
2140	THE IMMERSION PERIOD SHALL BE 2140 HOUR(S).
2146	THE TEST TEMPERATURE SHALL BE 2146 DEGREES CELSIUS.
2186	RESISTANCE TO OZONE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2186.
2188	RESISTANCE TO OZONE. THERE SHALL BE NO CRACKING OF THE INSULATION.
2172	RESISTANCE TO OZONE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2172.
2174	RESISTANCE TO OZONE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4111 OF FED-STD-228.
2176	THE EXPOSURE PERIOD SHALL BE 2176 HOUR(S).
2178	THE TEST TEMPERATURE SHALL BE 2178 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SMOKE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3150
MAXIMUM OPTICAL DENSITY (NUMBER)	3152
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3154
PER MIL-C-49059.	3156
TEST PERIOD (MINUTES)	3158
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3150	SMOKE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3150.
3152	SMOKE. THE OPTICAL DENSITY SHALL BE NOT GREATER THAN 3152.
3154	SMOKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3154.
3156	SMOKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-49059.
3158	THE TEST PERIOD SHALL BE 3158 MINUTE(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
SPARK TEST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1846
NO BREAKDOWN.	1848
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
PER FED-STD-228, METHOD 6211.	1833
TEST VOLTAGE (VOLTS AC)	1836
STRESS CRACK RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3160
NO EVIDENCE OF CRACKS, FLAWS, OR DAMAGE.	3162

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
1846	SPARK TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1846.
1848	SPARK TEST. THERE SHALL BE NO ELECTRICAL BREAKDOWN.
1832	SPARK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1833	SPARK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6211 OF FED-STD-228.
1836	THE TEST VOLTAGE SHALL BE 1836 VOLT(S) AC.
3160	STRESS CRACK RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3160.
3162	STRESS CRACK RESISTANCE. THERE SHALL BE NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRESS CRACK RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3164
PER MIL-C-87101.	3166
TEST TEMPERATURE (DEGREES CELSIUS)	3168
TEST DURATION (HOURS)	3170
STRESS ENDURANCE	
REQUIRMEENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3172
NO BREAKS OR CRACKS.	3174
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3176
PER MIL-C-915.	3178
CYCLES (NUMBER)	3180
SURFACE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1920

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3164	STRESS CRACK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3164.
3166	STRESS CRACK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
3168	THE TEST TEMPERATURE SHALL BE 3168 DEGREES CELSIUS.
3170	THE TEST DURATION SHALL BE 3170 HOUR(S).
3172	STRESS ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3172.
3174	STRESS ENDURANCE. THERE SHALL BE NO BREAKS OR CRACKS.
3176	STRESS ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3176.
3178	STRESS ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
3180	THERE SHALL BE 3180 CYCLE(S).
1920	SURFACE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1920.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
MINIMUM SURFACE RESISTANCE (SELECT ONE)	
(OHMS PER INCH)	1922
(OHMS PER MILLIMETER)	1923
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
PER FED-STD-228, METHOD 6041.	1910
NUMBER OF SPECIMENS (NUMBER)	1914
TEAR GROOVE PROPAGATION/BREAKOUTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3182
AS FOLLOWS:	3184
NO PROPAGATION INTO ADJACENT CONDUCTOR.	3186
LOAD (SELECT ONE)	
U.S.	
MINIMUM (POUNDS)	3188
MAXIMUM (POUNDS)	3190
SI	
MINIMUM (NEWTONS)	3192

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1922 SURFACE RESISTANCE. THE SURFACE RESISTANCE SHALL BE NOT LESS THAN 1922 OHM(S) PER INCH.

1923 SURFACE RESISTANCE. THE SURFACE RESISTANCE SHALL BE NOT LESS THAN 1923 OHM(S) PER MILLIMETER.

1912 SURFACE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.

1910 SURFACE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6041 OF FED-STD-228.

1914 THE NUMBER OF SPECIMENS SHALL BE 1914.

3182 TEAR GROOVE PROPAGATION/BREAKOUTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3182.

3184 TEAR GROOVE PROPAGATION/BREAKOUTS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3186 THERE SHALL BE NO PROPAGATION OF THE TEAR INTO AN ADJACENT CONDUCTOR.

3188 THE LOAD SHALL BE NOT LESS THAN 3188 POUND(S).

3190 THE LOAD SHALL BE NOT GREATER THAN 3190 POUND(S).

3192 THE LOAD SHALL BE NOT LESS THAN 3192 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

STANDARD PARAGRAPH	CHAR CODE
TEAR GROOVE PROPAGATION/BREAKOUTS (CONT)	
SI (CONT)	
MAXIMUM (NEWTONS)	3194
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3196
PER DOCUMENT (DOC DES)	3198
TENSION SET	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2838
MAXIMUM TENSION SET (PERCENT)	2840
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2828
PER FED-STD-228, METHOD 3161.	2846
ELONGATION (SELECT ONE)	
(INCHES)	2830
(METERS)	2831
ELONGATION DURATION (MINUTES)	2832
DURATION AFTER RELEASE (MINUTES)	2852
NUMBER OF SPECIMENS (NUMBER)	2826

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3194	THE LOAD SHALL BE NOT GREATER THAN 3194 NEWTON(S).
3196	TEAR GROOVE PROPAGATION/BREAKOUTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3196.
3198	TEAR GROOVE PROPAGATION/BREAKOUTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3198.
2838	TENSION SET. THE REQUIREMENT(S) SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2838.
2840	TENSION SET. THE TENSION SET SHALL BE NOT GREATER THAN 2840 PERCENT.
2828	TENSION SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2828.
2846	TENSION SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3161 OF FED-STD-228.
2830	THE ELONGATION SHALL BE 2830 INCH(S).
2831	THE ELONGATION SHALL BE 2831 METER(S).
2832	THE ELONGATION DURATION SHALL BE 2832 MINUTE(S).
2852	THE DURATION AFTER RELEASE SHALL BE 2852 MINUTE(S).
2826	THE NUMBER OF SPECIMENS SHALL BE 2826.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK, (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
THERMOPLASTIC FLOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
NO DIELECTRIC BREAKDOWN.	1904
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
PER MIL-C-915.	1884

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK, (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK, (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1902	THERMOPLASTIC FLOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1904	THERMOPLASTIC FLOW. THERE SHALL BE NO DIELECTRIC BREAKDOWN.
1882	THERMOPLASTIC FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	THERMOPLASTIC FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TWISTING ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2628
NO BREAKING OF CONDUCTORS OR CRACKING OF INSULATION OR JACKET.	2630
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2611
PER DOCUMENT (DOC DES)	2610
TENSION (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2612
(KILOPASCALS)	2613
TEMPERATURE (DEGREES CELSIUS)	2616
CYCLES (NUMBER)	2622
VACUUM STABILITY	
REQUIREMENTS (SELECG ONE)	
PER BASE DOCUMENT EXCEPT ____	4300
AS FOLLOWS:	4302
MAXIMUM TOTAL WEIGHT LOSS (PERCENT)	4304

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2628	TWISTING ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2628.
2630	TWISTING ENDURANCE. THERE SHALL BE NO BREAKING OF CONDUCTORS OR CRACKING OF INSULATION OR JACKET.
2611	TWISTING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2611.
2610	TWISTING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2610.
2612	THE TENSION SHALL BE 2612 POUND(S) PER SQUARE INCH.
2613	THE TENSION SHALL BE 2613 KILOPASCAL(S).
2616	THE TEST TEMPERATURE SHALL BE 2616 DEGREES CELSIUS.
2622	THERE SHALL BE 2622 CYCLE(S).
4300	VACUUM STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4300.
4302	VACUUM STABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4304	THE TOTAL WEIGHT LOSS SHALL BE NOT GREATER THAN 4304 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VACUUM STABILITY (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM VOLATILE CONDENSABLE MATERIALS (PERCENT)	4306
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4308
PER MIL-C-87101.	4310
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4306	THE VOLATILE CONDENSABLE MATERIALS SHALL BE NOT GREATER THAN 4306.
4308	VACUUM STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4308.
4310	VACUUM STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
METHOD OF MOUNTING (CONT)	
NORMAL MOUNTING MEANS.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
VOLTAGE STANDING WAVE RATIO/RETURN LOSS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4312
AS FOLLOWS:	4314
MAXIMUM (VSWR)	4316
MINIMUM RETURN LOSS (DECIBELS)	4318
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4320
PER MIL-C-87101.	4322
TEST FREQUENCY	
MINIMUM (MEGAHERTZ)	4324
*MAXIMUM	4326
NOMINAL (MEGAHERTZ)	4328
VOLTAGE WITHSTAND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1712
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	1714

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
4312	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4312.
4314	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4316	THE VOLTAGE STANDING WAVE RATIO SHALL BE NOT GREATER THAN 4316.
4318	THE RETURN LOSS SHALL BE NOT LESS THAN 4318 DECIBEL(S).
4320	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4320.
4322	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-87101.
4324 4326	THE TEST FREQUENCY SHALL BE FROM 4324 MEGAHERTZ TO 4326 MEGAHERTZ.
4328	THE TEST FREQUENCY SHALL BE 4328 MEGAHERTZ.
1712	VOLTAGE WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.
1714	VOLTAGE WITHSTAND. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE WITHSTAND (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1702
PER FED-STD-228, METHOD 6111.	1704
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	1700
(VOLTS DC)	1701
IMMERSION PERIOD (HOURS)	1703
VOLTAGE APPLICATION PERIOD (MINUTES)	1705
WET DIELECTRIC STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1822
NO DIELECTRIC BREAKDOWN.	1824
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1814
PER MIL-C-7078.	1815
TEST VOLTAGE (VOLTS RMS)	1816

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6111 OF FED-STD-228.
1700	THE TEST VOLTAGE SHALL BE 1700 VOLT(S) AC.
1701	THE TEST VOLTAGE SHALL BE 1701 VOLT(S) DC.
1703	THE IMMERSION PERIOD SHALL BE 1703 HOUR(S).
1705	THE VOLTAGE APPLICATION PERIOD SHALL BE 1705 MINUTE(S).
1822	WET DIELECTRIC STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.
1824	WET DIELECTRIC STRENGTH. THERE SHALL BE NO DIELECTRIC BREAKDOWN.
1814	WET DIELECTRIC STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1814.
1815	WET DIELECTRIC STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7078.
1816	THE TEST VOLTAGE SHALL BE 1816 VOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(1) 7001.
7002	(2) 7002.
7003	(3) 7003.
7004	(4) 7004.
7005	(5) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A296)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

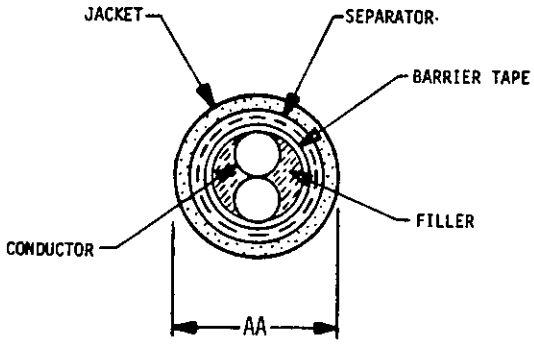


037-01-1

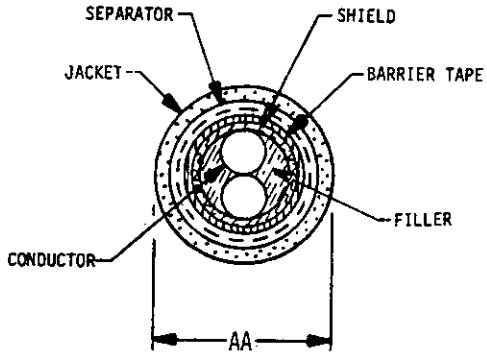

037-01-2

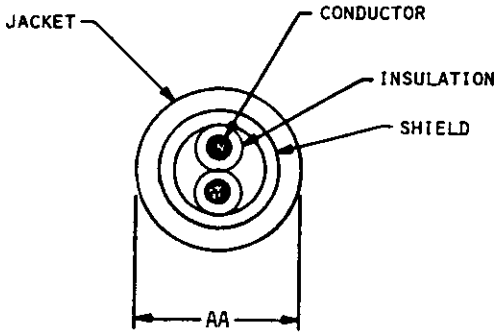


037-01-3

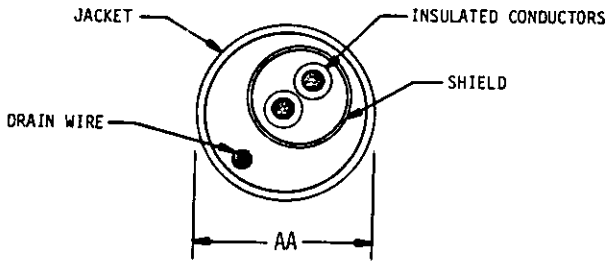


037-01-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

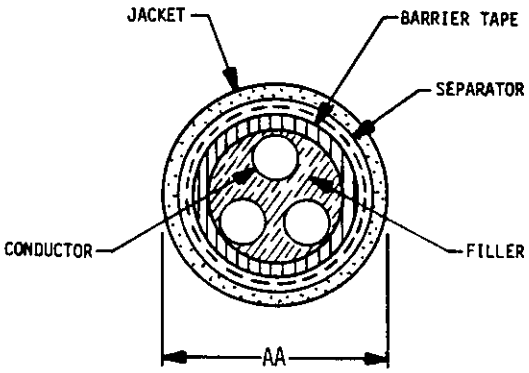


037-02-1

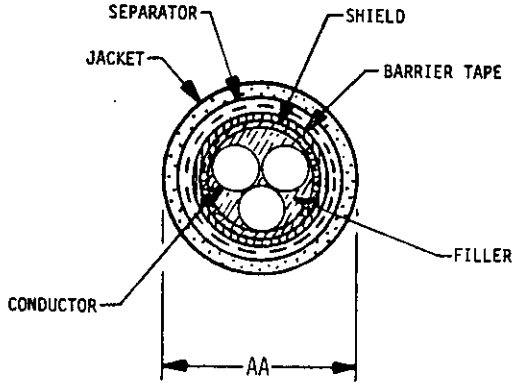

037-02-2

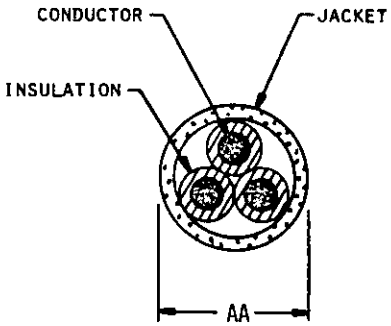


037-02-3

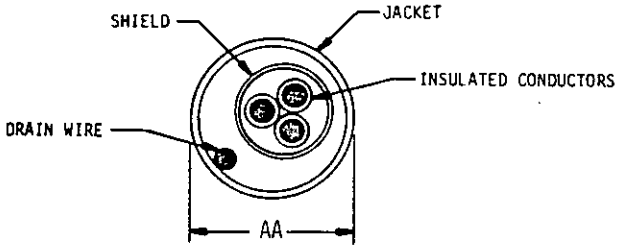


037-02-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

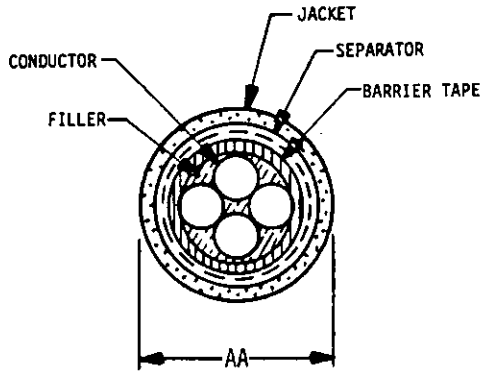


037-03-1

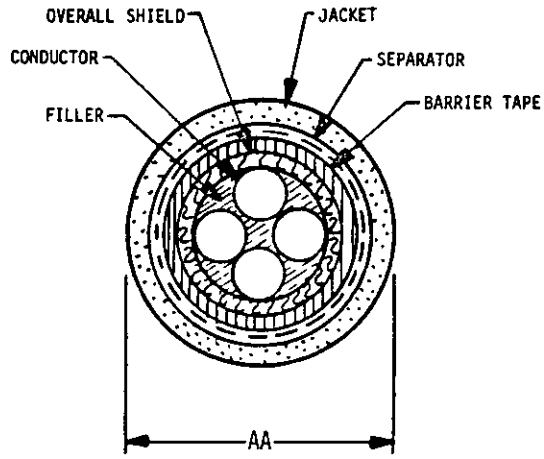

037-03-2

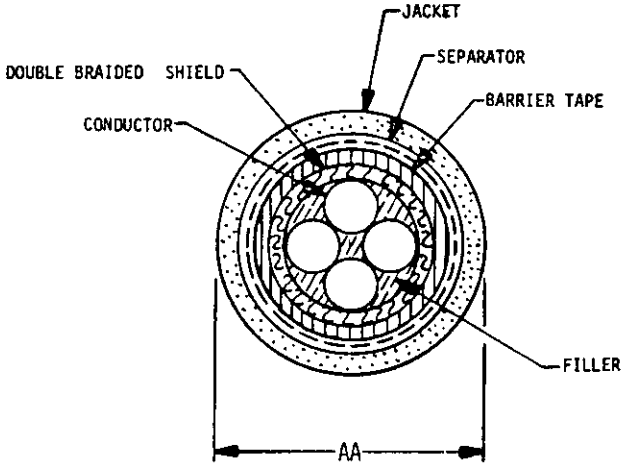


037-03-3

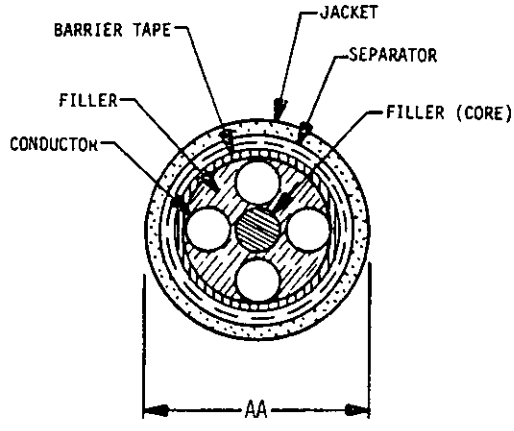


037-03-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

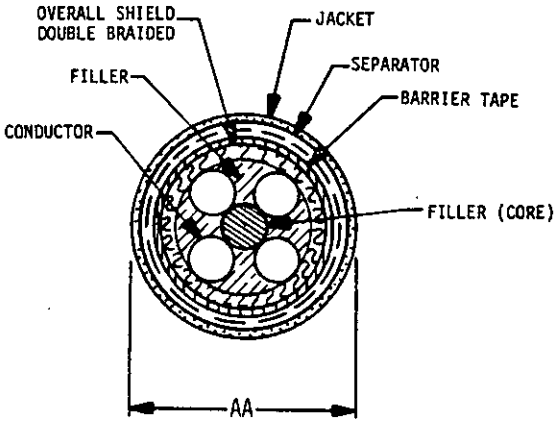


037-03-5

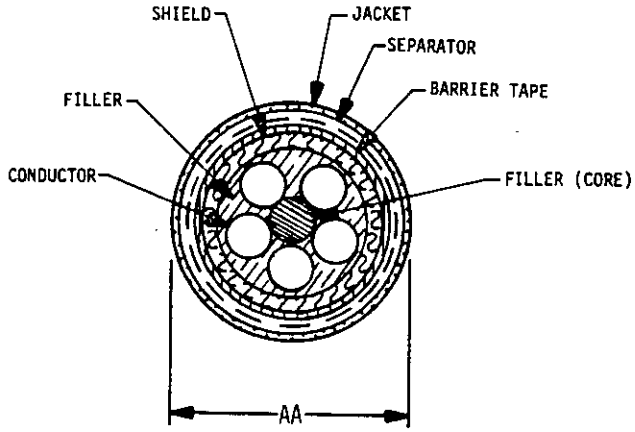

037-04-1

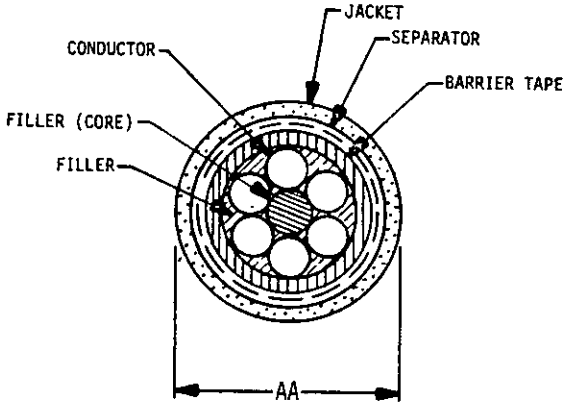


037-05-1

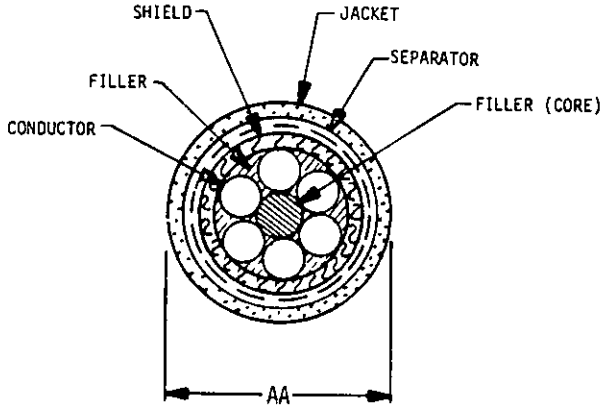


037-05-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

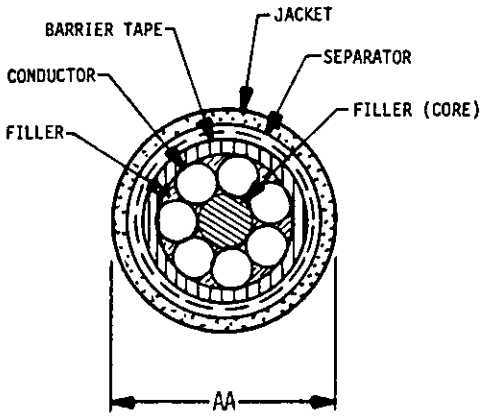


037-06-1

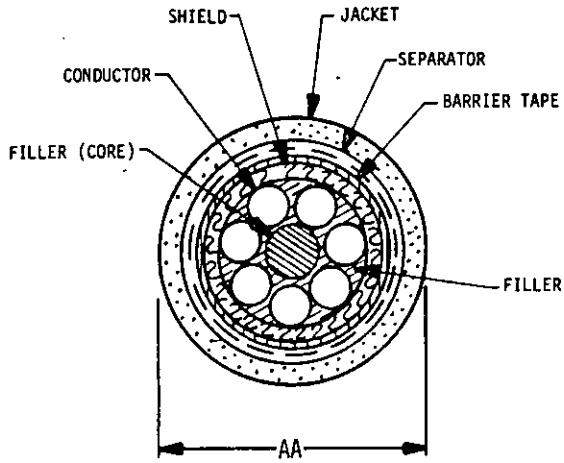

037-06-2

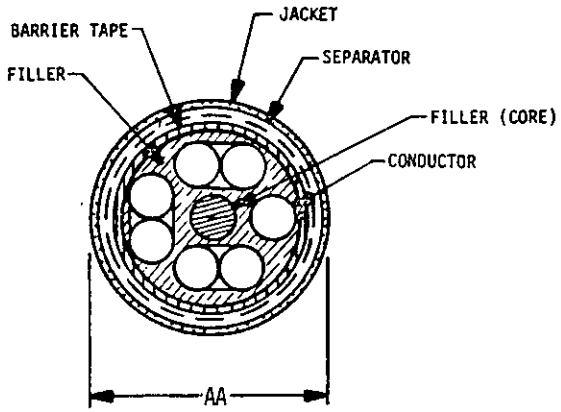


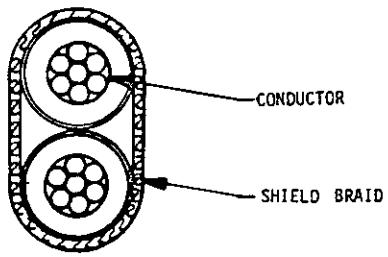


TWO CONDUCTORS
TWISTED AND SHIELDED
DETAIL

037-06-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

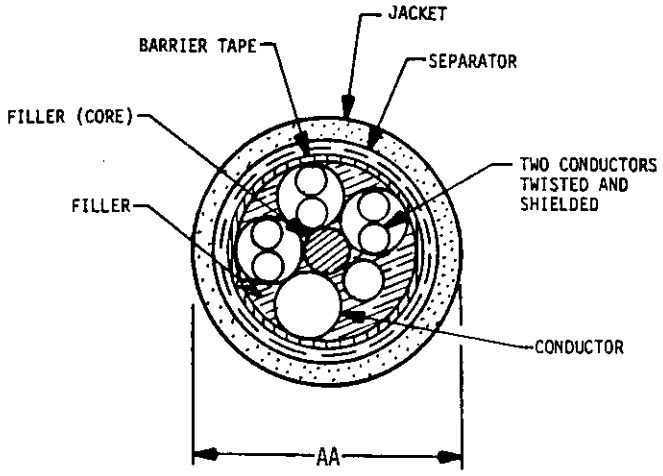

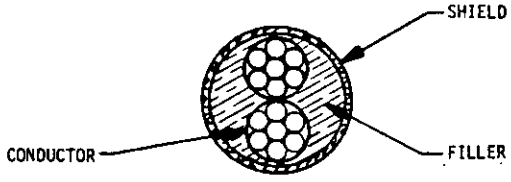


TWO CONDUCTORS TWISTED
AND SHIELDED
DETAIL

037-06-4

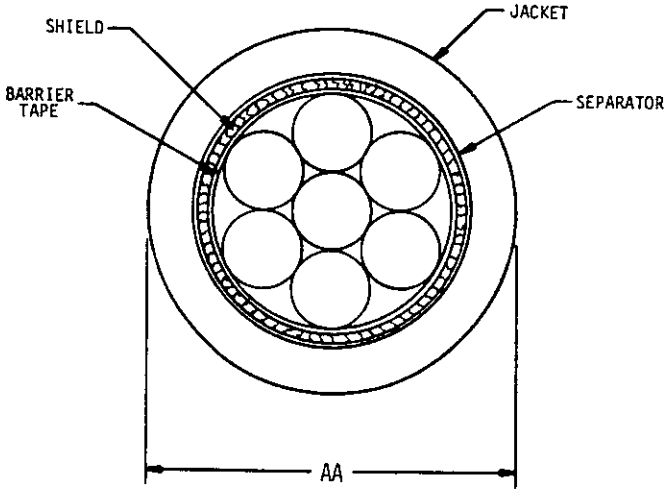


037-06-5




037-06-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

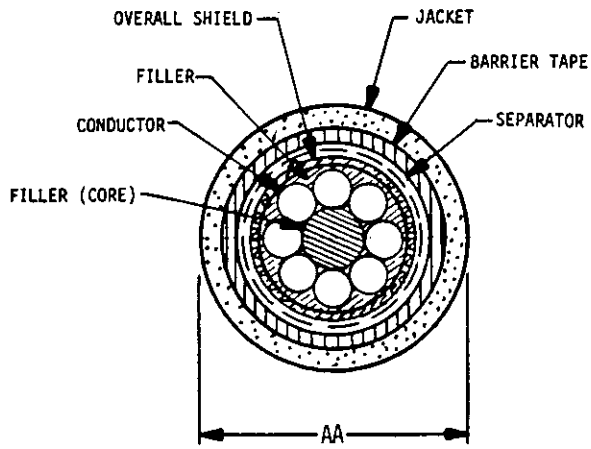


037-07-1

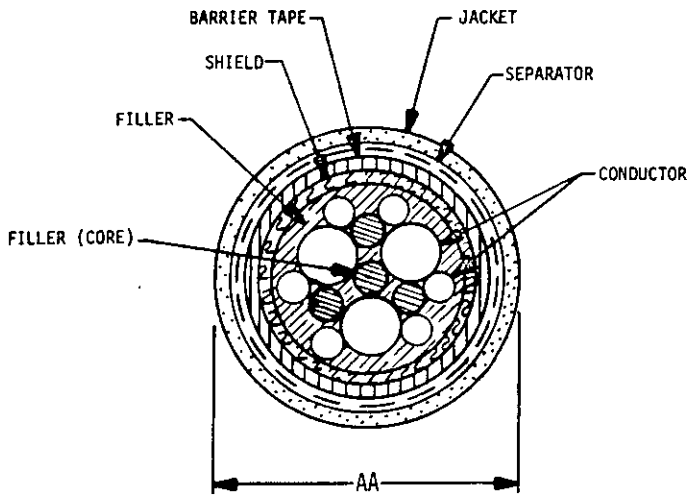


037-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

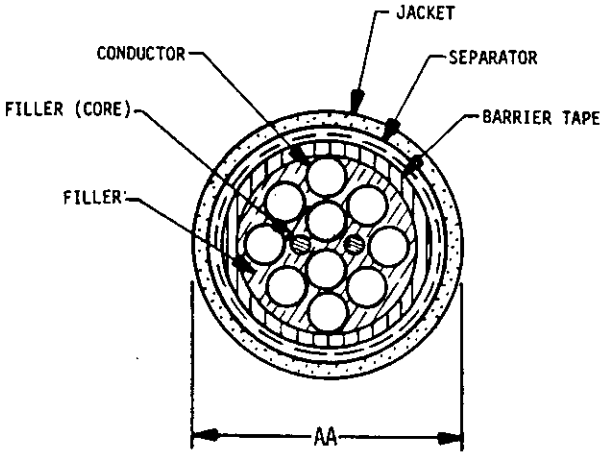


037-09-1

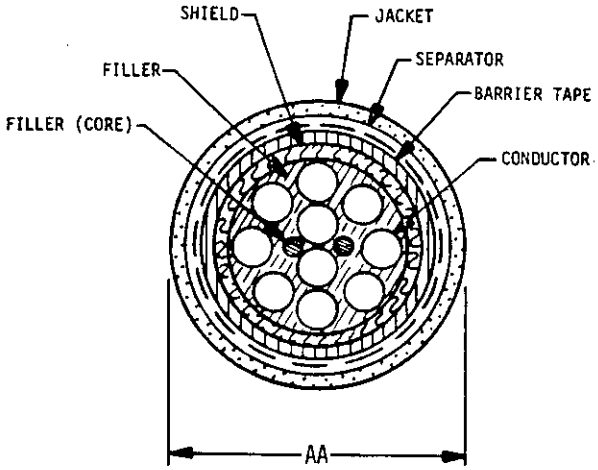



037-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

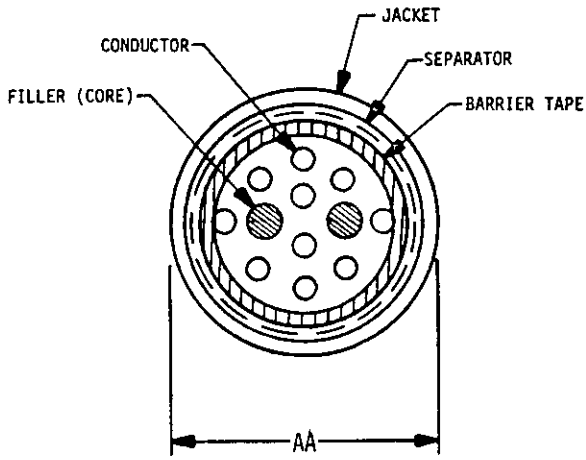

037-09-3

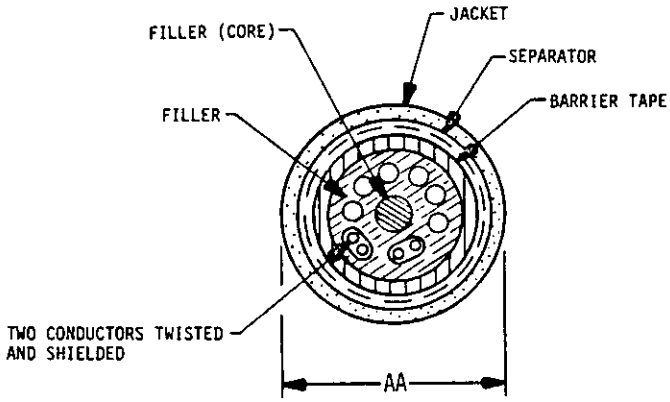


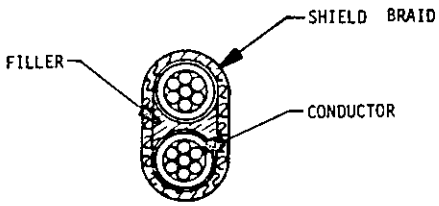


TWO CONDUCTORS
TWISTED AND SHIELDED
DETAIL

037-09-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

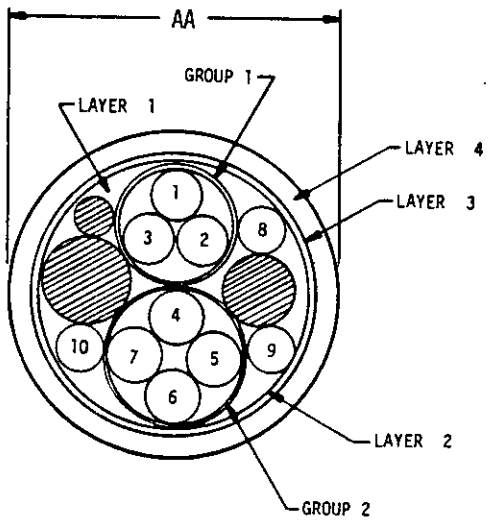


037-09-5

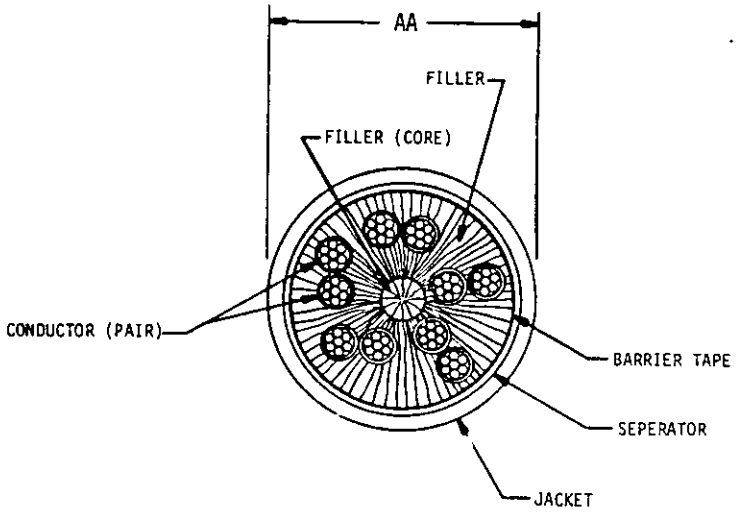


037-09-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

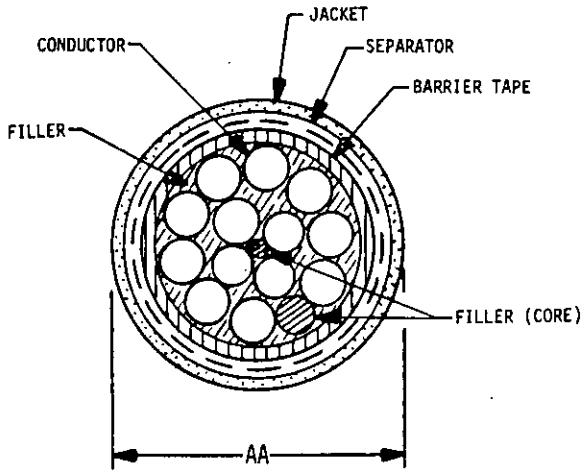

037-10-1

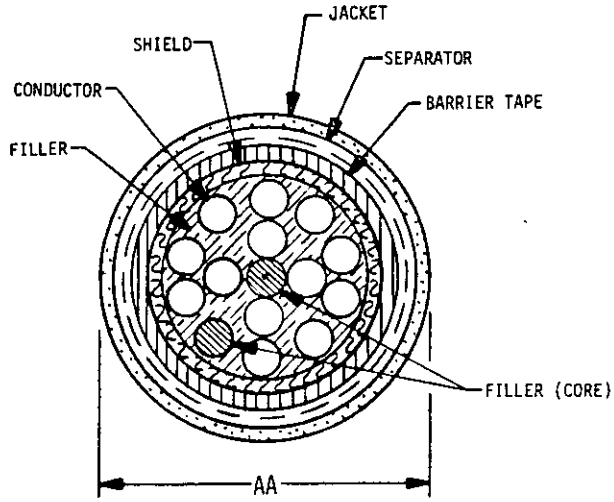


037-10-2

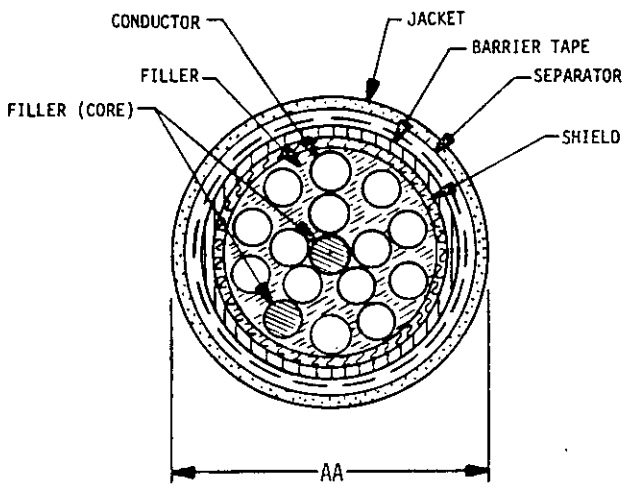


037-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

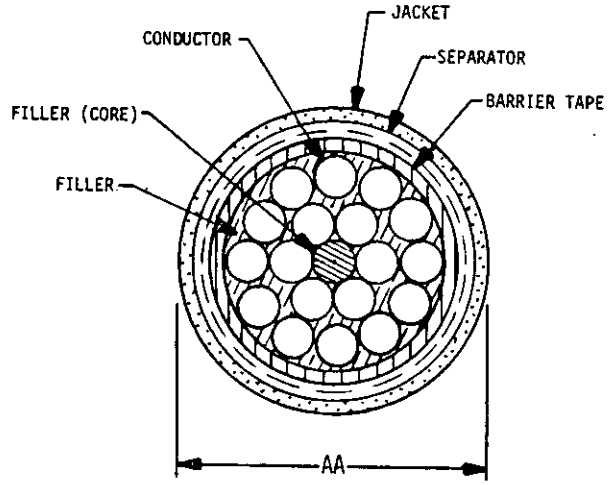


037-12-1

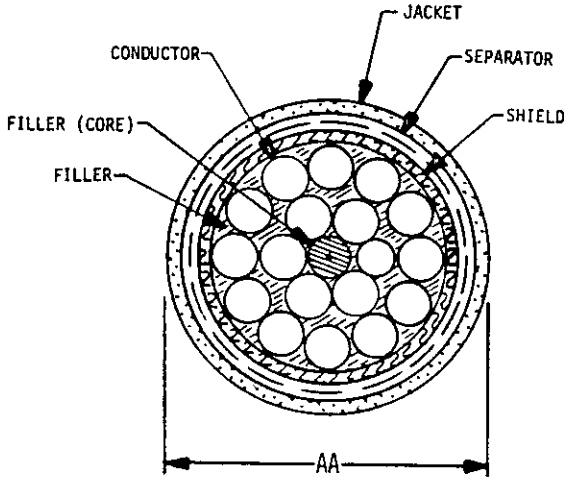


037-12-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

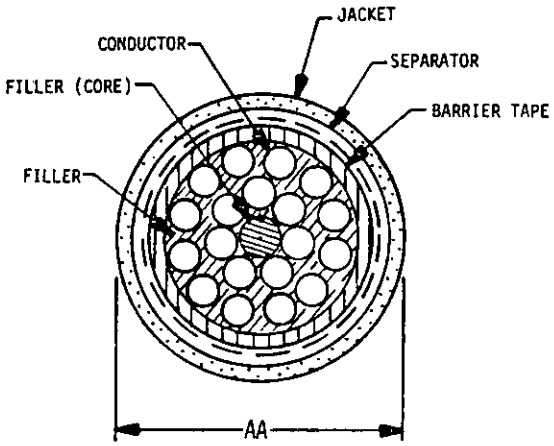

037-13-1

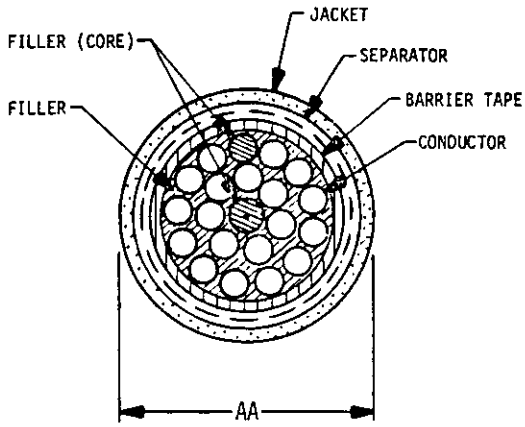


037-13-2

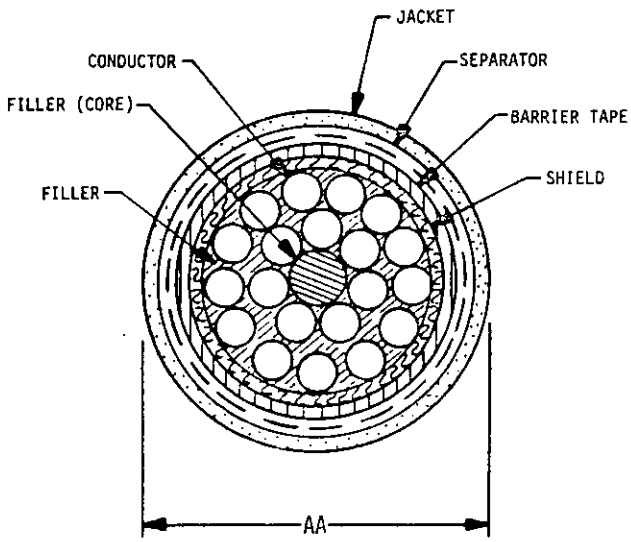


037-14-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

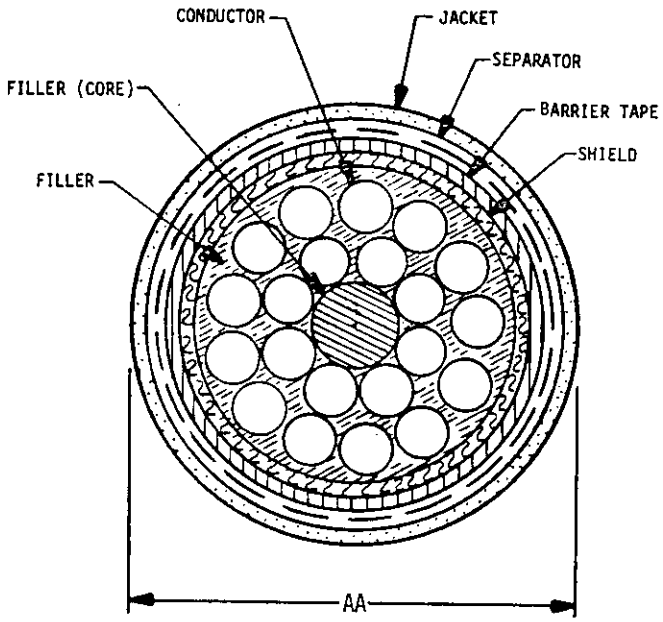


037-15-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

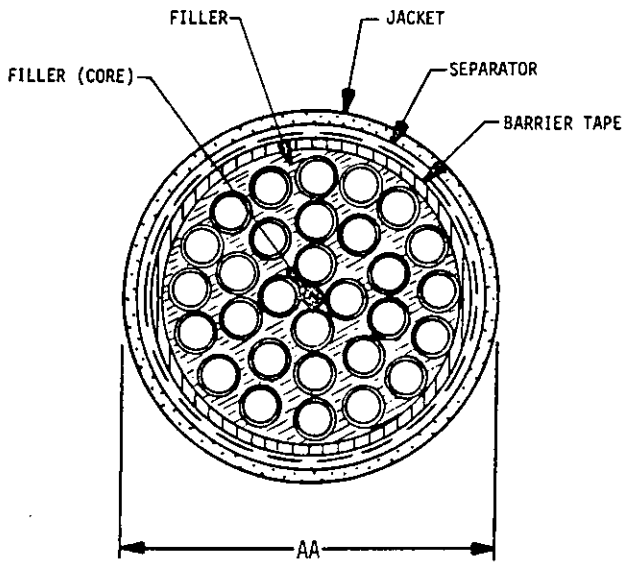


Ø37-16-1

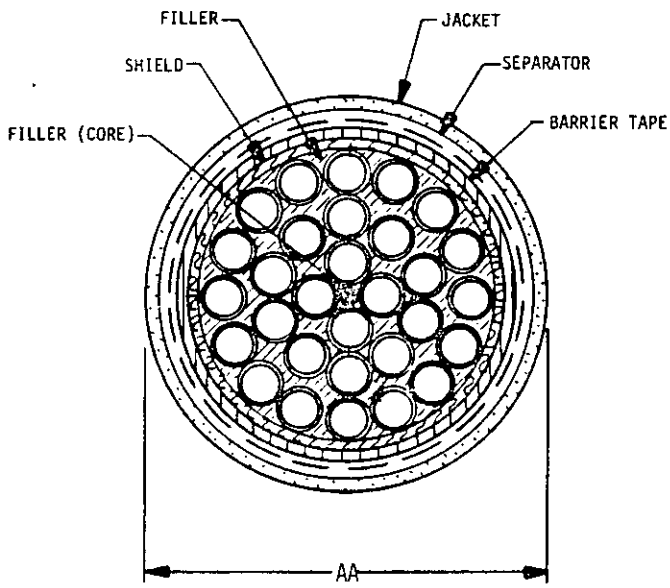


Ø37-16-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

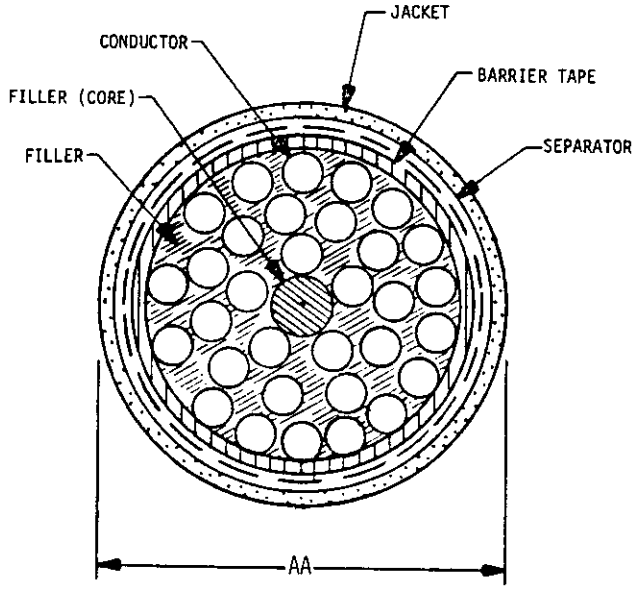

037-17-1

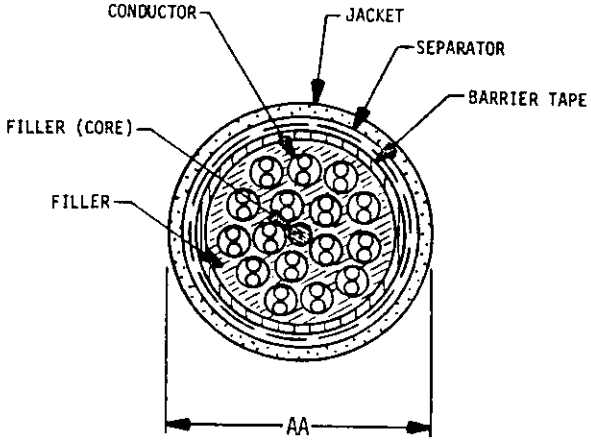


037-17-2

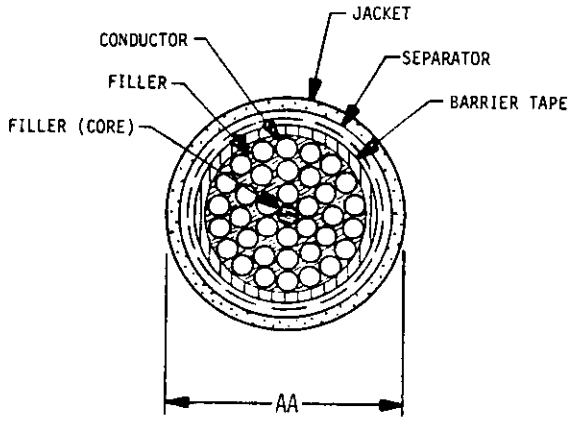


037-18-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

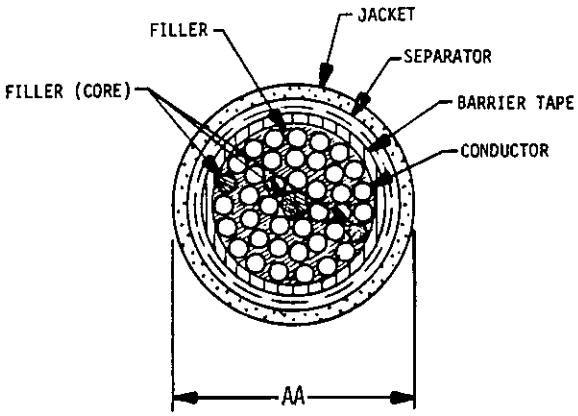

037-19-1

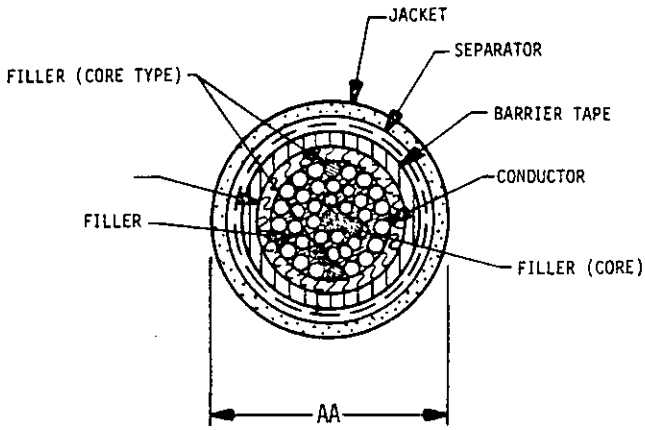


037-19-2

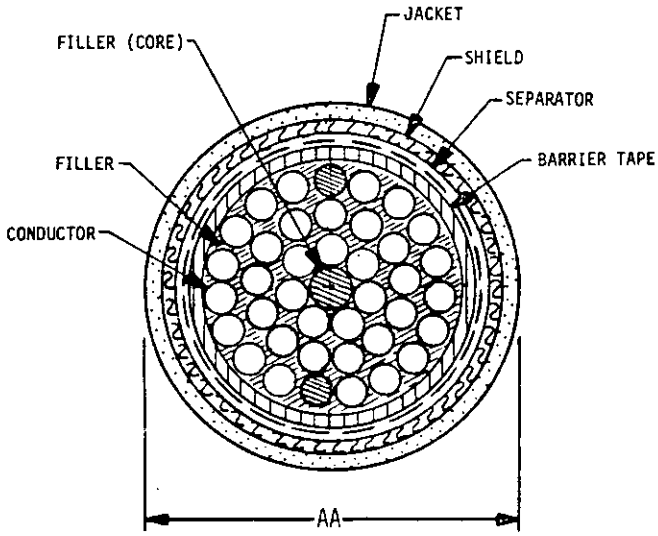


037-19-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

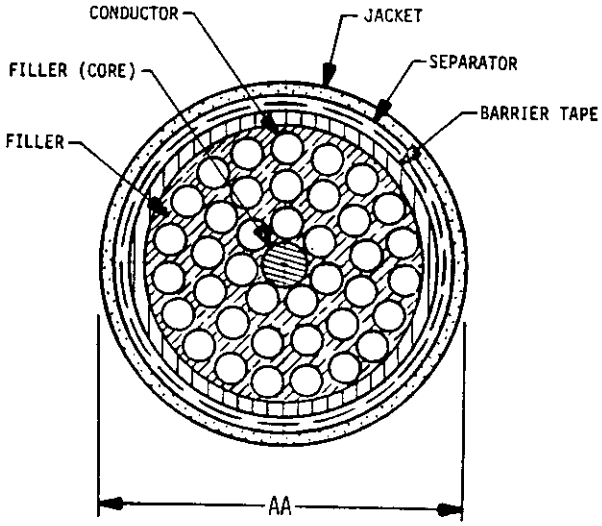



037-20-1

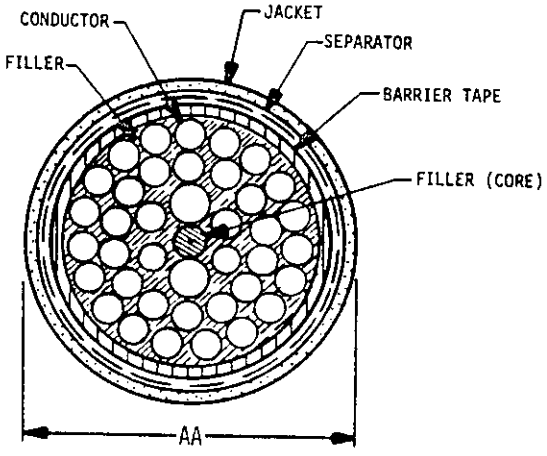

037-20-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

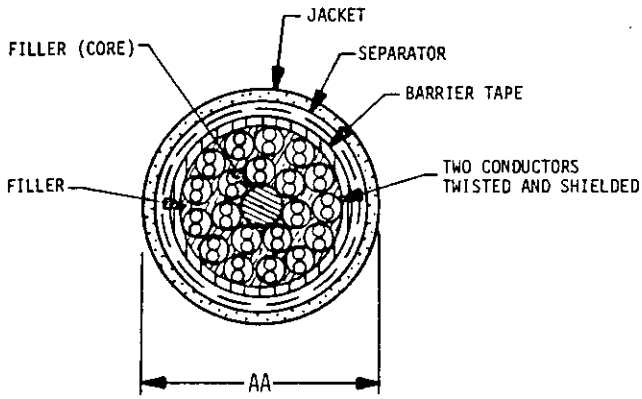


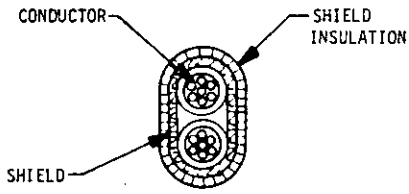


TWO CONDUCTORS
TWISTED AND SHIELDED
DETAIL

037-21-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

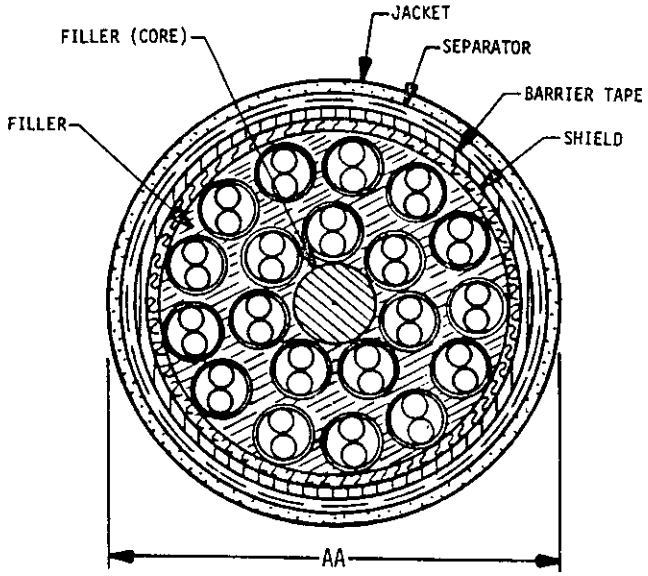





TWO CONDUCTORS
TWISTED, SHIELDED, AND INSULATED

DETAIL

037-21-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

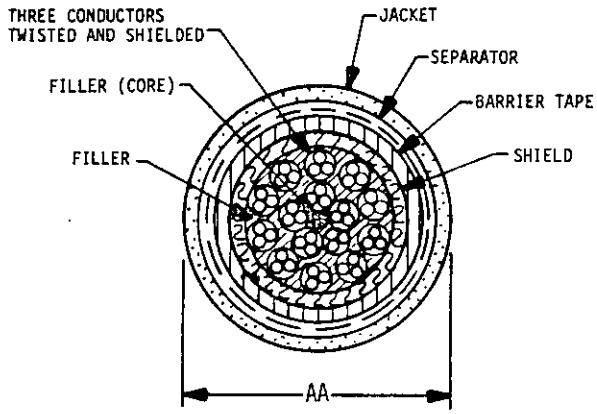


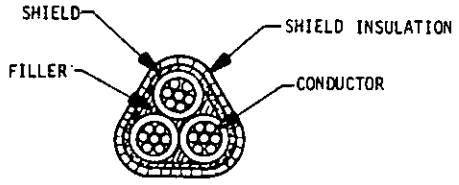

THREE CONDUCTORS
TWISTED AND SHIELDED
DETAIL


037-22-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

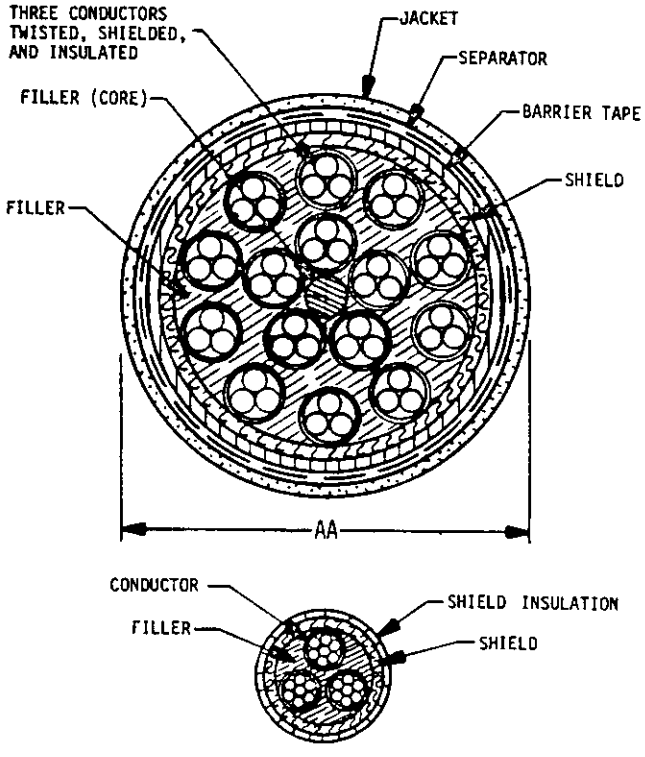


937-22-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

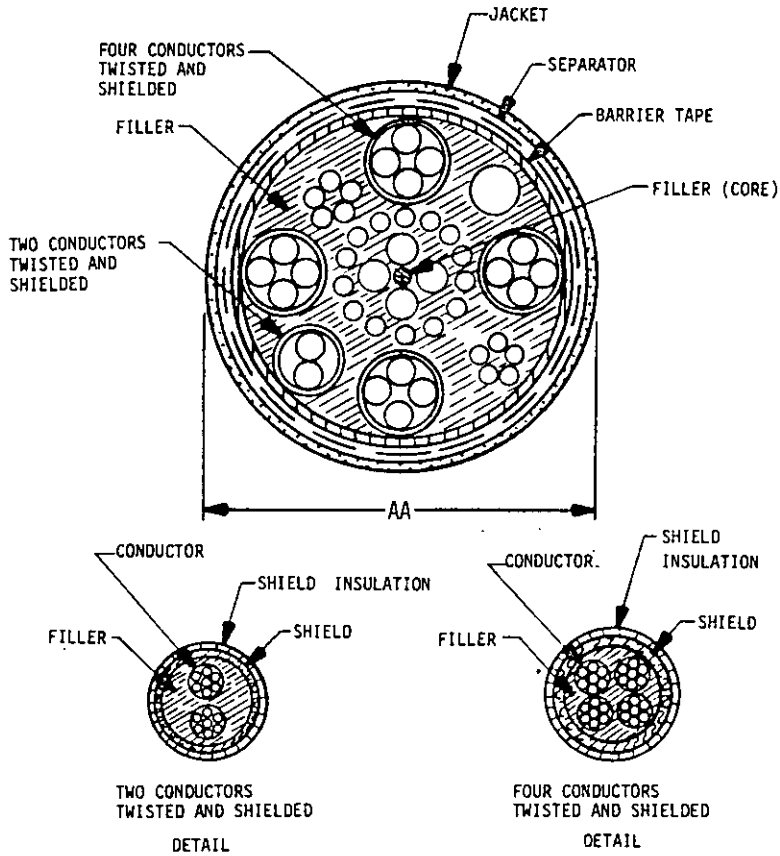


037-23-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

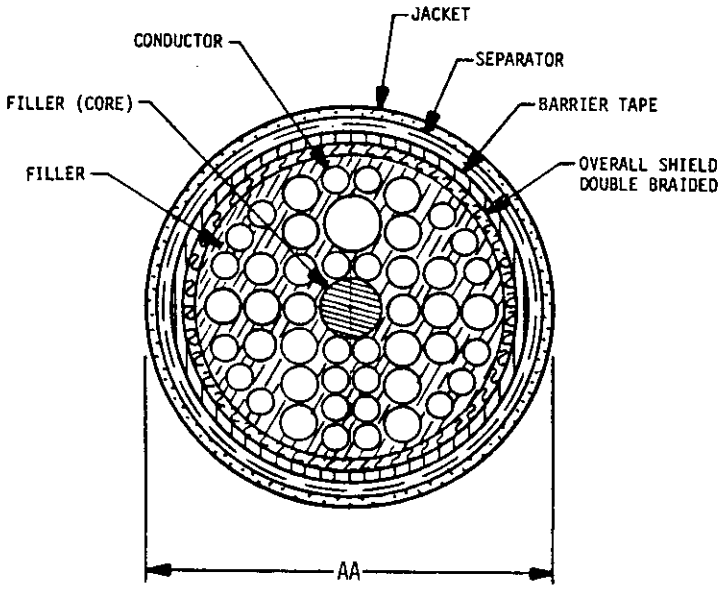

037-23-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

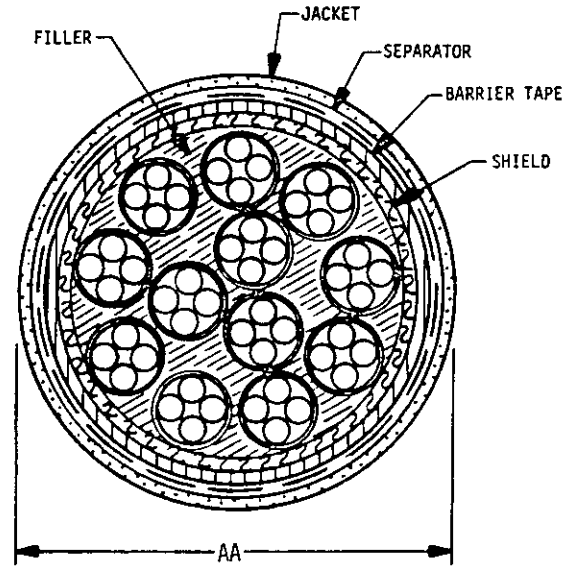

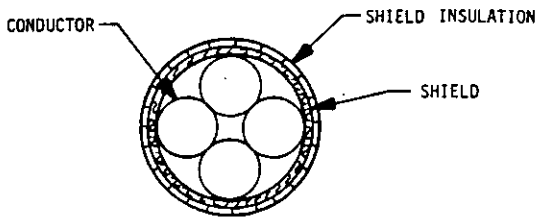


FOUR CONDUCTORS TWISTED, SHIELDED, AND INSULATED
DETAIL

037-24-1




037-24-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

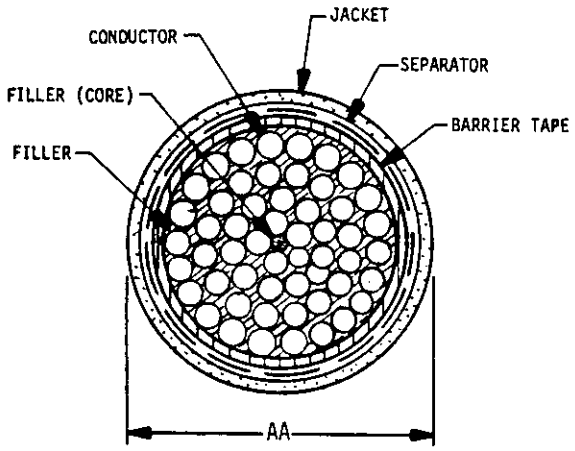


037-25-1

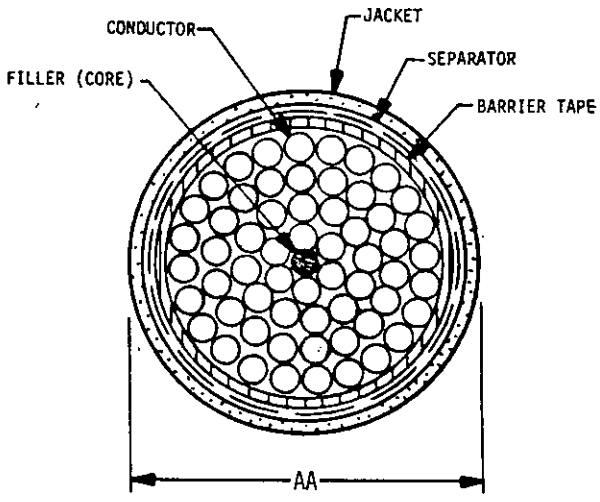


037-26-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

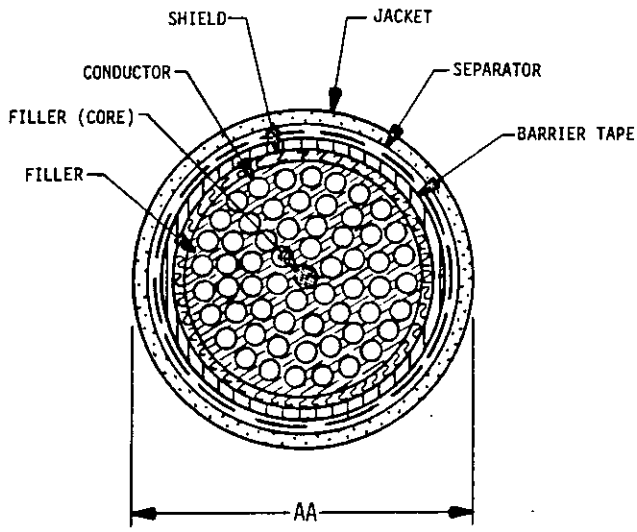


037-26-2

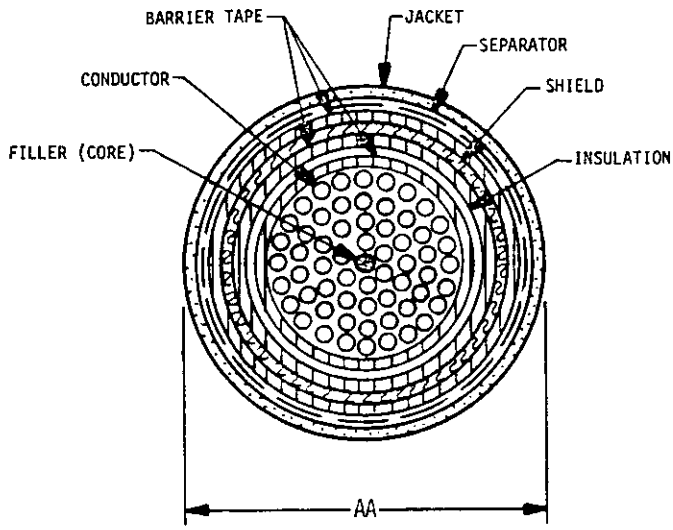


037-26-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

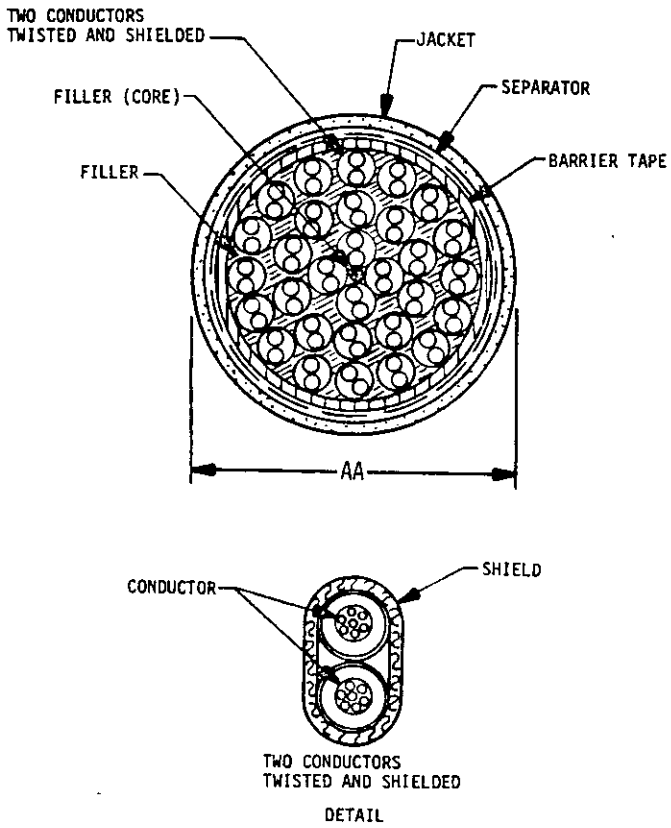

037-26-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

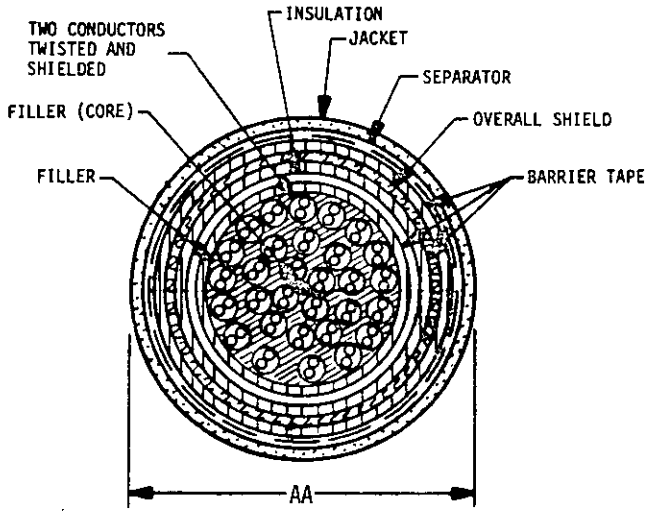

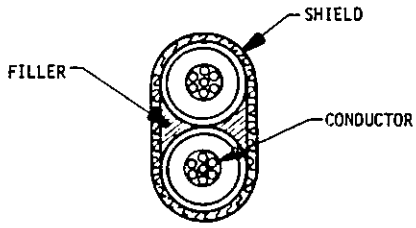



TWO CONDUCTORS
TWISTED AND
SHIELDED

DETAIL

037-26-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

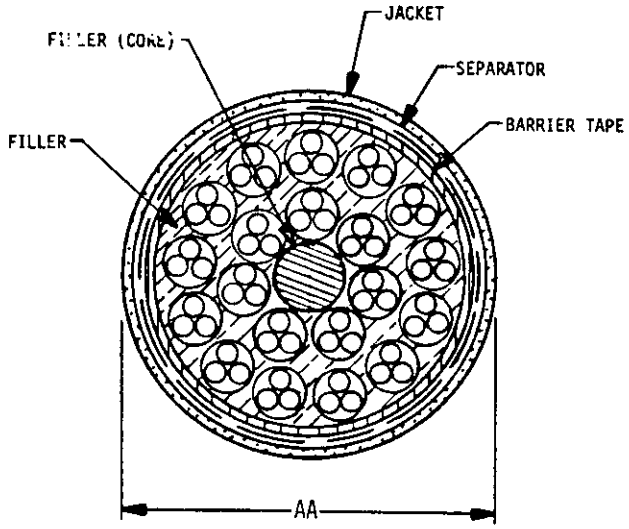




THREE CONDUCTORS
TWISTED AND SHIELDED

DETAIL

037-26-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

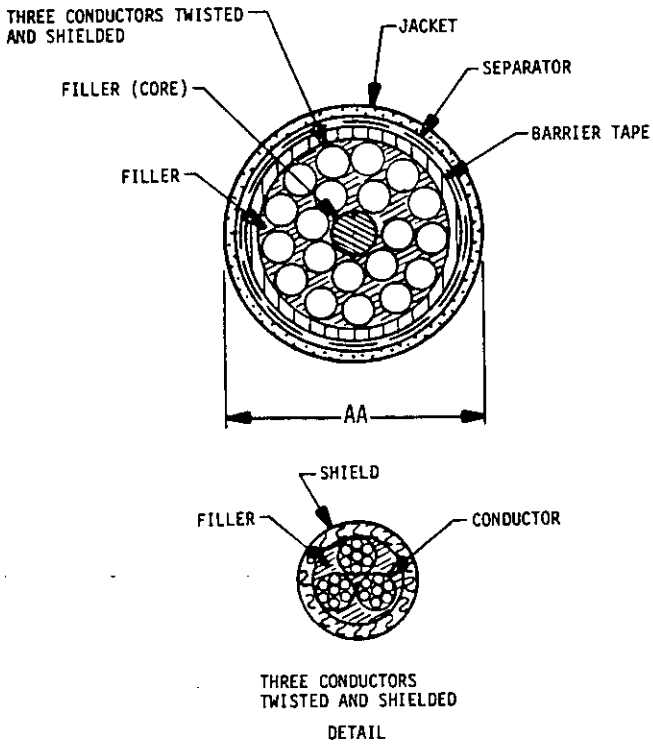


THREE CONDUCTORS
TWISTED AND SHIELDED
DETAIL

037-26-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

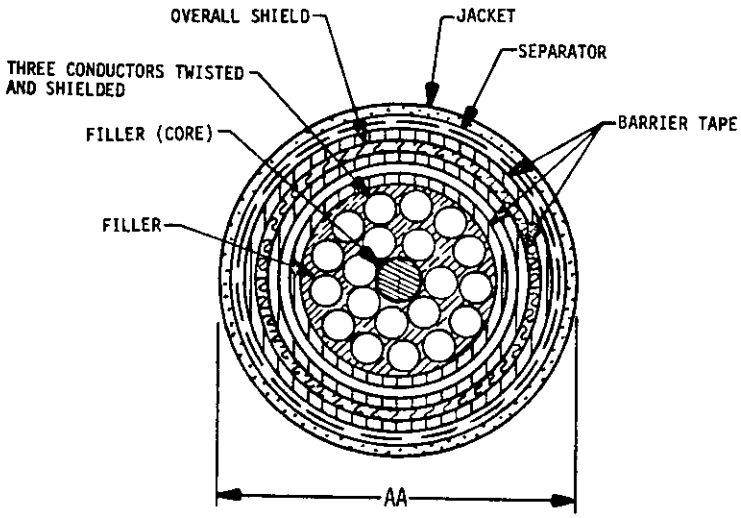

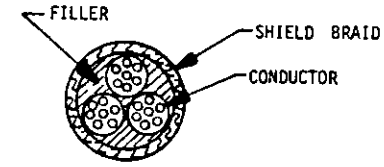


THREE CONDUCTORS TWISTED AND SHIELDED

DETAIL


037-26-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

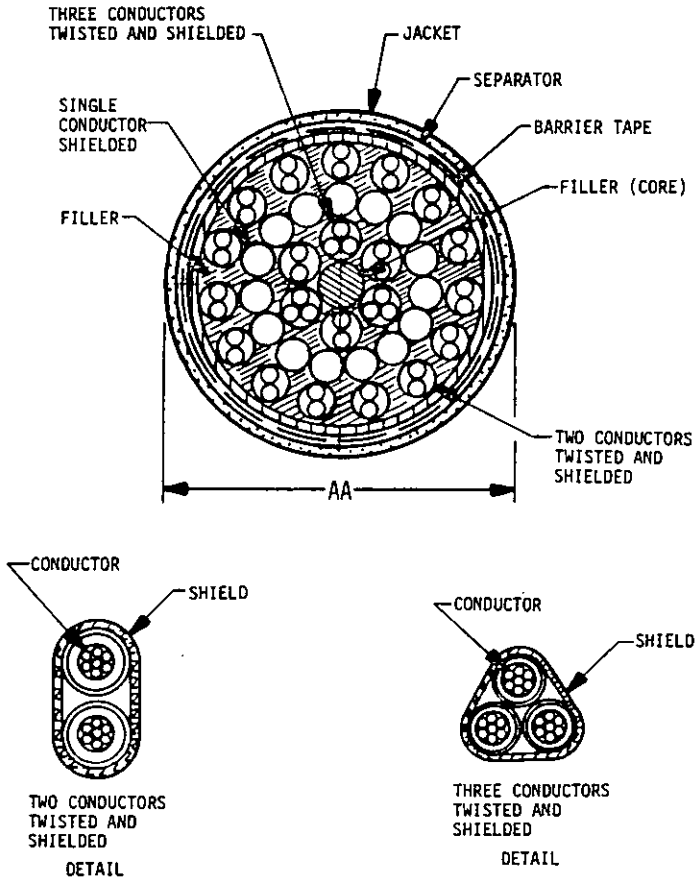

037-26-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

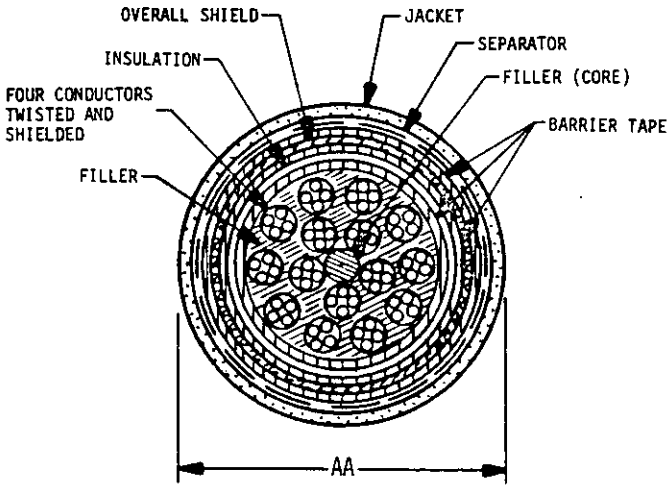





FOUR CONDUCTORS
TWISTED AND SHIELDED

DETAIL

037-26-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

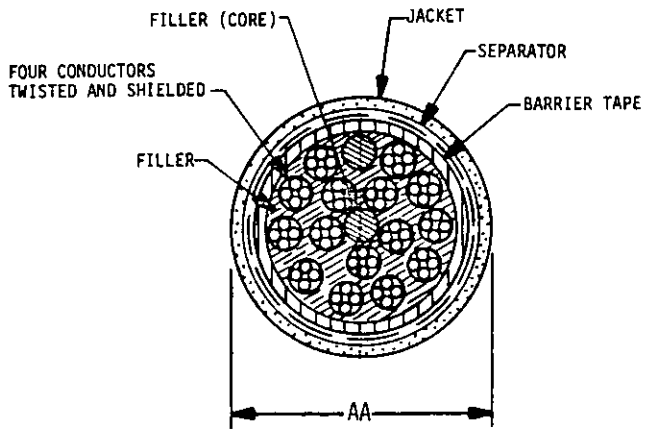




FOUR CONDUCTORS
TWISTED AND SHIELDED


DETAIL

037-26-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

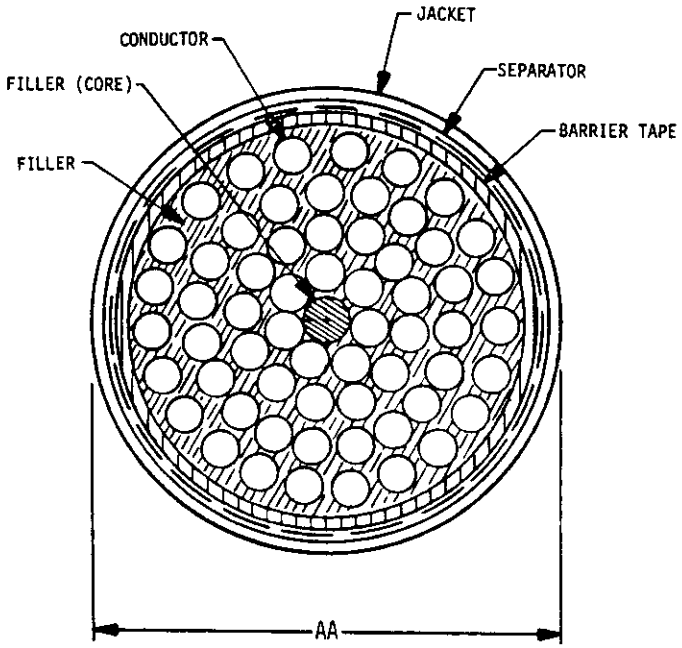


037-27-1

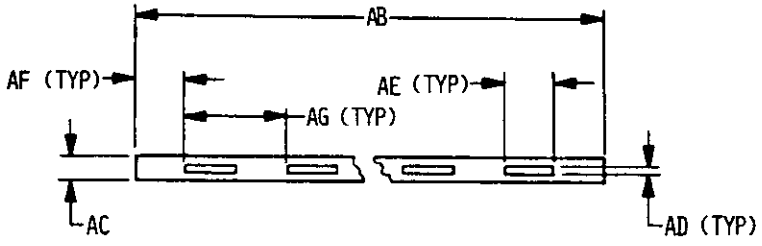


037-28-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

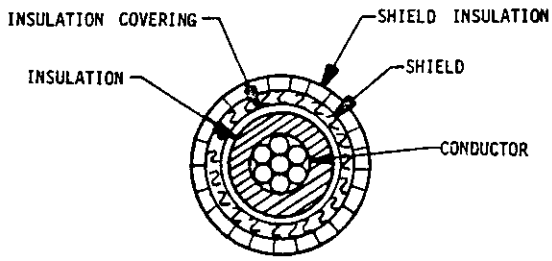


037-29-1

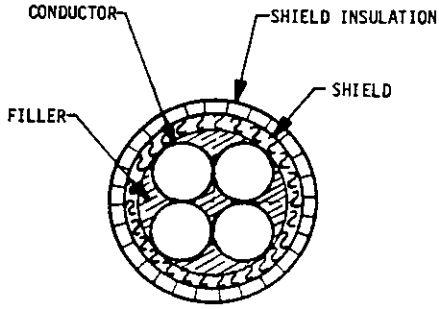


037-29-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

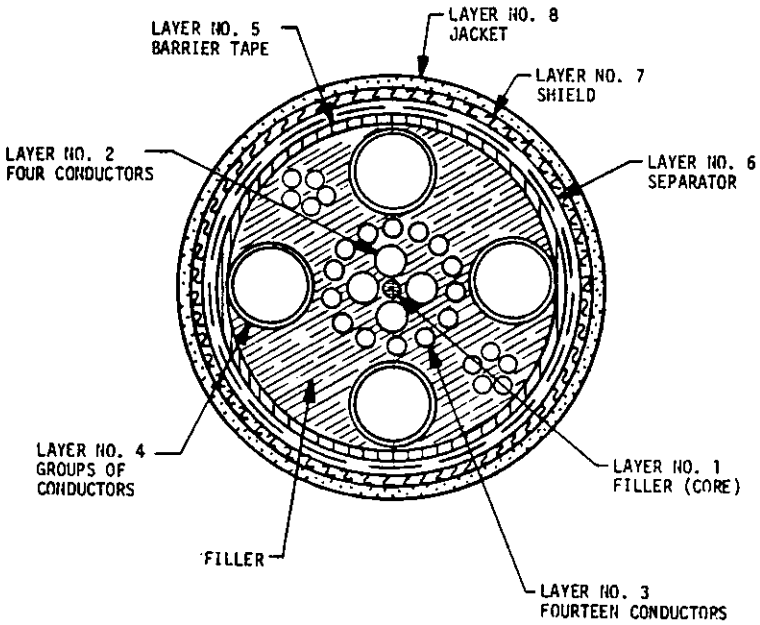

NOTE: LAYER NUMBERS ARE ASSIGNED CONSECUTIVELY STARTING AT THE CENTER OF THE CABLE

037-29-3



037-30-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1600	28	1738	98	1920	110
0102	14	1602	28	1740	98	1922	112
0103	14	1604	28	1744	90	1923	112
0104	14	1606	28	1746	90	1938	92
0105	14	1650	52	1750	90	1940	92
0107	16	1652	52	1754	88	1946	92
0108	16	1654	52	1756	90	1952	92
0700	14	1660	52	1778	42	1954	92
0800	14	1662	52	1780	42	2032	68
1003	14	1664	46	1782	42	2033	68
1004	14	1665	48	1788	40	2034	68
1005	14	1666	46	1789	40	2035	68
1006	14	1668	46	1790	40	2038	68
1008	14	1669	48	1791	40	2040	68
1009	22	1670	48	1792	42	2052	100
1370	80	1672	46	1793	42	2054	100
1380	80	1673	46	1794	42	2056	100
1391	88	1674	46	1796	42	2058	100
1394	88	1680	80	1797	42	2060	100
1395	88	1684	80	1798	42	2064	98
1396	88	1686	80	1814	124	2065	98
1397	88	1687	80	1815	124	2066	98
1400	68	1688	80	1816	124	2070	32
1446	120	1689	80	1822	124	2072	30
1447	120	1692	80	1824	124	2074	30
1448	120	1693	80	1832	108	2076	32
1455	120	1700	124	1833	108	2078	32
1456	120	1701	124	1836	108	2080	32
1469	120	1702	124	1846	108	2082	32
1473	120	1703	124	1848	108	2084	32
1562	18	1704	124	1856	36	2086	30
1563	20	1705	124	1858	36	2088	30
1564	20	1712	122	1872	34	2089	30
1572	20	1714	122	1882	116	2092	102
1574	20	1722	98	1884	116	2094	102
1590	26	1724	98	1902	116	2106	102
1592	26	1732	98	1904	116	2116	100
1594	26	1733	98	1910	112	2117	100
1596	26	1734	98	1912	112	2118	100
1598	28	1736	98	1914	112	2120	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2122	100	2294	70	2414	64	2537	86
2124	100	2316	74	2415	64	2538	86
2132	104	2318	74	2418	64	2542	86
2134	104	2324	74	2420	64	2548	86
2140	104	2330	74	2424	62	2556	86
2146	104	2331	74	2426	62	2558	86
2160	102	2333	72	2428	62	2562	76
2161	102	2334	74	2430	62	2564	76
2162	102	2335	72	2442	84	2566	76
2164	102	2336	74	2444	84	2568	76
2166	102	2338	74	2446	84	2570	76
2168	102	2340	74	2448	84	2572	76
2172	104	2341	74	2449	84	2574	76
2174	104	2342	74	2456	84	2592	78
2176	104	2344	72	2458	84	2596	78
2178	104	2346	72	2460	84	2598	78
2186	104	2350	68	2461	84	2600	78
2188	104	2352	68	2462	84	2602	78
2230	96	2354	68	2472	82	2604	78
2232	96	2364	68	2474	82	2605	78
2234	96	2366	68	2476	82	2606	78
2236	96	2370	40	2480	82	2607	78
2250	94	2372	40	2482	82	2610	118
2251	94	2374	40	2483	82	2611	118
2252	94	2376	40	2492	54	2612	118
2253	94	2384	40	2500	55	2613	118
2254	94	2386	40	2502	54	2616	118
2255	94	2392	58	2504	44	2622	118
2256	94	2394	58	2506	44	2628	118
2274	70	2396	58	2513	44	2630	118
2276	70	2397	58	2517	44	2634	60
2278	70	2398	58	2519	44	2636	60
2280	70	2399	58	2521	44	2638	60
2282	70	2402	58	2523	44	2640	60
2284	70	2404	58	2530	86	2642	60
2286	70	2406	58	2531	86	2644	60
2287	70	2407	58	2532	86	2646	60
2288	70	2408	58	2534	86	2648	60
2290	70	2411	44	2535	86	2650	60
2292	70	2412	64	2536	86	2652	62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2658	64	2916	22	3020	48	3100	72
2660	64	2918	22	3022	50	3102	72
2662	64	2920	22	3024	50	3104	72
2663	64	2922	22	3026	50	3106	72
2664	66	2924	30	3028	50	3108	72
2666	66	2926	30	3030	50	3110	72
2668	66	2928	30	3032	50	3112	90
2672	64	2930	30	3034	50	3114	90
2674	64	2932	30	3036	50	3116	90
2676	64	2934	32	3038	58	3118	90
2678	64	2936	32	3040	50	3120	90
2682	84	2938	32	3042	52	3122	90
2684	84	2940	32	3044	52	3124	90
2688	82	2942	34	3046	52	3126	92
2690	82	2944	34	3048	52	3128	92
2691	82	2946	34	3050	52	3130	96
2736	38	2948	34	3052	54	3132	96
2737	38	2949	54	3054	54	3134	92
2738	38	2950	34	3056	54	3136	64
2740	38	2952	34	3058	54	3138	94
2744	36	2956	38	3060	54	3140	96
2746	36	2958	38	3062	54	3142	96
2748	80	2960	38	3064	36	3144	96
2826	114	2962	38	3066	56	3146	96
2828	114	2990	88	3068	56	3148	96
2830	114	2991	88	3070	56	3150	106
2831	114	2992	88	3072	56	3152	106
2832	114	2994	88	3074	56	3154	106
2838	114	2996	44	3076	56	3156	106
2840	114	2998	44	3078	56	3158	106
2846	114	3000	44	3080	56	3160	108
2852	114	3002	26	3082	60	3162	108
2900	20	3004	46	3084	62	3164	110
2902	20	3006	46	3086	62	3166	110
2904	20	3008	48	3088	62	3168	110
2906	20	3010	48	3090	62	3170	110
2908	20	3012	48	3092	62	3172	110
2910	20	3014	48	3094	62	3174	110
2912	20	3016	48	3096	62	3176	110
2914	20	3018	48	3098	62	3178	110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3180	110	3235	25	3281	25	3326	25
3182	112	3236	25	3282	25	3327	25
3184	112	3237	25	3283	25	3328	25
3186	112	3238	25	3284	25	3329	25
3188	112	3239	25	3285	25	3330	25
3190	112	3240	25	3286	25	3331	25
3192	112	3241	25	3287	25	3332	25
3194	114	3242	25	3290	25	3333	25
3196	114	3244	25	3291	25	3334	25
3198	114	3246	25	3292	25	3336	25
3200	25	3247	25	3293	25	3337	25
3201	25	3248	25	3294	25	3338	25
3202	25	3249	25	3295	25	3339	25
3203	25	3250	25	3296	25	3340	25
3204	25	3251	25	3297	25	3341	25
3205	25	3252	25	3298	25	3342	25
3206	25	3253	25	3299	25	3343	25
3207	25	3254	25	3300	25	3344	25
3208	25	3255	25	3301	25	3345	25
3209	25	3256	25	3302	25	3346	25
3210	25	3257	25	3303	25	3347	25
3211	25	3260	25	3304	25	3350	25
3212	25	3261	25	3306	25	3351	25
3214	25	3262	25	3307	25	3352	25
3216	25	3263	25	3308	25	3353	25
3217	25	3264	25	3309	25	3355	25
3219	25	3265	25	3310	25	3356	25
3220	25	3266	25	3311	25	3357	25
3221	25	3267	25	3312	25	3358	25
3222	25	3269	25	3313	25	3359	25
3223	25	3270	25	3314	25	3360	25
3224	25	3271	25	3315	25	3361	25
3225	25	3272	25	3316	25	3362	25
3226	25	3273	25	3317	25	3363	25
3227	25	3274	25	3320	25	3364	25
3230	25	3276	25	3321	25	3366	25
3231	25	3277	25	3322	25	3367	25
3232	25	3278	25	3323	25	3368	25
3233	25	3279	25	3324	25	3369	25
3234	25	3280	25	3325	25	3370	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3371	25	3435	35	4754	66	7414	116
3372	25	3436	35	4755	66	7572	22
3373	25	3437	35	4756	66	7577	22
3374	25	3438	35	4760	66	7580	26
3375	25	3439	35	4761	66	7629	126
3376	25	3440	35	4762	66	7630	126
3377	25	3954	38	4950	22		
3401	35	4300	118	4985	88		
3402	35	4302	118	4986	88		
3403	35	4303	118	5060	18		
3404	35	4306	120	5061	18		
3405	35	4308	120	5062	18		
3406	35	4310	120	5063	1		
3407	35	4312	122	5068	18		
3409	35	4314	122	5069	18		
3410	35	4316	122	5070	18		
3411	35	4318	122	5071	18		
3412	35	4320	122	6369	14		
3413	35	4322	122	6372	126		
3414	35	4324	122	6870	126		
3415	35	4325	122	6873	14		
3416	35	4326	122	6874	16		
3417	35	4662	106	6941	16		
3418	35	4663	108	6942	16		
3419	35	4666	108	6991	128		
3420	35	4667	108	6992	128		
3421	35	4672	106	6993	128		
3422	35	4674	106	6994	128		
3423	35	4675	106	6995	128		
3424	35	4677	106	7001	126		
3425	35	4683	106	7002	126		
3426	35	4707	122	7003	126		
3427	35	4708	122	7004	136		
3428	35	4709	120	7005	126		
3429	35	4713	116	7059	28		
3430	35	4715	116	7301	18		
3431	35	4719	116	7302	18		
3432	35	4722	116	7347	28		
3433	35	4723	116	7403	28		
3434	35	4726	116	7407	28		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Abrasion Resistance	30
Additional Part Marking	128
Additional Requirements	126
Adhesion of Conductors	32
Aging Stability	30
Altitude Rating	18
Aperture Cards Required	16
Applicable Documents	128
Attenuation	34
Base Document	14
Blocking	36
Breaking Strength	38
Cable Drip	40
Capacitance	40
City, State, Zip	14
Classification	18
Cold Working	44
Color	26
Company Name/Command	14
Conductor Elongation	44
Conductor Resistance	46
Conductor Tensile Strength	48
Configuration	22
Configuration Table	24
Contamination	50
Continuity	52
Contract Number/Office Symbol	14
Control, Source	14
Control, Specification	16
Corona Extinction Voltage	52
Crack Resistance	54
Crosstalk	54
Date	14
Design and Construction	26
Dry Dielectric Strength	56
Electrical Ratings	20
Finishes	26
Flammability	58
Flexibility	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Flexing Endurance	60
Fluid Immersion	62
Folding	64
Format	14
Fungus	66
Gas Flame	68
Government Design Activity FSCM	14
High Temperature Aging (Heat Resistance)	68
Hydrostatic (Watertightness)	70
Identification	26
Illustrations	22
Impedance	72
Insulation Heat Distortion	72
Insulation Heat Shock	74
Insulation or Jacket Elongation	76
Insulation or Jacket Tensile Strength	78
Insulation Resistance	80
Insulation Shrinkage	80
Jacket Tearing Strength	82
Low Pressure (Elevated Temperature)	84
Low Temperature Flexibility (Cold Bend)	86
Materials	26
Mechanical Ratings	22
Metals	26
Moisture Resistance	88
Mounting Hardware	128
Mutual Inductance	88
Nomenclature	128
Notch Sensitivity	90
Notes	128
Packaging	128
Part Marking	126
Part Number	16
Part Number Cross-Reference	128
Permanence of Printing	92
Phase Stability	92

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Phone Number-	14
Pressure Cycling-	94
Propagation Delay	96
Pulse Response Time	98
Quality Assurance Provisions-	128
Requester FSCM-	14
Requester's Name-	14
Resistance to Acid and Alkali	98
Resistance to Light	100
Resistance to Oil	102
Resistance to Ozone	104
Revision of AEDPS Document (Number)	16
Scope	16
Smoke	106
Solderability	106
Source Table-	16
Spark Test-	108
Street/Building	14
Stress Crack Resistance	108
Stress Endurance-	110
Superseded Document	128
Surface Resistance-	110
System Application-	14
Tear Groove Propagation/Breakouts	112
Temperature Rating-	18
Tension Set	114
Thermal Shock, (Temperature Cycling)-	116
Thermoplastic Flow-	116
Twisting Endurance-	118
Units of Measure-	16, 22
Vacuum Stability-	118
Vibration, High Frequency	120
Voltage Standing Wave Ratio/Return Loss	122
Voltage Withstand	122
Weight-	28
Wet Dielectric Strength	124
Workmanship	126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-141(MI), dated 02 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-141(MI), dated 02 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.