MIL-STD-112A

8 DECEMBER 1955

SUPERSEDING

MIL-STD-112

25 JANUARY 1951

MILITARY STANDARD

GAGES, RING, PLAIN, GO



For sale by the Superintendent of Documents, U.S. Government Printing Office
Washington 25, D.C., Price $2.00

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

OFFICE OF THE ASSISTANT SECRETARY OF DEFENSE
WASHINGTON 25, D. C.

Supply and Logistics 8 December 1955

Gages, Ring, Plain, Go
MIL-STD-112A

1. This standard has been approved by the Department of Defense for use by the Departments of the Army, the Navy, and the Air Force.

2. In accordance with established procedure, the Standardization Division has designated the Ordnance Corps, the Bureau of Ordnance, and the Air Force, respectively, as Army-Navy-Air Force custodians of this standard.

3. This standard is mandatory for use effective 8 March 1956 by the Departments of the Army, the Navy, and the Air Force.

4. Recommended corrections, additions, or deletions should be addressed to the Standardization Division, Office of the Assistant Secretary of Defense (Supply and Logistics), Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

1. Scope
2. Referenced Documents
3. Definitions
4. General Requirements
4.1 Table I - Tabulation of Design and Identification Data
5. Detail Requirements
5.1 Manufacture and Inspection
5.1.1 General
5.1.2 Go Plain Ring Gage
5.1.3 Plain Plug Acceptance Check Gage
5.2 Procurement

FIGURES

Figure
1 Go Plain Ring Gage
2 Plain Plug Acceptance Check Gage (Wire Type)
3 Go Plain Ring Gage
4 Go Plain Ring Gage (Flange Type)

TABLES

Table I - Tabulation of Design and Identification Data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This standard covers the pertinent design data and stock numbers for American Gage Design Standard, go plain ring gages for the inspection of the maximum limits of external diameters that range in size from 0.059 to 2.510 inches inclusive in increments of 0.001 and 0.03125 inches. The class of gage required is listed in accordance with the total component tolerance.

1.1.1 This standard also covers the pertinent design data and stock numbers for the applicable American Gage Design Standard plain plug acceptance check gages for go plain ring gages up to and including 0.250 inch in size, except that acceptance check stock numbers are not provided above 0.125 inch in size for total component tolerance of 0.008 and above.

1.2 The stock numbers listed in this standard have been approved by the Cataloging Division, Office of the Assistant Secretary of Defense as Federal Item Identification Numbers (FIIN).

2. REFERENCED DOCUMENTS

2.1 The following standards, specifications, and publications of latest issue form a part of this standard:

STANDARDS

MIL-STD-10, Surface Roughness, Waviness, and Lay

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.)

SPECIFICATIONS

MIL-G-10944, Gages, Dimensional Control

(Copies of specifications should be obtained from the procuring activity or as directed by the contracting officer.)

OTHER PUBLICATIONS

U.S. Department of Commerce, Commercial Standard CS8, Gage Blanks

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.)

3. DEFINITIONS

Not applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Table I - Tabulation of Design and Identification Data

4.1.1 Stock numbers for each go plain ring gage and related acceptance check plug gage are listed in ascending numerical sequence in columns B and C respectively.

4.1.2 Column A lists the proper reference to the applicable figure for each stock number.

4.1.3 Column D lists the maximum component dimension and when applied to the total component tolerance in column E provides the data required for selecting the applicable stock number in column B or C.

4.1.3.1 When the total component tolerance is not listed, the stock number applicable to the next smaller listed total component tolerance for the maximum component dimension shall be used.

4.1.4 Columns F to H inclusive list the design data for each stock number and, when applied to the figure referenced in column A, provide the data required for manufacture and inspection.

4.1.5 Columns B to D inclusive list the identification data for each stock number and, when applied to the figure referenced in column A, provide the information for proper marking of the gages.

4.1.6 Design data, etc. not specifically covered in this standard shall conform to the latest issue of the documents referenced in paragraph 2 above.

4.1.7 Wear limit check plug stock numbers for go plain ring gages are provided in Standard Mil-Std-110, Gages, Plug, Plain Cylindrical (Go). (Apply the stock number in column B as listed for the master as shown in column E, corresponding to the applicable component dimension in column D.)

5. DETAIL REQUIREMENTS

5.1 Manufacture and Inspection

5.1.1 General

5.1.1.1 All gaging members shall be identified with the manufacturer's name or trade-mark.

5.1.1.2 All gages shall be clearly and permanently marked with the proper marking as listed in columns B or C and D of table I and as illustrated in figures 1 to 4 inclusive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.1.1.3 The surface roughness value denoted on the gaging surface of figures 1 to 4 inclusive, and listed in Column H of table I is the maximum acceptable roughness of these surfaces. These values correspond to the meter indications of surface roughness measuring instruments, which from their method of operation show readings in accordance with the standard values prescribed in Standard Mil-Std-10.

5.1.1.4 Sharp edges shall not be permitted.

5.1.1.5 Gaging surfaces shall be lapped free of amorphous metal.

5.1.2 Go Plain Ring Gage

5.1.2.1 American Gage Design Standard (AGD) plain ring gages shall be of hardened tool steel or other wear resistant material suitable for the intended purpose, as defined in specification MIL-G-10944. (See figures 1, 3, and 4 for hardness requirements.)

5.1.2.2 Go plain ring gages shall be finished from AGD plain ring gage blanks.

5.1.3 Plain Plug Acceptance Check Gage

5.1.3.1 American Gage Design Standard (AGD) wire type gaging members shall be of hardened tool steel or other wear resistant material suitable for the intended purpose, as defined in specification MIL-G-10944. (See figure 2 for hardness requirement.)

5.1.3.2 Plain plug acceptance check gages shall be finished from AGD plain plug gage blanks of the wire type design.

5.1.3.3 Gage handles shall be as designated in Commercial Standard CS8. The handles shall be of steel or aluminum alloy.

5.2 Procurement

5.2.1 The tabulated design data, manufacturing, and inspection specifications in this standard are applicable for procurement purposes.


5.2.1.1 Procurement documents shall specify the following:

a. Title, number, and date of this standard.
b. Gages required (quantity and stock number).
c. Place of delivery for acceptance inspection or place of delivery if acceptance inspection is to be at contractor's plant

5.2.1.2 When specified, the acceptance check plug gages may be procured without handles. The wire type gaging member shall be identified with a tag or label marked with the stock number and any other pertinent identification data as specified. The tag or label shall be such that it can be removed without damage to the member.

5.2.1.3 CAUTION - Although all items listed in this standard are included in the Federal Catalog system as items of supply, it is not intended that all items be procured and stock. Procurement and supply shall be confined to those items for which actual requirements exist.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

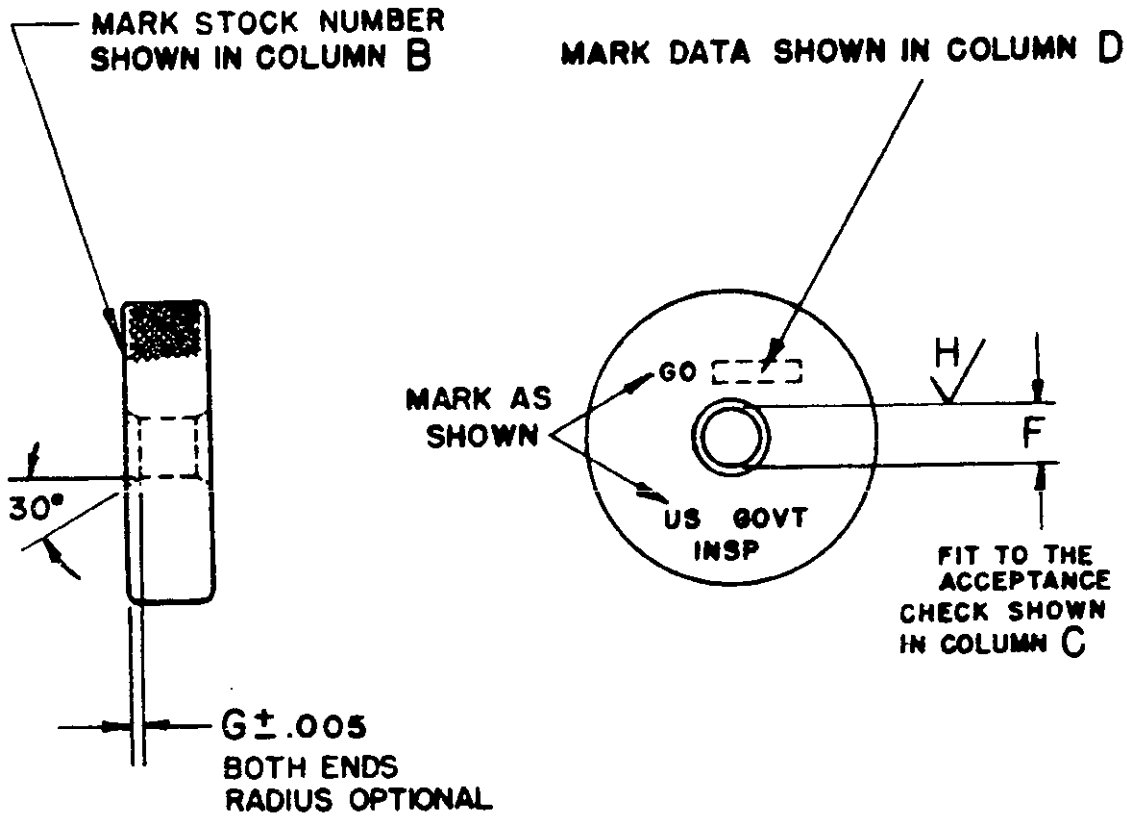


HARDNESS: ROCKWELL OR EQUIVALENT
C63 TO C66

Figure 1. Go Plain Ring Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

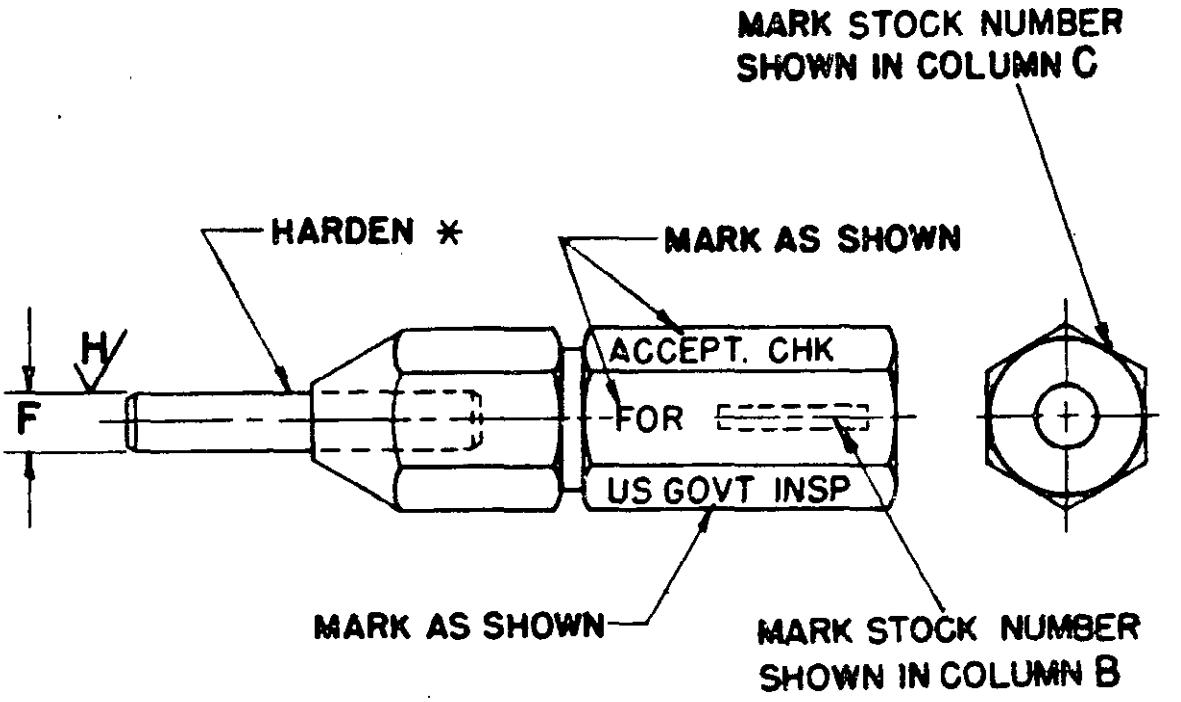

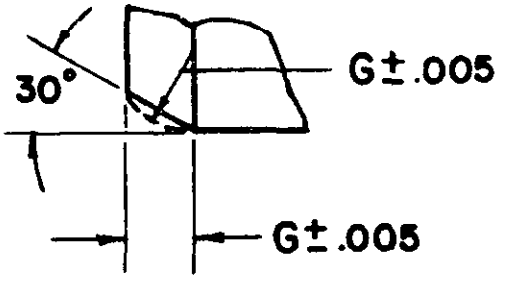


ENLARGED VIEW
CHAMFER OR RADIUS ON
BOTH ENDS OF WIRE

* HARDEN: ROCKWELL OR EQUIVALENT
C55 TO C60 FOR DIA UP TO AND INCL .10
C60 TO C63 FOR DIA ABOVE .10 TO AND INCL .20
C63 TO C66 FOR DIA ABOVE .20

Figure 2. Plain Plug Acceptance Check Gage (Wire Type)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

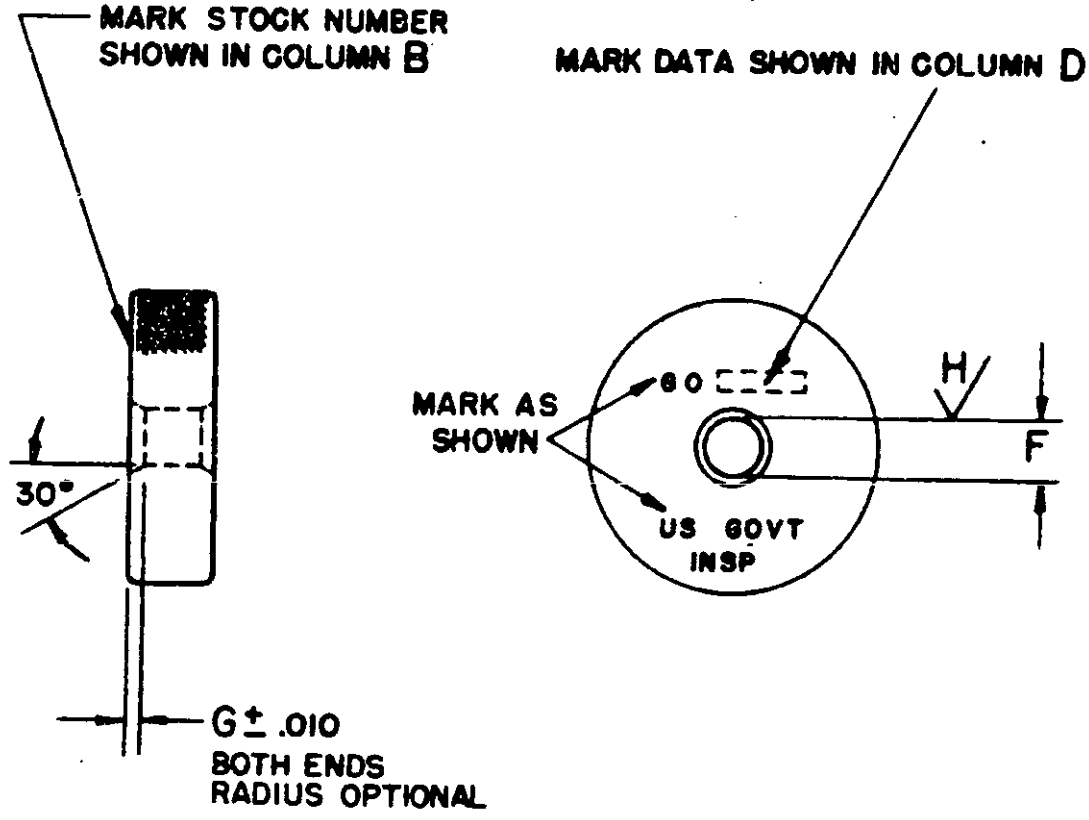

HARDNESS: ROCKWELL OR EQUIVALENT
C63 TO C66

Figure 3. Go Plain Ring Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

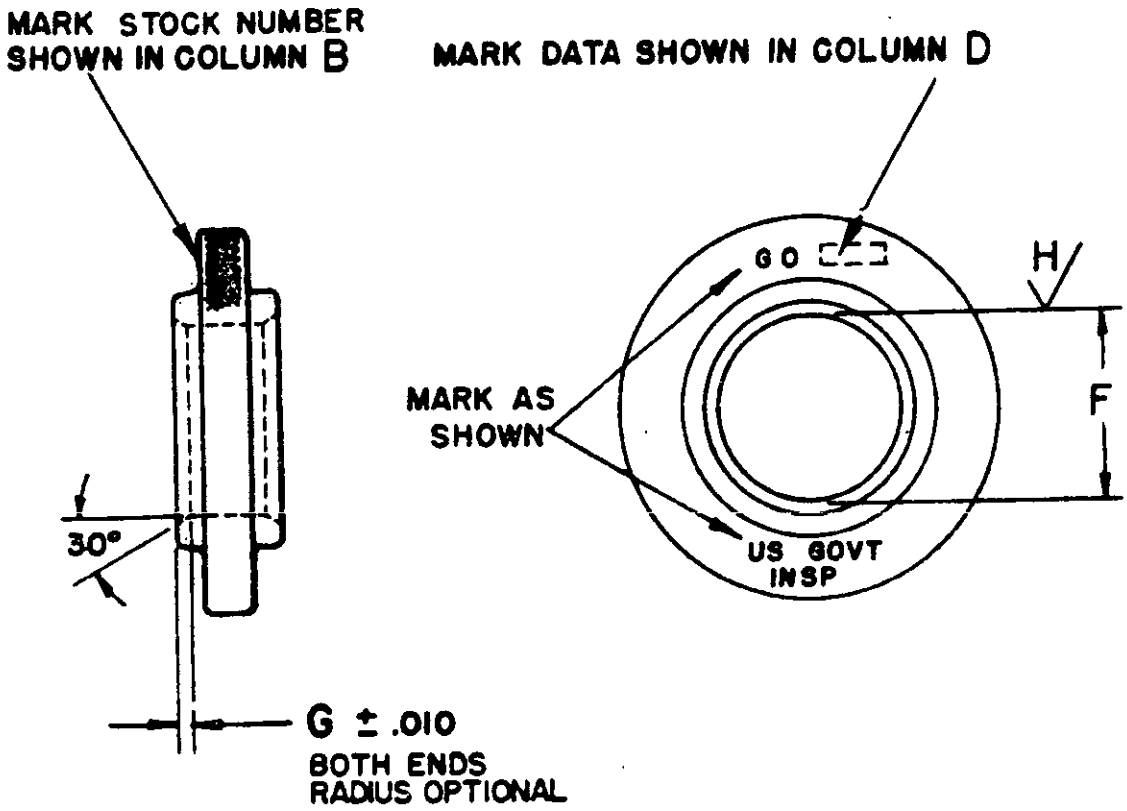

HARDNESS: ROCKWELL OR EQUIVALENT
C63 TO C66

Figure 4. Go Plain Ring Gage (Flange Type)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480000		.059	.0005	.05900	.008	4
2		7480001	.059	CHECK	.05900 - .00004	.008	4
1	7480004		.059	.002	.05890	.008	4
2		7480005	.059	CHECK	.05890 - .00007	.008	4
1	7480006		.059	.004 AND UP	.05880	.008	8
2		7480007	.059	CHECK	.05880 - .00010	.008	8
1	7480010		.060	.0005	.06000	.008	4
2		7480011	.060	CHECK	.06000 - .00004	.008	4
1	7480014		.060	.002	.05990	.008	4
2		7480015	.060	CHECK	.05990 - .00007	.008	4
1	7480016		.060	.004 AND UP	.05980	.008	8
2		7480017	.060	CHECK	.05980 - .00010	.008	8
1	7480022		.061	.0005	.06100	.008	4
2		7480023	.061	CHECK	.06100 - .00004	.008	4
1	7480026		.061	.002	.06090	.008	4
2		7480027	.061	CHECK	.06090 - .00007	.008	4
1	7480028		.061	.004 AND UP	.06080	.008	8
2		7480029	.061	CHECK	.06080 - .00010	.008	8
1	7480034		.062	.0005	.06200	.008	4
2		7480035	.062	CHECK	.06200 - .00004	.008	4
1	7480038		.062	.002	.06190	.008	4
2		7480039	.062	CHECK	.06190 - .00007	.008	4
1	7480040		.062	.004 AND UP	.06180	.008	8
2		7480041	.062	CHECK	.06180 - .00010	.008	8
1	7480046		.0625	.0005 AND UP	.06250	.008	4
2		7480047	.0625	CHECK	.06250 - .00004	.008	4
1	7480048		.063	.0005	.06300	.008	4
2		7480049	.063	CHECK	.06300 - .00004	.008	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480052		.063	.002	.06290	.008	4
2		7480053	.063	CHECK	.06290 - .00007	.008	4
1	7480054		.063	.004 AND UP	.06280	.008	8
2		7480055	.063	CHECK	.06280 - .00010	.008	8
1	7480060		.064	.0005	.06400	.008	4
2		7480061	.064	CHECK	.06400 - .00004	.008	4
1	7480064		.064	.002	.06390	.008	4
2		7480065	.064	CHECK	.06390 - .00007	.008	4
1	7480066		.064	.004 AND UP	.06380	.008	8
2		7480067	.064	CHECK	.06380 - .00010	.008	8
1	7480072		.065	.0005	.06500	.008	4
2		7480073	.065	CHECK	.06500 - .00004	.008	4
1	7480076		.065	.002	.06490	.008	4
2		7480077	.065	CHECK	.06490 - .00007	.008	4
1	7480078		.065	.004 AND UP	.06480	.008	8
2		7480079	.065	CHECK	.06480 - .00010	.008	8
1	7480084		.066	.0005	.06600	.008	4
2		7480085	.066	CHECK	.06600 - .00004	.008	4
1	7480088		.066	.002	.06590	.008	4
2		7480089	.065	CHECK	.06590 - .00007	.008	4
1	7480090		.066	.004 AND UP	.06580	.008	8
2		7480091	.066	CHECK	.06580 - .00010	.008	8
1	7480096		.067	.0005	.06700	.008	4
2		7480097	.067	CHECK	.06700 - .00004	.008	4
1	7480100		.067	.002	.06690	.008	4
2		7480101	.067	CHECK	.06690 - .00007	.008	4
1	7480102		.067	.004 AND UP	.06680	.008	8
2		7480103	.067	CHECK	.06680 - .00010	.008	8
1	7480108		.068	.0005	.06800	.008	4
2		7480109	.068	CHECK	.06800 - .00004	.008	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480112		.068	.002	.06790	.008	4
2		7480113	.068	CHECK	.06790 - .00007	.008	4
1	7480114		.068	.004 AND UP	.06780	.008	8
2		7480115	.068	CHECK	.06780 - .00010	.008	8
1	7480120		.069	.0005	.06900	.008	4
2		7480121	.069	CHECK	.06900 - .00004	.008	4
1	7480124		.069	.002	.06890	.008	4
2		7480125	.069	CHECK	.06890 - .00007	.008	4
1	7480126		.069	.004 AND UP	.06880	.008	8
2		7480127	.069	CHECK	.06880 - .00010	.008	8
1	7480132		.070	.0005	.07000	.008	4
2		7480133	.070	CHECK	.07000 - .00004	.008	4
1	7480136		.070	.002	.06990	.008	4
2		7480137	.070	CHECK	.06990 - .00007	.008	4
1	7480138		.070	.004 AND UP	.06980	.008	8
2		7480139	.070	CHECK	.06980 - .00010	.008	8
1	7480144		.071	.0005	.07100	.008	4
2		7480145	.071	CHECK	.07100 - .00004	.008	4
1	7480148		.071	.002	.07090	.008	4
2		7480149	.071	CHECK	.07090 - .00007	.008	4
1	7480150		.071	.004 AND UP	.07080	.008	8
2		7480151	.071	CHECK	.07080 - .00010	.008	8
1	7480156		.072	.0005	.07200	.008	4
2		7480157	.072	CHECK	.07200 - .00004	.008	4
1	7480160		.072	.002	.07190	.008	4
2		7480161	.072	CHECK	.07190 - .00007	.008	4
1	7480162		.072	.004 AND UP	.07180	.008	8
2		7480163	.072	CHECK	.07180 - .00010	.008	8
1	7480168		.073	.0005	.07300	.008	4
2		7480169	.073	CHECK	.07300 - .00004	.008	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480172		.073	.002	.07290	.008	4
2		7480173	.073	CHECK	.07290 - .00007	.008	4
1	7480174		.073	.004 AND UP	.07280	.008	8
2		7480175	.073	CHECK	.07280 - .00010	.008	8
1	7480180		.074	.0005	.07400	.008	4
2		7480181	.074	CHECK	.07400 - .00004	.008	4
1	7480184		.074	.002	.07390	.008	4
2		7480185	.074	CHECK	.07390 - .00007	.008	4
1	7480186		.074	.004 AND UP	.07380	.008	8
2		7480187	.074	CHECK	.07380 - .00010	.008	8
1	7480192		.075	.0005	.07500	.008	4
2		7480193	.075	CHECK	.07500 - .00004	.008	4
1	7480196		.075	.002	.07490	.008	4
2		7480197	.075	CHECK	.07490 - .00007	.008	4
1	7480198		.075	.004 AND UP	.07480	.008	8
2		7480199	.075	CHECK	.07480 - .00010	.008	8
1	7480204		.076	.0005	.07600	.015	4
2		7480205	.076	CHECK	.07600 - .00004	.015	4
1	7480208		.076	.002	.07590	.015	4
2		7480209	.076	CHECK	.07590 - .00007	.015	4
1	7480210		.076	.004 AND UP	.07580	.015	8
2		7480211	.076	CHECK	.07580 - .00010	.015	8
1	7480216		.077	.0005	.07700	.015	4
2		7480217	.077	CHECK	.07700 - .00004	.015	4
1	7480220		.077	.002	.07690	.015	4
2		7480221	.077	CHECK	.07690 - .00007	.015	4
1	7480222		.077	.004 AND UP	.07680	.015	8
2		7480223	.077	CHECK	.07680 - .00010	.015	8
1	7480228		.078	.0005	.07800	.015	4
2		7480229	.078	CHECK	.07800 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480232		.078	.002	.07790	.015	4
2		7480233	.078	CHECK	.07790 - .00007	.015	4
1	7480234		.078	.004 AND UP	.07780	.015	8
2		7480235	.078	CHECK	.07780 - .00010	.015	8
1	7480240		.079	.0005	.07900	.015	4
2		7480241	.079	CHECK	.07900 - .00004	.015	4
1	7480244		.079	.002	.07890	.015	4
2		7480245	.079	CHECK	.07890 - .00007	.015	4
1	7480246		.079	.004 AND UP	.07880	.015	8
2		7480247	.079	CHECK	.07880 - .00010	.015	8
1	7480252		.080	.0005	.08000	.015	4
2		7480253	.080	CHECK	.08000 - .00004	.015	4
1	7480256		.080	.002	.07990	.015	4
2		7480257	.080	CHECK	.07990 - .00007	.015	4
1	7480258		.080	.004 AND UP	.07980	.015	8
2		7480259	.080	CHECK	.07980 - .00010	.015	8
1	7480264		.081	.0005	.08100	.015	4
2		7480265	.081	CHECK	.08100 - .00004	.015	4
1	7480268		.081	.002	.08090	.015	4
2		7480269	.081	CHECK	.08090 - .00007	.015	4
1	7480270		.081	.004 AND UP	.08080	.015	8
2		7480271	.081	CHECK	.08080 - .00010	.015	8
1	7480276		.082	.0005	.08200	.015	4
2		7480277	.082	CHECK	.08200 - .00004	.015	4
1	7480280		.082	.002	.08190	.015	4
2		7480281	.082	CHECK	.08190 - .00007	.015	4
1	7480282		.082	.004 AND UP	.08180	.015	8
2		7480283	.082	CHECK	.08180 - .00010	.015	8
1	7480288		.083	.0005	.08300	.015	4
2		7480289	.083	CHECK	.08300 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7480292		.083	.002	.08290	.015	4
2		7480293	.083	CHECK	.08290 - .00007	.015	4
1	7480294		.083	.004 AND UP	.08280	.015	8
2		7480295	.083	CHECK	.08280 - .00010	.015	8
1	7480300		.084	.0005	.08400	.015	4
2		7480301	.084	CHECK	.08400 - .00004	.015	4
1	7480304		.084	.002	.08390	.015	4
2		7480305	.084	CHECK	.08390 - .00007	.015	4
1	7480306		.084	.004 AND UP	.08380	.015	8
2		7480307	.084	CHECK	.08380 - .00010	.015	8
1	7480312		.085	.0005	.08500	.015	4
2		7480313	.085	CHECK	.08500 - .00004	.015	4
1	7480316		.085	.002	.08490	.015	4
2		7480317	.085	CHECK	.08490 - .00007	.015	4
1	7480318		.085	.004 AND UP	.08480	.015	8
2		7480319	.085	CHECK	.08480 - .00010	.015	8
1	7480324		.086	.0005	.08600	.015	4
2		7480325	.086	CHECK	.08600 - .00004	.015	4
1	7480328		.086	.002	.08590	.015	4
2		7480329	.086	CHECK	.08590 - .00007	.015	4
1	7480330		.086	.004 AND UP	.08580	.015	8
2		7480331	.086	CHECK	.08580 - .00010	.015	8
1	7480336		.087	.0005	.08700	.015	4
2		7480337	.087	CHECK	.08700 - .00004	.015	4
1	7480340		.087	.002	.08690	.015	4
2		7480341	.087	CHECK	.08690 - .00007	.015	4
1	7480342		.087	.004 AND UP	.08680	.015	8
2		7480343	.087	CHECK	.08680 - .00010	.015	8
1	7480348		.088	.0005	.08800	.015	4
2		7480349	.088	CHECK	.08800 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN-GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN-GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7480352		.088	.002	.08790	.015	4
2		7480353	.088	CHECK	.08790 - .00007	.015	4
1	7480354		.088	.004 AND UP	.08780	.015	8
2		7480355	.088	CHECK	.08780 - .00010	.015	8
1	7480360		.089	.0005	.08900	.015	4
2		7480361	.089	CHECK	.08900 - .00004	.015	4
1	7480364		.089	.002	.08890	.015	4
2		7480365	.089	CHECK	.08890 - .00007	.015	4
1	7480366		.089	.004 AND UP	.08880	.015	8
2		7480367	.089	CHECK	.08880 - .00010	.015	8
1	7480372		.090	.0005	.09000	.015	4
2		7480373	.090	CHECK	.09000 - .00004	.015	4
1	7480376		.090	.002	.08990	.015	4
2		7480377	.090	CHECK	.08990 - .00007	.015	4
1	7480378		.090	.004 AND UP	.08980	.015	8
2		7480379	.090	CHECK	.08980 - .00010	.015	8
1	7480384		.091	.0005	.09100	.015	4
2		7480385	.091	CHECK	.09100 - .00004	.015	4
1	7480388		.091	.002	.09090	.015	4
2		7480389	.091	CHECK	.09090 - .00007	.015	4
1	7480390		.091	.004 AND UP	.09080	.015	8
2		7480391	.091	CHECK	.09080 - .00010	.015	8
1	7480396		.092	.0005	.09200	.015	4
2		7480397	.092	CHECK	.09200 - .00004	.015	4
1	7480400		.092	.002	.09190	.015	4
2		7480401	.092	CHECK	.09190 - .00007	.015	4
1	7480402		.092	.004 AND UP	.09180	.015	8
2		7480403	.092	CHECK	.09180 - .00010	.015	8
1	7480408		.093	.0005	.09300	.015	4
2		7480409	.093	CHECK	.09300 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7480412	7480413	.093	.002 CHECK	.09290	.015	4
2			.093	.004 AND UP CHECK	.09290 - .00007	.015	4
1	7480414	7480415	.093		.09280	.015	8
2					.09280 - .00010	.015	8
1	7480420	7480421	.09375	.0005 AND UP CHECK	.09375	.015	4
2			.09375		.09375 - .00004	.015	4
1	7480422	7480423	.094	.0005 CHECK	.09400	.015	4
2			.094		.09400 - .00004	.015	4
1	7480426	7480427	.094	.002 CHECK	.09390	.015	4
2			.094	.004 AND UP CHECK	.09390 - .00007	.015	4
1	7480428	7480429	.094		.09380	.015	8
2					.09380 - .00010	.015	8
1	7480434	7480435	.095	.0005 CHECK	.09500	.015	4
2			.095		.09500 - .00004	.015	4
1	7480438	7480439	.095	.002 CHECK	.09490	.015	4
2			.095	.004 AND UP CHECK	.09490 - .00007	.015	4
1	7480440	7480441	.095		.09480	.015	8
2					.09480 - .00010	.015	8
1	7480446	7480447	.096	.0005 CHECK	.09600	.015	4
2			.096		.09600 - .00004	.015	4
1	7480450	7480451	.096	.002 CHECK	.09590	.015	4
2			.096	.004 AND UP CHECK	.09590 - .00007	.015	4
1	7480452	7480453	.096		.09580	.015	8
2					.09580 - .00010	.015	8
1	7480458	7480459	.097	.0005 CHECK	.09700	.015	4
2			.097		.09700 - .00004	.015	4
1	7480462	7480463	.097	.002 CHECK	.09690	.015	4
2			.097	.004 AND UP CHECK	.09690 - .00007	.015	4
1	7480464	7480465	.097		.09680	.015	8
2					.09680 - .00010	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480470		.098	.0005	.09800	.015	4
2		7480471	.098	CHECK	.09800 - .00004	.015	4
1	7480474		.098	.002	.09790	.015	4
2		7480475	.098	CHECK	.09790 - .00007	.015	4
1	7480476		.098	.004 AND UP	.09780	.015	8
2		7480477	.098	CHECK	.09780 - .00010	.015	8
1	7480482		.099	.0005	.09900	.015	4
2		7480483	.099	CHECK	.09900 - .00004	.015	4
1	7480486		.099	.002	.09890	.015	4
2		7480487	.099	CHECK	.09890 - .00007	.015	4
1	7480488		.099	.004 AND UP	.09880	.015	8
2		7480489	.099	CHECK	.09880 - .00010	.015	8
1	7480494		.100	.0005	.10000	.015	4
2		7480495	.100	CHECK	.10000 - .00004	.015	4
1	7480498		.100	.002	.09990	.015	4
2		7480499	.100	CHECK	.09990 - .00007	.015	4
1	7480500		.100	.004 AND UP	.09980	.015	8
2		7480501	.100	CHECK	.09980 - .00010	.015	8
1	7480508		.101	.0005	.10100	.015	4
2		7480509	.101	CHECK	.10100 - .00004	.015	4
1	7480512		.101	.002	.10090	.015	4
2		7480513	.101	CHECK	.10090 - .00007	.015	4
1	7480514		.101	.004 AND UP	.10080	.015	8
2		7480515	.101	CHECK	.10080 - .00010	.015	8
1	7480522		.102	.0005	.10200	.015	4
2		7480523	.102	CHECK	.10200 - .00004	.015	4
1	7480526		.102	.002	.10190	.015	4
2		7480527	.102	CHECK	.10190 - .00007	.015	4
1	7480528		.102	.004 AND UP	.10180	.015	8
2		7480529	.102	CHECK	.10180 - .00010	.015	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480536		.103	.0005	.10300	.015	4
2		7480537	.103	CHECK	.10300 - .00004	.015	4
1	7480540		.103	.002	.10290	.015	4
2		7480541	.103	CHECK	.10290 - .00007	.015	4
1	7480542		.103	.004 AND UP	.10280	.015	8
2		7480543	.103	CHECK	.10280 - .00010	.015	8
1	7480550		.104	.0005	.10400	.015	4
2		7480551	.104	CHECK	.10400 - .00004	.015	4
1	7480554		.104	.002	.10390	.015	4
2		7480555	.104	CHECK	.10390 - .00007	.015	4
1	7480556		.104	.004 AND UP	.10380	.015	8
2		7480557	.104	CHECK	.10380 - .00010	.015	8
1	7480564		.105	.0005	.10500	.015	4
2		7480565	.105	CHECK	.10500 - .00004	.015	4
1	7480568		.105	.002	.10490	.015	4
2		7480569	.105	CHECK	.10490 - .00007	.015	4
1	7480570		.105	.004 AND UP	.10480	.015	8
2		7480571	.105	CHECK	.10480 - .00010	.015	8
1	7480578		.106	.0005	.10600	.015	4
2		7480579	.106	CHECK	.10600 - .00004	.015	4
1	7480582		.106	.002	.10590	.015	4
2		7480583	.106	CHECK	.10590 - .00007	.015	4
1	7480584		.106	.004 AND UP	.10580	.015	8
2		7480585	.106	CHECK	.10580 - .00010	.015	8
1	7480592		.107	.0005	.10700	.015	4
2		7480593	.107	CHECK	.10700 - .00004	.015	4
1	7480596		.107	.002	.10690	.015	4
2		7480597	.107	CHECK	.10690 - .00007	.015	4
1	7480598		.107	.004 AND UP	.10680	.015	8
2		7480599	.107	CHECK	.10680 - .00010	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE RING GAGE	MARKING ON GO GAGE: STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7480606		.108	.0005	.10800	.015	4
2		7480607	.108	CHECK	.10800 - .00004	.015	4
1	7480610		.108	.002	.10790	.015	4
2		7480611	.108	CHECK	.10790 - .00007	.015	4
1	7480612		.108	.004 AND UP	.10780	.015	8
2		7480613	.108	CHECK	.10780 - .00010	.015	8
1	7480620		.109	.0005	.10900	.015	4
2		7480621	.109	CHECK	.10900 - .00004	.015	4
1	7480624		.109	.002	.10890	.015	4
2		7480625	.109	CHECK	.10890 - .00007	.015	4
1	7480626		.109	.004 AND UP	.10880	.015	8
2		7480627	.109	CHECK	.10880 - .00010	.015	8
1	7480634		.110	.0005	.11000	.015	4
2		7480635	.110	CHECK	.11000 - .00004	.015	4
1	7480638		.110	.002	.10990	.015	4
2		7480639	.110	CHECK	.10990 - .00007	.015	4
1	7480640		.110	.004 AND UP	.10980	.015	8
2		7480641	.110	CHECK	.10980 - .00010	.015	8
1	7480648		.111	.0005	.11100	.015	4
2		7480649	.111	CHECK	.11100 - .00004	.015	4
1	7480652		.111	.002	.11090	.015	4
2		7480653	.111	CHECK	.11090 - .00007	.015	4
1	7480654		.111	.004 AND UP	.11080	.015	8
2		7480655	.111	CHECK	.11080 - .00010	.015	8
1	7480662		.112	.0005	.11200	.015	4
2		7480663	.112	CHECK	.11200 - .00004	.015	4
1	7480666		.112	.002	.11190	.015	4
2		7480667	.112	CHECK	.11190 - .00007	.015	4
1	7480668		.112	.004 AND UP	.11180	.015	8
2		7480669	.112	CHECK	.11180 - .00010	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480676		.113	.0005	.11300	.015	4
2		7480677	.113	CHECK	.11300 - .00004	.015	4
1	7480680		.113	.002	.11290	.015	4
2		7480681	.113	CHECK	.11290 - .00007	.015	4
1	7480682		.113	.004 AND UP	.11280	.015	8
2		7480683	.113	CHECK	.11280 - .00010	.015	8
1	7480690		.114	.0005	.11400	.015	4
2		7480691	.114	CHECK	.11400 - .00004	.015	4
1	7480694		.114	.002	.11390	.015	4
2		7480695	.114	CHECK	.11390 - .00007	.015	4
1	7480696		.114	.004 AND UP	.11380	.015	8
2		7480697	.114	CHECK	.11380 - .00010	.015	8
1	7480704		.115	.0005	.11500	.015	4
2		7480705	.115	CHECK	.11500 - .00004	.015	4
1	7480708		.115	.002	.11490	.015	4
2		7480709	.115	CHECK	.11490 - .00007	.015	4
1	7480710		.115	.004 AND UP	.11480	.015	8
2		7480711	.115	CHECK	.11480 - .00010	.015	8
1	7480718		.116	.0005	.11600	.015	4
2		7480719	.116	CHECK	.11600 - .00004	.015	4
1	7480722		.116	.002	.11590	.015	4
2		7480723	.116	CHECK	.11590 - .00007	.015	4
1	7480724		.116	.004 AND UP	.11580	.015	8
2		7480725	.116	CHECK	.11580 - .00010	.015	8
1	7480732		.117	.0005	.11700	.015	4
2		7480733	.117	CHECK	.11700 - .00004	.015	4
1	7480736		.117	.002	.11690	.015	4
2		7480737	.117	CHECK	.11690 - .00007	.015	4
1	7480738		.117	.004 AND UP	.11680	.015	8
2		7480739	.117	CHECK	.11680 - .00010	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480746		.118	.0005	.11800	.015	4
2		7480747	.118	CHECK	.11800 - .00004	.015	4
1	7480750		.118	.002	.11790	.015	4
2		7480751	.118	CHECK	.11790 - .00007	.015	4
1	7480752		.118	.004 AND UP	.11780	.015	8
2		7480753	.118	CHECK	.11780 - .00010	.015	8
1	7480760		.119	.0005	.11900	.015	4
2		7480761	.119	CHECK	.11900 - .00004	.015	4
1	7480764		.119	.002	.11890	.015	4
2		7480765	.119	CHECK	.11890 - .00007	.015	4
1	7480766		.119	.004 AND UP	.11880	.015	8
2		7480767	.119	CHECK	.11880 - .00010	.015	8
1	7480774		.120	.0005	.12000	.015	4
2		7480775	.120	CHECK	.12000 - .00004	.015	4
1	7480778		.120	.002	.11990	.015	4
2		7480779	.120	CHECK	.11990 - .00007	.015	4
1	7480780		.120	.004 AND UP	.11980	.015	8
2		7480781	.120	CHECK	.11980 - .00010	.015	8
1	7480788		.121	.0005	.12100	.015	4
2		7480789	.121	CHECK	.12100 - .00004	.015	4
1	7480792		.121	.002	.12090	.015	4
2		7480793	.121	CHECK	.12090 - .00007	.015	4
1	7480794		.121	.004 AND UP	.12080	.015	8
2		7480795	.121	CHECK	.12080 - .00010	.015	8
1	7480802		.122	.0005	.12200	.015	4
2		7480803	.122	CHECK	.12200 - .00004	.015	4
1	7480806		.122	.002	.12190	.015	4
2		7480807	.122	CHECK	.12190 - .00007	.015	4
1	7480808		.122	.004 AND UP	.12180	.015	8
2		7480809	.122	CHECK	.12180 - .00010	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480816		.123	.0005	.12300	.015	4
2		7480817	.123	CHECK	.12300 - .00004	.015	4
1	7480820		.123	.002	.12290	.015	4
2		7480821	.123	CHECK	.12290 - .00007	.015	4
1	7480822		.123	.004 AND UP	.12280	.015	8
2		7480823	.123	CHECK	.12280 - .00010	.015	8
1	7480830		.124	.0005	.12400	.015	4
2		7480831	.124	CHECK	.12400 - .00004	.015	4
1	7480834		.124	.002	.12390	.015	4
2		7480835	.124	CHECK	.12390 - .00007	.015	4
1	7480836		.124	.004 AND UP	.12380	.015	8
2		7480837	.124	CHECK	.12380 - .00010	.015	8
1	7480844		.125	.0005	.12500	.015	4
2		7480845	.125	CHECK	.12500 - .00004	.015	4
1	7480848		.125	.002	.12490	.015	4
2		7480849	.125	CHECK	.12490 - .00007	.015	4
1	7480850		.125	.004 AND UP	.12480	.015	8
2		7480851	.125	CHECK	.12480 - .00010	.015	8
1	7480857		.126	.0005	.12600	.015	4
2		7480858	.126	CHECK	.12600 - .00004	.015	4
1	7480861		.126	.002	.12590	.015	4
2		7480862	.126	CHECK	.12590 - .00007	.015	4
1	7480863		.126	.004	.12580	.015	8
2		7480864	.126	CHECK	.12580 - .00010	.015	8
3	7480866		.126	.008 AND UP	.12560 - .00030	.015	8
1	7480868		.127	.0005	.12700	.015	4
2		7480869	.127	CHECK	.12700 - .00004	.015	4
1	7480872		.127	.002	.12690	.015	4
2		7480873	.127	CHECK	.12690 - .00007	.015	4
1	7480874		.127	.004	.12680	.015	8
2		7480875	.127	CHECK	.12680 - .00010	.015	8
3	7480877		.127	.008 AND UP	.12660 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480879		.128	.0005	.12800	.015	4
2		7480880	.128	CHECK	.12800 - .00004	.015	4
1	7480883		.128	.002	.12790	.015	4
2		7480884	.128	CHECK	.12790 - .00007	.015	4
1	7480885		.128	.004	.12780	.015	8
2		7480886	.128	CHECK	.12780 - .00010	.015	8
3	7480888		.128	.008 AND UP	.12760 - .00030	.015	8
1	7480890		.129	.0005	.12900	.015	4
2		7480891	.129	CHECK	.12900 - .00004	.015	4
1	7480894		.129	.002	.12890	.015	4
2		7480895	.129	CHECK	.12890 - .00007	.015	4
1	7480896		.129	.004	.12880	.015	8
2		7480897	.129	CHECK	.12880 - .00010	.015	8
3	7480899		.129	.008 AND UP	.12860 - .00030	.015	8
1	7480901		.130	.0005	.13000	.015	4
2		7480902	.130	CHECK	.13000 - .00004	.015	4
1	7480905		.130	.002	.12990	.015	4
2		7480906	.130	CHECK	.12990 - .00007	.015	4
1	7480907		.130	.004	.12980	.015	8
2		7480908	.130	CHECK	.12980 - .00010	.015	8
3	7480910		.130	.008 AND UP	.12960 - .00030	.015	8
1	7480912		.131	.0005	.13100	.015	4
2		7480913	.131	CHECK	.13100 - .00004	.015	4
1	7480916		.131	.002	.13090	.015	4
2		7480917	.131	CHECK	.13090 - .00007	.015	4
1	7480918		.131	.004	.13080	.015	8
2		7480919	.131	CHECK	.13080 - .00010	.015	8
3	7480921		.131	.008 AND UP	.13060 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7480923		.132	.0005	.13200	.015	4
2		7480924	.132	CHECK	.13200 - .00004	.015	4
1	7480927		.132	.002	.13190	.015	4
2		7480928	.132	CHECK	.13190 - .00007	.015	4
1	7480929		.132	.004	.13180	.015	8
2		7480930	.132	CHECK	.13180 - .00010	.015	8
3	7480932		.132	.008 AND UP	.13160 - .00030	.015	8
1	7480934		.133	.0005	.13300	.015	4
2		7480935	.133	CHECK	.13300 - .00004	.015	4
1	7480938		.133	.002	.13290	.015	4
2		7480939	.133	CHECK	.13290 - .00007	.015	4
1	7480940		.133	.004	.13280	.015	8
2		7480941	.133	CHECK	.13280 - .00010	.015	8
3	7480943		.133	.008 AND UP	.13260 - .00030	.015	8
1	7480945		.134	.0005	.13400	.015	4
2		7480946	.134	CHECK	.13400 - .00004	.015	4
1	7480949		.134	.002	.13390	.015	4
2		7480950	.134	CHECK	.13390 - .00007	.015	4
1	7480951		.134	.004	.13380	.015	8
2		7480952	.134	CHECK	.13380 - .00010	.015	8
3	7480954		.134	.008 AND UP	.13360 - .00030	.015	8
1	7480956		.135	.0005	.13500	.015	4
2		7480957	.135	CHECK	.13500 - .00004	.015	4
1	7480960		.135	.002	.13490	.015	4
2		7480961	.135	CHECK	.13490 - .00007	.015	4
1	7480962		.135	.004	.13480	.015	8
2		7480963	.135	CHECK	.13480 - .00010	.015	8
3	7480965		.135	.008 AND UP	.13460 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7480967		.136	.0005	.13600	.015	4
2		7480968	.136	CHECK	.13600 - .00004	.015	4
1	7480971		.136	.002	.13590	.015	4
2		7480972	.136	CHECK	.13590 - .00007	.015	4
1	7480973		.136	.004	.13580	.015	8
2		7480974	.136	CHECK	.13580 - .00010	.015	8
3	7480976		.136	.008 AND UP	.13560 - .00030	.015	8
1	7480978		.137	.0005	.13700	.015	4
2		7480979	.137	CHECK	.13700 - .00004	.015	4
1	7480982		.137	.002	.13690	.015	4
2		7480983	.137	CHECK	.13690 - .00007	.015	4
1	7480984		.137	.004	.13680	.015	8
2		7480985	.137	CHECK	.13680 - .00010	.015	8
3	7480987		.137	.008 AND UP	.13660 - .00030	.015	8
1	7480989		.138	.0005	.13800	.015	4
2		7480990	.138	CHECK	.13800 - .00004	.015	4
1	7480993		.138	.002	.13790	.015	4
2		7480994	.138	CHECK	.13790 - .00007	.015	4
1	7480995		.138	.004	.13780	.015	8
2		7480996	.138	CHECK	.13780 - .00010	.015	8
3	7480998		.138	.008 AND UP	.13760 - .00030	.015	8
1	7481000		.139	.0005	.13900	.015	4
2		7481001	.139	CHECK	.13900 - .00004	.015	4
1	7481004		.139	.002	.13890	.015	4
2		7481005	.139	CHECK	.13890 - .00007	.015	4
1	7481006		.139	.004	.13880	.015	8
2		7481007	.139	CHECK	.13880 - .00010	.015	8
3	7481009		.139	.008 AND UP	.13860 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481011		.140	.0005	.14000	.015	4
2		7481012	.140	CHECK	.14000 - .00004	.015	4
1	7481015		.140	.002	.13990	.015	4
2		7481016	.140	CHECK	.13990 - .00007	.015	4
1	7481017		.140	.004	.13980	.015	8
2		7481018	.140	CHECK	.13980 - .00010	.015	8
3	7481020		.140	.008 AND UP	.13960 - .00030	.015	8
1	7481022		.141	.0005	.14100	.015	4
2		7481023	.141	CHECK	.14100 - .00004	.015	4
1	7481026		.141	.002	.14090	.015	4
2		7481027	.141	CHECK	.14090 - .00007	.015	4
1	7481028		.141	.004	.14080	.015	8
2		7481029	.141	CHECK	.14080 - .00010	.015	8
3	7481031		.141	.008 AND UP	.14060 - .00030	.015	8
1	7481033		.142	.0005	.14200	.015	4
2		7481034	.142	CHECK	.14200 - .00004	.015	4
1	7481037		.142	.002	.14190	.015	4
2		7481038	.142	CHECK	.14190 - .00007	.015	4
1	7481039		.142	.004	.14180	.015	8
2		7481040	.142	CHECK	.14180 - .00010	.015	8
3	7481042		.142	.008 AND UP	.14160 - .00030	.015	8
1	7481044		.143	.0005	.14300	.015	4
2		7481045	.143	CHECK	.14300 - .00004	.015	4
1	7481048		.143	.002	.14290	.015	4
2		7481049	.143	CHECK	.14290 - .00007	.015	4
1	7481050		.143	.004	.14280	.015	8
2		7481051	.143	CHECK	.14280 - .00010	.015	8
3	7481053		.143	.008 AND UP	.14260 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481055		.144	.0005	.14400	.015	4
2		7481056	.144	CHECK	.14400 - .00004	.015	4
1	7481059		.144	.002	.14390	.015	4
2		7481060	.144	CHECK	.14390 - .00007	.015	4
1	7481061		.144	.004	.14380	.015	8
2		7481062	.144	CHECK	.14380 - .00010	.015	8
3	7481064		.144	.008 AND UP	.14360 - .00030	.015	8
1	7481066		.145	.0005	.14500	.015	4
2		7481067	.145	CHECK	.14500 - .00004	.015	4
1	7481070		.145	.002	.14490	.015	4
2		7481071	.145	CHECK	.14490 - .00007	.015	4
1	7481072		.145	.004	.14480	.015	8
2		7481073	.145	CHECK	.14480 - .00010	.015	8
3	7481075		.145	.008 AND UP	.14460 - .00030	.015	8
1	7481077		.146	.0005	.14600	.015	4
2		7481078	.146	CHECK	.14600 - .00004	.015	4
1	7481081		.146	.002	.14590	.015	4
2		7481082	.146	CHECK	.14590 - .00007	.015	4
1	7481083		.146	.004	.14580	.015	8
2		7481084	.146	CHECK	.14580 - .00010	.015	8
3	7481086		.146	.008 AND UP	.14560 - .00030	.015	8
1	7481088		.147	.0005	.14700	.015	4
2		7481089	.147	CHECK	.14700 - .00004	.015	4
1	7481092		.147	.002	.14690	.015	4
2		7481093	.147	CHECK	.14690 - .00007	.015	4
1	7481094		.147	.004	.14680	.015	8
2		7481095	.147	CHECK	.14680 - .00010	.015	8
3	7481097		.147	.008 AND UP	.14660 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481099		.148	.0005	.14800	.015	4
2		7481100	.148	CHECK	.14800 - .00004	.015	4
1	7481103		.148	.002	.14790	.015	4
2		7481104	.148	CHECK	.14790 - .00007	.015	4
1	7481105		.148	.004	.14780	.015	8
2		7481106	.148	CHECK	.14780 - .00010	.015	8
3	7481108		.148	.008 AND UP	.14760 - .00030	.015	8
1	7481110		.149	.0005	.14900	.015	4
2		7481111	.149	CHECK	.14900 - .00004	.015	4
1	7481114		.149	.002	.14890	.015	4
2		7481115	.149	CHECK	.14890 - .00007	.015	4
1	7481116		.149	.004	.14880	.015	8
2		7481117	.149	CHECK	.14880 - .00010	.015	8
3	7481119		.149	.008 AND UP	.14860 - .00030	.015	8
1	7481121		.150	.0005	.15000	.015	4
2		7481122	.150	CHECK	.15000 - .00004	.015	4
1	7481125		.150	.002	.14990	.015	4
2		7481126	.150	CHECK	.14990 - .00007	.015	4
1	7481127		.150	.004	.14980	.015	8
2		7481128	.150	CHECK	.14980 - .00010	.015	8
3	7481130		.150	.008 AND UP	.14960 - .00030	.015	8
1	7481132		.151	.0005	.15100	.015	4
2		7481133	.151	CHECK	.15100 - .00004	.015	4
1	7481136		.151	.002	.15090	.015	4
2		7481137	.151	CHECK	.15090 - .00007	.015	4
1	7481138		.151	.004	.15080	.015	8
2		7481139	.151	CHECK	.15080 - .00010	.015	8
3	7481141		.151	.008 AND UP	.15060 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481143		.152	.0005	.15200	.015	4
2		7481144	.152	CHECK	.15200 - .00004	.015	4
1	7481147		.152	.002	.15190	.015	4
2		7481148	.152	CHECK	.15190 - .00007	.015	4
1	7481149		.152	.004	.15180	.015	8
2		7481150	.152	CHECK	.15180 - .00010	.015	8
3	7481152		.152	.008 AND UP	.15160 - .00030	.015	8
1	7481154		.153	.0005	.15300	.015	4
2		7481155	.153	CHECK	.15300 - .00004	.015	4
1	7481158		.153	.002	.15290	.015	4
2		7481159	.153	CHECK	.15290 - .00007	.015	4
1	7481160		.153	.004	.15280	.015	8
2		7481161	.153	CHECK	.15280 - .00010	.015	8
3	7481163		.153	.008 AND UP	.15260 - .00030	.015	8
1	7481165		.154	.0005	.15400	.015	4
2		7481166	.154	CHECK	.15400 - .00004	.015	4
1	7481169		.154	.002	.15390	.015	4
2		7481170	.154	CHECK	.15390 - .00007	.015	4
1	7481171		.154	.004	.15380	.015	8
2		7481172	.154	CHECK	.15380 - .00010	.015	8
3	7481174		.154	.008 AND UP	.15360 - .00030	.015	8
1	7481176		.155	.0005	.15500	.015	4
2		7481177	.155	CHECK	.15500 - .00004	.015	4
1	7481180		.155	.002	.15490	.015	4
2		7481181	.155	CHECK	.15490 - .00007	.015	4
1	7481182		.155	.004	.15480	.015	8
2		7481183	.155	CHECK	.15480 - .00010	.015	8
3	7481185		.155	.008 AND UP	.15460 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481187		.156	.0005	.15600	.015	4
2		7481188	.156	CHECK	.15600 - .00004	.015	4
1	7481191		.156	.002	.15590	.015	4
2		7481192	.156	CHECK	.15590 - .00007	.015	4
1	7481193		.156	.004	.15580	.015	8
2		7481194	.156	CHECK	.15580 - .00010	.015	8
3	7481196		.156	.008 AND UP	.15560 - .00030	.015	8
1	7481198		.15625	.0005 AND UP	.15625	.015	4
2		7481199	.15625	CHECK	.15625 - .00004	.015	4
1	7481200		.157	.0005	.15700	.015	4
2		7481201	.157	CHECK	.15700 - .00004	.015	4
1	7481204		.157	.002	.15690	.015	4
2		7481205	.157	CHECK	.15690 - .00007	.015	4
1	7481206		.157	.004	.15680	.015	8
2		7481207	.157	CHECK	.15680 - .00010	.015	8
3	7481209		.157	.008 AND UP	.15660 - .00030	.015	8
1	7481211		.158	.0005	.15800	.015	4
2		7481212	.158	CHECK	.15800 - .00004	.015	4
1	7481215		.158	.002	.15790	.015	4
2		7481216	.158	CHECK	.15790 - .00007	.015	4
1	7481217		.158	.004	.15780	.015	8
2		7481218	.158	CHECK	.15780 - .00010	.015	8
3	7481220		.158	.008 AND UP	.15760 - .00030	.015	8
1	7481222		.159	.0005	.15900	.015	4
2		7481223	.159	CHECK	.15900 - .00004	.015	4
1	7481226		.159	.002	.15890	.015	4
2		7481227	.159	CHECK	.15890 - .00007	.015	4
1	7481228		.159	.004	.15880	.015	8
2		7481229	.159	CHECK	.15880 - .00010	.015	8
3	7481231		.159	.008 AND UP	.15860 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481233		.160	.0005	.16000	.015	4
2		7481234	.160	CHECK	.16000 - .00004	.015	4
1	7481237		.160	.002	.15990	.015	4
2		7481238	.160	CHECK	.15990 - .00007	.015	4
1	7481239		.160	.004	.15980	.015	8
2		7481240	.160	CHECK	.15980 - .00010	.015	8
3	7481242		.160	.008 AND UP	.15960 - .00030	.015	8
1	7481244		.161	.0005	.16100	.015	4
2		7481245	.161	CHECK	.16100 - .00004	.015	4
1	7481248		.161	.002	.16090	.015	4
2		7481249	.161	CHECK	.16090 - .00007	.015	4
1	7481250		.161	.004	.16080	.015	8
2		7481251	.161	CHECK	.16080 - .00010	.015	8
3	7481253		.161	.008 AND UP	.16060 - .00030	.015	8
1	7481255		.162	.0005	.16200	.015	4
2		7481256	.162	CHECK	.16200 - .00004	.015	4
1	7481259		.162	.002	.16190	.015	4
2		7481260	.162	CHECK	.16190 - .00007	.015	4
1	7481261		.162	.004	.16180	.015	8
2		7481262	.162	CHECK	.16180 - .00010	.015	8
3	7481264		.162	.008 AND UP	.16160 - .00030	.015	8
1	7481266		.163	.0005	.16300	.015	4
2		7481267	.163	CHECK	.16300 - .00004	.015	4
1	7481270		.163	.002	.16290	.015	4
2		7481271	.163	CHECK	.16290 - .00007	.015	4
1	7481272		.163	.004	.16280	.015	8
2		7481273	.163	CHECK	.16280 - .00010	.015	8
3	7481275		.163	.008 AND UP	.16260 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481277		.164	.0005	.16400	.015	4
2		7481278	.164	CHECK	.16400 - .00004	.015	4
1	7481281		.164	.002	.16390	.015	4
2		7481282	.164	CHECK	.16390 - .00007	.015	4
1	7481283		.164	.004	.16380	.015	8
2		7481284	.164	CHECK	.16380 - .00010	.015	8
3	7481286		.164	.008 AND UP	.16360 - .00030	.015	8
1	7481288		.165	.0005	.16500	.015	4
2		7481289	.165	CHECK	.16500 - .00004	.015	4
1	7481292		.165	.002	.16490	.015	4
2		7481293	.165	CHECK	.16490 - .00007	.015	4
1	7481294		.165	.004	.16480	.015	8
2		7481295	.165	CHECK	.16480 - .00010	.015	8
3	7481297		.165	.008 AND UP	.16460 - .00030	.015	8
1	7481299		.166	.0005	.16600	.015	4
2		7481300	.166	CHECK	.16600 - .00004	.015	4
1	7481303		.166	.002	.16590	.015	4
2		7481304	.166	CHECK	.16590 - .00007	.015	4
1	7481305		.166	.004	.16580	.015	8
2		7481306	.166	CHECK	.16580 - .00010	.015	8
3	7481308		.166	.008 AND UP	.16560 - .00030	.015	8
1	7481310		.167	.0005	.16700	.015	4
2		7481311	.167	CHECK	.16700 - .00004	.015	4
1	7481314		.167	.002	.16690	.015	4
2		7481315	.167	CHECK	.16690 - .00007	.015	4
1	7481316		.167	.004	.16680	.015	8
2		7481317	.167	CHECK	.16680 - .00010	.015	8
3	7481319		.167	.008 AND UP	.16660 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE RING GAGE	MARKING ON GO GAGE: STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7481321		.168	.0005	.16800	.015	4
2		7481322	.168	CHECK	.16800 - .00004	.015	4
1	7481325		.168	.002	.16790	.015	4
2		7481326	.168	CHECK	.16790 - .00007	.015	4
1	7481327		.168	.004	.16780	.015	8
2		7481328	.168	CHECK	.16780 - .00010	.015	8
3	7481330		.168	.008 AND UP	.16760 - .00030	.015	8
1	7481332		.169	.0005	.16900	.015	4
2		7481333	.169	CHECK	.16900 - .00004	.015	4
1	7481336		.169	.002	.16890	.015	4
2		7481337	.169	CHECK	.16890 - .00007	.015	4
1	7481338		.169	.004	.16880	.015	8
2		7481339	.169	CHECK	.16880 - .00010	.015	8
3	7481341		.169	.008 AND UP	.16860 - .00030	.015	8
1	7481343		.170	.0005	.17000	.015	4
2		7481344	.170	CHECK	.17000 - .00004	.015	4
1	7481347		.170	.002	.16990	.015	4
2		7481348	.170	CHECK	.16990 - .00007	.015	4
1	7481349		.170	.004	.16980	.015	8
2		7481350	.170	CHECK	.16980 - .00010	.015	8
3	7481352		.170	.008 AND UP	.16960 - .00030	.015	8
1	7481354		.171	.0005	.17100	.015	4
2		7481355	.171	CHECK	.17100 - .00004	.015	4
1	7481358		.171	.002	.17090	.015	4
2		7481359	.171	CHECK	.17090 - .00007	.015	4
1	7481360		.171	.004	.17080	.015	8
2		7481361	.171	CHECK	.17080 - .00010	.015	8
3	7481363		.171	.008 AND UP	.17060 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481365		.172	.0005	.17200	.015	4
2		7481366	.172	CHECK	.17200 - .00004	.015	4
1	7481369		.172	.002	.17190	.015	4
2		7481370	.172	CHECK	.17190 - .00007	.015	4
1	7481371		.172	.004	.17180	.015	8
2		7481372	.172	CHECK	.17180 - .00010	.015	8
3	7481374		.172	.008 AND UP	.17160 - .00030	.015	8
1	7481376		.173	.0005	.17300	.015	4
2		7481377	.173	CHECK	.17300 - .00004	.015	4
1	7481380		.173	.002	.17290	.015	4
2		7481381	.173	CHECK	.17290 - .00007	.015	4
1	7481382		.173	.004	.17280	.015	8
2		7481383	.173	CHECK	.17280 - .00010	.015	8
3	7481385		.173	.008 AND UP	.17260 - .00030	.015	8
1	7481387		.174	.0005	.17400	.015	4
2		7481388	.174	CHECK	.17400 - .00004	.015	4
1	7481391		.174	.002	.17390	.015	4
2		7481392	.174	CHECK	.17390 - .00007	.015	4
1	7481393		.174	.004	.17380	.015	8
2		7481394	.174	CHECK	.17380 - .00010	.015	8
3	7481396		.174	.008 AND UP	.17360 - .00030	.015	8
1	7481398		.175	.0005	.17500	.015	4
2		7481399	.175	CHECK	.17500 - .00004	.015	4
1	7481402		.175	.002	.17490	.015	4
2		7481403	.175	CHECK	.17490 - .00007	.015	4
1	7481404		.175	.004	.17480	.015	8
2		7481405	.175	CHECK	.17480 - .00010	.015	8
3	7481407		.175	.008 AND UP	.17460 - .00030	.015	8
1	7481409		.176	.0005	.17600	.015	4
2		7481410	.176	CHECK	.17600 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481413		.176	.002	.17590	.015	4
2		7481414	.176	CHECK	.17590 - .00007	.015	4
1	7481415		.176	.004	.17580	.015	8
2		7481416	.176	CHECK	.17580 - .00010	.015	8
3	7481418		.176	.008 AND UP	.17560 - .00030	.015	8
1	7481420		.177	.0005	.17700	.015	4
2		7481421	.177	CHECK	.17700 - .00004	.015	4
1	7481424		.177	.002	.17690	.015	4
2		7481425	.177	CHECK	.17690 - .00007	.015	4
1	7481426		.177	.004	.17680	.015	8
2		7481427	.177	CHECK	.17680 - .00010	.015	8
3	7481429		.177	.008 AND UP	.17660 - .00030	.015	8
1	7481431		.178	.0005	.17800	.015	4
2		7481432	.178	CHECK	.17800 - .00004	.015	4
1	7481435		.178	.002	.17790	.015	4
2		7481436	.178	CHECK	.17790 - .00007	.015	4
1	7481437		.178	.004	.17780	.015	8
2		7481438	.178	CHECK	.17780 - .00010	.015	8
3	7481440		.178	.008 AND UP	.17760 - .00030	.015	8
1	7481442		.179	.0005	.17900	.015	4
2		7481443	.179	CHECK	.17900 - .00004	.015	4
1	7481446		.179	.002	.17890	.015	4
2		7481447	.179	CHECK	.17890 - .00007	.015	4
1	7481448		.179	.004	.17880	.015	8
2		7481449	.179	CHECK	.17880 - .00010	.015	8
3	7481451		.179	.008 AND UP	.17860 - .00030	.015	8
1	7481453		.180	.0005	.18000	.015	4
2		7481454	.180	CHECK	.18000 - .00004	.015	4
1	7481457		.180	.002	.17990	.015	4
2		7481458	.180	CHECK	.17990 - .00007	.015	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481459		.180	.004	.17980	.015	8
2		7481460	.180	CHECK	.17980 - .00010	.015	8
3	7481462		.180	.008 AND UP	.17960 - .00030	.015	8
1	7481464		.181	.0005	.18100	.015	4
2		7481465	.181	CHECK	.18100 - .00004	.015	4
1	7481468		.181	.002	.18090	.015	4
2		7481469	.181	CHECK	.18090 - .00007	.015	4
1	7481470		.181	.004	.18080	.015	8
2		7481471	.181	CHECK	.18080 - .00010	.015	8
3	7481473		.181	.008 AND UP	.18060 - .00030	.015	8
1	7481475		.182	.0005	.18200	.015	4
2		7481476	.182	CHECK	.18200 - .00004	.015	4
1	7481479		.182	.002	.18190	.015	4
2		7481480	.182	CHECK	.18190 - .00007	.015	4
1	7481481		.182	.004	.18180	.015	8
2		7481482	.182	CHECK	.18180 - .00010	.015	8
3	7481484		.182	.008 AND UP	.18160 - .00030	.015	8
1	7481486		.183	.0005	.18300	.015	4
2		7481487	.183	CHECK	.18300 - .00004	.015	4
1	7481490		.183	.002	.18290	.015	4
2		7481491	.183	CHECK	.18290 - .00007	.015	4
1	7481492		.183	.004	.18280	.015	8
2		7481493	.183	CHECK	.18280 - .00010	.015	8
3	7481495		.183	.008 AND UP	.18260 - .00030	.015	8
1	7481497		.184	.0005	.18400	.015	4
2		7481498	.184	CHECK	.18400 - .00004	.015	4
1	7481501		.184	.002	.18390	.015	4
2		7481502	.184	CHECK	.18390 - .00007	.015	4
1	7481503		.184	.004	.18380	.015	8
2		7481504	.184	CHECK	.18380 - .00010	.015	8
3	7481506		.184	.008 AND UP	.18360 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481508		.185	.0005	.18500	.015	4
2		7481509	.185	CHECK	.18500 - .00004	.015	4
1	7481512		.185	.002	.18490	.015	4
2		7481513	.185	CHECK	.18490 - .00007	.015	4
1	7481514		.185	.004	.18480	.015	8
2		7481515	.185	CHECK	.18480 - .00010	.015	8
3	7481517		.185	.008 AND UP	.18460 - .00030	.015	8
1	7481519		.186	.0005	.18600	.015	4
2		7481520	.186	CHECK	.18600 - .00004	.015	4
1	7481523		.186	.002	.18590	.015	4
2		7481524	.186	CHECK	.18590 - .00007	.015	4
1	7481525		.186	.004	.18580	.015	8
2		7481526	.186	CHECK	.18580 - .00010	.015	8
3	7481528		.186	.008 AND UP	.18560 - .00030	.015	8
1	7481530		.187	.0005	.18700	.015	4
2		7481531	.187	CHECK	.18700 - .00004	.015	4
1	7481534		.187	.002	.18690	.015	4
2		7481535	.187	CHECK	.18690 - .00007	.015	4
1	7481536		.187	.004	.18680	.015	8
2		7481537	.187	CHECK	.18680 - .00010	.015	8
3	7481539		.187	.008 AND UP	.18660 - .00030	.015	8
1	7481541		.1875	.0005 AND UP	.18750	.015	4
2		7481542	.1875	CHECK	.18750 - .00004	.015	4
1	7481543		.188	.0005	.18800	.015	4
2		7481544	.188	CHECK	.18800 - .00004	.015	4
1	7481547		.188	.002	.18790	.015	4
2		7481548	.188	CHECK	.18790 - .00007	.015	4
1	7481549		.188	.004	.18780	.015	8
2		7481550	.188	CHECK	.18780 - .00010	.015	8
3	7481552		.188	.008 AND UP	.18760 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7481554		.189	.0005	.18900	.015	4
2		7481555	.189	CHECK	.18900 - .00004	.015	4
1	7481558		.189	.002	.18890	.015	4
2		7481559	.189	CHECK	.18890 - .00007	.015	4
1	7481560		.189	.004	.18880	.015	8
2		7481561	.189	CHECK	.18880 - .00010	.015	8
3	7481563		.189	.008 AND UP	.18860 - .00030	.015	8
1	7481565		.190	.0005	.19000	.015	4
2		7481566	.190	CHECK	.19000 - .00004	.015	4
1	7481569		.190	.002	.18990	.015	4
2		7481570	.190	CHECK	.18990 - .00007	.015	4
1	7481571		.190	.004	.18980	.015	8
2		7481572	.190	CHECK	.18980 - .00010	.015	8
3	7481574		.190	.008 AND UP	.18960 - .00030	.015	8
1	7481576		.191	.0005	.19100	.015	4
2		7481577	.191	CHECK	.19100 - .00004	.015	4
1	7481580		.191	.002	.19090	.015	4
2		7481581	.191	CHECK	.19090 - .00007	.015	4
1	7481582		.191	.004	.19080	.015	8
2		7481583	.191	CHECK	.19080 - .00010	.015	8
3	7481585		.191	.008 AND UP	.19060 - .00030	.015	8
1	7481587		.192	.0005	.19200	.015	4
2		7481588	.192	CHECK	.19200 - .00004	.015	4
1	7481591		.192	.002	.19190	.015	4
2		7481592	.192	CHECK	.19190 - .00007	.015	4
1	7481593		.192	.004	.19180	.015	8
2		7481594	.192	CHECK	.19180 - .00010	.015	8
3	7481596		.192	.008 AND UP	.19160 - .00030	.015	8
1	7481598		.193	.0005	.19300	.015	4
2		7481599	.193	CHECK	.19300 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481602		.193	.002	.19290	.015	4
2		7481603	.193	CHECK	.19290 - .00007	.015	4
1	7481604		.193	.004	.19280	.015	8
2		7481605	.193	CHECK	.19280 - .00010	.015	8
3	7481607		.193	.008 AND UP	.19260 - .00030	.015	8
1	7481609		.194	.0005	.19400	.015	4
2		7481610	.194	CHECK	.19400 - .00004	.015	4
1	7481613		.194	.002	.19390	.015	4
2		7481614	.194	CHECK	.19390 - .00007	.015	4
1	7481615		.194	.004	.19380	.015	8
2		7481616	.194	CHECK	.19380 - .00010	.015	8
3	7481618		.194	.008 AND UP	.19360 - .00030	.015	8
1	7481620		.195	.0005	.19500	.015	4
2		7481621	.195	CHECK	.19500 - .00004	.015	4
1	7481624		.195	.002	.19490	.015	4
2		7481625	.195	CHECK	.19490 - .00007	.015	4
1	7481626		.195	.004	.19480	.015	8
2		7481627	.195	CHECK	.19480 - .00010	.015	8
3	7481629		.195	.008 AND UP	.19460 - .00030	.015	8
1	7481631		.196	.0005	.19600	.015	4
2		7481632	.196	CHECK	.19600 - .00004	.015	4
1	7481635		.196	.002	.19590	.015	4
2		7481636	.196	CHECK	.19590 - .00007	.015	4
1	7481637		.196	.004	.19580	.015	8
2		7481638	.196	CHECK	.19580 - .00010	.015	8
3	7481640		.196	.008 AND UP	.19560 - .00030	.015	8
1	7481642		.197	.0005	.19700	.015	4
2		7481643	.197	CHECK	.19700 - .00004	.015	4
1	7481646		.197	.002	.19690	.015	4
2		7481647	.197	CHECK	.19690 - .00007	.015	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481648		.197	.004	.19680	.015	8
2		7481649	.197	CHECK	.19680 - .00010	.015	8
3	7481651		.197	.008 AND UP	.19660 - .00030	.015	8
1	7481653		.198	.0005	.19800	.015	4
2		7481654	.198	CHECK	.19800 - .00004	.015	4
1	7481657		.198	.002	.19790	.015	4
2		7481658	.198	CHECK	.19790 - .00007	.015	4
1	7481659		.198	.004	.19780	.015	8
2		7481660	.198	CHECK	.19780 - .00010	.015	8
3	7481662		.198	.008 AND UP	.19760 - .00030	.015	8
1	7481664		.199	.0005	.19900	.015	4
2		7481665	.199	CHECK	.19900 - .00004	.015	4
1	7481668		.199	.002	.19890	.015	4
2		7481669	.199	CHECK	.19890 - .00007	.015	4
1	7481670		.199	.004	.19880	.015	8
2		7481671	.199	CHECK	.19880 - .00010	.015	8
3	7481673		.199	.008 AND UP	.19860 - .00030	.015	8
1	7481675		.200	.0005	.20000	.015	4
2		7481676	.200	CHECK	.20000 - .00004	.015	4
1	7481679		.200	.002	.19990	.015	4
2		7481680	.200	CHECK	.19990 - .00007	.015	4
1	7481681		.200	.004	.19980	.015	8
2		7481682	.200	CHECK	.19980 - .00010	.015	8
3	7481684		.200	.008 AND UP	.19960 - .00030	.015	8
1	7481686		.201	.0005	.20100	.015	4
2		7481687	.201	CHECK	.20100 - .00004	.015	4
1	7481690		.201	.002	.20090	.015	4
2		7481691	.201	CHECK	.20090 - .00007	.015	4
1	7481692		.201	.004	.20080	.015	8
2		7481693	.201	CHECK	.20080 - .00010	.015	8
3	7481695		.201	.008 AND UP	.20060 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481697		.202	.0005	.20200	.015	4
2		7481698	.202	CHECK	.20200 - .00004	.015	4
1	7481701		.202	.002	.20190	.015	4
2		7481702	.202	CHECK	.20190 - .00007	.015	4
1	7481703		.202	.004	.20180	.015	8
2		7481704	.202	CHECK	.20180 - .00010	.015	8
3	7481706		.202	.008 AND UP	.20160 - .00030	.015	8
1	7481708		.203	.0005	.20300	.015	4
2		7481709	.203	CHECK	.20300 - .00004	.015	4
1	7481712		.203	.002	.20290	.015	4
2		7481713	.203	CHECK	.20290 - .00007	.015	4
1	7481714		.203	.004	.20280	.015	8
2		7481715	.203	CHECK	.20280 - .00010	.015	8
3	7481717		.203	.008 AND UP	.20260 - .00030	.015	8
1	7481719		.204	.0005	.20400	.015	4
2		7481720	.204	CHECK	.20400 - .00004	.015	4
1	7481723		.204	.002	.20390	.015	4
2		7481724	.204	CHECK	.20390 - .00007	.015	4
1	7481725		.204	.004	.20380	.015	8
2		7481726	.204	CHECK	.20380 - .00010	.015	8
3	7481728		.204	.008 AND UP	.20360 - .00030	.015	8
1	7481730		.205	.0005	.20500	.015	4
2		7481731	.205	CHECK	.20500 - .00004	.015	4
1	7481734		.205	.002	.20490	.015	4
2		7481735	.205	CHECK	.20490 - .00007	.015	4
1	7481736		.205	.004	.20480	.015	8
2		7481737	.205	CHECK	.20480 - .00010	.015	8
3	7481739		.205	.008 AND UP	.20460 - .00030	.015	8
1	7481741		.206	.0005	.20600	.015	4
2		7481742	.206	CHECK	.20600 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481745		.206	.002	.20590	.015	4
2		7481746	.206	CHECK	.20590 - .00007	.015	4
1	7481747		.206	.004	.20580	.015	8
2		7481748	.206	CHECK	.20580 - .00010	.015	8
3	7481750		.206	.008 AND UP	.20560 - .00030	.015	8
1	7481752		.207	.0005	.20700	.015	4
2		7481753	.207	CHECK	.20700 - .00004	.015	4
1	7481756		.207	.002	.20690	.015	4
2		7481757	.207	CHECK	.20690 - .00007	.015	4
1	7481758		.207	.004	.20680	.015	8
2		7481759	.207	CHECK	.20680 - .00010	.015	8
3	7481761		.207	.008 AND UP	.20660 - .00030	.015	8
1	7481763		.208	.0005	.20800	.015	4
2		7481764	.208	CHECK	.20800 - .00004	.015	4
1	7481767		.208	.002	.20790	.015	4
2		7481768	.208	CHECK	.20790 - .00007	.015	4
1	7481769		.208	.004	.20780	.015	8
2		7481770	.208	CHECK	.20780 - .00010	.015	8
3	7481772		.208	.008 AND UP	.20760 - .00030	.015	8
1	7481774		.209	.0005	.20900	.015	4
2		7481775	.209	CHECK	.20900 - .00004	.015	4
1	7481778		.209	.002	.20890	.015	4
2		7481779	.209	CHECK	.20890 - .00007	.015	4
1	7481780		.209	.004	.20880	.015	8
2		7481781	.209	CHECK	.20880 - .00010	.015	8
3	7481783		.209	.008 AND UP	.20860 - .00030	.015	8
1	7481785		.210	.0005	.21000	.015	4
2		7481786	.210	CHECK	.21000 - .00004	.015	4
1	7481789		.210	.002	.20990	.015	4
2		7481790	.210	CHECK	.20990 - .00007	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481791		.210	.004	.20980	.015	8
2		7481792	.210	CHECK	.20980 - .00010	.015	8
3	7481794		.210	.008 AND UP	.20960 - .00030	.015	8
1	7481796		.211	.0005	.21100	.015	4
2		7481797	.211	CHECK	.21100 - .00004	.015	4
1	7481800		.211	.002	.21090	.015	4
2		7481801	.211	CHECK	.21090 - .00007	.015	4
1	7481802		.211	.004	.21080	.015	8
2		7481803	.211	CHECK	.21080 - .00010	.015	8
3	7481805		.211	.008 AND UP	.21060 - .00030	.015	8
1	7481807		.212	.0005	.21200	.015	4
2		7481808	.212	CHECK	.21200 - .00004	.015	4
1	7481811		.212	.002	.21190	.015	4
2		7481812	.212	CHECK	.21190 - .00007	.015	4
1	7481813		.212	.004	.21180	.015	8
2		7481814	.212	CHECK	.21180 - .00010	.015	8
3	7481816		.212	.008 AND UP	.21160 - .00030	.015	8
1	7481818		.213	.0005	.21300	.015	4
2		7481819	.213	CHECK	.21300 - .00004	.015	4
1	7481822		.213	.002	.21290	.015	4
2		7481823	.213	CHECK	.21290 - .00007	.015	4
1	7481824		.213	.004	.21280	.015	8
2		7481825	.213	CHECK	.21280 - .00010	.015	8
3	7481827		.213	.008 AND UP	.21260 - .00030	.015	8
1	7481829		.214	.0005	.21400	.015	4
2		7481830	.214	CHECK	.21400 - .00004	.015	4
1	7481833		.214	.002	.21390	.015	4
2		7481834	.214	CHECK	.21390 - .00007	.015	4
1	7481835		.214	.004	.21380	.015	8
2		7481836	.214	CHECK	.21380 - .00010	.015	8
3	7481838		.214	.008 AND UP	.21360 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481840		.215	.0005	.21500	.015	4
2		7481841	.215	CHECK	.21500 - .00004	.015	4
1	7481844		.215	.002	.21490	.015	4
2		7481845	.215	CHECK	.21490 - .00007	.015	4
1	7481846		.215	.004	.21480	.015	8
2		7481847	.215	CHECK	.21480 - .00010	.015	8
3	7481849		.215	.008 AND UP	.21460 - .00030	.015	8
1	7481851		.216	.0005	.21600	.015	4
2		7481852	.216	CHECK	.21600 - .00004	.015	4
1	7481855		.216	.002	.21590	.015	4
2		7481856	.216	CHECK	.21590 - .00007	.015	4
1	7481857		.216	.004	.21580	.015	8
2		7481858	.216	CHECK	.21580 - .00010	.015	8
3	7481860		.216	.008 AND UP	.21560 - .00030	.015	8
1	7481862		.217	.0005	.21700	.015	4
2		7481863	.217	CHECK	.21700 - .00004	.015	4
1	7481866		.217	.002	.21690	.015	4
2		7481867	.217	CHECK	.21690 - .00007	.015	4
1	7481868		.217	.004	.21680	.015	8
2		7481869	.217	CHECK	.21680 - .00010	.015	8
3	7481871		.217	.008 AND UP	.21660 - .00030	.015	8
1	7481873		.218	.0005	.21800	.015	4
2		7481874	.218	CHECK	.21800 - .00004	.015	4
1	7481877		.218	.002	.21790	.015	4
2		7481878	.218	CHECK	.21790 - .00007	.015	4
1	7481879		.218	.004	.21780	.015	8
2		7481880	.218	CHECK	.21780 - .00010	.015	8
3	7481882		.218	.008 AND UP	.21760 - .00030	.015	8
1	7481884		.21875	.0005 AND UP	.21875	.015	4
2		7481885	.21875	CHECK	.21875 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481886		.219	.0005	.21900	.015	4
2		7481887	.219	CHECK	.21900 - .00004	.015	4
1	7481890		.219	.002	.21890	.015	4
2		7481891	.219	CHECK	.21890 - .00007	.015	4
1	7481892		.219	.004	.21880	.015	8
2		7481893	.219	CHECK	.21880 - .00010	.015	8
3	7481895		.219	.008 AND UP	.21860 - .00030	.015	8
1	7481897		.220	.0005	.22000	.015	4
2		7481898	.220	CHECK	.22000 - .00004	.015	4
1	7481901		.220	.002	.21990	.015	4
2		7481902	.220	CHECK	.21990 - .00007	.015	4
1	7481903		.220	.004	.21980	.015	8
2		7481904	.220	CHECK	.21980 - .00010	.015	8
3	7481906		.220	.008 AND UP	.21960 - .00030	.015	8
1	7481908		.221	.0005	.22100	.015	4
2		7481909	.221	CHECK	.22100 - .00004	.015	4
1	7481912		.221	.002	.22090	.015	4
2		7481913	.221	CHECK	.22090 - .00007	.015	4
1	7481914		.221	.004	.22080	.015	8
2		7481915	.221	CHECK	.22080 - .00010	.015	8
3	7481917		.221	.008 AND UP	.22060 - .00030	.015	8
1	7481919		.222	.0005	.22200	.015	4
2		7481920	.222	CHECK	.22200 - .00004	.015	4
1	7481923		.222	.002	.22190	.015	4
2		7481924	.222	CHECK	.22190 - .00007	.015	4
1	7481925		.222	.004	.22180	.015	8
2		7481926	.222	CHECK	.22180 - .00010	.015	8
3	7481928		.222	.008 AND UP	.22160 - .00030	.015	8
1	7481930		.223	.0005	.22300	.015	4
2		7481931	.223	CHECK	.22300 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7481934		.223	.002	.22290	.015	4
2		7481935	.223	CHECK	.22290 - .00007	.015	4
1	7481936		.223	.004	.22280	.015	8
2		7481937	.223	CHECK	.22280 - .00010	.015	8
3	7481939		.223	.008 AND UP	.22260 - .00030	.015	8
1	7481941		.224	.0005	.22400	.015	4
2		748_942	.224	CHECK	.22400 - .00004	.015	4
1	7481945		.224	.002	.22390	.015	4
2		7481946	.224	CHECK	.22390 - .00007	.015	4
1	7481947		.224	.004	.22380	.015	8
2		7481948	.224	CHECK	.22380 - .00010	.015	8
3	7481950		.224	.008 AND UP	.22360 - .00030	.015	8
1	7481952		.225	.0005	.22500	.015	4
2		7481953	.225	CHECK	.22500 - .00004	.015	4
1	7481956		.225	.002	.22490	.015	4
2		7481957	.225	CHECK	.22490 - .00007	.015	4
1	7481958		.225	.004	.22480	.015	8
2		7481959	.225	CHECK	.22480 - .00010	.015	8
3	7481961		.225	.008 AND UP	.22460 - .00030	.015	8
1	7481963		.226	.0005	.22600	.015	4
2		7481964	.226	CHECK	.22600 - .00004	.015	4
1	7481967		.226	.002	.22590	.015	4
2		7481968	.226	CHECK	.22590 - .00007	.015	4
1	7481969		.226	.004	.22580	.015	8
2		7481970	.226	CHECK	.22580 - .00010	.015	8
3	7481972		.226	.008 AND UP	.22560 - .00030	.015	8
1	7481974		.227	.0005	.22700	.015	4
2		7481975	.227	CHECK	.22700 - .00004	.015	4
1	7481978		.227	.002	.22690	.015	4
2		7481979	.227	CHECK	.22690 - .00007	.015	4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7481980		.227	.004	.22680	.015	8
2		7481981	.227	CHECK	.22680 - .00010	.015	8
3	7481983		.227	.008 AND UP	.22660 - .00030	.015	8
1	7481985		.228	.0005	.22800	.015	4
2		7481986	.228	CHECK	.22800 - .00004	.015	4
1	7481989		228	.002	.22790	.015	4
2		7481990	.228	CHECK	.22790 - .00007	.015	4
1	7481991		.228	.004	.22780	.015	8
2		7481992	.228	CHECK	.22780 - .00010	.015	8
3	7481994		.228	.008 AND UP	.22760 - .00030	.015	8
1	7481996		.229	.0005	.22900	.015	4
2		7481997	.229	CHECK	.22900 - .00004	.015	4
1	7482000		.229	.002	.22890	.015	4
2		7482001	.229	CHECK	.22890 - .00007	.015	4
1	7482002		.229	.004	.22880	.015	8
2		7482003	.229	CHECK	.22880 - .00010	.015	8
3	7482005		.229	.008 AND UP	.22860 - .00030	.015	8
1	7482007		.230	.0005	.23000	.015	4
2		7482008	.230	CHECK	.23000 - .00004	.015	4
1	7482011		.230	.002	.22990	.015	4
2		7482012	.230	CHECK	.22990 - .00007	.015	4
1	7482013		.230	.004	.22980	.015	8
2		7482014	.230	CHECK	.22980 - .00010	.015	8
3	7482016		.230	.008 AND UP	.22960 - .00030	.015	8
1	7482018		.231	.0005	.23100	.015	4
2		7482019	.231	CHECK	.23100 - .00004	.015	4
1	7482022		.231	.002	.23090	.015	4
2		7482023	.231	CHECK	.23090 - .00007	.015	4
1	7482024		.231	.004	.23080	.015	8
2		7482025	.231	CHECK	.23080 - .00010	.015	8
3	7482027		.231	.008 AND UP	.23060 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7482029		.232	.0005	.23200	.015	4
2		7482030	.232	CHECK	.23200 - .00004	.015	4
1	7482033		.232	.002	.23190	.015	4
2		7482034	.232	CHECK	.23190 - .00007	.015	4
1	7482035		.232	.004	.23180	.015	8
2		7482036	.232	CHECK	.23180 - .00010	.015	8
3	7482038		.232	.008 AND UP	.23160 - .00030	.015	8
1	7482040		.233	.0005	.23300	.015	4
2		7482041	.233	CHECK	.23300 - .00004	.015	4
1	7482044		.233	.002	.23290	.015	4
2		7482045	.233	CHECK	.23290 - .00007	.015	4
1	7482046		.233	.004	.23280	.015	8
2		7482047	.233	CHECK	.23280 - .00010	.015	8
3	7482049		.233	.008 AND UP	.23260 - .00030	.015	8
1	7482051		.234	.0005	.23400	.015	4
2		7482052	.234	CHECK	.23400 - .00004	.015	4
1	7482055		.234	.002	.23390	.015	4
2		7482056	.234	CHECK	.23390 - .00007	.015	4
1	7482057		.234	.004	.23380	.015	8
2		7482058	.234	CHECK	.23380 - .00010	.015	8
3	7482060		.234	.008 AND UP	.23360 - .00030	.015	8
1	7482062		.235	.0005	.23500	.015	4
2		7482063	.235	CHECK	.23500 - .00004	.015	4
1	7482066		.235	.002	.23490	.015	4
2		7482067	.235	CHECK	.23490 - .00007	.015	4
1	7482068		.235	.004	.23480	.015	8
2		7482069	.235	CHECK	.23480 - .00010	.015	8
3	7482071		.235	.008 AND UP	.23460 - .00030	.015	8
1	7482073		.236	.0005	.23600	.015	4
2		7482074	.236	CHECK	.23600 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7482077		.236	.002	.23590	.015	4
2		7482078	.236	CHECK	.23590 - .00007	.015	4
1	7482079		.236	.004	.23580	.015	8
2		7482080	.236	CHECK	.23580 - .00010	.015	8
3	7482082		.236	.008 AND UP	.23560 - .00030	.015	8
1	7482084		.237	.0005	.23700	.015	4
2		7482085	.237	CHECK	.23700 - .00004	.015	4
1	7482088		.237	.002	.23690	.015	4
2		7482089	.237	CHECK	.23690 - .00007	.015	4
1	7482090		.237	.004	.23680	.015	8
2		7482091	.237	CHECK	.23680 - .00010	.015	8
3	7482093		.237	.008 AND UP	.23660 - .00030	.015	8
1	7482095		.238	.0005	.23800	.015	4
2		7482096	.238	CHECK	.23800 - .00004	.015	4
1	7482099		.238	.002	.23790	.015	4
2		7482100	.238	CHECK	.23790 - .00007	.015	4
1	7482101		.238	.004	.23780	.015	8
2		7482102	.238	CHECK	.23780 - .00010	.015	8
3	7482104		.238	.008 AND UP	.23760 - .00030	.015	8
1	7482106		.239	.0005	.23900	.015	4
2		7482107	.239	CHECK	.23900 - .00004	.015	4
1	7482110		.239	.002	.23890	.015	4
2		7482111	.239	CHECK	.23890 - .00007	.015	4
1	7482112		.239	.004	.23880	.015	8
2		7482113	.239	CHECK	.23880 - .00010	.015	8
3	7482115		.239	.008 AND UP	.23860 - .00030	.015	8
1	7482117		.240	.0005	.24000	.015	4
2		7482118	.240	CHECK	.24000 - .00004	.015	4
1	7482121		.240	.002	.23990	.015	4
2		7482122	.240	CHECK	.23990 - .00007	.015	4

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7482123		.240	.004	.23980	.015	8
2		7482124	.240	CHECK	.23980 - .00010	.015	8
3	7482126		.240	.008 AND UP	.23960 - .00030	.015	8
1	7482128		.241	.0005	.24100	.015	4
2		7482129	.241	CHECK	.24100 - .00004	.015	4
1	7482132		.241	.002	.24090	.015	4
2		7482133	.241	CHECK	.24090 - .00007	.015	4
1	7482134		.241	.004	.24080	.015	8
2		7482135	.241	CHECK	.24080 - .00010	.015	8
3	7482137		.241	.008 AND UP	.24060 - .00030	.015	8
1	7482139		.242	.0005	.24200	.015	4
2		7482140	.242	CHECK	.24200 - .00004	.015	4
1	7482143		.242	.002	.24190	.015	4
2		7482144	.242	CHECK	.24190 - .00007	.015	4
1	7482145		.242	.004	.24180	.015	8
2		7482146	.242	CHECK	.24180 - .00010	.015	8
3	7482148		.242	.008 AND UP	.24160 - .00030	.015	8
1	7482150		.243	.0005	.24300	.015	4
2		7482151	.243	CHECK	.24300 - .00004	.015	4
1	7482154		.243	.002	.24290	.015	4
2		7482155	.243	CHECK	.24290 - .00007	.015	4
1	7482156		.243	.004	.24280	.015	8
2		7482157	.243	CHECK	.24280 - .00010	.015	8
3	7482159		.243	.008 AND UP	.24260 - .00030	.015	8
1	7482161		.244	.0005	.24400	.015	4
2		7482162	.244	CHECK	.24400 - .00004	.015	4
1	7482165		.244	.002	.24390	.015	4
2		7482166	.244	CHECK	.24390 - .00007	.015	4
1	7482167		.244	.004	.24380	.015	8
2		7482168	.244	CHECK	.24380 - .00010	.015	8
3	7482170		.244	.008 AND UP	.24360 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
1	7482172		.245	.0005	.24500	.015	4
2		7482173	.245	CHECK	.24500 - .00004	.015	4
1	7482176		.245	.002	.24490	.015	4
2		7482177	.245	CHECK	.24490 - .00007	.015	4
1	7482178		.245	.004	.24480	.015	8
2		7482179	.245	CHECK	.24480 - .00010	.015	8
3	7482181		.245	.008 AND UP	.24460 - .00030	.015	8
1	7482183		.246	.0005	.24600	.015	4
2		7482184	.246	CHECK	.24600 - .00004	.015	4
1	7482187		.246	.002	.24590	.015	4
2		7482188	.246	CHECK	.24590 - .00007	.015	4
1	7482189		.246	.004	.24580	.015	8
2		7482190	.246	CHECK	.24580 - .00010	.015	8
3	7482192		.246	.008 AND UP	.24560 - .00030	.015	8
1	7482194		.247	.0005	.24700	.015	4
2		7482195	.247	CHECK	.24700 - .00004	.015	4
1	7482198		.247	.002	.24690	.015	4
2		7482199	.247	CHECK	.24690 - .00007	.015	4
1	7482200		.247	.004	.24680	.015	8
2		7482201	.247	CHECK	.24680 - .00010	.015	8
3	7482203		.247	.008 AND UP	.24660 - .00030	.015	8
1	7482205		.248	.0005	.24800	.015	4
2		7482206	.248	CHECK	.24800 - .00004	.015	4
1	7482209		.248	.002	.24790	.015	4
2		7482210	.248	CHECK	.24790 - .00007	.015	4
1	7482211		.248	.004	.24780	.015	8
2		7482212	.248	CHECK	.24780 - .00010	.015	8
3	7482214		.248	.008 AND UP	.24760 - .00030	.015	8
1	7482216		.249	.0005	.24900	.015	4
2		7482217	.249	CHECK	.24900 - .00004	.015	4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
1	7482220		.249	.002	.24890	.015	4
2		7482221	.249	CHECK	.24890 - .00007	.015	4
1	7482222		.249	.004	.24880	.015	8
2		7482223	.249	CHECK	.24880 - .00010	.015	8
3	7482225		.249	.008 AND UP	.24860 - .00030	.015	8
1	7482227		.250	.0005	.25000	.015	4
2		7482228	.250	CHECK	.25000 - .00004	.015	4
1	7482231		.250	.002	.24990	.015	4
2		7482232	.250	CHECK	.24990 - .00007	.015	4
1	7482233		.250	.004	.24980	.015	8
2		7482234	.250	CHECK	.24980 - .00010	.015	8
3	7482236		.250	.008 AND UP	.24960 - .00030	.015	8
3	7482238		.251	.0005	.25100 - .00004	.015	4
3	7482240		.251	.002	.25090 - .00007	.015	4
3	7482241		.251	.004	.25080 - .00010	.015	8
3	7482243		.251	.008 AND UP	.25060 - .00030	.015	8
3	7482245		.252	.0005	.25200 - .00004	.015	4
3	7482247		.252	.002	.25190 - .00007	.015	4
3	7482248		.252	.004	.25180 - .00010	.015	8
3	7482250		.252	.008 AND UP	.25160 - .00030	.015	8
3	7482252		.253	.0005	.25300 - .00004	.015	4
3	7482254		.253	.002	.25290 - .00007	.015	4
3	7482255		.253	.004	.25280 - .00010	.015	8
3	7482257		.253	.008 AND UP	.25260 - .00030	.015	8
3	7482259		.254	.0005	.25400 - .00004	.015	4
3	7482261		.254	.002	.25390 - .00007	.015	4
3	7482262		.254	.004	.25380 - .00010	.015	8
3	7482264		.254	.008 AND UP	.25360 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482266		.255	.0005	.25500 - .00004	.015	4
3	7482268		.255	.002	.25490 - .00007	.015	4
3	7482269		.255	.004	.25480 - .00010	.015	8
3	7482271		.255	.008 AND UP	.25460 - .00030	.015	8
3	7482273		.256	.0005	.25600 - .00004	.015	4
3	7482275		.256	.002	.25590 - .00007	.015	4
3	7482276		.256	.004	.25580 - .00010	.015	8
3	7482278		.256	.008 AND UP	.25560 - .00030	.015	8
3	7482280		.257	.0005	.25700 - .00004	.015	4
3	7482282		.257	.002	.25690 - .00007	.015	4
3	7482283		.257	.004	.25680 - .00010	.015	8
3	7482285		.257	.008 AND UP	.25660 - .00030	.015	8
3	7482287		.258	.0005	.25800 - .00004	.015	4
3	7482289		.258	.002	.25790 - .00007	.015	4
3	7482290		.258	.004	.25780 - .00010	.015	8
3	7482292		.258	.008 AND UP	.25760 - .00030	.015	8
3	7482294		.259	.0005	.25900 - .00004	.015	4
3	7482296		.259	.002	.25890 - .00007	.015	4
3	7482297		.259	.004	.25880 - .00010	.015	8
3	7482299		.259	.008 AND UP	.25860 - .00030	.015	8
3	7482301		.260	.0005	.26000 - .00004	.015	4
3	7482303		.260	.002	.25990 - .00007	.015	4
3	7482304		.260	.004	.25980 - .00010	.015	8
3	7482306		.260	.008 AND UP	.25960 - .00030	.015	8
3	7482308		.261	.0005	.26100 - .00004	.015	4
3	7482310		.261	.002	.26090 - .00007	.015	4
3	7482311		.261	.004	.26080 - .00010	.015	8
3	7482313		.261	.008 AND UP	.26060 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482315		.262	.0005	.26200 - .00004	.015	4
3	7482317		.262	.002	.26190 - .00007	.015	4
3	7482318		.262	.004	.26180 - .00010	.015	8
3	7482320		.262	.008 AND UP	.26160 - .00030	.015	8
3	7482322		.263	.0005	.26300 - .00004	.015	4
3	7482324		.263	.002	.26290 - .00007	.015	4
3	7482325		.263	.004	.26280 - .00010	.015	8
3	7482327		.263	.008 AND UP	.26260 - .00030	.015	8
3	7482329		.264	.0005	.26400 - .00004	.015	4
3	7482331		.264	.002	.26390 - .00007	.015	4
3	7482332		.264	.004	.26380 - .00010	.015	8
3	7482334		.264	.008 AND UP	.26360 - .00030	.015	8
3	7482336		.265	.0005	.26500 - .00004	.015	4
3	7482338		.265	.002	.26490 - .00007	.015	4
3	7482339		.265	.004	.26480 - .00010	.015	8
3	7482341		.265	.008 AND UP	.26460 - .00030	.015	8
3	7482343		.266	.0005	.26600 - .00004	.015	4
3	7482345		.266	.002	.26590 - .00007	.015	4
3	7482346		.266	.004	.26580 - .00010	.015	8
3	7482348		.266	.008 AND UP	.26560 - .00030	.015	8
3	7482350		.267	.0005	.26700 - .00004	.015	4
3	7482352		.267	.002	.26690 - .00007	.015	4
3	7482353		.267	.004	.26680 - .00010	.015	8
3	7482355		.267	.008 AND UP	.26660 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482357		.268	.0005	.26800 - .00004	.015	4
3	7482359		.268	.002	.26790 - .00007	.015	4
3	7482360		.268	.004	.26780 - .00010	.015	8
3	7482362		.268	.008 AND UP	.26760 - .00030	.015	8
3	7482364		.269	.0005	.26900 - .00004	.015	4
3	7482365		.269	.002	.26890 - .00007	.015	4
3	7482367		.269	.004	.26880 - .00010	.015	8
3	7482369		.269	.008 AND UP	.26860 - .00030	.015	8
3	7482371		.270	.0005	.27000 - .00004	.015	4
3	7482373		.270	.002	.26990 - .00007	.015	4
3	7482374		.270	.004	.26980 - .00010	.015	8
3	7482376		.270	.008 AND UP	.26960 - .00030	.015	8
3	7482378		.271	.0005	.27100 - .00004	.015	4
3	7482380		.271	.002	.27090 - .00007	.015	4
3	7482381		.271	.004	.27080 - .00010	.015	8
3	7482383		.271	.008 AND UP	.27060 - .00030	.015	8
3	7482385		.272	.0005	.27200 - .00004	.015	4
3	7482387		.272	.002	.27190 - .00007	.015	4
3	7482388		.272	.004	.27180 - .00010	.015	8
3	7482390		.272	.008 AND UP	.27160 - .00030	.015	8
3	7482392		.273	.0005	.27300 - .00004	.015	4
3	7482394		.273	.002	.27290 - .00007	.015	4
3	7482395		.273	.004	.27280 - .00010	.015	8
3	7482397		.273	.008 AND UP	.27260 - .00030	.015	8
3	7482399		.274	.0005	.27400 - .00004	.015	4
3	7482401		.274	.002	.27390 - .00007	.015	4
3	7482402		.274	.004	.27380 - .00010	.015	8
3	7482404		.274	.008 AND UP	.27360 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7482406		.275	.0005	.27500 - .00004	.015	4
3	7482408		.275	.002	.27490 - .00007	.015	4
3	7482409		.275	.004	.27480 - .00010	.015	8
3	7482411		.275	.008 AND UP	.27460 - .00030	.015	8
3	7482413		.276	.0005	.27600 - .00004	.015	4
3	7482415		.276	.002	.27590 - .00007	.015	4
3	7482416		.276	.004	.27580 - .00010	.015	8
3	7482418		.276	.008 AND UP	.27560 - .00030	.015	8
3	7482420		.277	.0005	.27700 - .00004	.015	4
3	7482422		.277	.002	.27690 - .00007	.015	4
3	7482423		.277	.004	.27680 - .00010	.015	8
3	7482425		.277	.008 AND UP	.27660 - .00030	.015	8
3	7482427		.278	.0005	.27800 - .00004	.015	4
3	7482429		.278	.002	.27790 - .00007	.015	4
3	7482430		.278	.004	.27780 - .00010	.015	8
3	7482432		.278	.008 AND UP	.27760 - .00030	.015	8
3	7482434		.279	.0005	.27900 - .00004	.015	4
3	7482436		.279	.002	.27890 - .00007	.015	4
3	7482437		.279	.004	.27880 - .00010	.015	8
3	7482439		.279	.008 AND UP	.27860 - .00030	.015	8
3	7482441		.280	.0005	.28000 - .00004	.015	4
3	7482443		.280	.002	.27990 - .00007	.015	4
3	7482444		.280	.004	.27980 - .00010	.015	8
3	7482446		.280	.008 AND UP	.27960 - .00030	.015	8
3	7482448		.281	.0005	.28100 - .00004	.015	4
3	7482450		.281	.002	.28090 - .00007	.015	4
3	7482451		.281	.004	.28080 - .00010	.015	8
3	7482453		.281	.008 AND UP	.28060 - .00030	.015	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482455		.28125	.0005 AND UP	.28125 - .00004	.015	4
3	7482456		.282	.0005	.28200 - .00004	.030	4
3	7482458		.282	.002	.28190 - .00007	.030	4
3	7482459		.282	.004	.28180 - .00010	.030	8
3	7482461		.282	.008 AND UP	.28160 - .00030	.030	8
3	7482463		.283	.0005	.28300 - .00004	.030	4
3	7482465		.283	.002	.28290 - .00007	.030	4
3	7482466		.283	.004	.28280 - .00010	.030	8
3	7482468		.283	.008 AND UP	.28260 - .00030	.030	8
3	7482470		.284	.0005	.28400 - .00004	.030	4
3	7482472		.284	.002	.28390 - .00007	.030	4
3	7482473		.284	.004	.28380 - .00010	.030	8
3	7482475		.284	.008 AND UP	.28360 - .00030	.030	8
3	7482477		.285	.0005	.28500 - .00004	.030	4
3	7482479		.285	.002	.28490 - .00007	.030	4
3	7482480		.285	.004	.28480 - .00010	.030	8
3	7482482		.285	.008 AND UP	.28460 - .00030	.030	8
3	7482484		.286	.0005	.28600 - .00004	.030	4
3	7482486		.286	.002	.28590 - .00007	.030	4
3	7482487		.286	.004	.28580 - .00010	.030	8
3	7482489		.286	.008 AND UP	.28560 - .00030	.030	8
3	7482491		.287	.0005	.28700 - .00004	.030	4
3	7482493		.287	.002	.28690 - .00007	.030	4
3	7482494		.287	.004	.28680 - .00010	.030	8
3	7482496		.287	.008 AND UP	.28660 - .00030	.030	8
3	7482498		.288	.0005	.28800 - .00004	.030	4
3	7482500		.288	.002	.28790 - .00007	.030	4
3	7482501		.288	.004	.28780 - .00010	.030	8
3	7482503		.288	.008 AND UP	.28760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482505		.289	.0005	.28900 - .00004	.030	4
3	7482507		.289	.002	.28890 - .00007	.030	4
3	7482508		.289	.004	.28880 - .00010	.030	8
3	7482510		.289	.008 AND UP	.28860 - .00030	.030	8
3	7482512		.290	.0005	.29000 - .00004	.030	4
3	7482514		.290	.002	.28990 - .00007	.030	4
3	7482515		.290	.004	.28980 - .00010	.030	8
3	7482517		.290	.008 AND UP	.28960 - .00030	.030	8
3	7482519		.291	.0005	.29100 - .00004	.030	4
3	7482521		.291	.002	.29090 - .00007	.030	4
3	7482522		.291	.004	.29080 - .00010	.030	8
3	7482524		.291	.008 AND UP	.29060 - .00030	.030	8
3	7482526		.292	.0005	.29200 - .00004	.030	4
3	7482528		.292	.002	.29190 - .00007	.030	4
3	7482529		.292	.004	.29180 - .00010	.030	8
3	7482531		.292	.008 AND UP	.29160 - .00030	.030	8
3	7482533		.293	.0005	.29300 - .00004	.030	4
3	7482535		.293	.002	.29290 - .00007	.030	4
3	7482536		.293	.004	.29280 - .00010	.030	8
3	7482538		.293	.008 AND UP	.29260 - .00030	.030	8
3	7482540		.294	.0005	.29400 - .00004	.030	4
3	7482542		.294	.002	.29390 - .00007	.030	4
3	7482543		.294	.004	.29380 - .00010	.030	8
3	7482545		.294	.008 AND UP	.29360 - .00030	.030	8
3	7482547		.295	.0005	.29500 - .00004	.030	4
3	7482549		.295	.002	.29490 - .00007	.030	4
3	7482550		.295	.004	.29480 - .00010	.030	8
3	7482552		.295	.008 AND UP	.29460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482554		.296	.0005	.29600 - .00004	.030	4
3	7482556		.296	.002	.29590 - .00007	.030	4
3	7482557		.296	.004	.29580 - .00010	.030	8
3	7482559		.296	.008 AND UP	.29560 - .00030	.030	8
3	7482561		.297	.0005	.29700 - .00004	.030	4
3	7482563		.297	.002	.29690 - .00007	.030	4
3	7482564		.297	.004	.29680 - .00010	.030	8
3	7482566		.297	.008 AND UP	.29660 - .00030	.030	8
3	7482568		.298	.0005	.29800 - .00004	.030	4
3	7482570		.298	.002	.29790 - .00007	.030	4
3	7482571		.298	.004	.29780 - .00010	.030	8
3	7482573		.298	.008 AND UP	.29760 - .00030	.030	8
3	7482575		.299	.0005	.29900 - .00004	.030	4
3	7482577		.299	.002	.29890 - .00007	.030	4
3	7482578		.299	.004	.29880 - .00010	.030	8
3	7482580		.299	.008 AND UP	.29860 - .00030	.030	8
3	7482582		.300	.0005	.30000 - .00004	.030	4
3	7482584		.300	.002	.29990 - .00007	.030	4
3	7482585		.300	.004	.29980 - .00010	.030	8
3	7482587		.300	.008 AND UP	.29960 - .00030	.030	8
3	7482589		.301	.0005	.30100 - .00004	.030	4
3	7482591		.301	.002	.30090 - .00007	.030	4
3	7482592		.301	.004	.30080 - .00010	.030	8
3	7482594		.301	.008 AND UP	.30060 - .00030	.030	8
3	7482596		.302	.0005	.30200 - .00004	.030	4
3	7482598		.302	.002	.30190 - .00007	.030	4
3	7482599		.302	.004	.30180 - .00010	.030	8
3	7482601		.302	.008 AND UP	.30160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482603		.303	.0005	.30300 - .00004	.030	4
3	7482605		.303	.002	.30290 - .00007	.030	4
3	7482606		.303	.004	.30280 - .00010	.030	8
3	7482608		.303	.008 AND UP	.30260 - .00030	.030	8
3	7482610		.304	.0005	.30400 - .00004	.030	4
3	7482612		.304	.002	.30390 - .00007	.030	4
3	7482613		.304	.004	.30380 - .00010	.030	8
3	7482615		.304	.008 AND UP	.30360 - .00030	.030	8
3	7482617		.305	.0005	.30500 - .00004	.030	4
3	7482619		.305	.002	.30490 - .00007	.030	4
3	7482620		.305	.004	.30480 - .00010	.030	8
3	7482622		.305	.008 AND UP	.30460 - .00030	.030	8
3	7482624		.306	.0005	.30600 - .00004	.030	4
3	7482626		.306	.002	.30590 - .00007	.030	4
3	7482627		.306	.004	.30580 - .00010	.030	8
3	7482629		.306	.008 AND UP	.30560 - .00030	.030	8
3	7482631		.307	.0005	.30700 - .00004	.030	4
3	7482633		.307	.002	.30690 - .00007	.030	4
3	7482634		.307	.004	.30680 - .00010	.030	8
3	7482636		.307	.008 AND UP	.30660 - .00030	.030	8
3	7482638		.308	.0005	.30800 - .00004	.030	4
3	7482640		.308	.002	.30790 - .00007	.030	4
3	7482641		.308	.004	.30780 - .00010	.030	8
3	7482643		.308	.008 AND UP	.30760 - .00030	.030	8
3	7482645		.309	.0005	.30900 - .00004	.030	4
3	7482647		.309	.002	.30890 - .00007	.030	4
3	7482648		.309	.004	.30880 - .00010	.030	8
3	7482650		.309	.008 AND UP	.30860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482652		.310	.0005	.31000 - .00004	.030	4
3	7482654		.310	.002	.30990 - .00007	.030	4
3	7482655		.310	.004	.30980 - .00010	.030	8
3	7482657		.310	.008 AND UP	.30960 - .00030	.030	8
3	7482659		.311	.0005	.31100 - .00004	.030	4
3	7482661		.311	.002	.31090 - .00007	.030	4
3	7482662		.311	.004	.31080 - .00010	.030	8
3	7482664		.311	.008 AND UP	.31060 - .00030	.030	8
3	7482666		.312	.0005	.31200 - .00004	.030	4
3	7482668		.312	.002	.31190 - .00007	.030	4
3	7482669		.312	.004	.31180 - .00010	.030	8
3	7482671		.312	.008 AND UP	.31160 - .00030	.030	8
3	7482673		.3125	.0005 AND UP	.31250 - .00004	.030	4
3	7482674		.313	.0005	.31300 - .00004	.030	4
3	7482676		.313	.002	.31290 - .00007	.030	4
3	7482677		.313	.004	.31280 - .00010	.030	8
3	7482679		.313	.008 AND UP	.31260 - .00030	.030	8
3	7482681		.314	.0005	.31400 - .00004	.030	4
3	7482683		.314	.002	.31390 - .00007	.030	4
3	7482684		.314	.004	.31380 - .00010	.030	8
3	7482686		.314	.008 AND UP	.31360 - .00030	.030	8
3	7482688		.315	.0005	.31500 - .00004	.030	4
3	7482690		.315	.002	.31490 - .00007	.030	4
3	7482691		.315	.004	.31480 - .00010	.030	8
3	7482693		.315	.008 AND UP	.31460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482695		.316	.0005	.31600 - .00004	.030	4
3	7482697		.316	.002	.31590 - .00007	.030	4
3	7482698		.316	.004	.31580 - .00010	.030	8
3	7482700		.316	.008 AND UP	.31560 - .00030	.030	8
3	7482702		.317	.0005	.31700 - .00004	.030	4
3	7482704		.317	.002	.31690 - .00007	.030	4
3	7482705		.317	.004	.31680 - .00010	.030	8
3	7482707		.317	.008 AND UP	.31660 - .00030	.030	8
3	7482709		.318	.0005	.31800 - .00004	.030	4
3	7482711		.318	.002	.31790 - .00007	.030	4
3	7482712		.318	.004	.31780 - .00010	.030	8
3	7482714		.318	.008 AND UP	.31760 - .00030	.030	8
3	7482716		.319	.0005	.31900 - .00004	.030	4
3	7482718		.319	.002	.31890 - .00007	.030	4
3	7482719		.319	.004	.31880 - .00010	.030	8
3	7482721		.319	.008 AND UP	.31860 - .00030	.030	8
3	7482723		.320	.0005	.32000 - .00004	.030	4
3	7482725		.320	.002	.31990 - .00007	.030	4
3	7482726		.320	.004	.31980 - .00010	.030	8
3	7482728		.320	.008 AND UP	.31960 - .00030	.030	8
3	7482730		.321	.0005	.32100 - .00004	.030	4
3	7482732		.321	.002	.32090 - .00007	.030	4
3	7482733		.321	.004	.32080 - .00010	.030	8
3	7482735		.321	.008 AND UP	.32060 - .00030	.030	8
3	7482737		.322	.0005	.32200 - .00004	.030	4
3	7482739		.322	.002	.32190 - .00007	.030	4
3	7482740		.322	.004	.32180 - .00010	.030	8
3	7482742		.322	.008 AND UP	.32160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482744		.323	.0005	.32300 - .00004	.030	4
3	7482746		.323	.002	.32290 - .00007	.030	4
3	7482747		.323	.004	.32280 - .00010	.030	8
3	7482749		.323	.008 AND UP	.32260 - .00030	.030	8
3	7482751		.324	.0005	.32400 - .00004	.030	4
3	7482753		.324	.002	.32390 - .00007	.030	4
3	7482754		.324	.004	.32380 - .00010	.030	8
3	7482756		.324	.008 AND UP	.32360 - .00030	.030	8
3	7482758		.325	.0005	.32500 - .00004	.030	4
3	7482760		.325	.002	.32490 - .00007	.030	4
3	7482761		.325	.004	.32480 - .00010	.030	8
3	7482763		.325	.008 AND UP	.32460 - .00030	.030	8
3	7482765		.326	.0005	.32600 - .00004	.030	4
3	7482767		.326	.002	.32590 - .00007	.030	4
3	7482768		.326	.004	.32580 - .00010	.030	8
3	7482770		.326	.008 AND UP	.32560 - .00030	.030	8
3	7482772		.327	.0005	.32700 - .00004	.030	4
3	7482774		.327	.002	.32690 - .00007	.030	4
3	7482775		.327	.004	.32680 - .00010	.030	8
3	7482777		.327	.008 AND UP	.32660 - .00030	.030	8
3	7482779		.328	.0005	.32800 - .00004	.030	4
3	7482781		.328	.002	.32790 - .00007	.030	4
3	7482782		.328	.004	.32780 - .00010	.030	8
3	7482784		.328	.008 AND UP	.32760 - .00030	.030	8
3	7482786		.329	.0005	.32900 - .00004	.030	4
3	7482788		.329	.002	.32890 - .00007	.030	4
3	7482789		.329	.004	.32880 - .00010	.030	8
3	7482791		.329	.008 AND UP	.32860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.						
	RING GAGE	ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
3	7482793		.330	.0005	.33000 - .00004	.030	4
3	7482795		.330	.002	.32990 - .00007	.030	4
3	7482796		.330	.004	.32980 - .00010	.030	8
3	7482798		.330	.008 AND UP	.32960 - .00030	.030	8
3	7482800		.331	.0005	.33100 - .00004	.030	4
3	7482802		.331	.002	.33090 - .00007	.030	4
3	7482803		.331	.004	.33080 - .00010	.030	8
3	7482805		.331	.008 AND UP	.33060 - .00030	.030	8
3	7482807		.332	.0005	.33200 - .00004	.030	4
3	7482809		.332	.002	.33190 - .00007	.030	4
3	7482810		.332	.004	.33180 - .00010	.030	8
3	7482812		.332	.008 AND UP	.33160 - .00030	.030	8
3	7482814		.333	.0005	.33300 - .00004	.030	4
3	7482816		.333	.002	.33290 - .00007	.030	4
3	7482817		.333	.004	.33280 - .00010	.030	8
3	7482819		.333	.008 AND UP	.33260 - .00030	.030	8
3	7482821		.334	.0005	.33400 - .00004	.030	4
3	7482823		.334	.002	.33390 - .00007	.030	4
3	7482824		.334	.004	.33380 - .00010	.030	8
3	7482826		.334	.008 AND UP	.33360 - .00030	.030	8
3	7482828		.335	.0005	.33500 - .00004	.030	4
3	7482830		.335	.002	.33490 - .00007	.030	4
3	7482831		.335	.004	.33480 - .00010	.030	8
3	7482833		.335	.008 AND UP	.33460 - .00030	.030	8
3	7482835		.336	.0005	.33600 - .00004	.030	4
3	7482837		.336	.002	.33590 - .00007	.030	4
3	7482838		.336	.004	.33580 - .00010	.030	8
3	7482840		.336	.008 AND UP	.33560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482842		.337	.0005	.33700 - .00004	.030	4
3	7482844		.337	.002	.33690 - .00007	.030	4
3	7482845		.337	.004	.33680 - .00010	.030	8
3	7482847		.337	.008 AND UP	.33660 - .00030	.030	8
3	7482849		.338	.0005	.33800 - .00004	.030	4
3	7482851		.338	.002	.33790 - .00007	.030	4
3	7482852		.338	.004	.33780 - .00010	.030	8
3	7482854		.338	.008 AND UP	.33760 - .00030	.030	8
3	7482856		.339	.0005	.33900 - .00004	.030	4
3	7482858		.339	.002	.33890 - .00007	.030	4
3	7482859		.339	.004	.33880 - .00010	.030	8
3	7482861		.339	.008 AND UP	.33860 - .00030	.030	8
3	7482863		.340	.0005	.34000 - .00004	.030	4
3	7482865		.340	.002	.33990 - .00007	.030	4
3	7482866		.340	.004	.33980 - .00010	.030	8
3	7482868		.340	.008 AND UP	.33960 - .00030	.030	8
3	7482870		.341	.0005	.34100 - .00004	.030	4
3	7482872		.341	.002	.34090 - .00007	.030	4
3	7482873		.341	.004	.34080 - .00010	.030	8
3	7482875		.341	.008 AND UP	.34060 - .00030	.030	8
3	7482877		.342	.0005	.34200 - .00004	.030	4
3	7482879		.342	.002	.34190 - .00007	.030	4
3	7482880		.342	.004	.34180 - .00010	.030	8
3	7482882		.342	.008 AND UP	.34160 - .00030	.030	8
3	7482884		.343	.0005	.34300 - .00004	.030	4
3	7482886		.343	.002	.34290 - .00007	.030	4
3	7482887		.343	.004	.34280 - .00010	.030	8
3	7482889		.343	.008 AND UP	.34260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482891		.34375	.0005 AND UP	.34375 - .00004	.030	4
3	7482892		.344	.0005	.34400 - .00004	.030	4
3	7482894		.344	.002	.34390 - .00007	.030	4
3	7482895		.344	.004	.34380 - .00010	.030	8
3	7482897		.344	.008 AND UP	.34360 - .00030	.030	8
3	7482899		.345	.0005	.34500 - .00004	.030	4
3	7482901		.345	.002	.34490 - .00007	.030	4
3	7482902		.345	.004	.34480 - .00010	.030	8
3	7482904		.345	.008 AND UP	.34460 - .00030	.030	8
3	7482906		.346	.0005	.34600 - .00004	.030	4
3	7482908		.346	.002	.34590 - .00007	.030	4
3	7482909		.346	.004	.34580 - .00010	.030	8
3	7482911		.346	.008 AND UP	.34560 - .00030	.030	8
3	7482913		.347	.0005	.34700 - .00004	.030	4
3	7482915		.347	.002	.34690 - .00007	.030	4
3	7482916		.347	.004	.34680 - .00010	.030	8
3	7482918		.347	.008 AND UP	.34660 - .00030	.030	8
3	7482920		.348	.0005	.34800 - .00004	.030	4
3	7482922		.348	.002	.34790 - .00007	.030	4
3	7482923		.348	.004	.34780 - .00010	.030	8
3	7482925		.348	.008 AND UP	.34760 - .00030	.030	8
3	7482927		.349	.0005	.34900 - .00004	.030	4
3	7482929		.349	.002	.34890 - .00007	.030	4
3	7482930		.349	.004	.34880 - .00010	.030	8
3	7482932		.349	.008 AND UP	.34860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7482934		.350	.0005	.35000 - .00004	.030	4
3	7482936		.350	.002	.34990 - .00007	.030	4
3	7482937		.350	.004	.34980 - .00010	.030	8
3	7482939		.350	.008 AND UP	.34960 - .00030	.030	8
3	7482941		.351	.0005	.35100 - .00004	.030	4
3	7482943		.351	.002	.35090 - .00007	.030	4
3	7482944		.351	.004	.35080 - .00010	.030	8
3	7482946		.351	.008 AND UP	.35060 - .00030	.030	8
3	7482948		.352	.0005	.35200 - .00004	.030	4
3	7482950		.352	.002	.35190 - .00007	.030	4
3	7482951		.352	.004	.35180 - .00010	.030	8
3	7482953		.352	.008 AND UP	.35160 - .00030	.030	8
3	7482955		.353	.0005	.35300 - .00004	.030	4
3	7482957		.353	.002	.35290 - .00007	.030	4
3	7482958		.353	.004	.35280 - .00010	.030	8
3	7482960		.353	.008 AND UP	.35260 - .00030	.030	8
3	7482962		.354	.0005	.35400 - .00004	.030	4
3	7482964		.354	.002	.35390 - .00007	.030	4
3	7482965		.354	.004	.35380 - .00010	.030	8
3	7482967		.354	.008 AND UP	.35360 - .00030	.030	8
3	7482969		.355	.0005	.35500 - .00004	.030	4
3	7482971		.355	.002	.35490 - .00007	.030	4
3	7482972		.355	.004	.35480 - .00010	.030	8
3	7482974		.355	.008 AND UP	.35460 - .00030	.030	8
3	7482976		.356	.0005	.35600 - .00004	.030	4
3	7482978		.356	.002	.35590 - .00007	.030	4
3	7482979		.356	.004	.35580 - .00010	.030	8
3	7482981		.356	.008 AND UP	.35560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7482983		.357	.0005	.35700 - .00004	.030	4
3	7482985		.357	.002	.35690 - .00007	.030	4
3	7482986		.357	.004	.35680 - .00010	.030	8
3	7482988		.357	.008 AND UP	.35660 - .00030	.030	8
3	7482990		.358	.0005	.35800 - .00004	.030	4
3	7482992		.358	.002	.35790 - .00007	.030	4
3	7482993		.358	.004	.35780 - .00010	.030	8
3	7482995		.358	.008 AND UP	.35760 - .00030	.030	8
3	7482997		.359	.0005	.35900 - .00004	.030	4
3	7482999		.359	.002	.35890 - .00007	.030	4
3	7483000		.359	.004	.35880 - .00010	.030	8
3	7483002		.359	.008 AND UP	.35860 - .00030	.030	8
3	7483004		.360	.0005	.36000 - .00004	.030	4
3	7483006		.360	.002	.35990 - .00007	.030	4
3	7483007		.360	.004	.35980 - .00010	.030	8
3	7483009		.360	.008 AND UP	.35960 - .00030	.030	8
3	7483011		.361	.0005	.36100 - .00004	.030	4
3	7483013		.361	.002	.36090 - .00007	.030	4
3	7483014		.361	.004	.36080 - .00010	.030	8
3	7483016		.361	.008 AND UP	.36060 - .00030	.030	8
3	7483018		.362	.0005	.36200 - .00004	.030	4
3	7483020		.362	.002	.36190 - .00007	.030	4
3	7483021		.362	.004	.36180 - .00010	.030	8
3	7483023		.362	.008 AND UP	.36160 - .00030	.030	8
3	7483025		.363	.0005	.36300 - .00004	.030	4
3	7483027		.363	.002	.36290 - .00007	.030	4
3	7483028		.363	.004	.36280 - .00010	.030	8
3	7483030		.363	.008 AND UP	.36260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
2	7483032		.364	.0005	.36400 - .00004	.030	4
3	7483034		.364	.002	.36390 - .00007	.030	4
3	7483035		.364	.004	.36380 - .00010	.030	8
3	7483037		.364	.008 AND UP	.36360 - .00030	.030	8
3	7483039		.365	.0005	.36500 - .00004	.030	4
3	7483041		.365	.002	.36490 - .00007	.030	4
3	7483042		.365	.004	.36480 - .00010	.030	8
3	7483044		.365	.008 AND UP	.36460 - .00030	.030	8
3	7483046		.366	.0005	.36600 - .00004	.030	4
3	7483048		.366	.002	.36590 - .00007	.030	4
3	7483049		.366	.004	.36580 - .00010	.030	8
3	7483051		.366	.008 AND UP	.36560 - .00030	.030	8
3	7483053		.367	.0005	.36700 - .00004	.030	4
3	7483055		.367	.002	.36690 - .00007	.030	4
3	7483056		.367	.004	.36680 - .00010	.030	8
3	7483058		.367	.008 AND UP	.36660 - .00030	.030	8
3	7483060		.368	.0005	.36800 - .00004	.030	4
3	7483062		.368	.002	.36790 - .00007	.030	4
3	7483063		.368	.004	.36780 - .00010	.030	8
3	7483065		.368	.008 AND UP	.36760 - .00030	.030	8
3	7483067		.369	.0005	.36900 - .00004	.030	4
3	7483069		.369	.002	.36890 - .00007	.030	4
3	7483070		.369	.004	.36880 - .00010	.030	8
3	7483072		.369	.008 AND UP	.36860 - .00030	.030	8
3	7483074		.370	.0005	.37000 - .00004	.030	4
3	7483076		.370	.002	.36990 - .00007	.030	4
3	7483077		.370	.004	.36980 - .00010	.030	8
3	7483079		.370	.008 AND UP	.36960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN— GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7483081		.371	.0005	.37100 - .00004	.030	4
3	7483083		.371	.002	.37090 - .00007	.030	4
3	7483084		.371	.004	.37080 - .00010	.030	8
3	7483086		.371	.008 AND UP	.37060 - .00030	.030	8
3	7483088		.372	.0005	.37200 - .00004	.030	4
3	7483090		.372	.002	.37190 - .00007	.030	4
3	7483091		.372	.004	.37180 - .00010	.030	8
3	7483093		.372	.008 AND UP	.37160 - .00030	.030	8
3	7483095		.373	.0005	.37300 - .00004	.030	4
3	7483097		.373	.002	.37290 - .00007	.030	4
3	7483098		.373	.004	.37280 - .00010	.030	8
3	7483100		.373	.008 AND UP	.37260 - .00030	.030	8
3	7483102		.374	.0005	.37400 - .00004	.030	4
3	7483104		.374	.002	.37390 - .00007	.030	4
3	7483105		.374	.004	.37380 - .00010	.030	8
3	7483107		.374	.008 AND UP	.37360 - .00030	.030	8
3	7483109		.375	.0005	.37500 - .00004	.030	4
3	7483111		.375	.002	.37490 - .00007	.030	4
3	7483112		.375	.004	.37480 - .00010	.030	8
3	7483114		.375	.008 AND UP	.37460 - .00030	.030	8
3	7483116		.376	.0005	.37600 - .00004	.030	4
3	7483118		.376	.002	.37590 - .00007	.030	4
3	7483119		.376	.004	.37580 - .00010	.030	8
3	7483121		.376	.008 AND UP	.37560 - .00030	.030	8
3	7483123		.377	.0005	.37700 - .00004	.030	4
3	7483125		.377	.002	.37690 - .00007	.030	4
3	7483126		.377	.004	.37680 - .00010	.030	8
3	7483128		.377	.008 AND UP	.37660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483130		.378	.0005	.37900 - .00004	.030	4
3	7483132		.378	.002	.37790 - .00007	.030	4
3	7483133		.378	.004	.37780 - .00010	.030	8
3	7483135		.378	.008 AND UP	.37760 - .00030	.030	8
3	7483137		.379	.0005	.37900 - .00004	.030	4
3	7483139		.379	.002	.37890 - .00007	.030	4
3	7483140		.379	.004	.37880 - .00010	.030	8
3	7483142		.379	.008 AND UP	.37860 - .00030	.030	8
3	7483144		.380	.0005	.38000 - .00004	.030	4
3	7483146		.380	.002	.37990 - .00007	.030	4
3	7483147		.380	.004	.37980 - .00010	.030	8
3	7483149		.380	.008 AND UP	.37960 - .00030	.030	8
3	7483151		.381	.0005	.38100 - .00004	.030	4
3	7483153		.381	.002	.38090 - .00007	.030	4
3	7483154		.381	.004	.38080 - .00010	.030	8
3	7483156		.381	.008 AND UP	.38060 - .00030	.030	8
3	7483158		.382	.0005	.38200 - .00004	.030	4
3	7483160		.382	.002	.38190 - .00007	.030	4
3	7483161		.382	.004	.38180 - .00010	.030	8
3	7483163		.382	.008 AND UP	.38160 - .00030	.030	8
3	7483165		.383	.0005	.38300 - .00004	.030	4
3	7483167		.383	.002	.38290 - .00007	.030	4
3	7483168		.383	.004	.38280 - .00010	.030	8
3	7483170		.383	.008 AND UP	.38260 - .00030	.030	8
3	7483172		.384	.0005	.38400 - .00004	.030	4
3	7483174		.384	.002	.38390 - .00007	.030	4
3	7483175		.384	.004	.38380 - .00010	.030	8
3	7483177		.384	.008 AND UP	.38360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483179		.385	.0005	.38500 - .00004	.030	4
3	7483181		.385	.002	.38490 - .00007	.030	4
3	7483182		.385	.004	.38480 - .00010	.030	8
3	7483184		.385	.008 AND UP	.38460 - .00030	.030	8
3	7483186		.386	.0005	.38600 - .00004	.030	4
3	7483188		.386	.002	.38590 - .00007	.030	4
3	7483189		.386	.004	.38580 - .00010	.030	8
3	7483191		.386	.008 AND UP	.38560 - .00030	.030	8
3	7483193		.387	.0005	.38700 - .00004	.030	4
3	7483195		.387	.002	.38690 - .00007	.030	4
3	7483196		.387	.004	.38680 - .00010	.030	8
3	7483198		.387	.008 AND UP	.38660 - .00030	.030	8
3	7483200		.388	.0005	.38800 - .00004	.030	4
3	7483202		.388	.002	.38790 - .00007	.030	4
3	7483203		.388	.004	.38780 - .00010	.030	8
3	7483205		.388	.008 AND UP	.38760 - .00030	.030	8
3	7483207		.389	.0005	.38900 - .00004	.030	4
3	7483209		.389	.002	.38890 - .00007	.030	4
3	7483210		.389	.004	.38880 - .00010	.030	8
3	7483212		.389	.008 AND UP	.38860 - .00030	.030	8
3	7483214		.390	.0005	.39000 - .00004	.030	4
3	7483216		.390	.002	.38990 - .00007	.030	4
3	7483217		.390	.004	.38980 - .00010	.030	8
3	7483219		.390	.008 AND UP	.38960 - .00030	.030	8
3	7483221		.391	.0005	.39100 - .00004	.030	4
3	7483223		.391	.002	.39090 - .00007	.030	4
3	7483224		.391	.004	.39080 - .00010	.030	8
3	7483226		.391	.008 AND UP	.39060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483228		.392	.0005	.39200 - .00004	.030	4
3	7483230		.392	.002	.39190 - .00007	.030	4
3	7483231		.392	.004	.39180 - .00010	.030	8
3	7483233		.392	.008 AND UP	.39160 - .00030	.030	8
3	7483235		.393	.0005	.39300 - .00004	.030	4
3	7483237		.393	.002	.39290 - .00007	.030	4
3	7483238		.393	.004	.39280 - .00010	.030	8
3	7483240		.393	.008 AND UP	.39260 - .00030	.030	8
3	7483242		.394	.0005	.39400 - .00004	.030	4
3	7483244		.394	.002	.39390 - .00007	.030	4
3	7483245		.394	.004	.39380 - .00010	.030	8
3	7483247		.394	.008 AND UP	.39360 - .00030	.030	8
3	7483249		.395	.0005	.39500 - .00004	.030	4
3	7483251		.395	.002	.39490 - .00007	.030	4
3	7483252		.395	.004	.39480 - .00010	.030	8
3	7483254		.395	.008 AND UP	.39460 - .00030	.030	8
3	7483256		.396	.0005	.39600 - .00004	.030	4
3	7483258		.396	.002	.39590 - .00007	.030	4
3	7483259		.396	.004	.39580 - .00010	.030	8
3	7483261		.396	.008 AND UP	.39560 - .00030	.030	8
3	7483263		.397	.0005	.39700 - .00004	.030	4
3	7483265		.397	.002	.39690 - .00007	.030	4
3	7483266		.397	.004	.39680 - .00010	.030	8
3	7483268		.397	.008 AND UP	.39660 - .00030	.030	8
3	7483270		.398	.0005	.39800 - .00004	.030	4
3	7483272		.398	.002	.39790 - .00007	.030	4
3	7483273		.398	.004	.39780 - .00010	.030	8
3	7483275		.398	.008 AND UP	.39760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7483277		.399	.0005	.39900 - .00004	.030	4
3	7483279		.399	.002	.39890 - .00007	.030	4
3	7483280		.399	.004	.39880 - .00010	.030	8
3	7483282		.399	.008 AND UP	.39860 - .00030	.030	8
3	7483284		.400	.0005	.40000 - .00004	.030	4
3	7483286		.400	.002	.39990 - .00007	.030	4
3	7483287		.400	.004	.39980 - .00010	.030	8
3	7483289		.400	.008 AND UP	.39960 - .00030	.030	8
3	7483291		.401	.0005	.40100 - .00004	.030	4
3	7483293		.401	.002	.40090 - .00007	.030	4
3	7483294		.401	.004	.40080 - .00010	.030	8
3	7483296		.401	.008 AND UP	.40060 - .00030	.030	8
3	7483298		.402	.0005	.40200 - .00004	.030	4
3	7483300		.402	.002	.40190 - .00007	.030	4
3	7483301		.402	.004	.40180 - .00010	.030	8
3	7483303		.402	.008 AND UP	.40160 - .00030	.030	8
3	7483305		.403	.0005	.40300 - .00004	.030	4
3	7483307		.403	.002	.40290 - .00007	.030	4
3	7483308		.403	.004	.40280 - .00010	.030	8
3	7483310		.403	.008 AND UP	.40260 - .00030	.030	8
3	7483312		.404	.0005	.40400 - .00004	.030	4
3	7483314		.404	.002	.40390 - .00007	.030	4
3	7483315		.404	.004	.40380 - .00010	.030	8
3	7483317		.404	.008 AND UP	.40360 - .00030	.030	8
3	7483319		.405	.0005	.40500 - .00004	.030	4
3	7483321		.405	.002	.40490 - .00007	.030	4
3	7483322		.405	.004	.40480 - .00010	.030	8
3	7483324		.405	.008 AND UP	.40460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483326		.406	.0005	.40600 - .00004	.030	4
3	7483328		.406	.002	.40590 - .00007	.030	4
3	7483329		.406	.004	.40580 - .00010	.030	8
3	7483331		.406	.008 AND UP	.40560 - .00030	.030	8
3	7483333		.40625	.0005 AND UP	.40625 - .00004	.030	4
3	7483334		.407	.0005	.40700 - .00004	.030	4
3	7483336		.407	.002	.40690 - .00007	.030	4
3	7483337		.407	.004	.40680 - .00010	.030	8
3	7483339		.407	.008 AND UP	.40660 - .00030	.030	8
3	7483341		.408	.0005	.40800 - .00004	.030	4
3	7483343		.408	.002	.40790 - .00007	.030	4
3	7483344		.408	.004	.40780 - .00010	.030	8
3	7483346		.408	.008 AND UP	.40760 - .00030	.030	8
3	7483348		.409	.0005	.40900 - .00004	.030	4
3	7483350		.409	.002	.40890 - .00007	.030	4
3	7483351		.409	.004	.40880 - .00010	.030	8
3	7483353		.409	.008 AND UP	.40860 - .00030	.030	8
3	7483355		.410	.0005	.41000 - .00004	.030	4
3	7483357		.410	.002	.40990 - .00007	.030	4
3	7483358		.410	.004	.40980 - .00010	.030	8
3	7483360		.410	.008 AND UP	.40960 - .00030	.030	8
3	7483362		.411	.0005	.41100 - .00004	.030	4
3	7483364		.411	.002	.41090 - .00007	.030	4
3	7483365		.411	.004	.41080 - .00010	.030	8
3	7483367		.411	.008 AND UP	.41060 - .00030	.030	8
3	7483369		.412	.0005	.41200 - .00004	.030	4
3	7483371		.412	.002	.41190 - .00007	.030	4
3	7483372		.412	.004	.41180 - .00010	.030	8
3	7483374		.412	.008 AND UP	.41160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483376		.413	.0005	.41300 - .00004	.030	4
3	7483378		.413	.002	.41290 - .00007	.030	4
3	7483379		.413	.004	.41280 - .00010	.030	8
3	7483381		.413	.008 AND UP	.41260 - .00030	.030	8
3	7483383		.414	.0005	.41400 - .00004	.030	4
3	7483385		.414	.002	.41390 - .00007	.030	4
3	7483386		.414	.004	.41380 - .00010	.030	8
3	7483388		.414	.008 AND UP	.41360 - .00030	.030	8
3	7483390		.415	.0005	.41500 - .00004	.030	4
3	7483392		.415	.002	.41490 - .00007	.030	4
3	7483393		.415	.004	.41480 - .00010	.030	8
3	7483395		.415	.008 AND UP	.41460 - .00030	.030	8
3	7483397		.416	.0005	.41600 - .00004	.030	4
3	7483399		.416	.002	.41590 - .00007	.030	4
3	7483400		.416	.004	.41580 - .00010	.030	8
3	7483402		.416	.008 AND UP	.41560 - .00030	.030	8
3	7483404		.417	.0005	.41700 - .00004	.030	4
3	7483406		.417	.002	.41690 - .00007	.030	4
3	7483407		.417	.004	.41680 - .00010	.030	8
3	7483409		.417	.008 AND UP	.41660 - .00030	.030	8
3	7483411		.418	.0005	.41800 - .00004	.030	4
3	7483413		.418	.002	.41790 - .00007	.030	4
3	7483414		.418	.004	.41780 - .00010	.030	8
3	7483416		.418	.008 AND UP	.41760 - .00030	.030	8
3	7483418		.419	.0005	.41900 - .00004	.030	4
3	7483420		.419	.002	.41890 - .00007	.030	4
3	7483421		.419	.004	.41880 - .00010	.030	8
3	7483423		.419	.008 AND UP	.41860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING OF GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483425		.420	.0005	.42000 - .00004	.030	4
3	7483427		.420	.002	.41990 - .00007	.030	4
3	7483428		.420	.004	.41980 - .00010	.030	8
3	7483430		.420	.008 AND UP	.41960 - .00030	.030	8
3	7483432		.421	.0005	.42100 - .00004	.030	4
3	7483434		.421	.002	.42090 - .00007	.030	4
3	7483435		.421	.004	.42080 - .00010	.030	8
3	7483437		.421	.008 AND UP	.42060 - .00030	.030	8
3	7483439		.422	.0005	.42200 - .00004	.030	4
3	7483441		.422	.002	.42190 - .00007	.030	4
3	7483442		.422	.004	.42180 - .00010	.030	8
3	7483444		.422	.008 AND UP	.42160 - .00030	.030	8
3	7483446		.423	.0005	.42300 - .00004	.030	4
3	7483448		.423	.002	.42290 - .00007	.030	4
3	7483449		.423	.004	.42280 - .00010	.030	8
3	7483451		.423	.008 AND UP	.42260 - .00030	.030	8
3	7483453		.424	.0005	.42400 - .00004	.030	4
3	7483455		.424	.002	.42390 - .00007	.030	4
3	7483456		.424	.004	.42380 - .00010	.030	8
3	7483458		.424	.008 AND UP	.42360 - .00030	.030	8
3	7483460		.425	.0005	.42500 - .00004	.030	4
3	7483462		.425	.002	.42490 - .00007	.030	4
3	7483463		.425	.004	.42480 - .00010	.030	8
3	7483465		.425	.008 AND UP	.42460 - .00030	.030	8
3	7483467		.426	.0005	.42600 - .00004	.030	4
3	7483469		.426	.002	.42590 - .00007	.030	4
3	7483470		.426	.004	.42580 - .00010	.030	8
3	7483472		.426	.008 AND UP	.42560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483474		.427	.0005	.42700 - .00004	.030	4
3	7483476		.427	.002	.42690 - .00007	.030	4
3	7483477		.427	.004	.42680 - .00010	.030	8
3	7483479		.427	.008 AND UP	.42660 - .00030	.030	8
3	7483481		.428	.0005	.42800 - .00004	.030	4
3	7483483		.428	.002	.42790 - .00007	.030	4
3	7483484		.428	.004	.42780 - .00010	.030	8
3	7483486		.428	.008 AND UP	.42760 - .00030	.030	8
3	7483488		.429	.0005	.42900 - .00004	.030	4
3	7483490		.429	.002	.42890 - .00007	.030	4
3	7483491		.429	.004	.42880 - .00010	.030	8
3	7483493		.429	.008 AND UP	.42860 - .00030	.030	8
3	7483495		.430	.0005	.43000 - .00004	.030	4
3	7483497		.430	.002	.42990 - .00007	.030	4
3	7483498		.430	.004	.42980 - .00010	.030	8
3	7483500		.430	.008 AND UP	.42960 - .00030	.030	8
3	7483502		.431	.0005	.43100 - .00004	.030	4
3	7483504		.431	.002	.43090 - .00007	.030	4
3	7483505		.431	.004	.43080 - .00010	.030	8
3	7483507		.431	.008 AND UP	.43060 - .00030	.030	8
3	7483509		.432	.0005	.43200 - .00004	.030	4
3	7483511		.432	.002	.43190 - .00007	.030	4
3	7483512		.432	.004	.43180 - .00010	.030	8
3	7483514		.432	.008 AND UP	.43160 - .00030	.030	8
3	7483516		.433	.0005	.43300 - .00004	.030	4
3	7483518		.433	.002	.43290 - .00007	.030	4
3	7483519		.433	.004	.43280 - .00010	.030	8
3	7483521		.433	.008 AND UP	.43260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483523		.434	.0005	.43400 - .00004	.030	4
3	7483525		.434	.002	.43390 - .00007	.030	4
3	7483526		.434	.004	.43380 - .00010	.030	8
3	7483528		.434	.008 AND UP	.43360 - .00030	.030	8
3	7483530		.435	.0005	.43500 - .00004	.030	4
3	7483532		.435	.002	.43490 - .00007	.030	4
3	7483533		.435	.004	.43480 - .00010	.030	8
3	7483535		.435	.008 AND UP	.43460 - .00030	.030	8
3	7483537		.436	.0005	.43600 - .00004	.030	4
3	7483539		.436	.002	.43590 - .00007	.030	4
3	7483540		.436	.004	.43580 - .00010	.030	8
3	7483542		.436	.008 AND UP	.43560 - .00030	.030	8
3	7483544		.437	.0005	.43700 - .00004	.030	4
3	7483546		.437	.002	.43690 - .00007	.030	4
3	7483547		.437	.004	.43680 - .00010	.030	8
3	7483549		.437	.008 AND UP	.43660 - .00030	.030	8
3	7483551		.4375	.0005 AND UP	.43750 - .00004	.030	4
3	7483552		.438	.0005	.43800 - .00004	.030	4
3	7483554		.438	.002	.43790 - .00007	.030	4
3	7483555		.438	.004	.43780 - .00010	.030	8
3	7483557		.438	.008 AND UP	.43760 - .00030	.030	8
3	7483559		.439	.0005	.43900 - .00004	.030	4
3	7483561		.439	.002	.43890 - .00007	.030	4
3	7483562		.439	.004	.43880 - .00010	.030	8
3	7483564		.439	.008 AND UP	.43860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483566		.440	.0005	.44000 - .00004	.030	4
3	7483568		.440	.002	.43990 - .00007	.030	4
3	7483569		.440	.004	.43980 - .00010	.030	8
3	7483571		.440	.008 AND UP	.43960 - .00030	.030	8
3	7483573		.441	.0005	.44100 - .00004	.030	4
3	7483575		.441	.002	.44090 - .00007	.030	4
3	7483576		.441	.004	.44080 - .00010	.030	8
3	7483578		.441	.008 AND UP	.44060 - .00030	.030	8
3	7483580		.442	.0005	.44200 - .00004	.030	4
3	7483582		.442	.002	.44190 - .00007	.030	4
3	7483583		.442	.004	.44180 - .00010	.030	8
3	7483585		.442	.008 AND UP	.44160 - .00030	.030	8
3	7483587		.443	.0005	.44300 - .00004	.030	4
3	7483589		.443	.002	.44290 - .00007	.030	4
3	7483590		.443	.004	.44280 - .00010	.030	8
3	7483592		.443	.008 AND UP	.44260 - .00030	.030	8
3	7483594		.444	.0005	.44400 - .00004	.030	4
3	7483596		.444	.002	.44390 - .00007	.030	4
3	7483597		.444	.004	.44380 - .00010	.030	8
3	7483599		.444	.008 AND UP	.44360 - .00030	.030	8
3	7483601		.445	.0005	.44500 - .00004	.030	4
3	7483603		.445	.002	.44490 - .00007	.030	4
3	7483604		.445	.004	.44480 - .00010	.030	8
3	7483606		.445	.008 AND UP	.44460 - .00030	.030	8
3	7483608		.446	.0005	.44600 - .00004	.030	4
3	7483610		.446	.002	.44590 - .00007	.030	4
3	7483611		.446	.004	.44580 - .00010	.030	8
3	7483613		.446	.008 AND UP	.44560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483615		.447	.0005	.44700 - .00004	.030	4
3	7483617		.447	.002	.44690 - .00007	.030	4
3	7483618		.447	.004	.44680 - .00010	.030	8
3	7483620		.447	.008 AND UP	.44660 - .00030	.030	8
3	7483622		.448	.0005	.44800 - .00004	.030	4
3	7483624		.448	.002	.44790 - .00007	.030	4
3	7483625		.448	.004	.44780 - .00010	.030	8
3	7483627		.448	.008 AND UP	.44760 - .00030	.030	8
3	7483629		.449	.0005	.44900 - .00004	.030	4
3	7483631		.449	.002	.44890 - .00007	.030	4
3	7483632		.449	.004	.44880 - .00010	.030	8
3	7483634		.449	.008 AND UP	.44860 - .00030	.030	8
3	7483636		.450	.0005	.45000 - .00004	.030	4
3	7483638		.450	.002	.44990 - .00007	.030	4
3	7483639		.450	.004	.44980 - .00010	.030	8
3	7483641		.450	.008 AND UP	.44960 - .00030	.030	8
3	7483643		.451	.0005	.45100 - .00004	.030	4
3	7483645		.451	.002	.45090 - .00007	.030	4
3	7483646		.451	.004	.45080 - .00010	.030	8
3	7483648		.451	.008 AND UP	.45060 - .00030	.030	8
3	7483650		.452	.0005	.45200 - .00004	.030	4
3	7483652		.452	.002	.45190 - .00007	.030	4
3	7483653		.452	.004	.45180 - .00010	.030	8
3	7483655		.452	.008 AND UP	.45160 - .00030	.030	8
3	7483657		.453	.0005	.45300 - .00004	.030	4
3	7483659		.453	.002	.45290 - .00007	.030	4
3	7483660		.453	.004	.45280 - .00010	.030	8
3	7483662		.453	.008 AND UP	.45260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483664		.454	.0005	.45400 - .00004	.030	4
3	7483666		.454	.002	.45390 - .00007	.030	4
3	7483667		.454	.004	.45380 - .00010	.030	8
3	7483669		.454	.008 AND UP	.45360 - .00030	.030	8
3	7483671		.455	.0005	.45500 - .00004	.030	4
3	7483673		.455	.002	.45490 - .00007	.030	4
3	7483674		.455	.004	.45480 - .00010	.030	8
3	7483676		.455	.008 AND UP	.45460 - .00030	.030	8
3	7483678		.456	.0005	.45600 - .00004	.030	4
3	7483680		.456	.002	.45590 - .00007	.030	4
3	7483681		.456	.004	.45580 - .00010	.030	8
3	7483683		.456	.008 AND UP	.45560 - .00030	.030	8
3	7483685		.457	.0005	.45700 - .00004	.030	4
3	7483687		.457	.002	.45690 - .00007	.030	4
3	7483688		.457	.004	.45680 - .00010	.030	8
3	7483690		.457	.008 AND UP	.45660 - .00030	.030	8
3	7483692		.458	.0005	.45800 - .00004	.030	4
3	7483694		.458	.002	.45790 - .00007	.030	4
3	7483695		.458	.004	.45780 - .00010	.030	8
3	7483697		.458	.008 AND UP	.45760 - .00030	.030	8
3	7483699		.459	.0005	.45900 - .00004	.030	4
3	7483701		.459	.002	.45890 - .00007	.030	4
3	7483702		.459	.004	.45880 - .00010	.030	8
3	7483704		.459	.008 AND UP	.45860 - .00030	.030	8
3	7483706		.460	.0005	.46000 - .00004	.030	4
3	7483708		.460	.002	.45990 - .00007	.030	4
3	7483709		.460	.004	.45980 - .00010	.030	8
3	7483711		.460	.008 AND UP	.45960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483713		.461	.0005	.46100 - .00004	.030	4
3	7483715		.461	.002	.46090 - .00007	.030	4
3	7483716		.461	.004	.46080 - .00010	.030	8
3	7483718		.461	.008 AND UP	.46060 - .00030	.030	8
3	7483720		.462	.0005	.46200 - .00004	.030	4
3	7483722		.462	.002	.46190 - .00007	.030	4
3	7483723		.462	.004	.46180 - .00010	.030	8
3	7483725		.462	.008 AND UP	.46160 - .00030	.030	8
3	7483727		.463	.0005	.46300 - .00004	.030	4
3	7483729		.463	.002	.46290 - .00007	.030	4
3	7483730		.463	.004	.46280 - .00010	.030	8
3	7483732		.463	.008 AND UP	.46260 - .00030	.030	8
3	7483734		.464	.0005	.46400 - .00004	.030	4
3	7483736		.464	.002	.46390 - .00007	.030	4
3	7483737		.464	.004	.46380 - .00010	.030	8
3	7483739		.464	.008 AND UP	.46360 - .00030	.030	8
3	7483741		.465	.0005	.46500 - .00004	.030	4
3	7483743		.465	.002	.46490 - .00007	.030	4
3	7483744		.465	.004	.46480 - .00010	.030	8
3	7483746		.465	.008 AND UP	.46460 - .00030	.030	8
3	7483748		.466	.0005	.46600 - .00004	.030	4
3	7483750		.466	.002	.46590 - .00007	.030	4
3	7483751		.466	.004	.46580 - .00010	.030	8
3	7483753		.466	.008 AND UP	.46560 - .00030	.030	8
3	7483755		.467	.0005	.46700 - .00004	.030	4
3	7483757		.467	.002	.46690 - .00007	.030	4
3	7483758		.467	.004	.46680 - .00010	.030	8
3	7483760		.467	.008 AND UP	.46660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483762		.468	.0005	.46800 - .00004	.030	4
3	7483764		.468	.002	.46790 - .00007	.030	4
3	7483765		.468	.004	.46780 - .00010	.030	8
3	7483767		.468	.008 AND UP	.46760 - .00030	.030	8
3	7483769		.46875	.0005 AND UP	.46875 - .00004	.030	4
3	7483770		.469	.0005	.46900 - .00004	.030	4
3	7483772		.469	.002	.46890 - .00007	.030	4
3	7483773		.469	.004	.46880 - .00010	.030	8
3	7483775		.469	.008 AND UP	.46860 - .00030	.030	8
3	7483777		.470	.0005	.47000 - .00004	.030	4
3	7483779		.470	.002	.46990 - .00007	.030	4
3	7483780		.470	.004	.46980 - .00010	.030	8
3	7483782		.470	.008 AND UP	.46960 - .00030	.030	8
3	7483784		.471	.0005	.47100 - .00004	.030	4
3	7483786		.471	.002	.47090 - .00007	.030	4
3	7483787		.471	.004	.47080 - .00010	.030	8
3	7483789		.471	.008 AND UP	.47060 - .00030	.030	8
3	7483791		.472	.0005	.47200 - .00004	.030	4
3	7483793		.472	.002	.47190 - .00007	.030	4
3	7483794		.472	.004	.47180 - .00010	.030	8
3	7483796		.472	.008 AND UP	.47160 - .00030	.030	8
3	7483798		.473	.0005	.47300 - .00004	.030	4
3	7483800		.473	.002	.47290 - .00007	.030	4
3	7483801		.473	.004	.47280 - .00010	.030	8
3	7483803		.473	.008 AND UP	.47260 - .00030	.030	8
3	7483805		.474	.0005	.47400 - .00004	.030	4
3	7483807		.474	.002	.47390 - .00007	.030	4
3	7483808		.474	.004	.47380 - .00010	.030	8
3	7483810		.474	.008 AND UP	.47360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483812		.475	.0005	.47500 - .00004	.030	4
3	7483814		.475	.002	.47490 - .00007	.030	4
3	7483815		.475	.004	.47480 - .00010	.030	8
3	7483817		.475	.008 AND UP	.47460 - .00030	.030	8
3	7483819		.476	.0005	.47600 - .00004	.030	4
3	7483821		.476	.002	.47590 - .00007	.030	4
3	7483822		.476	.004	.47580 - .00010	.030	8
3	7483824		.476	.008 AND UP	.47560 - .00030	.030	8
3	7483826		.477	.0005	.47700 - .00004	.030	4
3	7483828		.477	.002	.47690 - .00007	.030	4
3	7483829		.477	.004	.47680 - .00010	.030	8
3	7483831		.477	.008 AND UP	.47660 - .00030	.030	8
3	7483833		.478	.0005	.47800 - .00004	.030	4
3	7483835		.478	.002	.47790 - .00007	.030	4
3	7483836		.478	.004	.47780 - .00010	.030	8
3	7483838		.478	.008 AND UP	.47760 - .00030	.030	8
3	7483840		.479	.0005	.47900 - .00004	.030	4
3	7483842		.479	.002	.47890 - .00007	.030	4
3	7483843		.479	.004	.47880 - .00010	.030	8
3	7483845		.479	.008 AND UP	.47860 - .00030	.030	8
3	7483847		.480	.0005	.48000 - .00004	.030	4
3	7483849		.480	.002	.47990 - .00007	.030	4
3	7483850		.480	.004	.47980 - .00010	.030	8
3	7483852		.480	.008 AND UP	.47960 - .00030	.030	8
3	7483854		.481	.0005	.48100 - .00004	.030	4
3	7483856		.481	.002	.48090 - .00007	.030	4
3	7483857		.481	.004	.48080 - .00010	.030	8
3	7483859		.481	.008 AND UP	.48060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483861		.482	.0005	.48200 - .00004	.030	4
3	7483863		.482	.002	.48190 - .00007	.030	4
3	7483864		.482	.004	.48180 - .00010	.030	8
3	7483866		.482	.008 AND UP	.48160 - .00030	.030	8
3	7483868		.483	.0005	.48300 - .00004	.030	4
3	7483870		.483	.002	.48290 - .00007	.030	4
3	7483871		.483	.004	.48280 - .00010	.030	8
3	7483873		.483	.008 AND UP	.48260 - .00030	.030	8
3	7483875		.484	.0005	.48400 - .00004	.030	4
3	7483877		.484	.002	.48390 - .00007	.030	4
3	7483878		.484	.004	.48380 - .00010	.030	8
3	7483880		.484	.008 AND UP	.48360 - .00030	.030	8
3	7483882		.485	.0005	.48500 - .00004	.030	4
3	7483884		.485	.002	.48490 - .00007	.030	4
3	7483885		.485	.004	.48480 - .00010	.030	8
3	7483887		.485	.008 AND UP	.48460 - .00030	.030	8
3	7483889		.486	.0005	.48600 - .00004	.030	4
3	7483891		.486	.002	.48590 - .00007	.030	4
3	7483892		.486	.004	.48580 - .00010	.030	8
3	7483894		.486	.008 AND UP	.48560 - .00030	.030	8
3	7483896		.487	.0005	.48700 - .00004	.030	4
3	7483898		.487	.002	.48690 - .00007	.030	4
3	7483899		.487	.004	.48680 - .00010	.030	8
3	7483901		.487	.008 AND UP	.48660 - .00030	.030	8
3	7483903		.488	.0005	.48800 - .00004	.030	4
3	7483905		.488	.002	.48790 - .00007	.030	4
3	7483906		.488	.004	.48780 - .00010	.030	8
3	7483908		.488	.008 AND UP	.48760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FUN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483910		.489	.0005	.48900 - .00004	.030	4
3	7483912		.489	.002	.48890 - .00007	.030	4
3	7483913		.489	.004	.48880 - .00010	.030	8
3	7483915		.489	.008 AND UP	.48860 - .00030	.030	8
3	7483917		.490	.0005	.49000 - .00004	.030	4
3	7483919		.490	.002	.48990 - .00007	.030	4
3	7483920		.490	.004	.48980 - .00010	.030	8
3	7483922		.490	.008 AND UP	.48960 - .00030	.030	8
3	7483924		.491	.0005	.49100 - .00004	.030	4
3	7483926		.491	.002	.49090 - .00007	.030	4
3	7483927		.491	.004	.49080 - .00010	.030	8
3	7483929		.491	.008 AND UP	.49060 - .00030	.030	8
3	7483931		.492	.0005	.49200 - .00004	.030	4
3	7483933		.492	.002	.49190 - .00007	.030	4
3	7483934		.492	.004	.49180 - .00010	.030	8
3	7483936		.492	.008 AND UP	.49160 - .00030	.030	8
3	7483938		.493	.0005	.49300 - .00004	.030	4
3	7483940		.493	.002	.49290 - .00007	.030	4
3	7483941		.493	.004	.49280 - .00010	.030	8
3	7483943		.493	.008 AND UP	.49260 - .00030	.030	8
3	7483945		.494	.0005	.49400 - .00004	.030	4
3	7483947		.494	.002	.49390 - .00007	.030	4
3	7483948		.494	.004	.49380 - .00010	.030	8
3	7483950		.494	.008 AND UP	.49360 - .00030	.030	8
3	7483952		.495	.0005	.49500 - .00004	.030	4
3	7483954		.495	.002	.49490 - .00007	.030	4
3	7483955		.495	.004	.49480 - .00010	.030	8
3	7483957		.495	.008 AND UP	.49460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7483959		.496	.0005	.49600 - .00004	.030	4
3	7483961		.496	.002	.49590 - .00007	.030	4
3	7483962		.496	.004	.49580 - .00010	.030	8
3	7483964		.496	.008 AND UP	.49560 - .00030	.030	8
3	7483966		.497	.0005	.49700 - .00004	.030	4
3	7483968		.497	.002	.49690 - .00007	.030	4
3	7483969		.497	.004	.49680 - .00010	.030	8
3	7483971		.497	.008 AND UP	.49660 - .00030	.030	8
3	7483973		.498	.0005	.49800 - .00004	.030	4
3	7483975		.498	.002	.49790 - .00007	.030	4
3	7483976		.498	.004	.49780 - .00010	.030	8
3	7483978		.498	.008 AND UP	.49760 - .00030	.030	8
3	7483980		.499	.0005	.49900 - .00004	.030	4
3	7483982		.499	.002	.49890 - .00007	.030	4
3	7483983		.499	.004	.49880 - .00010	.030	8
3	7483985		.499	.008 AND UP	.49860 - .00030	.030	8
3	7483987		.500	.0005	.50000 - .00004	.030	4
3	7483989		.500	.002	.49990 - .00007	.030	4
3	7483990		.500	.004	.49980 - .00010	.030	8
3	7483992		.500	.008 AND UP	.49960 - .00030	.030	8
3	7483994		.501	.0005	.50100 - .00004	.030	4
3	7483996		.501	.002	.50090 - .00007	.030	4
3	7483997		.501	.004	.50080 - .00010	.030	8
3	7483999		.501	.008 AND UP	.50060 - .00030	.030	8
3	7484001		.502	.0005	.50200 - .00004	.030	4
3	7484003		.502	.002	.50190 - .00007	.030	4
3	7484004		.502	.004	.50180 - .00010	.030	8
3	7484006		.502	.008 AND UP	.50160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484008		.503	.0005	.50300 - .00004	.030	4
3	7484010		.503	.002	.50290 - .00007	.030	4
3	7484011		.503	.004	.50280 - .00010	.030	8
3	7484013		.503	.008 AND UP	.50260 - .00030	.030	8
3	7484015		.504	.0005	.50400 - .00004	.030	4
3	7484017		.504	.002	.50390 - .00007	.030	4
3	7484018		.504	.004	.50380 - .00010	.030	8
3	7484020		.504	.008 AND UP	.50360 - .00030	.030	8
3	7484022		.505	.0005	.50500 - .00004	.030	4
3	7484024		.505	.002	.50490 - .00007	.030	4
3	7484025		.505	.004	.50480 - .00010	.030	8
3	7484027		.505	.008 AND UP	.50460 - .00030	.030	8
3	7484029		.506	.0005	.50600 - .00004	.030	4
3	7484031		.506	.002	.50590 - .00007	.030	4
3	7484032		.506	.004	.50580 - .00010	.030	8
3	7484034		.506	.008 AND UP	.50560 - .00030	.030	8
3	7484036		.507	.0005	.50700 - .00004	.030	4
3	7484038		.507	.002	.50690 - .00007	.030	4
3	7484039		.507	.004	.50680 - .00010	.030	8
3	7484041		.507	.008 AND UP	.50660 - .00030	.030	8
3	7484043		.508	.0005	.50800 - .00004	.030	4
3	7484045		.508	.002	.50790 - .00007	.030	4
3	7484046		.508	.004	.50780 - .00010	.030	8
3	7484048		.508	.008 AND UP	.50760 - .00030	.030	8
3	7484050		.509	.0005	.50900 - .00004	.030	4
3	7484052		.509	.002	.50890 - .00007	.030	4
3	7484053		.509	.004	.50880 - .00010	.030	8
3	7484055		.509	.008 AND UP	.50860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484057		.510	.0005	.51000 - .00004	.030	4
3	7484059		.510	.002	.50990 - .00007	.030	4
3	7484060		.510	.004	.50980 - .00010	.030	8
3	7484062		.510	.008 AND UP	.50960 - .00030	.030	8
3	7484064		.511	.0005	.51100 - .00004	.030	4
3	7484066		.511	.002	.51090 - .00007	.030	4
3	7484067		.511	.004	.51080 - .00010	.030	8
3	7484069		.511	.008 AND UP	.51060 - .00030	.030	8
3	7484071		.512	.0005	.51200 - .00004	.030	4
3	7484073		.512	.002	.51190 - .00007	.030	4
3	7484074		.512	.004	.51180 - .00010	.030	8
3	7484076		.512	.008 AND UP	.51160 - .00030	.030	8
3	7484078		.513	.0005	.51300 - .00004	.030	4
3	7484080		.513	.002	.51290 - .00007	.030	4
3	7484081		.513	.004	.51280 - .00010	.030	8
3	7484083		.513	.008 AND UP	.51260 - .00030	.030	8
3	7484085		.514	.0005	.51400 - .00004	.030	4
3	7484087		.514	.002	.51390 - .00007	.030	4
3	7484088		.514	.004	.51380 - .00010	.030	8
3	7484090		.514	.008 AND UP	.51360 - .00030	.030	8
3	7484092		.515	.0005	.51500 - .00004	.030	4
3	7484094		.515	.002	.51490 - .00007	.030	4
3	7484095		.515	.004	.51480 - .00010	.030	8
3	7484097		.515	.008 AND UP	.51460 - .00030	.030	8
3	7484099		.516	.0005	.51600 - .00004	.030	4
3	7484101		.516	.002	.51590 - .00007	.030	4
3	7484102		.516	.004	.51580 - .00010	.030	8
3	7484104		.516	.008 AND UP	.51560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484106		.517	.0005	.51700 - .00004	.030	4
3	7484108		.517	.002	.51690 - .00007	.030	4
3	7484109		.517	.004	.51680 - .00010	.030	8
3	7484111		.517	.008 AND UP	.51660 - .00030	.030	8
3	7484113		.518	.0005	.51800 - .00004	.030	4
3	7484115		.518	.002	.51790 - .00007	.030	4
3	7484116		.518	.004	.51780 - .00010	.030	8
3	7484118		.518	.008 AND UP	.51760 - .00030	.030	8
3	7484120		.519	.0005	.51900 - .00004	.030	4
3	7484122		.519	.002	.51890 - .00007	.030	4
3	7484123		.519	.004	.51880 - .00010	.030	8
3	7484125		.519	.008 AND UP	.51860 - .00030	.030	8
3	7484127		.520	.0005	.52000 - .00004	.030	4
3	7484129		.520	.002	.51990 - .00007	.030	4
3	7484130		.520	.004	.51980 - .00010	.030	8
3	7484132		.520	.008 AND UP	.51960 - .00030	.030	8
3	7484134		.521	.0005	.52100 - .00004	.030	4
3	7484136		.521	.002	.52090 - .00007	.030	4
3	7484137		.521	.004	.52080 - .00010	.030	8
3	7484139		.521	.008 AND UP	.52060 - .00030	.030	8
3	7484141		.522	.0005	.52200 - .00004	.030	4
3	7484143		.522	.002	.52190 - .00007	.030	4
3	7484144		.522	.004	.52180 - .00010	.030	8
3	7484146		.522	.008 AND UP	.52160 - .00030	.030	8
3	7484148		.523	.0005	.52300 - .00004	.030	4
3	7484150		.523	.002	.52290 - .00007	.030	4
3	7484151		.523	.004	.52280 - .00010	.030	8
3	7484153		.523	.008 AND UP	.52260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484155		.524	.0005	.52400 - .00004	.030	4
3	7484157		.524	.002	.52390 - .00007	.030	4
3	7484158		.524	.004	.52380 - .00010	.030	8
3	7484160		.524	.008 AND UP	.52360 - .00030	.030	8
3	7484162		.525	.0005	.52500 - .00004	.030	4
3	7484164		.525	.002	.52490 - .00007	.030	4
3	7484165		.525	.004	.52480 - .00010	.030	8
3	7484167		.525	.008 AND UP	.52460 - .00030	.030	8
3	7484169		.526	.0005	.52600 - .00004	.030	4
3	7484171		.526	.002	.52590 - .00007	.030	4
3	7484172		.526	.004	.52580 - .00010	.030	8
3	7484174		.526	.008 AND UP	.52560 - .00030	.030	8
3	7484176		.527	.0005	.52700 - .00004	.030	4
3	7484178		.527	.002	.52690 - .00007	.030	4
3	7484179		.527	.004	.52680 - .00010	.030	8
3	7484181		.527	.008 AND UP	.52660 - .00030	.030	8
3	7484183		.528	.0005	.52800 - .00004	.030	4
3	7484185		.528	.002	.52790 - .00007	.030	4
3	7484186		.528	.004	.52780 - .00010	.030	8
3	7484188		.528	.008 AND UP	.52760 - .00030	.030	8
3	7484190		.529	.0005	.52900 - .00004	.030	4
3	7484192		.529	.002	.52890 - .00007	.030	4
3	7484193		.529	.004	.52880 - .00010	.030	8
3	7484195		.529	.008 AND UP	.52860 - .00030	.030	8
3	7484197		.530	.0005	.53000 - .00004	.030	4
3	7484199		.530	.002	.52990 - .00007	.030	4
3	7484200		.530	.004	.52980 - .00010	.030	8
3	7484202		.530	.008 AND UP	.52960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484204		.531	.0005	.53100 - .00004	.030	4
3	7484206		.531	.002	.53090 - .00007	.030	4
3	7484207		.531	.004	.53080 - .00010	.030	8
3	7484209		.531	.008 AND UP	.53060 - .00030	.030	8
3	7484211		.53125	.0005 AND UP	.53125 - .00004	.030	4
3	7484212		.532	.0005	.53200 - .00004	.030	4
3	7484214		.532	.002	.53190 - .00007	.030	4
3	7484215		.532	.004	.53180 - .00010	.030	8
3	7484217		.532	.008 AND UP	.53160 - .00030	.030	8
3	7484219		.533	.0005	.53300 - .00004	.030	4
3	7484221		.533	.002	.53290 - .00007	.030	4
3	7484222		.533	.004	.53280 - .00010	.030	8
3	7484224		.533	.008 AND UP	.53260 - .00030	.030	8
3	7484226		.534	.0005	.53400 - .00004	.030	4
3	7484228		.534	.002	.53390 - .00007	.030	4
3	7484229		.534	.004	.53380 - .00010	.030	8
3	7484231		.534	.008 AND UP	.53360 - .00030	.030	8
3	7484233		.535	.0005	.53500 - .00004	.030	4
3	7484235		.535	.002	.53490 - .00007	.030	4
3	7484236		.535	.004	.53480 - .00010	.030	8
3	7484238		.535	.008 AND UP	.53460 - .00030	.030	8
3	7484240		.536	.0005	.53600 - .00004	.030	4
3	7484242		.536	.002	.53590 - .00007	.030	4
3	7484243		.536	.004	.53580 - .00010	.030	8
3	7484245		.536	.008 AND UP	.53560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484247		.537	.0005	.53700 - .00004	.030	4
3	7484249		.537	.002	.53690 - .00007	.030	4
3	7484250		.537	.004	.53680 - .00010	.030	8
3	7484252		.537	.008 AND UP	.53660 - .00030	.030	8
3	7484254		.538	.0005	.53800 - .00004	.030	4
3	7484256		.538	.002	.53790 - .00007	.030	4
3	7484257		.538	.004	.53780 - .00010	.030	8
3	7484259		.538	.008 AND UP	.53760 - .00030	.030	8
3	7484261		.539	.0005	.53900 - .00004	.030	4
3	7484263		.539	.002	.53890 - .00007	.030	4
3	7484264		.539	.004	.53880 - .00010	.030	8
3	7484266		.539	.008 AND UP	.53860 - .00030	.030	8
3	7484268		.540	.0005	.54000 - .00004	.030	4
3	7484270		.540	.002	.53990 - .00007	.030	4
3	7484271		.540	.004	.53980 - .00010	.030	8
3	7484273		.540	.008 AND UP	.53960 - .00030	.030	8
3	7484275		.541	.0005	.54100 - .00004	.030	4
3	7484277		.541	.002	.54090 - .00007	.030	4
3	7484278		.541	.004	.54080 - .00010	.030	8
3	7484280		.541	.008 AND UP	.54060 - .00030	.030	8
3	7484282		.542	.0005	.54200 - .00004	.030	4
3	7484284		.542	.002	.54190 - .00007	.030	4
3	7484285		.542	.004	.54180 - .00010	.030	8
3	7484287		.542	.008 AND UP	.54160 - .00030	.030	8
3	7484289		.543	.0005	.54300 - .00004	.030	4
3	7484291		.543	.002	.54290 - .00007	.030	4
3	7484292		.543	.004	.54280 - .00010	.030	8
3	7484294		.543	.008 AND UP	.54260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484296		.544	.0005	.54400 - .00004	.030	4
3	7484298		.544	.002	.54390 - .00007	.030	4
3	7484299		.544	.004	.54380 - .00010	.030	8
3	7484301		.544	.008 AND UP	.54360 - .00030	.030	8
3	7484303		.545	.0005	.54500 - .00004	.030	4
3	7484305		.545	.002	.54490 - .00007	.030	4
3	7484306		.545	.004	.54480 - .00010	.030	8
3	7484308		.545	.008 AND UP	.54460 - .00030	.030	8
3	7484310		.546	.0005	.54600 - .00004	.030	4
3	7484312		.546	.002	.54590 - .00007	.030	4
3	7484313		.546	.004	.54580 - .00010	.030	8
3	7484315		.546	.008 AND UP	.54560 - .00030	.030	8
3	7484317		.547	.0005	.54700 - .00004	.030	4
3	7484319		.547	.002	.54690 - .00007	.030	4
3	7484320		.547	.004	.54680 - .00010	.030	8
3	7484322		.547	.008 AND UP	.54660 - .00030	.030	8
3	7484324		.548	.0005	.54800 - .00004	.030	4
3	7484326		.548	.002	.54790 - .00007	.030	4
3	7484327		.548	.004	.54780 - .00010	.030	8
3	7484329		.548	.008 AND UP	.54760 - .00030	.030	8
3	7484331		.549	.0005	.54900 - .00004	.030	4
3	7484333		.549	.002	.54890 - .00007	.030	4
3	7484334		.549	.004	.54880 - .00010	.030	8
3	7484336		.549	.008 AND UP	.54860 - .00030	.030	8
3	7484338		.550	.0005	.55000 - .00004	.030	4
3	7484340		.550	.002	.54990 - .00007	.030	4
3	7484341		.550	.004	.54980 - .00010	.030	8
3	7484343		.550	.008 AND UP	.54960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484345		.551	.0005	.55100 - .00004	.030	4
3	7484347		.551	.002	.55090 - .00007	.030	4
3	7484348		.551	.004	.55080 - .00010	.030	8
3	7484350		.551	.008 AND UP	.55060 - .00030	.030	8
3	7484352		.552	.0005	.55200 - .00004	.030	4
3	7484354		.552	.002	.55190 - .00007	.030	4
3	7484355		.552	.004	.55180 - .00010	.030	8
3	7484357		.552	.008 AND UP	.55160 - .00030	.030	8
3	7484359		.553	.0005	.55300 - .00004	.030	4
3	7484361		.553	.002	.55290 - .00007	.030	4
3	7484362		.553	.004	.55280 - .00010	.030	8
3	7484364		.553	.008 AND UP	.55260 - .00030	.030	8
3	7484366		.554	.0005	.55400 - .00004	.030	4
3	7484368		.554	.002	.55390 - .00007	.030	4
3	7484369		.554	.004	.55380 - .00010	.030	8
3	7484371		.554	.008 AND UP	.55360 - .00030	.030	8
3	7484373		.555	.0005	.55500 - .00004	.030	4
3	7484375		.555	.002	.55490 - .00007	.030	4
3	7484376		.555	.004	.55480 - .00010	.030	8
3	7484378		.555	.008 AND UP	.55460 - .00030	.030	8
3	7484380		.556	.0005	.55600 - .00004	.030	4
3	7484382		.556	.002	.55590 - .00007	.030	4
3	7484383		.556	.004	.55580 - .00010	.030	8
3	7484385		.556	.008 AND UP	.55560 - .00030	.030	8
3	7484387		.557	.0005	.55700 - .00004	.030	4
3	7484389		.557	.002	.55690 - .00007	.030	4
3	7484390		.557	.004	.55680 - .00010	.030	8
3	7484392		.557	.008 AND UP	.55660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE				TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH	
	RING GAGE	PLUG—GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIAMETER	CHAMFER		
A	B	C	D	E	F	G	H		
3	7484394		.558	.0005	.55800 - .00004	.030	4		
3	7484396		.558	.002	.55790 - .00007	.030	4		
3	7484397		.558	.004	.55780 - .00010	.030	8		
3	7484399		.558	.008 AND UP	.55760 - .00030	.030	8		
3	7484401		.559	.0005	.55900 - .00004	.030	4		
3	7484403		.559	.002	.55890 - .00007	.030	4		
3	7484404		.559	.004	.55880 - .00010	.030	8		
3	7484406		.559	.008 AND UP	.55860 - .00030	.030	8		
3	7484408		.560	.0005	.56000 - .00004	.030	4		
3	7484410		.560	.002	.55990 - .00007	.030	4		
3	7484411		.560	.004	.55980 - .00010	.030	8		
3	7484413		.560	.008 AND UP	.55960 - .00030	.030	8		
3	7484415		.561	.0005	.56100 - .00004	.030	4		
3	7484417		.561	.002	.56090 - .00007	.030	4		
3	7484418		.561	.004	.56080 - .00010	.030	8		
3	7484420		.561	.008 AND UP	.56060 - .00030	.030	8		
3	7484422		.562	.0005	.56200 - .00004	.030	4		
3	7484424		.562	.002	.56190 - .00007	.030	4		
3	7484425		.562	.004	.56180 - .00010	.030	8		
3	7484427		.562	.008 AND UP	.56160 - .00030	.030	8		
3	7484429		.5625	.0005 AND UP	.56250 - .00004	.030	4		
3	7484430		.563	.0005	.56300 - .00004	.030	4		
3	7484432		.563	.002	.56290 - .00007	.030	4		
3	7484433		.563	.004	.56280 - .00010	.030	8		
3	7484435		.563	.008 AND UP	.56260 - .00030	.030	8		
3	7484437		.564	.0005	.56400 - .00004	.030	4		
3	7484439		.564	.002	.56390 - .00007	.030	4		
3	7484440		.564	.004	.56380 - .00010	.030	8		
3	7484442		.564	.008 AND UP	.56360 - .00030	.030	8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7484444		.565	.0005	.56500 - .00004	.030	4
3	7484446		.565	.002	.56490 - .00007	.030	4
3	7484447		.565	.004	.56480 - .00010	.030	8
3	7484449		.565	.008 AND UP	.56460 - .00030	.030	8
3	7484451		.566	.0005	.56600 - .00004	.030	4
3	7484453		.566	.002	.56590 - .00007	.030	4
3	7484454		.566	.004	.56580 - .00010	.030	8
3	7484456		.566	.008 AND UP	.56560 - .00030	.030	8
3	7484458		.567	.0005	.56700 - .00004	.030	4
3	7484460		.567	.002	.56690 - .00007	.030	4
3	7484461		.567	.004	.56680 - .00010	.030	8
3	7484463		.567	.008 AND UP	.56660 - .00030	.030	8
3	7484465		.568	.0005	.56800 - .00004	.030	4
3	7484467		.568	.002	.56790 - .00007	.030	4
3	7484468		.568	.004	.56780 - .00010	.030	8
3	7484470		.568	.008 AND UP	.56760 - .00030	.030	8
3	7484472		.569	.0005	.56900 - .00004	.030	4
3	7484474		.569	.002	.56890 - .00007	.030	4
3	7484475		.569	.004	.56880 - .00010	.030	8
3	7484477		.569	.008 AND UP	.56860 - .00030	.030	8
3	7484479		.570	.0005	.57000 - .00004	.030	4
3	7484481		.570	.002	.56990 - .00007	.030	4
3	7484482		.570	.004	.56980 - .00010	.030	8
3	7484484		.570	.008 AND UP	.56960 - .00030	.030	8
3	7484486		.571	.0005	.57100 - .00004	.030	4
3	7484488		.571	.002	.57090 - .00007	.030	4
3	7484489		.571	.004	.57080 - .00010	.030	8
3	7484491		.571	.008 AND UP	.57060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20261026T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484493		.572	.0005	.57200 - .00004	.030	4
3	7484495		.572	.002	.57190 - .00007	.030	4
3	7484496		.572	.004	.57180 - .00010	.030	8
3	7484498		.572	.008 AND UP	.57160 - .00030	.030	8
3	7484500		.573	.0005	.57300 - .00004	.030	4
3	7484502		.573	.002	.57290 - .00007	.030	4
3	7484503		.573	.004	.57280 - .00010	.030	8
3	7484505		.573	.008 AND UP	.57260 - .00030	.030	8
3	7484507		.574	.0005	.57400 - .00004	.030	4
3	7484509		.574	.002	.57390 - .00007	.030	4
3	7484510		.574	.004	.57380 - .00010	.030	8
3	7484512		.574	.008 AND UP	.57360 - .00030	.030	8
3	7484514		.575	.0005	.57500 - .00004	.030	4
3	7484516		.575	.002	.57490 - .00007	.030	4
3	7484517		.575	.004	.57480 - .00010	.030	8
3	7484519		.575	.008 AND UP	.57460 - .00030	.030	8
3	7484521		.576	.0005	.57600 - .00004	.030	4
3	7484523		.576	.002	.57590 - .00007	.030	4
3	7484524		.576	.004	.57580 - .00010	.030	8
3	7484526		.576	.008 AND UP	.57560 - .00030	.030	8
3	7484528		.577	.0005	.57700 - .00004	.030	4
3	7484530		.577	.002	.57690 - .00007	.030	4
3	7484531		.577	.004	.57680 - .00010	.030	8
3	7484533		.577	.008 AND UP	.57660 - .00030	.030	8
3	7484535		.578	.0005	.57800 - .00004	.030	4
3	7484537		.578	.002	.57790 - .00007	.030	4
3	7484538		.578	.004	.57780 - .00010	.030	8
3	7484540		.578	.008 AND UP	.57760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7484542		.579	.0005	.57900 - .00004	.030	4
3	7484544		.579	.002	.57890 - .00007	.030	4
3	7484545		.579	.004	.57880 - .00010	.030	8
3	7484547		.579	.008 AND UP	.57860 - .00030	.030	8
3	7484549		.580	.0005	.58000 - .00004	.030	4
3	7484551		.580	.002	.57990 - .00007	.030	4
3	7484552		.580	.004	.57980 - .00010	.030	8
3	7484554		.580	.008 AND UP	.57960 - .00030	.030	8
3	7484556		.581	.0005	.58100 - .00004	.030	4
3	7484558		.581	.002	.58090 - .00007	.030	4
3	7484559		.581	.004	.58080 - .00010	.030	8
3	7484561		.581	.008 AND UP	.58060 - .00030	.030	8
3	7484563		.582	.0005	.58200 - .00004	.030	4
3	7484565		.582	.002	.58190 - .00007	.030	4
3	7484566		.582	.004	.58180 - .00010	.030	8
3	7484568		.582	.008 AND UP	.58160 - .00030	.030	8
3	7484570		.583	.0005	.58300 - .00004	.030	4
3	7484572		.583	.002	.58290 - .00007	.030	4
3	7484573		.583	.004	.58280 - .00010	.030	8
3	7484575		.583	.008 AND UP	.58260 - .00030	.030	8
3	7484577		.584	.0005	.58400 - .00004	.030	4
3	7484579		.584	.002	.58390 - .00007	.030	4
3	7484580		.584	.004	.58380 - .00010	.030	8
3	7484582		.584	.008 AND UP	.58360 - .00030	.030	8
3	7484584		.585	.0005	.58500 - .00004	.030	4
3	7484586		.585	.002	.58490 - .00007	.030	4
3	7484587		.585	.004	.58480 - .00010	.030	8
3	7484589		.585	.008 AND UP	.58460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484591		.586	.0005	.58600 - .00004	.030	4
3	7484593		.586	.002	.58590 - .00007	.030	4
3	7484594		.586	.004	.58580 - .00010	.030	8
3	7484596		.586	.008 AND UP	.58560 - .00030	.030	8
3	7484598		.587	.0005	.58700 - .00004	.030	4
3	7484600		.587	.002	.58690 - .00007	.030	4
3	7484601		.587	.004	.58680 - .00010	.030	8
3	7484603		.587	.008 AND UP	.58660 - .00030	.030	8
3	7484605		.588	.0005	.58800 - .00004	.030	4
3	7484607		.588	.002	.58790 - .00007	.030	4
3	7484608		.588	.004	.58780 - .00010	.030	8
3	7484610		.588	.008 AND UP	.58760 - .00030	.030	8
3	7484612		.589	.0005	.58900 - .00004	.030	4
3	7484614		.589	.002	.58890 - .00007	.030	4
3	7484615		.589	.004	.58880 - .00010	.030	8
3	7484617		.589	.008 AND UP	.58860 - .00030	.030	8
3	7484619		.590	.0005	.59000 - .00004	.030	4
3	7484621		.590	.002	.58990 - .00007	.030	4
3	7484622		.590	.004	.58980 - .00010	.030	8
3	7484624		.590	.008 AND UP	.58960 - .00030	.030	8
3	7484626		.591	.0005	.59100 - .00004	.030	4
3	7484628		.591	.002	.59090 - .00007	.030	4
3	7484629		.591	.004	.59080 - .00010	.030	8
3	7484631		.591	.008 AND UP	.59060 - .00030	.030	8
3	7484633		.592	.0005	.59200 - .00004	.030	4
3	7484635		.592	.002	.59190 - .00007	.030	4
3	7484636		.592	.004	.59180 - .00010	.030	8
3	7484638		.592	.008 AND UP	.59160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484640		.593	.0005	.59300 - .00004	.030	4
3	7484642		.593	.002	.59290 - .00007	.030	4
3	7484643		.593	.004	.59280 - .00010	.030	8
3	7484645		.593	.008 AND UP	.59260 - .00030	.030	8
3	7484647		.59375	.0005 AND UP	.59375 - .00004	.030	4
3	7484648		.594	.0005	.59400 - .00004	.030	4
3	7484650		.594	.002	.59390 - .00007	.030	4
3	7484651		.594	.004	.59380 - .00010	.030	8
3	7484653		.594	.008 AND UP	.59360 - .00030	.030	8
3	7484655		.595	.0005	.59500 - .00004	.030	4
3	7484657		.595	.002	.59490 - .00007	.030	4
3	7484658		.595	.004	.59480 - .00010	.030	8
3	7484660		.595	.008 AND UP	.59460 - .00030	.030	8
3	7484662		.596	.0005	.59600 - .00004	.030	4
3	7484664		.596	.002	.59590 - .00007	.030	4
3	7484665		.596	.004	.59580 - .00010	.030	8
3	7484667		.596	.008 AND UP	.59560 - .00030	.030	8
3	7484669		.597	.0005	.59700 - .00004	.030	4
3	7484671		.597	.002	.59690 - .00007	.030	4
3	7484672		.597	.004	.59680 - .00010	.030	8
3	7484674		.597	.008 AND UP	.59660 - .00030	.030	8
3	7484676		.598	.0005	.59800 - .00004	.030	4
3	7484678		.598	.002	.59790 - .00007	.030	4
3	7484679		.598	.004	.59780 - .00010	.030	8
3	7484681		.598	.008 AND UP	.59760 - .00030	.030	8
3	7484683		.599	.0005	.59900 - .00004	.030	4
3	7484685		.599	.002	.59890 - .00007	.030	4
3	7484686		.599	.004	.59880 - .00010	.030	8
3	7484688		.599	.008 AND UP	.59860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484690		.600	.0005	.60000 - .00004	.030	4
3	7484692		.600	.002	.59990 - .00007	.030	4
3	7484693		.600	.004	.59980 - .00010	.030	8
3	7484695		.600	.008 AND UP	.59960 - .00030	.030	8
3	7484697		.601	.0005	.60100 - .00004	.030	4
3	7484699		.601	.002	.60090 - .00007	.030	4
3	7484700		.601	.004	.60080 - .00010	.030	8
3	7484702		.601	.008 AND UP	.60060 - .00030	.030	8
3	7484704		.602	.0005	.60200 - .00004	.030	4
3	7484706		.602	.002	.60190 - .00007	.030	4
3	7484707		.602	.004	.60180 - .00010	.030	8
3	7484709		.602	.008 AND UP	.60160 - .00030	.030	8
3	7484711		.603	.0005	.60300 - .00004	.030	4
3	7484713		.603	.002	.60290 - .00007	.030	4
3	7484714		.603	.004	.60280 - .00010	.030	8
3	7484716		.603	.008 AND UP	.60260 - .00030	.030	8
3	7484718		.604	.0005	.60400 - .00004	.030	4
3	7484720		.604	.002	.60390 - .00007	.030	4
3	7484721		.604	.004	.60380 - .00010	.030	8
3	7484723		.604	.008 AND UP	.60360 - .00030	.030	8
3	7484725		.605	.0005	.60500 - .00004	.030	4
3	7484727		.605	.002	.60490 - .00007	.030	4
3	7484728		.605	.004	.60480 - .00010	.030	8
3	7484730		.605	.008 AND UP	.60460 - .00030	.030	8
3	7484732		.606	.0005	.60600 - .00004	.030	4
3	7484734		.606	.002	.60590 - .00007	.030	4
3	7484735		.606	.004	.60580 - .00010	.030	8
3	7484737		.606	.008 AND UP	.60560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484739		.607	.0005	.60700 - .00004	.030	4
3	7484741		.607	.002	.60690 - .00007	.030	4
3	7484742		.607	.004	.60680 - .00010	.030	8
3	7484744		.607	.008 AND UP	.60660 - .00030	.030	8
3	7484746		.608	.0005	.60800 - .00004	.030	4
3	7484748		.608	.002	.60790 - .00007	.030	4
3	7484749		.608	.004	.60780 - .00010	.030	8
3	7484751		.608	.008 AND UP	.60760 - .00030	.030	8
3	7484753		.609	.0005	.60900 - .00004	.030	4
3	7484755		.609	.002	.60890 - .00007	.030	4
3	7484756		.609	.004	.60880 - .00010	.030	8
3	7484758		.609	.008 AND UP	.60860 - .00030	.030	8
3	7484760		.610	.0005	.61000 - .00004	.030	4
3	7484762		.610	.002	.60990 - .00007	.030	4
3	7484763		.610	.004	.60980 - .00010	.030	8
3	7484765		.610	.008 AND UP	.60960 - .00030	.030	8
3	7484767		.611	.0005	.61100 - .00004	.030	4
3	7484769		.611	.002	.61090 - .00007	.030	4
3	7484770		.611	.004	.61080 - .00010	.030	8
3	7484772		.611	.008 AND UP	.61060 - .00030	.030	8
3	7484774		.612	.0005	.61200 - .00004	.030	4
3	7484776		.612	.002	.61190 - .00007	.030	4
3	7484777		.612	.004	.61180 - .00010	.030	8
3	7484779		.612	.008 AND UP	.61160 - .00030	.030	8
3	7484781		.613	.0005	.61300 - .00004	.030	4
3	7484783		.613	.002	.61290 - .00007	.030	4
3	7484784		.613	.004	.61280 - .00010	.030	8
3	7484786		.613	.008 AND UP	.61260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484788		.614	.0005	.61400 - .00004	.030	4
3	7484790		.614	.002	.61390 - .00007	.030	4
3	7484791		.614	.004	.61380 - .00010	.030	8
3	7484793		.614	.008 AND UP	.61360 - .00030	.030	8
3	7484795		.615	.0005	.61500 - .00004	.030	4
3	7484797		.615	.002	.61490 - .00007	.030	4
3	7484798		.615	.004	.61480 - .00010	.030	8
3	7484800		.615	.008 AND UP	.61460 - .00030	.030	8
3	7484802		.616	.0005	.61600 - .00004	.030	4
3	7484804		.616	.002	.61590 - .00007	.030	4
3	7484805		.616	.004	.61580 - .00010	.030	8
3	7484807		.616	.008 AND UP	.61560 - .00030	.030	8
3	7484809		.617	.0005	.61700 - .00004	.030	4
3	7484811		.617	.002	.61690 - .00007	.030	4
3	7484812		.617	.004	.61680 - .00010	.030	8
3	7484814		.617	.008 AND UP	.61660 - .00030	.030	8
3	7484816		.618	.0005	.61800 - .00004	.030	4
3	7484818		.618	.002	.61790 - .00007	.030	4
3	7484819		.618	.004	.61780 - .00010	.030	8
3	7484821		.618	.008 AND UP	.61760 - .00030	.030	8
3	7484823		.619	.0005	.61900 - .00004	.030	4
3	7484825		.619	.002	.61890 - .00007	.030	4
3	7484826		.619	.004	.61880 - .00010	.030	8
3	7484828		.619	.008 AND UP	.61860 - .00030	.030	8
3	7484830		.620	.0005	.62000 - .00004	.030	4
3	7484832		.620	.002	.61990 - .00007	.030	4
3	7484833		.620	.004	.61980 - .00010	.030	8
3	7484835		.620	.008 AND UP	.61960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484837		.621	.0005	.62100 - .00004	.030	4
3	7484839		.621	.002	.62090 - .00007	.030	4
3	7484840		.621	.004	.62080 - .00010	.030	8
3	7484842		.621	.008 AND UP	.62060 - .00030	.030	8
3	7484844		.622	.0005	.62200 - .00004	.030	4
3	7484846		.622	.002	.62190 - .00007	.030	4
3	7484847		.622	.004	.62180 - .00010	.030	8
3	7484849		.622	.008 AND UP	.62160 - .00030	.030	8
3	7484851		.623	.0005	.62300 - .00004	.030	4
3	7484853		.623	.002	.62290 - .00007	.030	4
3	7484854		.623	.004	.62280 - .00010	.030	8
3	7484856		.623	.008 AND UP	.62260 - .00030	.030	8
3	7484858		.624	.0005	.62400 - .00004	.030	4
3	7484860		.624	.002	.62390 - .00007	.030	4
3	7484861		.624	.004	.62380 - .00010	.030	8
3	7484863		.624	.008 AND UP	.62360 - .00030	.030	8
3	7484865		.625	.0005	.62500 - .00004	.030	4
3	7484867		.625	.002	.62490 - .00007	.030	4
3	7484868		.625	.004	.62480 - .00010	.030	8
3	7484870		.625	.008 AND UP	.62460 - .00030	.030	8
3	7484872		.626	.0005	.62600 - .00004	.030	4
3	7484874		.626	.002	.62590 - .00007	.030	4
3	7484875		.626	.004	.62580 - .00010	.030	8
3	7484877		.626	.008 AND UP	.62560 - .00030	.030	8
3	7484879		.627	.0005	.62700 - .00004	.030	4
3	7484881		.627	.002	.62690 - .00007	.030	4
3	7484882		.627	.004	.62680 - .00010	.030	8
3	7484884		.627	.008 AND UP	.62660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484886		.628	.0005	.62800 - .00004	.030	4
3	7484888		.628	.002	.62790 - .00007	.030	4
3	7484889		.628	.004	.62780 - .00010	.030	8
3	7484891		.628	.008 AND UP	.62760 - .00030	.030	8
3	7484893		.629	.0005	.62900 - .00004	.030	4
3	7484895		.629	.002	.62890 - .00007	.030	4
3	7484896		.629	.004	.62880 - .00010	.030	8
3	7484898		.629	.008 AND UP	.62860 - .00030	.030	8
3	7484900		.630	.0005	.63000 - .00004	.030	4
3	7484902		.630	.002	.62990 - .00007	.030	4
3	7484903		.630	.004	.62980 - .00010	.030	8
3	7484905		.630	.008 AND UP	.62960 - .00030	.030	8
3	7484907		.631	.0005	.63100 - .00004	.030	4
3	7484909		.631	.002	.63090 - .00007	.030	4
3	7484910		.631	.004	.63080 - .00010	.030	8
3	7484912		.631	.008 AND UP	.63060 - .00030	.030	8
3	7484914		.632	.0005	.63200 - .00004	.030	4
3	7484916		.632	.002	.63190 - .00007	.030	4
3	7484917		.632	.004	.63180 - .00010	.030	8
3	7484919		.632	.008 AND UP	.63160 - .00030	.030	8
3	7484921		.633	.0005	.63300 - .00004	.030	4
3	7484923		.633	.002	.63290 - .00007	.030	4
3	7484924		.633	.004	.63280 - .00010	.030	8
3	7484926		.633	.008 AND UP	.63260 - .00030	.030	8
3	7484928		.634	.0005	.63400 - .00004	.030	4
3	7484930		.634	.002	.63390 - .00007	.030	4
3	7484931		.634	.004	.63380 - .00010	.030	8
3	7484933		.634	.008 AND UP	.63360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484935		.635	.0005	.63500 - .00004	.030	4
3	7484937		.635	.002	.63490 - .00007	.030	4
3	7484938		.635	.004	.63480 - .00010	.030	8
3	7484940		.635	.008 AND UP	.63460 - .00030	.030	8
3	7484942		.636	.0005	.63600 - .00004	.030	4
3	7484944		.636	.002	.63590 - .00007	.030	4
3	7484945		.636	.004	.63580 - .00010	.030	8
3	7484947		.636	.008 AND UP	.63560 - .00030	.030	8
3	7484949		.637	.0005	.63700 - .00004	.030	4
3	7484951		.637	.002	.63690 - .00007	.030	4
3	7484952		.637	.004	.63680 - .00010	.030	8
3	7484954		.637	.008 AND UP	.63660 - .00030	.030	8
3	7484956		.638	.0005	.63800 - .00004	.030	4
3	7484958		.638	.002	.63790 - .00007	.030	4
3	7484959		.638	.004	.63780 - .00010	.030	8
3	7484961		.638	.008 AND UP	.63760 - .00030	.030	8
3	7484963		.639	.0005	.63900 - .00004	.030	4
3	7484965		.639	.002	.63890 - .00007	.030	4
3	7484966		.639	.004	.63880 - .00010	.030	8
3	7484968		.639	.008 AND UP	.63860 - .00030	.030	8
3	7484970		.640	.0005	.64000 - .00004	.030	4
3	7484972		.640	.002	.63990 - .00007	.030	4
3	7484973		.640	.004	.63980 - .00010	.030	8
3	7484975		.640	.008 AND UP	.63960 - .00030	.030	8
3	7484977		.641	.0005	.64100 - .00004	.030	4
3	7484979		.641	.002	.64090 - .00007	.030	4
3	7484980		.641	.004	.64080 - .00010	.030	8
3	7484982		.641	.008 AND UP	.64060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7484984		.642	.0005	.64200 - .00004	.030	4
3	7484986		.642	.002	.64190 - .00007	.030	4
3	7484987		.642	.004	.64180 - .00010	.030	8
3	7484989		.642	.008 AND UP	.64160 - .00030	.030	8
3	7484991		.643	.0005	.64300 - .00004	.030	4
3	7484993		.643	.002	.64290 - .00007	.030	4
3	7484994		.643	.004	.64280 - .00010	.030	8
3	7484996		.643	.008 AND UP	.64260 - .00030	.030	8
3	7484998		.644	.0005	.64400 - .00004	.030	4
3	7485000		.644	.002	.64390 - .00007	.030	4
3	7485001		.644	.004	.64380 - .00010	.030	8
3	7485003		.644	.008 AND UP	.64360 - .00030	.030	8
3	7485005		.645	.0005	.64500 - .00004	.030	4
3	7485007		.645	.002	.64490 - .00007	.030	4
3	7485008		.645	.004	.64480 - .00010	.030	8
3	7485010		.645	.008 AND UP	.64460 - .00030	.030	8
3	7485012		.646	.0005	.64600 - .00004	.030	4
3	7485014		.646	.002	.64590 - .00007	.030	4
3	7485015		.646	.004	.64580 - .00010	.030	8
3	7485017		.646	.008 AND UP	.64560 - .00030	.030	8
3	7485019		.647	.0005	.64700 - .00004	.030	4
3	7485021		.647	.002	.64690 - .00007	.030	4
3	7485022		.647	.004	.64680 - .00010	.030	8
3	7485024		.647	.008 AND UP	.64660 - .00030	.030	8
3	7485026		.648	.0005	.64800 - .00004	.030	4
3	7485028		.648	.002	.64790 - .00007	.030	4
3	7485029		.648	.004	.64780 - .00010	.030	8
3	7485031		.648	.008 AND UP	.64760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: PIN-GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: PIN-GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7485033		.649	.0005	.64900 - .00004	.030	4
3	7485035		.649	.002	.64890 - .00007	.030	4
3	7485036		.649	.004	.64880 - .00010	.030	8
3	7485038		.649	.008 AND UP	.64860 - .00030	.030	8
3	7485040		.650	.0005	.65000 - .00004	.030	4
3	7485042		.650	.002	.64990 - .00007	.030	4
3	7485043		.650	.004	.64980 - .00010	.030	8
3	7485045		.650	.008 AND UP	.64960 - .00030	.030	8
3	7485047		.651	.0005	.65100 - .00004	.030	4
3	7485049		.651	.002	.65090 - .00007	.030	4
3	7485050		.651	.004	.65080 - .00010	.030	8
3	7485052		.651	.008 AND UP	.65060 - .00030	.030	8
3	7485054		.652	.0005	.65200 - .00004	.030	4
3	7485056		.652	.002	.65190 - .00007	.030	4
3	7485057		.652	.004	.65180 - .00010	.030	8
3	7485059		.652	.008 AND UP	.65160 - .00030	.030	8
3	7485061		.653	.0005	.65300 - .00004	.030	4
3	7485063		.653	.002	.65290 - .00007	.030	4
3	7485064		.653	.004	.65280 - .00010	.030	8
3	7485066		.653	.008 AND UP	.65260 - .00030	.030	8
3	7485068		.654	.0005	.65400 - .00004	.030	4
3	7485070		.654	.002	.65390 - .00007	.030	4
3	7485071		.654	.004	.65380 - .00010	.030	8
3	7485073		.654	.008 AND UP	.65360 - .00030	.030	8
3	7485075		.655	.0005	.65500 - .00004	.030	4
3	7485077		.655	.002	.65490 - .00007	.030	4
3	7485078		.655	.004	.65480 - .00010	.030	8
3	7485080		.655	.008 AND UP	.65460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FED—GAGE STOCK NO.				DIAMETER	CRAMPER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485082		.656	.0005	.65600 - .00004	.030	4
3	7485084		.656	.002	.65590 - .00007	.030	4
3	7485085		.656	.004	.65580 - .00010	.030	8
3	7485087		.656	.008 AND UP	.65560 - .00030	.030	8
3	7485089		.65625	.0005 AND UP	.65625 - .00004	.030	4
3	7485090		.657	.0005	.65700 - .00004	.030	4
3	7485092		.657	.002	.65690 - .00007	.030	4
3	7485093		.657	.004	.65680 - .00010	.030	8
3	7485095		.657	.008 AND UP	.65660 - .00030	.030	8
3	7485097		.658	.0005	.65800 - .00004	.030	4
3	7485099		.658	.002	.65790 - .00007	.030	4
3	7485100		.658	.004	.65780 - .00010	.030	8
3	7485102		.658	.008 AND UP	.65760 - .00030	.030	8
3	7485104		.659	.0005	.65900 - .00004	.030	4
3	7485106		.659	.002	.65890 - .00007	.030	4
3	7485107		.659	.004	.65880 - .00010	.030	8
3	7485109		.659	.008 AND UP	.65860 - .00030	.030	8
3	7485111		.660	.0005	.66000 - .00004	.030	4
3	7485113		.660	.002	.65990 - .00007	.030	4
3	7485114		.660	.004	.65980 - .00010	.030	8
3	7485116		.660	.008 AND UP	.65960 - .00030	.030	8
3	7485118		.661	.0005	.66100 - .00004	.030	4
3	7485120		.661	.002	.66090 - .00007	.030	4
3	7485121		.661	.004	.66080 - .00010	.030	8
3	7485123		.661	.008 AND UP	.66060 - .00030	.030	8
3	7485125		.662	.0005	.66200 - .00004	.030	4
3	7485127		.662	.002	.66190 - .00007	.030	4
3	7485128		.662	.004	.66180 - .00010	.030	8
3	7485130		.662	.008 AND UP	.66160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	PIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485132		.663	.0005	.66300 - .00004	.030	4
3	7485134		.663	.002	.66290 - .00007	.030	4
3	7485135		.663	.004	.66280 - .00010	.030	8
3	7485137		.663	.008 AND UP	.66260 - .00030	.030	8
3	7485139		.664	.0005	.66400 - .00004	.030	4
3	7485141		.664	.002	.66390 - .00007	.030	4
3	7485142		.664	.004	.66380 - .00010	.030	8
3	7485144		.664	.008 AND UP	.66360 - .00030	.030	8
3	7485146		.665	.0005	.66500 - .00004	.030	4
3	7485148		.665	.002	.66490 - .00007	.030	4
3	7485149		.665	.004	.66480 - .00010	.030	8
3	7485151		.665	.008 AND UP	.66460 - .00030	.030	8
3	7485153		.666	.0005	.66600 - .00004	.030	4
3	7485155		.666	.002	.66590 - .00007	.030	4
3	7485156		.666	.004	.66580 - .00010	.030	8
3	7485158		.666	.008 AND UP	.66560 - .00030	.030	8
3	7485160		.667	.0005	.66700 - .00004	.030	4
3	7485162		.667	.002	.66690 - .00007	.030	4
3	7485163		.667	.004	.66680 - .00010	.030	8
3	7485165		.667	.008 AND UP	.66660 - .00030	.030	8
3	7485167		.668	.0005	.66800 - .00004	.030	4
3	7485169		.668	.002	.66790 - .00007	.030	4
3	7485170		.668	.004	.66780 - .00010	.030	8
3	7485172		.668	.008 AND UP	.66760 - .00030	.030	8
3	7485174		.669	.0005	.66900 - .00004	.030	4
3	7485176		.669	.002	.66890 - .00007	.030	4
3	7485177		.669	.004	.66880 - .00010	.030	8
3	7485179		.669	.008 AND UP	.66860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485181		.670	.0005	.67000 - .00004	.030	4
3	7485183		.670	.002	.66990 - .00007	.030	4
3	7485184		.670	.004	.66980 - .00010	.030	8
3	7485186		.670	.008 AND UP	.66960 - .00030	.030	8
3	7485188		.671	.0005	.67100 - .00004	.030	4
3	7485190		.671	.002	.67090 - .00007	.030	4
3	7485191		.671	.004	.67080 - .00010	.030	8
3	7485193		.671	.008 AND UP	.67060 - .00030	.030	8
3	7485195		.672	.0005	.67200 - .00004	.030	4
3	7485197		.672	.002	.67190 - .00007	.030	4
3	7485198		.672	.004	.67180 - .00010	.030	8
3	7485200		.672	.008 AND UP	.67160 - .00030	.030	8
3	7485202		.673	.0005	.67300 - .00004	.030	4
3	7485204		.673	.002	.67290 - .00007	.030	4
3	7485205		.673	.004	.67280 - .00010	.030	8
3	7485207		.673	.008 AND UP	.67260 - .00030	.030	8
3	7485209		.674	.0005	.67400 - .00004	.030	4
3	7485211		.674	.002	.67390 - .00007	.030	4
3	7485212		.674	.004	.67380 - .00010	.030	8
3	7485214		.674	.008 AND UP	.67360 - .00030	.030	8
3	7485216		.675	.0005	.67500 - .00004	.030	4
3	7485218		.675	.002	.67490 - .00007	.030	4
3	7485219		.675	.004	.67480 - .00010	.030	8
3	7485221		.675	.008 AND UP	.67460 - .00030	.030	8
3	7485223		.676	.0005	.67600 - .00004	.030	4
3	7485225		.676	.002	.67590 - .00007	.030	4
3	7485226		.676	.004	.67580 - .00010	.030	8
3	7485228		.676	.008 AND UP	.67560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485230		.677	.0005	.67700 - .00004	.030	4
3	7485232		.677	.002	.67690 - .00007	.030	4
3	7485233		.677	.004	.67680 - .00010	.030	8
3	7485235		.677	.008 AND UP	.67660 - .00030	.030	8
3	7485237		.678	.0005	.67800 - .00004	.030	4
3	7485239		.678	.002	.67790 - .00007	.030	4
3	7485240		.678	.004	.67780 - .00010	.030	8
3	7485242		.678	.008 AND UP	.67760 - .00030	.030	8
3	7485244		.679	.0005	.67900 - .00004	.030	4
3	7485246		.679	.002	.67890 - .00007	.030	4
3	7485247		.679	.004	.67880 - .00010	.030	8
3	7485249		.679	.008 AND UP	.67860 - .00030	.030	8
3	7485251		.680	.0005	.68000 - .00004	.030	4
3	7485253		.680	.002	.67990 - .00007	.030	4
3	7485254		.680	.004	.67980 - .00010	.030	8
3	7485256		.680	.008 AND UP	.67960 - .00030	.030	8
3	7485258		.681	.0005	.68100 - .00004	.030	4
3	7485260		.681	.002	.68090 - .00007	.030	4
3	7485261		.681	.004	.68080 - .00010	.030	8
3	7485263		.681	.008 AND UP	.68060 - .00030	.030	8
3	7485265		.682	.0005	.68200 - .00004	.030	4
3	7485267		.682	.002	.68190 - .00007	.030	4
3	7485268		.682	.004	.68180 - .00010	.030	8
3	7485270		.682	.008 AND UP	.68160 - .00030	.030	8
3	7485272		.683	.0005	.68300 - .00004	.030	4
3	7485274		.683	.002	.68290 - .00007	.030	4
3	7485275		.683	.004	.68280 - .00010	.030	8
3	7485277		.683	.008 AND UP	.68260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485279		.684	.0005	.68400 - .00004	.030	4
3	7485281		.684	.002	.68390 - .00007	.030	4
3	7485282		.684	.004	.68380 - .00010	.030	8
3	7485284		.684	.008 AND UP	.68360 - .00030	.030	8
3	7485286		.685	.0005	.68500 - .00004	.030	4
3	7485288		.685	.002	.68490 - .00007	.030	4
3	7485289		.685	.004	.68480 - .00010	.030	8
3	7485291		.685	.008 AND UP	.68460 - .00030	.030	8
3	7485293		.686	.0005	.68600 - .00004	.030	4
3	7485295		.686	.002	.68590 - .00007	.030	4
3	7485296		.686	.004	.68580 - .00010	.030	8
3	7485298		.686	.008 AND UP	.68560 - .00030	.030	8
3	7485300		.687	.0005	.68700 - .00004	.030	4
3	7485302		.687	.002	.68690 - .00007	.030	4
3	7485303		.687	.004	.68680 - .00010	.030	8
3	7485305		.687	.008 AND UP	.68660 - .00030	.030	8
3	7485307		.6875	.0005 AND UP	.68750 - .00004	.030	4
3	7485308		.688	.0005	.68800 - .00004	.030	4
3	7485310		.688	.002	.68790 - .00007	.030	4
3	7485311		.688	.004	.68780 - .00010	.030	8
3	7485313		.688	.008 AND UP	.68760 - .00030	.030	8
3	7485315		.689	.0005	.68900 - .00004	.030	4
3	7485317		.689	.002	.68890 - .00007	.030	4
3	7485318		.689	.004	.68880 - .00010	.030	8
3	7485320		.689	.008 AND UP	.68860 - .00030	.030	8
3	7485322		.690	.0005	.69000 - .00004	.030	4
3	7485324		.690	.002	.68990 - .00007	.030	4
3	7485325		.690	.004	.68980 - .00010	.030	8
3	7485327		.690	.008 AND UP	.68960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485329		.691	.0005	.69100 - .00004	.030	4
3	7485331		.691	.002	.69090 - .00007	.030	4
3	7485332		.691	.004	.69080 - .00010	.030	8
3	7485334		.691	.008 AND UP	.69060 - .00030	.030	8
3	7485336		.692	.0005	.69200 - .00004	.030	4
3	7485338		.692	.002	.69190 - .00007	.030	4
3	7485339		.692	.004	.69180 - .00010	.030	8
3	7485341		.692	.008 AND UP	.69160 - .00030	.030	8
3	7485343		.693	.0005	.69300 - .00004	.030	4
3	7485345		.693	.002	.69290 - .00007	.030	4
3	7485346		.693	.004	.69280 - .00010	.030	8
3	7485348		.693	.008 AND UP	.69260 - .00030	.030	8
3	7485350		.694	.0005	.69400 - .00004	.030	4
3	7485352		.694	.002	.69390 - .00007	.030	4
3	7485353		.694	.004	.69380 - .00010	.030	8
3	7485355		.694	.008 AND UP	.69360 - .00030	.030	8
3	7485357		.695	.0005	.69500 - .00004	.030	4
3	7485359		.695	.002	.69490 - .00007	.030	4
3	7485360		.695	.004	.69480 - .00010	.030	8
3	7485362		.695	.008 AND UP	.69460 - .00030	.030	8
3	7485364		.696	.0005	.69600 - .00004	.030	4
3	7485366		.696	.002	.69590 - .00007	.030	4
3	7485367		.696	.004	.69580 - .00010	.030	8
3	7485369		.696	.008 AND UP	.69560 - .00030	.030	8
3	7485371		.697	.0005	.69700 - .00004	.030	4
3	7485373		.697	.002	.69690 - .00007	.030	4
3	7485374		.697	.004	.69680 - .00010	.030	8
3	7485376		.697	.008 AND UP	.69660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN--GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485378		.698	.0005	.69800 - .00004	.030	4
3	7485380		.698	.002	.69790 - .00007	.030	4
3	7485381		.698	.004	.69780 - .00010	.030	8
3	7485383		.698	.008 AND UP	.69760 - .00030	.030	8
3	7485385		.699	.0005	.69900 - .00004	.030	4
3	7485387		.699	.002	.69890 - .00007	.030	4
3	7485388		.699	.004	.69880 - .00010	.030	8
3	7485390		.699	.008 AND UP	.69860 - .00030	.030	8
3	7485392		.700	.0005	.70000 - .00004	.030	4
3	7485394		.700	.002	.69990 - .00007	.030	4
3	7485395		.700	.004	.69980 - .00010	.030	8
3	7485397		.700	.008 AND UP	.69960 - .00030	.030	8
3	7485399		.701	.0005	.70100 - .00004	.030	4
3	7485401		.701	.002	.70090 - .00007	.030	4
3	7485402		.701	.004	.70080 - .00010	.030	8
3	7485404		.701	.008 AND UP	.70060 - .00030	.030	8
3	7485406		.702	.0005	.70200 - .00004	.030	4
3	7485408		.702	.002	.70190 - .00007	.030	4
3	7485409		.702	.004	.70180 - .00010	.030	8
3	7485411		.702	.008 AND UP	.70160 - .00030	.030	8
3	7485413		.703	.0005	.70300 - .00004	.030	4
3	7485415		.703	.002	.70290 - .00007	.030	4
3	7485416		.703	.004	.70280 - .00010	.030	8
3	7485418		.703	.008 AND UP	.70260 - .00030	.030	8
3	7485420		.704	.0005	.70400 - .00004	.030	4
3	7485422		.704	.002	.70390 - .00007	.030	4
3	7485423		.704	.004	.70380 - .00010	.030	8
3	7485425		.704	.008 AND UP	.70360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485427		.705	.0005	.70500 - .00004	.030	4
3	7485429		.705	.002	.70490 - .00007	.030	4
3	7485430		.705	.004	.70480 - .00010	.030	8
3	7485432		.705	.008 AND UP	.70460 - .00030	.030	8
3	7485434		.706	.0005	.70600 - .00004	.030	4
3	7485436		.706	.002	.70590 - .00007	.030	4
3	7485437		.706	.004	.70580 - .00010	.030	8
3	7485439		.706	.008 AND UP	.70560 - .00030	.030	8
3	7485441		.707	.0005	.70700 - .00004	.030	4
3	7485443		.707	.002	.70690 - .00007	.030	4
3	7485444		.707	.004	.70680 - .00010	.030	8
3	7485446		.707	.008 AND UP	.70660 - .00030	.030	8
3	7485448		.708	.0005	.70800 - .00004	.030	4
3	7485450		.708	.002	.70790 - .00007	.030	4
3	7485451		.708	.004	.70780 - .00010	.030	8
3	7485453		.708	.008 AND UP	.70760 - .00030	.030	8
3	7485455		.709	.0005	.70900 - .00004	.030	4
3	7485457		.709	.002	.70890 - .00007	.030	4
3	7485458		.709	.004	.70880 - .00010	.030	8
3	7485460		.709	.008 AND UP	.70860 - .00030	.030	8
3	7485462		.710	.0005	.71000 - .00004	.030	4
3	7485464		.710	.002	.70990 - .00007	.030	4
3	7485465		.710	.004	.70980 - .00010	.030	8
3	7485467		.710	.008 AND UP	.70960 - .00030	.030	8
3	7485469		.711	.0005	.71100 - .00004	.030	4
3	7485471		.711	.002	.71090 - .00007	.030	4
3	7485472		.711	.004	.71080 - .00010	.030	8
3	7485474		.711	.008 AND UP	.71060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485476		.712	.0005	.71200 - .00004	.030	4
3	7485478		.712	.002	.71190 - .00007	.030	4
3	7485479		.712	.004	.71180 - .00010	.030	8
3	7485481		.712	.008 AND UP	.71160 - .00030	.030	8
3	7485483		.713	.0005	.71300 - .00004	.030	4
3	7485485		.713	.002	.71290 - .00007	.030	4
3	7485486		.713	.004	.71280 - .00010	.030	8
3	7485488		.713	.008 AND UP	.71260 - .00030	.030	8
3	7485490		.714	.0005	.71400 - .00004	.030	4
3	7485492		.714	.002	.71390 - .00007	.030	4
3	7485493		.714	.004	.71380 - .00010	.030	8
3	7485495		.714	.008 AND UP	.71360 - .00030	.030	8
3	7485497		.715	.0005	.71500 - .00004	.030	4
3	7485499		.715	.002	.71490 - .00007	.030	4
3	7485500		.715	.004	.71480 - .00010	.030	8
3	7485502		.715	.008 AND UP	.71460 - .00030	.030	8
3	7485504		.716	.0005	.71600 - .00004	.030	4
3	7485506		.716	.002	.71590 - .00007	.030	4
3	7485507		.716	.004	.71580 - .00010	.030	8
3	7485509		.716	.008 AND UP	.71560 - .00030	.030	8
3	7485511		.717	.0005	.71700 - .00004	.030	4
3	7485513		.717	.002	.71690 - .00007	.030	4
3	7485514		.717	.004	.71680 - .00010	.030	8
3	7485516		.717	.008 AND UP	.71660 - .00030	.030	8
3	7485518		.718	.0005	.71800 - .00004	.030	4
3	7485520		.718	.002	.71790 - .00007	.030	4
3	7485521		.718	.004	.71780 - .00010	.030	8
3	7485523		.718	.008 AND UP	.71760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485525		.71875	.0005 AND UP	.71875 - .00004	.030	4
3	7485526		.719	.0005	.71900 - .00004	.030	4
3	7485528		.719	.002	.71890 - .00007	.030	4
3	7485529		.719	.004	.71880 - .00010	.030	8
3	7485531		.719	.008 AND UP	.71860 - .00030	.030	8
3	7485533		.720	.0005	.72000 - .00004	.030	4
3	7485535		.720	.002	.71990 - .00007	.030	4
3	7485536		.720	.004	.71980 - .00010	.030	8
3	7485538		.720	.008 AND UP	.71960 - .00030	.030	8
3	7485540		.721	.0005	.72100 - .00004	.030	4
3	7485542		.721	.002	.72090 - .00007	.030	4
3	7485543		.721	.004	.72080 - .00010	.030	8
3	7485545		.721	.008 AND UP	.72060 - .00030	.030	8
3	7485547		.722	.0005	.72200 - .00004	.030	4
3	7485549		.722	.002	.72190 - .00007	.030	4
3	7485550		.722	.004	.72180 - .00010	.030	8
3	7485552		.722	.008 AND UP	.72160 - .00030	.030	8
3	7485554		.723	.0005	.72300 - .00004	.030	4
3	7485556		.723	.002	.72290 - .00007	.030	4
3	7485557		.723	.004	.72280 - .00010	.030	8
3	7485559		.723	.008 AND UP	.72260 - .00030	.030	8
3	7485561		.724	.0005	.72400 - .00004	.030	4
3	7485563		.724	.002	.72390 - .00007	.030	4
3	7485564		.724	.004	.72380 - .00010	.030	8
3	7485566		.724	.008 AND UP	.72360 - .00030	.030	8
3	7485568		.725	.0005	.72500 - .00004	.030	4
3	7485570		.725	.002	.72490 - .00007	.030	4
3	7485571		.725	.004	.72480 - .00010	.030	8
3	7485573		.725	.008 AND UP	.72460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485575		.726	.0005	.72600 - .00004	.030	4
3	7485577		.726	.002	.72590 - .00007	.030	4
3	7485578		.726	.004	.72580 - .00010	.030	8
3	7485580		.726	.008 AND UP	.72560 - .00030	.030	8
3	7485582		.727	.0005	.72700 - .00004	.030	4
3	7485584		.727	.002	.72690 - .00007	.030	4
3	7485585		.727	.004	.72680 - .00010	.030	8
3	7485587		.727	.008 AND UP	.72660 - .00030	.030	8
3	7485589		.728	.0005	.72800 - .00004	.030	4
3	7485591		.728	.002	.72790 - .00007	.030	4
3	7485592		.728	.004	.72780 - .00010	.030	8
3	7485594		.728	.008 AND UP	.72760 - .00030	.030	8
3	7485596		.729	.0005	.72900 - .00004	.030	4
3	7485598		.729	.002	.72890 - .00007	.030	4
3	7485599		.729	.004	.72880 - .00010	.030	8
3	7485601		.729	.008 AND UP	.72860 - .00030	.030	8
3	7485603		.730	.0005	.73000 - .00004	.030	4
3	7485605		.730	.002	.72990 - .00007	.030	4
3	7485606		.730	.004	.72980 - .00010	.030	8
3	7485608		.730	.008 AND UP	.72960 - .00030	.030	8
3	7485610		.731	.0005	.73100 - .00004	.030	4
3	7485612		.731	.002	.73090 - .00007	.030	4
3	7485613		.731	.004	.73080 - .00010	.030	8
3	7485615		.731	.008 AND UP	.73060 - .00030	.030	8
3	7485617		.732	.0005	.73200 - .00004	.030	4
3	7485619		.732	.002	.73190 - .00007	.030	4
3	7485620		.732	.004	.73180 - .00010	.030	8
3	7485622		.732	.008 AND UP	.73160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485624		.733	.0005	.73300 - .00004	.030	4
3	7485626		.733	.002	.73290 - .00007	.030	4
3	7485627		.733	.004	.73280 - .00010	.030	8
3	7485629		.733	.008 AND UP	.73260 - .00030	.030	8
3	7485631		.734	.0005	.73400 - .00004	.030	4
3	7485633		.734	.002	.73390 - .00007	.030	4
3	7485634		.734	.004	.73380 - .00010	.030	8
3	7485636		.734	.008 AND UP	.73360 - .00030	.030	8
3	7485638		.735	.0005	.73500 - .00004	.030	4
3	7485640		.735	.002	.73490 - .00007	.030	4
3	7485641		.735	.004	.73480 - .00010	.030	8
3	7485643		.735	.008 AND UP	.73460 - .00030	.030	8
3	7485645		.736	.0005	.73600 - .00004	.030	4
3	7485647		.736	.002	.73590 - .00007	.030	4
3	7485648		.736	.004	.73580 - .00010	.030	8
3	7485650		.736	.008 AND UP	.73560 - .00030	.030	8
3	7485652		.737	.0005	.73700 - .00004	.030	4
3	7485654		.737	.002	.73690 - .00007	.030	4
3	7485655		.737	.004	.73680 - .00010	.030	8
3	7485657		.737	.008 AND UP	.73660 - .00030	.030	8
3	7485659		.738	.0005	.73800 - .00004	.030	4
3	7485661		.738	.002	.73790 - .00007	.030	4
3	7485662		.738	.004	.73780 - .00010	.030	8
3	7485664		.738	.008 AND UP	.73760 - .00030	.030	8
3	7485666		.739	.0005	.73900 - .00004	.030	4
3	7485668		.739	.002	.73890 - .00007	.030	4
3	7485669		.739	.004	.73880 - .00010	.030	8
3	7485671		.739	.008 AND UP	.73860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485673		.740	.0005	.74000 - .00004	.030	4
3	7485675		.740	.002	.73990 - .00007	.030	4
3	7485676		.740	.004	.73980 - .00010	.030	8
3	7485678		.740	.008 AND UP	.73960 - .00030	.030	8
3	7485680		.741	.0005	.74100 - .00004	.030	4
3	7485682		.741	.002	.74090 - .00007	.030	4
3	7485683		.741	.004	.74080 - .00010	.030	8
3	7485685		.741	.008 AND UP	.74060 - .00030	.030	8
3	7485687		.742	.0005	.74200 - .00004	.030	4
3	7485689		.742	.002	.74190 - .00007	.030	4
3	7485690		.742	.004	.74180 - .00010	.030	8
3	7485692		.742	.008 AND UP	.74160 - .00030	.030	8
3	7485694		.743	.0005	.74300 - .00004	.030	4
3	7485696		.743	.002	.74290 - .00007	.030	4
3	7485697		.743	.004	.74280 - .00010	.030	8
3	7485699		.743	.008 AND UP	.74260 - .00030	.030	8
3	7485701		.744	.0005	.74400 - .00004	.030	4
3	7485703		.744	.002	.74390 - .00007	.030	4
3	7485704		.744	.004	.74380 - .00010	.030	8
3	7485706		.744	.008 AND UP	.74360 - .00030	.030	8
3	7485708		.745	.0005	.74500 - .00004	.030	4
3	7485710		.745	.002	.74490 - .00007	.030	4
3	7485711		.745	.004	.74480 - .00010	.030	8
3	7485713		.745	.008 AND UP	.74460 - .00030	.030	8
3	7485715		.746	.0005	.74600 - .00004	.030	4
3	7485717		.746	.002	.74590 - .00007	.030	4
3	7485718		.746	.004	.74580 - .00010	.030	8
3	7485720		.746	.008 AND UP	.74560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485722		.747	.0005	.74700 - .00004	.030	4
3	7485724		.747	.002	.74690 - .00007	.030	4
3	7485725		.747	.004	.74680 - .00010	.030	8
3	7485727		.747	.008 AND UP	.74660 - .00030	.030	8
3	7485729		.748	.0005	.74800 - .00004	.030	4
3	7485731		.748	.002	.74790 - .00007	.030	4
3	7485732		.748	.004	.74780 - .00010	.030	8
3	7485734		.748	.008 AND UP	.74760 - .00030	.030	8
3	7485736		.749	.0005	.74900 - .00004	.030	4
3	7485738		.749	.002	.74890 - .00007	.030	4
3	7485739		.749	.004	.74880 - .00010	.030	8
3	7485741		.749	.008 AND UP	.74860 - .00030	.030	8
3	7485743		.750	.0005	.75000 - .00004	.030	4
3	7485745		.750	.002	.74990 - .00007	.030	4
3	7485746		.750	.004	.74980 - .00010	.030	8
3	7485748		.750	.008 AND UP	.74960 - .00030	.030	8
3	7485750		.751	.0005	.75100 - .00004	.030	4
3	7485752		.751	.002	.75090 - .00007	.030	4
3	7485753		.751	.004	.75080 - .00010	.030	8
3	7485755		.751	.008 AND UP	.75060 - .00030	.030	8
3	7485757		.752	.0005	.75200 - .00004	.030	4
3	7485759		.752	.002	.75190 - .00007	.030	4
3	7485760		.752	.004	.75180 - .00010	.030	8
3	7485762		.752	.008 AND UP	.75160 - .00030	.030	8
3	7485764		.753	.0005	.75300 - .00004	.030	4
3	7485766		.753	.002	.75290 - .00007	.030	4
3	7485767		.753	.004	.75280 - .00010	.030	8
3	7485769		.753	.008 AND UP	.75260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485771		.754	.0005	.75400 - .00004	.030	4
3	7485773		.754	.002	.75390 - .00007	.030	4
3	7485774		.754	.004	.75380 - .00010	.030	8
3	7485776		.754	.008 AND UP	.75360 - .00030	.030	8
3	7485778		.755	.0005	.75500 - .00004	.030	4
3	7485780		.755	.002	.75490 - .00007	.030	4
3	7485781		.755	.004	.75480 - .00010	.030	8
3	7485783		.755	.008 AND UP	.75460 - .00030	.030	8
3	7485785		.756	.0005	.75600 - .00004	.030	4
3	7485787		.756	.002	.75590 - .00007	.030	4
3	7485788		.756	.004	.75580 - .00010	.030	8
3	7485790		.756	.008 AND UP	.75560 - .00030	.030	8
3	7485792		.757	.0005	.75700 - .00004	.030	4
3	7485794		.757	.002	.75690 - .00007	.030	4
3	7485795		.757	.004	.75680 - .00010	.030	8
3	7485797		.757	.008 AND UP	.75660 - .00030	.030	8
3	7485799		.758	.0005	.75800 - .00004	.030	4
3	7485801		.758	.002	.75790 - .00007	.030	4
3	7485802		.758	.004	.75780 - .00010	.030	8
3	7485804		.758	.008 AND UP	.75760 - .00030	.030	8
3	7485806		.759	.0005	.75900 - .00004	.030	4
3	7485808		.759	.002	.75890 - .00007	.030	4
3	7485809		.759	.004	.75880 - .00010	.030	8
3	7485811		.759	.008 AND UP	.75860 - .00030	.030	8
3	7485813		.760	.0005	.76000 - .00004	.030	4
3	7485815		.760	.002	.75990 - .00007	.030	4
3	7485816		.760	.004	.75980 - .00010	.030	8
3	7485818		.760	.008 AND UP	.75960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485820		.761	.0005	.76100 - .00004	.030	4
3	7485822		.761	.002	.76090 - .00007	.030	4
3	7485823		.761	.004	.76080 - .00010	.030	8
3	7485825		.761	.008 AND UP	.76060 - .00030	.030	8
3	7485827		.762	.0005	.76200 - .00004	.030	4
3	7485829		.762	.002	.76190 - .00007	.030	4
3	7485830		.762	.004	.76180 - .00010	.030	8
3	7485832		.762	.008 AND UP	.76160 - .00030	.030	8
3	7485834		.763	.0005	.76300 - .00004	.030	4
3	7485836		.763	.002	.76290 - .00007	.030	4
3	7485837		.763	.004	.76280 - .00010	.030	8
3	7485839		.763	.008 AND UP	.76260 - .00030	.030	8
3	7485841		.764	.0005	.76400 - .00004	.030	4
3	7485843		.764	.002	.76390 - .00007	.030	4
3	7485844		.764	.004	.76380 - .00010	.030	8
3	7485846		.764	.008 AND UP	.76360 - .00030	.030	8
3	7485848		.765	.0005	.76500 - .00004	.030	4
3	7485850		.765	.002	.76490 - .00007	.030	4
3	7485851		.765	.004	.76480 - .00010	.030	8
3	7485853		.765	.008 AND UP	.76460 - .00030	.030	8
3	7485855		.766	.0005	.76600 - .00004	.030	4
3	7485857		.766	.002	.76590 - .00007	.030	4
3	7485858		.766	.004	.76580 - .00010	.030	8
3	7485860		.766	.008 AND UP	.76560 - .00030	.030	8
3	7485862		.767	.0005	.76700 - .00004	.030	4
3	7485864		.767	.002	.76690 - .00007	.030	4
3	7485865		.767	.004	.76680 - .00010	.030	8
3	7485867		.767	.008 AND UP	.76660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485869		.768	.0005	.76800 - .00004	.030	4
3	7485871		.768	.002	.76790 - .00007	.030	4
3	7485872		.768	.004	.76780 - .00010	.030	8
3	7485874		.768	.008 AND UP	.76760 - .00030	.030	8
3	7485876		.769	.0005	.76900 - .00004	.030	4
3	7485878		.769	.002	.76890 - .00007	.030	4
3	7485879		.769	.004	.76880 - .00010	.030	8
3	7485881		.769	.008 AND UP	.76860 - .00030	.030	8
3	7485883		.770	.0005	.77000 - .00004	.030	4
3	7485885		.770	.002	.76990 - .00007	.030	4
3	7485886		.770	.004	.76980 - .00010	.030	8
3	7485888		.770	.008 AND UP	.76960 - .00030	.030	8
3	7485890		.771	.0005	.77100 - .00004	.030	4
3	7485892		.771	.002	.77090 - .00007	.030	4
3	7485893		.771	.004	.77080 - .00010	.030	8
3	7485895		.771	.008 AND UP	.77060 - .00030	.030	8
3	7485897		.772	.0005	.77200 - .00004	.030	4
3	7485899		.772	.002	.77190 - .00007	.030	4
3	7485900		.772	.004	.77180 - .00010	.030	8
3	7485902		.772	.008 AND UP	.77160 - .00030	.030	8
3	7485904		.773	.0005	.77300 - .00004	.030	4
3	7485906		.773	.002	.77290 - .00007	.030	4
3	7485907		.773	.004	.77280 - .00010	.030	8
3	7485909		.773	.008 AND UP	.77260 - .00030	.030	8
3	7485911		.774	.0005	.77400 - .00004	.030	4
3	7485913		.774	.002	.77390 - .00007	.030	4
3	7485914		.774	.004	.77380 - .00010	.030	8
3	7485916		.774	.008 AND UP	.77360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.						
	RING GAGE	ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
3	7485918		.775	.0005	.77500 - .00004	.030	4
3	7485920		.775	.002	.77490 - .00007	.030	4
3	7485921		.775	.004	.77480 - .00010	.030	8
3	7485923		.775	.008 AND UP	.77460 - .00030	.030	8
3	7485925		.776	.0005	.77600 - .00004	.030	4
3	7485927		.776	.002	.77590 - .00007	.030	4
3	7485928		.776	.004	.77580 - .00010	.030	8
3	7485930		.776	.008 AND UP	.77560 - .00030	.030	8
3	7485932		.777	.0005	.77700 - .00004	.030	4
3	7485934		.777	.002	.77690 - .00007	.030	4
3	7485935		.777	.004	.77680 - .00010	.030	8
3	7485937		.777	.008 AND UP	.77660 - .00030	.030	8
3	7485939		.778	.0005	.77800 - .00004	.030	4
3	7485941		.778	.002	.77790 - .00007	.030	4
3	7485942		.778	.004	.77780 - .00010	.030	8
3	7485944		.778	.008 AND UP	.77760 - .00030	.030	8
3	7485946		.779	.0005	.77900 - .00004	.030	4
3	7485948		.779	.002	.77890 - .00007	.030	4
3	7485949		.779	.004	.77880 - .00010	.030	8
3	7485951		.779	.008 AND UP	.77860 - .00030	.030	8
3	7485953		.780	.0005	.78000 - .00004	.030	4
3	7485955		.780	.002	.77990 - .00007	.030	4
3	7485956		.780	.004	.77980 - .00010	.030	8
3	7485958		.780	.008 AND UP	.77960 - .00030	.030	8
3	7485960		.781	.0005	.78100 - .00004	.030	4
3	7485962		.781	.002	.78090 - .00007	.030	4
3	7485963		.781	.004	.78080 - .00010	.030	8
3	7485965		.781	.008 AND UP	.78060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7485967		.78125	.0005 AND UP	.78125 - .00004	.030	4
3	7485968		.782	.0005	.78200 - .00004	.030	4
3	7485970		.782	.002	.78190 - .00007	.030	4
3	7485971		.782	.004	.78180 - .00010	.030	8
3	7485973		.782	.008 AND UP	.78160 - .00030	.030	8
3	7485975		.783	.0005	.78300 - .00004	.030	4
3	7485977		.783	.002	.78290 - .00007	.030	4
3	7485978		.783	.004	.78280 - .00010	.030	8
3	7485980		.783	.008 AND UP	.78260 - .00030	.030	8
3	7485982		.784	.0005	.78400 - .00004	.030	4
3	7485984		.784	.002	.78390 - .00007	.030	4
3	7485985		.784	.004	.78380 - .00010	.030	8
3	7485987		.784	.008 AND UP	.78360 - .00030	.030	8
3	7485989		.785	.0005	.78500 - .00004	.030	4
3	7485991		.785	.002	.78490 - .00007	.030	4
3	7485992		.785	.004	.78480 - .00010	.030	8
3	7485994		.785	.008 AND UP	.78460 - .00030	.030	8
3	7485996		.786	.0005	.78600 - .00004	.030	4
3	7485998		.786	.002	.78590 - .00007	.030	4
3	7485999		.786	.004	.78580 - .00010	.030	8
3	7486001		.786	.008 AND UP	.78560 - .00030	.030	8
3	7486003		.787	.0005	.78700 - .00004	.030	4
3	7486005		.787	.002	.78690 - .00007	.030	4
3	7486006		.787	.004	.78680 - .00010	.030	8
3	7486008		.787	.008 AND UP	.78660 - .00030	.030	8
3	7486010		.788	.0005	.78800 - .00004	.030	4
3	7486012		.788	.002	.78790 - .00007	.030	4
3	7486013		.788	.004	.78780 - .00010	.030	8
3	7486015		.788	.008 AND UP	.78760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486017		.789	.0005	.78900 - .00004	.030	4
3	7486019		.789	.002	.78890 - .00007	.030	4
3	7486020		.789	.004	.78880 - .00010	.030	8
3	7486022		.789	.008 AND UP	.78860 - .00030	.030	8
3	7486024		.790	.0005	.79000 - .00004	.030	4
3	7486026		.790	.002	.78990 - .00007	.030	4
3	7486027		.790	.004	.78980 - .00010	.030	8
3	7486029		.790	.008 AND UP	.78960 - .00030	.030	8
3	7486031		.791	.0005	.79100 - .00004	.030	4
3	7486033		.791	.002	.79090 - .00007	.030	4
3	7486034		.791	.004	.79080 - .00010	.030	8
3	7486036		.791	.008 AND UP	.79060 - .00030	.030	8
3	7486038		.792	.0005	.79200 - .00004	.030	4
3	7486040		.792	.002	.79190 - .00007	.030	4
3	7486041		.792	.004	.79180 - .00010	.030	8
3	7486043		.792	.008 AND UP	.79160 - .00030	.030	8
3	7486045		.793	.0005	.79300 - .00004	.030	4
3	7486047		.793	.002	.79290 - .00007	.030	4
3	7486048		.793	.004	.79280 - .00010	.030	8
3	7486050		.793	.008 AND UP	.79260 - .00030	.030	8
3	7486052		.794	.0005	.79400 - .00004	.030	4
3	7486054		.794	.002	.79390 - .00007	.030	4
3	7486055		.794	.004	.79380 - .00010	.030	8
3	7486057		.794	.008 AND UP	.79360 - .00030	.030	8
3	7486059		.795	.0005	.79500 - .00004	.030	4
3	7486061		.795	.002	.79490 - .00007	.030	4
3	7486062		.795	.004	.79480 - .00010	.030	8
3	7486064		.795	.008 AND UP	.79460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486066		.796	.0005	.79600 - .00004	.030	4
3	7486068		.796	.002	.79590 - .00007	.030	4
3	7486069		.796	.004	.79580 - .00010	.030	8
3	7486071		.796	.008 AND UP	.79560 - .00030	.030	8
3	7486073		.797	.0005	.79700 - .00004	.030	4
3	7486075		.797	.002	.79690 - .00007	.030	4
3	7486076		.797	.004	.79680 - .00010	.030	8
3	7486078		.797	.008 AND UP	.79660 - .00030	.030	8
3	7486080		.798	.0005	.79800 - .00004	.030	4
3	7486082		.798	.002	.79790 - .00007	.030	4
3	7486083		.798	.004	.79780 - .00010	.030	8
3	7486085		.798	.008 AND UP	.79760 - .00030	.030	8
3	7486087		.799	.0005	.79900 - .00004	.030	4
3	7486089		.799	.002	.79890 - .00007	.030	4
3	7486090		.799	.004	.79880 - .00010	.030	8
3	7486092		.799	.008 AND UP	.79860 - .00030	.030	8
3	7486094		.800	.0005	.80000 - .00004	.030	4
3	7486096		.800	.002	.79990 - .00007	.030	4
3	7486097		.800	.004	.79980 - .00010	.030	8
3	7486099		.800	.008 AND UP	.79960 - .00030	.030	8
3	7486101		.801	.0005	.80100 - .00004	.030	4
3	7486103		.801	.002	.80090 - .00007	.030	4
3	7486104		.801	.004	.80080 - .00010	.030	8
3	7486106		.801	.008 AND UP	.80060 - .00030	.030	8
3	7486108		.802	.0005	.80200 - .00004	.030	4
3	7486110		.802	.002	.80190 - .00007	.030	4
3	7486111		.802	.004	.80180 - .00010	.030	8
3	7486113		.802	.008 AND UP	.80160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.						
	RING GAGE	ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
3	7486115		.803	.0005	.80300 - .00004	.030	4
3	7486117		.803	.002	.80290 - .00007	.030	4
3	7486118		.803	.004	.80280 - .00010	.030	8
3	7486120		.803	.008 AND UP	.80260 - .00030	.030	8
3	7486122		.804	.0005	.80400 - .00004	.030	4
3	7486124		.804	.002	.80390 - .00007	.030	4
3	7486125		.804	.004	.80380 - .00010	.030	8
3	7486127		.804	.008 AND UP	.80360 - .00030	.030	8
3	7486129		.805	.0005	.80500 - .00004	.030	4
3	7486131		.805	.002	.80490 - .00007	.030	4
3	7486132		.805	.004	.80480 - .00010	.030	8
3	7486134		.805	.008 AND UP	.80460 - .00030	.030	8
3	7486136		.806	.0005	.80600 - .00004	.030	4
3	7486138		.806	.002	.80590 - .00007	.030	4
3	7486139		.806	.004	.80580 - .00010	.030	8
3	7486141		.806	.008 AND UP	.80560 - .00030	.030	8
3	7486143		.807	.0005	.80700 - .00004	.030	4
3	7486145		.807	.002	.80690 - .00007	.030	4
3	7486146		.807	.004	.80680 - .00010	.030	8
3	7486148		.807	.008 AND UP	.80660 - .00030	.030	8
3	7486150		.808	.0005	.80800 - .00004	.030	4
3	7486152		.808	.002	.80790 - .00007	.030	4
3	7486153		.808	.004	.80780 - .00010	.030	8
3	7486155		.808	.008 AND UP	.80760 - .00030	.030	8
3	7486157		.809	.0005	.80900 - .00004	.030	4
3	7486159		.809	.002	.80890 - .00007	.030	4
3	7486160		.809	.004	.80880 - .00010	.030	8
3	7486162		.809	.008 AND UP	.80860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486164		.810	.0005	.81000 - .00004	.030	4
3	7486166		.810	.002	.80990 - .00007	.030	4
3	7486167		.810	.004	.80980 - .00010	.030	8
3	7486169		.810	.008 AND UP	.80960 - .00030	.030	8
3	7486171		.811	.0005	.81100 - .00004	.030	4
3	7486173		.811	.002	.81090 - .00007	.030	4
3	7486174		.811	.004	.81080 - .00010	.030	8
3	7486176		.811	.008 AND UP	.81060 - .00030	.030	8
3	7486178		.812	.0005	.81200 - .00004	.030	4
3	7486180		.812	.002	.81190 - .00007	.030	4
3	7486181		.812	.004	.81180 - .00010	.030	8
3	7486183		.812	.008 AND UP	.81160 - .00030	.030	8
3	7486185		.8125	.0005 AND UP	.81250 - .00004	.030	4
3	7486186		.813	.0005	.81300 - .00004	.030	4
3	7486188		.813	.002	.81290 - .00007	.030	4
3	7486189		.813	.004	.81280 - .00010	.030	8
3	7486191		.813	.008 AND UP	.81260 - .00030	.030	8
3	7486193		.814	.0005	.81400 - .00004	.030	4
3	7486195		.814	.002	.81390 - .00007	.030	4
3	7486196		.814	.004	.81380 - .00010	.030	8
3	7486198		.814	.008 AND UP	.81360 - .00030	.030	8
3	7486200		.815	.0005	.81500 - .00004	.030	4
3	7486202		.815	.002	.81490 - .00007	.030	4
3	7486203		.815	.004	.81480 - .00010	.030	8
3	7486205		.815	.008 AND UP	.81460 - .00030	.030	8
3	7486207		.816	.0005	.81600 - .00004	.030	4
3	7486209		.816	.002	.81590 - .00007	.030	4
3	7486210		.816	.004	.81580 - .00010	.030	8
3	7486212		.816	.008 AND UP	.81560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486214		.817	.0005	.81700 - .00004	.030	4
3	7486216		.817	.002	.81690 - .00007	.030	4
3	7486217		.817	.004	.81680 - .00010	.030	8
3	7486219		.817	.008 AND UP	.81660 - .00030	.030	8
3	7486221		.818	.0005	.81800 - .00004	.030	4
3	7486223		.818	.002	.81790 - .00007	.030	4
3	7486224		.818	.004	.81780 - .00010	.030	8
3	7486226		.818	.008 AND UP	.81760 - .00030	.030	8
3	7486228		.819	.0005	.81900 - .00004	.030	4
3	7486230		.819	.002	.81890 - .00007	.030	4
3	7486231		.819	.004	.81880 - .00010	.030	8
3	7486233		.819	.008 AND UP	.81860 - .00030	.030	8
3	7486235		.820	.0005	.82000 - .00004	.030	4
3	7486237		.820	.002	.81990 - .00007	.030	4
3	7486238		.820	.004	.81980 - .00010	.030	8
3	7486240		.820	.008 AND UP	.81960 - .00030	.030	8
3	7486242		.821	.0005	.82100 - .00004	.030	4
3	7486244		.821	.002	.82090 - .00007	.030	4
3	7486245		.821	.004	.82080 - .00010	.030	8
3	7486247		.821	.008 AND UP	.82060 - .00030	.030	8
3	7486249		.822	.0005	.82200 - .00004	.030	4
3	7486251		.822	.002	.82190 - .00007	.030	4
3	7486252		.822	.004	.82180 - .00010	.030	8
3	7486254		.822	.008 AND UP	.82160 - .00030	.030	8
3	7486256		.823	.0005	.82300 - .00004	.030	4
3	7486258		.823	.002	.82290 - .00007	.030	4
3	7486259		.823	.004	.82280 - .00010	.030	8
3	7486261		.823	.008 AND UP	.82260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486263		.824	.0005	.82400 - .00004	.030	4
3	7486265		.824	.002	.82390 - .00007	.030	4
3	7486266		.824	.004	.82380 - .00010	.030	8
3	7486268		.824	.008 AND UP	.82360 - .00030	.030	8
3	7486270		.825	.0005	.82500 - .00004	.030	4
3	7486272		.825	.002	.82490 - .00007	.030	4
3	7486273		.825	.004	.82480 - .00010	.030	8
3	7486275		.825	.008 AND UP	.82460 - .00030	.030	8
3	7486277		.826	.0005	.82600 - .00006	.030	4
3	7486279		.826	.002	.82590 - .00009	.030	4
3	7486280		.826	.004	.82580 - .00012	.030	8
3	7486282		.826	.008 AND UP	.82560 - .00030	.030	8
3	7486284		.827	.0005	.82700 - .00006	.030	4
3	7486286		.827	.002	.82690 - .00009	.030	4
3	7486287		.827	.004	.82680 - .00012	.030	8
3	7486289		.827	.008 AND UP	.82660 - .00030	.030	8
3	7486291		.828	.0005	.82800 - .00006	.030	4
3	7486293		.828	.002	.82790 - .00009	.030	4
3	7486294		.828	.004	.82780 - .00012	.030	8
3	7486296		.828	.008 AND UP	.82760 - .00030	.030	8
3	7486298		.829	.0005	.82900 - .00006	.030	4
3	7486300		.829	.002	.82890 - .00009	.030	4
3	7486301		.829	.004	.82880 - .00012	.030	8
3	7486303		.829	.008 AND UP	.82860 - .00030	.030	8
3	7486305		.830	.0005	.83000 - .00006	.030	4
3	7486307		.830	.002	.82990 - .00009	.030	4
3	7486308		.830	.004	.82980 - .00012	.030	8
3	7486310		.830	.008 AND UP	.82960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486312		.831	.0005	.83100 - .00006	.030	4
3	7486314		.831	.002	.83090 - .00009	.030	4
3	7486315		.831	.004	.83080 - .00012	.030	8
3	7486317		.831	.008 AND UP	.83060 - .00030	.030	8
3	7486319		.832	.0005	.83200 - .00006	.030	4
3	7486321		.832	.002	.83190 - .00009	.030	4
3	7486322		.832	.004	.83180 - .00012	.030	8
3	7486324		.832	.008 AND UP	.83160 - .00030	.030	8
3	7486326		.833	.0005	.83300 - .00006	.030	4
3	7486328		.833	.002	.83290 - .00009	.030	4
3	7486329		.833	.004	.83280 - .00012	.030	8
3	7486331		.833	.008 AND UP	.83260 - .00030	.030	8
3	7486333		.834	.0005	.83400 - .00006	.030	4
3	7486335		.834	.002	.83390 - .00009	.030	4
3	7486336		.834	.004	.83380 - .00012	.030	8
3	7486338		.834	.008 AND UP	.83360 - .00030	.030	8
3	7486340		.835	.0005	.83500 - .00006	.030	4
3	7486342		.835	.002	.83490 - .00009	.030	4
3	7486343		.835	.004	.83480 - .00012	.030	8
3	7486345		.835	.008 AND UP	.83460 - .00030	.030	8
3	7486347		.836	.0005	.83600 - .00006	.030	4
3	7486349		.836	.002	.83590 - .00009	.030	4
3	7486350		.836	.004	.83580 - .00012	.030	8
3	7486352		.836	.008 AND UP	.83560 - .00030	.030	8
3	7486354		.837	.0005	.83700 - .00006	.030	4
3	7486356		.837	.002	.83690 - .00009	.030	4
3	7486357		.837	.004	.83680 - .00012	.030	8
3	7486359		.837	.008 AND UP	.83660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486361		.838	.0005	.83800 - .00006	.030	4
3	7486363		.838	.002	.83790 - .00009	.030	4
3	7486364		.838	.004	.83780 - .00012	.030	8
3	7486366		.838	.008 AND UP	.83760 - .00030	.030	8
3	7486368		.839	.0005	.83900 - .00006	.030	4
3	7486370		.839	.002	.83890 - .00009	.030	4
3	7486371		.839	.004	.83880 - .00012	.030	8
3	7486373		.839	.008 AND UP	.83860 - .00030	.030	8
3	7486375		.840	.0005	.84000 - .00006	.030	4
3	7486377		.840	.002	.83990 - .00009	.030	4
3	7486378		.840	.004	.83980 - .00012	.030	8
3	7486380		.840	.008 AND UP	.83960 - .00030	.030	8
3	7486382		.841	.0005	.84100 - .00006	.030	4
3	7486384		.841	.002	.84090 - .00009	.030	4
3	7486385		.841	.004	.84080 - .00012	.030	8
3	7486387		.841	.008 AND UP	.84060 - .00030	.030	8
3	7486389		.842	.0005	.84200 - .00006	.030	4
3	7486391		.842	.002	.84190 - .00009	.030	4
3	7486392		.842	.004	.84180 - .00012	.030	8
3	7486394		.842	.008 AND UP	.84160 - .00030	.030	8
3	7486396		.843	.0005	.84300 - .00006	.030	4
3	7486398		.843	.002	.84290 - .00009	.030	4
3	7486399		.843	.004	.84280 - .00012	.030	8
3	7486401		.843	.008 AND UP	.84260 - .00030	.030	8
3	7486403		.84375	.0005 AND UP	.84375 - .00006	.030	4
3	7486404		.844	.0005	.84400 - .00006	.030	4
3	7486406		.844	.002	.84390 - .00009	.030	4
3	7486407		.844	.004	.84380 - .00012	.030	8
3	7486409		.844	.008 AND UP	.84360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.						
	RING GAGE	ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
3	7486411		.845	.0005	.84500 - .00006	.030	4
3	7486413		.845	.002	.84490 - .00009	.030	4
3	7486414		.845	.004	.84480 - .00012	.030	8
3	7486416		.845	.008 AND UP	.84460 - .00030	.030	8
3	7486418		.846	.0005	.84600 - .00006	.030	4
3	7486420		.846	.002	.84590 - .00009	.030	4
3	7486421		.846	.004	.84580 - .00012	.030	8
3	7486423		.846	.008 AND UP	.84560 - .00030	.030	8
3	7486425		.847	.0005	.84700 - .00006	.030	4
3	7486427		.847	.002	.84690 - .00009	.030	4
3	7486428		.847	.004	.84680 - .00012	.030	8
3	7486430		.847	.008 AND UP	.84660 - .00030	.030	8
3	7486432		.848	.0005	.84800 - .00006	.030	4
3	7486434		.848	.002	.84790 - .00009	.030	4
3	7486435		.848	.004	.84780 - .00012	.030	8
3	7486437		.848	.008 AND UP	.84760 - .00030	.030	8
3	7486439		.849	.0005	.84900 - .00006	.030	4
3	7486441		.849	.002	.84890 - .00009	.030	4
3	7486442		.849	.004	.84880 - .00012	.030	8
3	7486444		.849	.008 AND UP	.84860 - .00030	.030	8
3	7486446		.850	.0005	.85000 - .00006	.030	4
3	7486448		.850	.002	.84990 - .00009	.030	4
3	7486449		.850	.004	.84980 - .00012	.030	8
3	7486451		.850	.008 AND UP	.84960 - .00030	.030	8
3	7486453		.851	.0005	.85100 - .00006	.030	4
3	7486455		.851	.002	.85090 - .00009	.030	4
3	7486456		.851	.004	.85080 - .00012	.030	8
3	7486458		.851	.008 AND UP	.85060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486460		.852	.0005	.85200 - .00006	.030	4
3	7486462		.852	.002	.85190 - .00009	.030	4
3	7486463		.852	.004	.85180 - .00012	.030	8
3	7486465		.852	.008 AND UP	.85160 - .00030	.030	8
3	7486467		.853	.0005	.85300 - .00006	.030	4
3	7486469		.853	.002	.85290 - .00009	.030	4
3	7486470		.853	.004	.85280 - .00012	.030	8
3	7486472		.853	.008 AND UP	.85260 - .00030	.030	8
3	7486474		.854	.0005	.85400 - .00006	.030	4
3	7486476		.854	.002	.85390 - .00009	.030	4
3	7486477		.854	.004	.85380 - .00012	.030	8
3	7486479		.854	.008 AND UP	.85360 - .00030	.030	8
3	7486481		.855	.0005	.85500 - .00006	.030	4
3	7486483		.855	.002	.85490 - .00009	.030	4
3	7486484		.855	.004	.85480 - .00012	.030	8
3	7486486		.855	.008 AND UP	.85460 - .00030	.030	8
3	7486488		.856	.0005	.85600 - .00006	.030	4
3	7486490		.856	.002	.85590 - .00009	.030	4
3	7486491		.856	.004	.85580 - .00012	.030	8
3	7486493		.856	.008 AND UP	.85560 - .00030	.030	8
3	7486495		.857	.0005	.85700 - .00006	.030	4
3	7486497		.857	.002	.85690 - .00009	.030	4
3	7486498		.857	.004	.85680 - .00012	.030	8
3	7486500		.857	.008 AND UP	.85660 - .00030	.030	8
3	7486502		.858	.0005	.85800 - .00006	.030	4
3	7486504		.858	.002	.85790 - .00009	.030	4
3	7486505		.858	.004	.85780 - .00012	.030	8
3	7486507		.858	.008 AND UP	.85760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486509		.859	.0005	.85900 - .00006	.030	4
3	7486511		.859	.002	.85890 - .00009	.030	4
3	7486512		.859	.004	.85880 - .00012	.030	8
3	7486514		.859	.008 AND UP	.85860 - .00030	.030	8
3	7486516		.860	.0005	.86000 - .00006	.030	4
3	7486518		.860	.002	.85990 - .00009	.030	4
3	7486519		.860	.004	.85980 - .00012	.030	8
3	7486521		.860	.008 AND UP	.85960 - .00030	.030	8
3	7486523		.861	.0005	.86100 - .00006	.030	4
3	7486525		.861	.002	.86090 - .00009	.030	4
3	7486526		.861	.004	.86080 - .00012	.030	8
3	7486528		.861	.008 AND UP	.86060 - .00030	.030	8
3	7486530		.862	.0005	.86200 - .00006	.030	4
3	7486532		.862	.002	.86190 - .00009	.030	4
3	7486533		.862	.004	.86180 - .00012	.030	8
3	7486535		.862	.008 AND UP	.86160 - .00030	.030	8
3	7486537		.863	.0005	.86300 - .00006	.030	4
3	7486539		.863	.002	.86290 - .00009	.030	4
3	7486540		.863	.004	.86280 - .00012	.030	8
3	7486542		.863	.008 AND UP	.86260 - .00030	.030	8
3	7486544		.864	.0005	.86400 - .00006	.030	4
3	7486546		.864	.002	.86390 - .00009	.030	4
3	7486547		.864	.004	.86380 - .00012	.030	8
3	7486549		.864	.008 AND UP	.86360 - .00030	.030	8
3	7486551		.865	.0005	.86500 - .00006	.030	4
3	7486553		.865	.002	.86490 - .00009	.030	4
3	7486554		.865	.004	.86480 - .00012	.030	8
3	7486556		.865	.008 AND UP	.86460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486558		.866	.0005	.86600 - .00006	.030	4
3	7486560		.866	.002	.86590 - .00009	.030	4
3	7486561		.866	.004	.86580 - .00012	.030	8
3	7486563		.866	.008 AND UP	.86560 - .00030	.030	8
3	7486565		.867	.0005	.86700 - .00006	.030	4
3	7486567		.867	.002	.86690 - .00009	.030	4
3	7486568		.867	.004	.86680 - .00012	.030	8
3	7486570		.867	.008 AND UP	.86660 - .00030	.030	8
3	7486572		.868	.0005	.86800 - .00006	.030	4
3	7486574		.868	.002	.86790 - .00009	.030	4
3	7486575		.868	.004	.86780 - .00012	.030	8
3	7486577		.868	.008 AND UP	.86760 - .00030	.030	8
3	7486579		.869	.0005	.86900 - .00006	.030	4
3	7486581		.869	.002	.86890 - .00009	.030	4
3	7486582		.869	.004	.86880 - .00012	.030	8
3	7486584		.869	.008 AND UP	.86860 - .00030	.030	8
3	7486586		.870	.0005	.87000 - .00006	.030	4
3	7486588		.870	.002	.86990 - .00009	.030	4
3	7486589		.870	.004	.86980 - .00012	.030	8
3	7486591		.870	.008 AND UP	.86960 - .00030	.030	8
3	7486593		.871	.0005	.87100 - .00006	.030	4
3	7486595		.871	.002	.87090 - .00009	.030	4
3	7486596		.871	.004	.87080 - .00012	.030	8
3	7486598		.871	.008 AND UP	.87060 - .00030	.030	8
3	7486600		.872	.0005	.87200 - .00006	.030	4
3	7486602		.872	.002	.87190 - .00009	.030	4
3	7486603		.872	.004	.87180 - .00012	.030	8
3	7486605		.872	.008 AND UP	.87160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486607		.873	.0005	.87300 - .00006	.030	4
3	7486609		.873	.002	.87290 - .00009	.030	4
3	7486610		.873	.004	.87280 - .00012	.030	8
3	7486612		.873	.008 AND UP	.87260 - .00030	.030	8
3	7486614		.874	.0005	.87400 - .00006	.030	4
3	7486616		.874	.002	.87390 - .00009	.030	4
3	7486617		.874	.004	.87380 - .00012	.030	8
3	7486619		.874	.008 AND UP	.87360 - .00030	.030	8
3	7486621		.875	.0005	.87500 - .00006	.030	4
3	7486623		.875	.002	.87490 - .00009	.030	4
3	7486624		.875	.004	.87480 - .00012	.030	8
3	7486626		.875	.008 AND UP	.87460 - .00030	.030	8
3	7486628		.876	.0005	.87600 - .00006	.030	4
3	7486630		.876	.002	.87590 - .00009	.030	4
3	7486631		.876	.004	.87580 - .00012	.030	8
3	7486633		.876	.008 AND UP	.87560 - .00030	.030	8
3	7486635		.877	.0005	.87700 - .00006	.030	4
3	7486637		.877	.002	.87690 - .00009	.030	4
3	7486638		.877	.004	.87680 - .00012	.030	8
3	7486640		.877	.008 AND UP	.87660 - .00030	.030	8
3	7486642		.878	.0005	.87800 - .00006	.030	4
3	7486644		.878	.002	.87790 - .00009	.030	4
3	7486645		.878	.004	.87780 - .00012	.030	8
3	7486647		.878	.008 AND UP	.87760 - .00030	.030	8
3	7486649		.879	.0005	.87900 - .00006	.030	4
3	7486651		.879	.002	.87890 - .00009	.030	4
3	7486652		.879	.004	.87880 - .00012	.030	8
3	7486654		.879	.008 AND UP	.87860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486656		.880	.0005	.88000 - .00006	.030	4
3	7486658		.880	.002	.87990 - .00009	.030	4
3	7486659		.880	.004	.87980 - .00012	.030	8
3	7486661		.880	.008 AND UP	.87960 - .00030	.030	8
3	7486663		.881	.0005	.88100 - .00006	.030	4
3	7486665		.881	.002	.88090 - .00009	.030	4
3	7486666		.881	.004	.88080 - .00012	.030	8
3	7486668		.881	.008 AND UP	.88060 - .00030	.030	8
3	7486670		.882	.0005	.88200 - .00006	.030	4
3	7486672		.882	.002	.88190 - .00009	.030	4
3	7486673		.882	.004	.88180 - .00012	.030	8
3	7486675		.882	.008 AND UP	.88160 - .00030	.030	8
3	7486677		.883	.0005	.88300 - .00006	.030	4
3	7486679		.883	.002	.88290 - .00009	.030	4
3	7486680		.883	.004	.88280 - .00012	.030	8
3	7486682		.883	.008 AND UP	.88260 - .00030	.030	8
3	7486684		.884	.0005	.88400 - .00006	.030	4
3	7486686		.884	.002	.88390 - .00009	.030	4
3	7486687		.884	.004	.88380 - .00012	.030	8
3	7486689		.884	.008 AND UP	.88360 - .00030	.030	8
3	7486691		.885	.0005	.88500 - .00006	.030	4
3	7486693		.885	.002	.88490 - .00009	.030	4
3	7486694		.885	.004	.88480 - .00012	.030	8
3	7486696		.885	.008 AND UP	.88460 - .00030	.030	8
3	7486698		.886	.0005	.88600 - .00006	.030	4
3	7486700		.886	.002	.88590 - .00009	.030	4
3	7486701		.886	.004	.88580 - .00012	.030	8
3	7486703		.886	.008 AND UP	.88560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN-GAGE	STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK						
A	B	C		D	E	F	G	H
3	7486705			.887	.0005	.88700 - .00006	.030	4
3	7486707			.887	.002	.88690 - .00009	.030	4
3	7486708			.887	.004	.88680 - .00012	.030	8
3	7486710			.887	.008 AND UP	.88660 - .00030	.030	8
3	7486712			.888	.0005	.88800 - .00006	.030	4
3	7486714			.888	.002	.88790 - .00009	.030	4
3	7486715			.888	.004	.88780 - .00012	.030	8
3	7486717			.888	.008 AND UP	.88760 - .00030	.030	8
3	7486719			.889	.0005	.88900 - .00006	.030	4
3	7486721			.889	.002	.88890 - .00009	.030	4
3	7486722			.889	.004	.88880 - .00012	.030	8
3	7486724			.889	.008 AND UP	.88860 - .00030	.030	8
3	7486726			.890	.0005	.89000 - .00006	.030	4
3	7486728			.890	.002	.88990 - .00009	.030	4
3	7486729			.890	.004	.88980 - .00012	.030	8
3	7486731			.890	.008 AND UP	.88960 - .00030	.030	8
3	7486733			.891	.0005	.89100 - .00006	.030	4
3	7486735			.891	.002	.89090 - .00009	.030	4
3	7486736			.891	.004	.89080 - .00012	.030	8
3	7486738			.891	.008 AND UP	.89060 - .00030	.030	8
3	7486740			.892	.0005	.89200 - .00006	.030	4
3	7486742			.892	.002	.89190 - .00009	.030	4
3	7486743			.892	.004	.89180 - .00012	.030	8
3	7486745			.892	.008 AND UP	.89160 - .00030	.030	8
3	7486747			.893	.0005	.89300 - .00006	.030	4
3	7486749			.893	.002	.89290 - .00009	.030	4
3	7486750			.893	.004	.89280 - .00012	.030	8
3	7486752			.893	.008 AND UP	.89260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486754		.894	.0005	.89400 - .00006	.030	4
3	7486756		.894	.002	.89390 - .00009	.030	4
3	7486757		.894	.004	.89380 - .00012	.030	8
3	7486759		.894	.008 AND UP	.89360 - .00030	.030	8
3	7486761		.895	.0005	.89500 - .00006	.030	4
3	7486763		.895	.002	.89490 - .00009	.030	4
3	7486764		.895	.004	.89480 - .00012	.030	8
3	7486766		.895	.008 AND UP	.89460 - .00030	.030	8
3	7486768		.896	.0005	.89600 - .00006	.030	4
3	7486770		.896	.002	.89590 - .00009	.030	4
3	7486771		.896	.004	.89580 - .00012	.030	8
3	7486773		.896	.008 AND UP	.89560 - .00030	.030	8
3	7486775		.897	.0005	.89700 - .00006	.030	4
3	7486777		.897	.002	.89690 - .00009	.030	4
3	7486778		.897	.004	.89680 - .00012	.030	8
3	7486780		.897	.008 AND UP	.89660 - .00030	.030	8
3	7486782		.898	.0005	.89800 - .00006	.030	4
3	7486784		.898	.002	.89790 - .00009	.030	4
3	7486785		.898	.004	.89780 - .00012	.030	8
3	7486787		.898	.008 AND UP	.89760 - .00030	.030	8
3	7486789		.899	.0005	.89900 - .00006	.030	4
3	7486791		.899	.002	.89890 - .00009	.030	4
3	7486792		.899	.004	.89880 - .00012	.030	8
3	7486794		.899	.008 AND UP	.89860 - .00030	.030	8
3	7486796		.900	.0005	.90000 - .00006	.030	4
3	7486798		.900	.002	.89990 - .00009	.030	4
3	7486799		.900	.004	.89980 - .00012	.030	8
3	7486801		.900	.008 AND UP	.89960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486803		.901	.0005	.90100 - .00006	.030	4
3	7486805		.901	.002	.90090 - .00009	.030	4
3	7486806		.901	.004	.90080 - .00012	.030	8
3	7486808		.901	.008 AND UP	.90060 - .00030	.030	8
3	7486810		.902	.0005	.90200 - .00006	.030	4
3	7486812		.902	.002	.90190 - .00009	.030	4
3	7486813		.902	.004	.90180 - .00012	.030	8
3	7486815		.902	.008 AND UP	.90160 - .00030	.030	8
3	7486817		.903	.0005	.90300 - .00006	.030	4
3	7486819		.903	.002	.90290 - .00009	.030	4
3	7486820		.903	.004	.90280 - .00012	.030	8
3	7486822		.903	.008 AND UP	.90260 - .00030	.030	8
3	7486824		.904	.0005	.90400 - .00006	.030	4
3	7486826		.904	.002	.90390 - .00009	.030	4
3	7486827		.904	.004	.90380 - .00012	.030	8
3	7486829		.904	.008 AND UP	.90360 - .00030	.030	8
3	7486831		.905	.0005	.90500 - .00006	.030	4
3	7486833		.905	.002	.90490 - .00009	.030	4
3	7486834		.905	.004	.90480 - .00012	.030	8
3	7486836		.905	.008 AND UP	.90460 - .00030	.030	8
3	7486838		.906	.0005	.90600 - .00006	.030	4
3	7486840		.906	.002	.90590 - .00009	.030	4
3	7486841		.906	.004	.90580 - .00012	.030	8
3	7486843		.906	.008 AND UP	.90560 - .00030	.030	8
3	7486845		.90625	.0005 AND UP	.90625 - .00006	.030	4
3	7486846		.907	.0005	.90700 - .00006	.030	4
3	7486848		.907	.002	.90690 - .00009	.030	4
3	7486849		.907	.004	.90680 - .00012	.030	8
3	7486851		.907	.008 AND UP	.90660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.						
	RING GAGE	ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
3	7486853		.908	.0005	.90800 - .00006	.030	4
3	7486855		.908	.002	.90790 - .00009	.030	4
3	7486856		.908	.004	.90780 - .00012	.030	8
3	7486858		.908	.008 AND UP	.90760 - .00030	.030	8
3	7486860		.909	.0005	.90900 - .00006	.030	4
3	7486862		.909	.002	.90890 - .00009	.030	4
3	7486863		.909	.004	.90880 - .00012	.030	8
3	7486865		.909	.008 AND UP	.90860 - .00030	.030	8
3	7486867		.910	.0005	.91000 - .00006	.030	4
3	7486869		.910	.002	.90990 - .00009	.030	4
3	7486870		.910	.004	.90980 - .00012	.030	8
3	7486872		.910	.008 AND UP	.90960 - .00030	.030	8
3	7486874		.911	.0005	.91100 - .00006	.030	4
3	7486876		.911	.002	.91090 - .00009	.030	4
3	7486877		.911	.004	.91080 - .00012	.030	8
3	7486879		.911	.008 AND UP	.91060 - .00030	.030	8
3	7486881		.912	.0005	.91200 - .00006	.030	4
3	7486883		.912	.002	.91190 - .00009	.030	4
3	7486884		.912	.004	.91180 - .00012	.030	8
3	7486886		.912	.008 AND UP	.91160 - .00030	.030	8
3	7486888		.913	.0005	.91300 - .00006	.030	4
3	7486890		.913	.002	.91290 - .00009	.030	4
3	7486891		.913	.004	.91280 - .00012	.030	8
3	7486893		.913	.008 AND UP	.91260 - .00030	.030	8
3	7486895		.914	.0005	.91400 - .00006	.030	4
3	7486897		.914	.002	.91390 - .00009	.030	4
3	7486898		.914	.004	.91380 - .00012	.030	8
3	7486900		.914	.008 AND UP	.91360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486902		.915	.0005	.91500 - .00006	.030	4
3	7486904		.915	.002	.91490 - .00009	.030	4
3	7486905		.915	.004	.91480 - .00012	.030	8
3	7486907		.915	.008 AND UP	.91460 - .00030	.030	8
3	7486909		.916	.0005	.91600 - .00006	.030	4
3	7486911		.916	.002	.91590 - .00009	.030	4
3	7486912		.916	.004	.91580 - .00012	.030	8
3	7486914		.916	.008 AND UP	.91560 - .00030	.030	8
3	7486916		.917	.0005	.91700 - .00006	.030	4
3	7486918		.917	.002	.91690 - .00009	.030	4
3	7486919		.917	.004	.91680 - .00012	.030	8
3	7486921		.917	.008 AND UP	.91660 - .00030	.030	8
3	7486923		.918	.0005	.91800 - .00006	.030	4
3	7486925		.918	.002	.91790 - .00009	.030	4
3	7486926		.918	.004	.91780 - .00012	.030	8
3	7486928		.918	.008 AND UP	.91760 - .00030	.030	8
3	7486930		.919	.0005	.91900 - .00006	.030	4
3	7486932		.919	.002	.91890 - .00009	.030	4
3	7486933		.919	.004	.91880 - .00012	.030	8
3	7486935		.919	.008 AND UP	.91860 - .00030	.030	8
3	7486937		.920	.0005	.92000 - .00006	.030	4
3	7486939		.920	.002	.91990 - .00009	.030	4
3	7486940		.920	.004	.91980 - .00012	.030	8
3	7486942		.920	.008 AND UP	.91960 - .00030	.030	8
3	7486944		.921	.0005	.92100 - .00006	.030	4
3	7486946		.921	.002	.92090 - .00009	.030	4
3	7486947		.921	.004	.92080 - .00012	.030	8
3	7486949		.921	.008 AND UP	.92060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7486951		.922	.0005	.92200 - .00006	.030	4
3	7486953		.922	.002	.92190 - .00009	.030	4
3	7486954		.922	.004	.92180 - .00012	.030	8
3	7486956		.922	.008 AND UP	.92160 - .00030	.030	8
3	7486958		.923	.0005	.92300 - .00006	.030	4
3	7486960		.923	.002	.92290 - .00009	.030	4
3	7486961		.923	.004	.92280 - .00012	.030	8
3	7486963		.923	.008 AND UP	.92260 - .00030	.030	8
3	7486965		.924	.0005	.92400 - .00006	.030	4
3	7486967		.924	.002	.92390 - .00009	.030	4
3	7486968		.924	.004	.92380 - .00012	.030	8
3	7486970		.924	.008 AND UP	.92360 - .00030	.030	8
3	7486972		.925	.0005	.92500 - .00006	.030	4
3	7486974		.925	.002	.92490 - .00009	.030	4
3	7486975		.925	.004	.92480 - .00012	.030	8
3	7486977		.925	.008 AND UP	.92460 - .00030	.030	8
3	7486979		.926	.0005	.92600 - .00006	.030	4
3	7486981		.926	.002	.92590 - .00009	.030	4
3	7486982		.926	.004	.92580 - .00012	.030	8
3	7486984		.926	.008 AND UP	.92560 - .00030	.030	8
3	7486986		.927	.0005	.92700 - .00006	.030	4
3	7486988		.927	.002	.92690 - .00009	.030	4
3	7486989		.927	.004	.92680 - .00012	.030	8
3	7486991		.927	.008 AND UP	.92660 - .00030	.030	8
3	7486993		.928	.0005	.92800 - .00006	.030	4
3	7486995		.928	.002	.92790 - .00009	.030	4
3	7486996		.928	.004	.92780 - .00012	.030	8
3	7486998		.928	.008 AND UP	.92760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487000		.929	.0005	.92900 - .00006	.030	4
3	7487002		.929	.002	.92890 - .00009	.030	4
3	7487003		.929	.004	.92880 - .00012	.030	8
3	7487005		.929	.008 AND UP	.92860 - .00030	.030	8
3	7487007		.930	.0005	.93000 - .00006	.030	4
3	7487009		.930	.002	.92990 - .00009	.030	4
3	7487010		.930	.004	.92980 - .00012	.030	8
3	7487012		.930	.008 AND UP	.92960 - .00030	.030	8
3	7487014		.931	.0005	.93100 - .00006	.030	4
3	7487016		.931	.002	.93090 - .00009	.030	4
3	7487017		.931	.004	.93080 - .00012	.030	8
3	7487019		.931	.008 AND UP	.93060 - .00030	.030	8
3	7487021		.932	.0005	.93200 - .00006	.030	4
3	7487023		.932	.002	.93190 - .00009	.030	4
3	7487024		.932	.004	.93180 - .00012	.030	8
3	7487026		.932	.008 AND UP	.93160 - .00030	.030	8
3	7487028		.933	.0005	.93300 - .00006	.030	4
3	7487030		.933	.002	.93290 - .00009	.030	4
3	7487031		.933	.004	.93280 - .00012	.030	8
3	7487033		.933	.008 AND UP	.93260 - .00030	.030	8
3	7487035		.934	.0005	.93400 - .00006	.030	4
3	7487037		.934	.002	.93390 - .00009	.030	4
3	7487038		.934	.004	.93380 - .00012	.030	8
3	7487040		.934	.008 AND UP	.93360 - .00030	.030	8
3	7487042		.935	.0005	.93500 - .00006	.030	4
3	7487044		.935	.002	.93490 - .00009	.030	4
3	7487045		.935	.004	.93480 - .00012	.030	8
3	7487047		.935	.008 AND UP	.93460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487049		.936	.0005	.93600 - .00006	.030	4
3	7487051		.936	.002	.93590 - .00009	.030	4
3	7487052		.936	.004	.93580 - .00012	.030	8
3	7487054		.936	.008 AND UP	.93560 - .00030	.030	8
3	7487056		.937	.0005	.93700 - .00006	.030	4
3	7487058		.937	.002	.93690 - .00009	.030	4
3	7487059		.937	.004	.93680 - .00012	.030	8
3	7487061		.937	.008 AND UP	.93660 - .00030	.030	8
3	7487063		.9375	.0005 AND UP	.93750 - .00006	.030	4
3	7487064		.938	.0005	.93800 - .00006	.030	4
3	7487066		.938	.002	.93790 - .00009	.030	4
3	7487067		.938	.004	.93780 - .00012	.030	8
3	7487069		.938	.008 AND UP	.93760 - .00030	.030	8
3	7487071		.939	.0005	.93900 - .00006	.030	4
3	7487073		.939	.002	.93890 - .00009	.030	4
3	7487074		.939	.004	.93880 - .00012	.030	8
3	7487076		.939	.008 AND UP	.93860 - .00030	.030	8
3	7487078		.940	.0005	.94000 - .00006	.030	4
3	7487080		.940	.002	.93990 - .00009	.030	4
3	7487081		.940	.004	.93980 - .00012	.030	8
3	7487083		.940	.008 AND UP	.93960 - .00030	.030	8
3	7487085		.941	.0005	.94100 - .00006	.030	4
3	7487087		.941	.002	.94090 - .00009	.030	4
3	7487088		.941	.004	.94080 - .00012	.030	8
3	7487090		.941	.008 AND UP	.94060 - .00030	.030	8
3	7487092		.942	.0005	.94200 - .00006	.030	4
3	7487094		.942	.002	.94190 - .00009	.030	4
3	7487095		.942	.004	.94180 - .00012	.030	8
3	7487097		.942	.008 AND UP	.94160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487099		.943	.0005	.94300 - .00006	.030	4
3	7487101		.943	.002	.94290 - .00009	.030	4
3	7487102		.943	.004	.94280 - .00012	.030	8
3	7487104		.943	.008 AND UP	.94260 - .00030	.030	8
3	7487106		.944	.0005	.94400 - .00006	.030	4
3	7487108		.944	.002	.94390 - .00009	.030	4
3	7487109		.944	.004	.94380 - .00012	.030	8
3	7487111		.944	.008 AND UP	.94360 - .00030	.030	8
3	7487113		.945	.0005	.94500 - .00006	.030	4
3	7487115		.945	.002	.94490 - .00009	.030	4
3	7487116		.945	.004	.94480 - .00012	.030	8
3	7487118		.945	.008 AND UP	.94460 - .00030	.030	8
3	7487120		.946	.0005	.94600 - .00006	.030	4
3	7487122		.946	.002	.94590 - .00009	.030	4
3	7487123		.946	.004	.94580 - .00012	.030	8
3	7487125		.946	.008 AND UP	.94560 - .00030	.030	8
3	7487127		.947	.0005	.94700 - .00006	.030	4
3	7487129		.947	.002	.94690 - .00009	.030	4
3	7487130		.947	.004	.94680 - .00012	.030	8
3	7487132		.947	.008 AND UP	.94660 - .00030	.030	8
3	7487134		.948	.0005	.94800 - .00006	.030	4
3	7487136		.948	.002	.94790 - .00009	.030	4
3	7487137		.948	.004	.94780 - .00012	.030	8
3	7487139		.948	.008 AND UP	.94760 - .00030	.030	8
3	7487141		.949	.0005	.94900 - .00006	.030	4
3	7487143		.949	.002	.94890 - .00009	.030	4
3	7487144		.949	.004	.94880 - .00012	.030	8
3	7487146		.949	.008 AND UP	.94860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487148		.950	.0005	.95000 - .00006	.030	4
3	7487150		.950	.002	.94990 - .00009	.030	4
3	7487151		.950	.004	.94980 - .00012	.030	8
3	7487153		.950	.008 AND UP	.94960 - .00030	.030	8
3	7487155		.951	.0005	.95100 - .00006	.030	4
3	7487157		.951	.002	.95090 - .00009	.030	4
3	7487158		.951	.004	.95080 - .00012	.030	8
3	7487160		.951	.008 AND UP	.95060 - .00030	.030	8
3	7487162		.952	.0005	.95200 - .00006	.030	4
3	7487164		.952	.002	.95190 - .00009	.030	4
3	7487165		.952	.004	.95180 - .00012	.030	8
3	7487167		.952	.008 AND UP	.95160 - .00030	.030	8
3	7487169		.953	.0005	.95300 - .00006	.030	4
3	7487171		.953	.002	.95290 - .00009	.030	4
3	7487172		.953	.004	.95280 - .00012	.030	8
3	7487174		.953	.008 AND UP	.95260 - .00030	.030	8
3	7487176		.954	.0005	.95400 - .00006	.030	4
3	7487178		.954	.002	.95390 - .00009	.030	4
3	7487179		.954	.004	.95380 - .00012	.030	8
3	7487181		.954	.008 AND UP	.95360 - .00030	.030	8
3	7487183		.955	.0005	.95500 - .00006	.030	4
3	7487185		.955	.002	.95490 - .00009	.030	4
3	7487186		.955	.004	.95480 - .00012	.030	8
3	7487188		.955	.008 AND UP	.95460 - .00030	.030	8
3	7487190		.956	.0005	.95600 - .00006	.030	4
3	7487192		.956	.002	.95590 - .00009	.030	4
3	7487193		.956	.004	.95580 - .00012	.030	8
3	7487195		.956	.008 AND UP	.95560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487197		.957	.0005	.95700 - .00006	.030	4
3	7487199		.957	.002	.95690 - .00009	.030	4
3	7487200		.957	.004	.95680 - .00012	.030	8
3	7487202		.957	.008 AND UP	.95660 - .00030	.030	8
3	7487204		.958	.0005	.95800 - .00006	.030	4
3	7487206		.958	.002	.95790 - .00009	.030	4
3	7487207		.958	.004	.95780 - .00012	.030	8
3	7487209		.958	.008 AND UP	.95760 - .00030	.030	8
3	7487211		.959	.0005	.95900 - .00006	.030	4
3	7487213		.959	.002	.95890 - .00009	.030	4
3	7487214		.959	.004	.95880 - .00012	.030	8
3	7487216		.959	.008 AND UP	.95860 - .00030	.030	8
3	7487218		.960	.0005	.96000 - .00006	.030	4
3	7487220		.960	.002	.95990 - .00009	.030	4
3	7487221		.960	.004	.95980 - .00012	.030	8
3	7487223		.960	.008 AND UP	.95960 - .00030	.030	8
3	7487225		.961	.0005	.96100 - .00006	.030	4
3	7487227		.961	.002	.96090 - .00009	.030	4
3	7487228		.961	.004	.96080 - .00012	.030	8
3	7487230		.961	.008 AND UP	.96060 - .00030	.030	8
3	7487232		.962	.0005	.96200 - .00006	.030	4
3	7487234		.962	.002	.96190 - .00009	.030	4
3	7487235		.962	.004	.96180 - .00012	.030	8
3	7487237		.962	.008 AND UP	.96160 - .00030	.030	8
3	7487239		.963	.0005	.96300 - .00006	.030	4
3	7487241		.963	.002	.96290 - .00009	.030	4
3	7487242		.963	.004	.96280 - .00012	.030	8
3	7487244		.963	.008 AND UP	.96260 - .00030	.030	8

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487246		.964	.0005	.96400 - .00006	.030	4
3	7487248		.964	.002	.96390 - .00009	.030	4
3	7487249		.964	.004	.96380 - .00012	.030	8
3	7487251		.964	.008 AND UP	.96360 - .00030	.030	8
3	7487253		.965	.0005	.96500 - .00006	.030	4
3	7487255		.965	.002	.96490 - .00009	.030	4
3	7487256		.965	.004	.96480 - .00012	.030	8
3	7487258		.965	.008 AND UP	.96460 - .00030	.030	8
3	7487260		.966	.0005	.96600 - .00006	.030	4
3	7487262		.966	.002	.96590 - .00009	.030	4
3	7487263		.966	.004	.96580 - .00012	.030	8
3	7487265		.966	.008 AND UP	.96560 - .00030	.030	8
3	7487267		.967	.0005	.96700 - .00006	.030	4
3	7487269		.967	.002	.96690 - .00009	.030	4
3	7487270		.967	.004	.96680 - .00012	.030	8
3	7487272		.967	.008 AND UP	.96660 - .00030	.030	8
3	7487274		.968	.0005	.96800 - .00006	.030	4
3	7487276		.968	.002	.96790 - .00009	.030	4
3	7487277		.968	.004	.96780 - .00012	.030	8
3	7487279		.968	.008 AND UP	.96760 - .00030	.030	8
3	7487281		.96875	.0005 AND UP	.96875 - .00006	.030	4
3	7487282		.969	.0005	.96900 - .00006	.030	4
3	7487284		.969	.002	.96890 - .00009	.030	4
3	7487285		.969	.004	.96880 - .00012	.030	8
3	7487287		.969	.008 AND UP	.96860 - .00030	.030	8
3	7487289		.970	.0005	.97000 - .00006	.030	4
3	7487291		.970	.002	.96990 - .00009	.030	4
3	7487292		.970	.004	.96980 - .00012	.030	8
3	7487294		.970	.008 AND UP	.96960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487296		.971	.0005	.97100 - .00006	.030	4
3	7487298		.971	.002	.97090 - .00009	.030	4
3	7487299		.971	.004	.97080 - .00012	.030	8
3	7487301		.971	.008 AND UP	.97060 - .00030	.030	8
3	7487303		.972	.0005	.97200 - .00006	.030	4
3	7487305		.972	.002	.97190 - .00009	.030	4
3	7487306		.972	.004	.97180 - .00012	.030	8
3	7487308		.972	.008 AND UP	.97160 - .00030	.030	8
3	7487310		.973	.0005	.97300 - .00006	.030	4
3	7487312		.973	.002	.97290 - .00009	.030	4
3	7487313		.973	.004	.97280 - .00012	.030	8
3	7487315		.973	.008 AND UP	.97260 - .00030	.030	8
3	7487317		.974	.0005	.97400 - .00006	.030	4
3	7487319		.974	.002	.97390 - .00009	.030	4
3	7487320		.974	.004	.97380 - .00012	.030	8
3	7487322		.974	.008 AND UP	.97360 - .00030	.030	8
3	7487324		.975	.0005	.97500 - .00006	.030	4
3	7487326		.975	.002	.97490 - .00009	.030	4
3	7487327		.975	.004	.97480 - .00012	.030	8
3	7487329		.975	.008 AND UP	.97460 - .00030	.030	8
3	7487331		.976	.0005	.97600 - .00006	.030	4
3	7487333		.976	.002	.97590 - .00009	.030	4
3	7487334		.976	.004	.97580 - .00012	.030	8
3	7487336		.976	.008 AND UP	.97560 - .00030	.030	8
3	7487338		.977	.0005	.97700 - .00006	.030	4
3	7487340		.977	.002	.97690 - .00009	.030	4
3	7487341		.977	.004	.97680 - .00012	.030	8
3	7487343		.977	.008 AND UP	.97660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487345		.978	.0005	.97800 - .00006	.030	4
3	7487347		.978	.002	.97790 - .00009	.030	4
3	7487348		.978	.004	.97780 - .00012	.030	8
3	7487350		.978	.008 AND UP	.97760 - .00030	.030	8
3	7487352		.979	.0005	.97900 - .00006	.030	4
3	7487354		.979	.002	.97890 - .00009	.030	4
3	7487355		.979	.004	.97880 - .00012	.030	8
3	7487357		.979	.008 AND UP	.97860 - .00030	.030	8
3	7487359		.980	.0005	.98000 - .00006	.030	4
3	7487361		.980	.002	.97990 - .00009	.030	4
3	7487362		.980	.004	.97980 - .00012	.030	8
3	7487364		.980	.008 AND UP	.97960 - .00030	.030	8
3	7487366		.981	.0005	.98100 - .00006	.030	4
3	7487368		.981	.002	.98090 - .00009	.030	4
3	7487369		.981	.004	.98080 - .00012	.030	8
3	7487371		.981	.008 AND UP	.98060 - .00030	.030	8
3	7487373		.982	.0005	.98200 - .00006	.030	4
3	7487375		.982	.002	.98190 - .00009	.030	4
3	7487376		.982	.004	.98180 - .00012	.030	8
3	7487378		.982	.008 AND UP	.98160 - .00030	.030	8
3	7487380		.983	.0005	.98300 - .00006	.030	4
3	7487382		.983	.002	.98290 - .00009	.030	4
3	7487383		.983	.004	.98280 - .00012	.030	8
3	7487385		.983	.008 AND UP	.98260 - .00030	.030	8
3	7487387		.984	.0005	.98400 - .00006	.030	4
3	7487389		.984	.002	.98390 - .00009	.030	4
3	7487390		.984	.004	.98380 - .00012	.030	8
3	7487392		.984	.008 AND UP	.98360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487394		.985	.0005	.98500 - .00006	.030	4
3	7487396		.985	.002	.98490 - .00009	.030	4
3	7487397		.985	.004	.98480 - .00012	.030	8
3	7487399		.985	.008 AND UP	.98460 - .00030	.030	8
3	7487401		.986	.0005	.98600 - .00006	.030	4
3	7487403		.986	.002	.98590 - .00009	.030	4
3	7487404		.986	.004	.98580 - .00012	.030	8
3	7487406		.986	.008 AND UP	.98560 - .00030	.030	8
3	7487408		.987	.0005	.98700 - .00006	.030	4
3	7487410		.987	.002	.98690 - .00009	.030	4
3	7487411		.987	.004	.98680 - .00012	.030	8
3	7487413		.987	.008 AND UP	.98660 - .00030	.030	8
3	7487415		.988	.0005	.98800 - .00006	.030	4
3	7487417		.988	.002	.98790 - .00009	.030	4
3	7487418		.988	.004	.98780 - .00012	.030	8
3	7487420		.988	.008 AND UP	.98760 - .00030	.030	8
3	7487422		.989	.0005	.98900 - .00006	.030	4
3	7487424		.989	.002	.98890 - .00009	.030	4
3	7487425		.989	.004	.98880 - .00012	.030	8
3	7487427		.989	.008 AND UP	.98860 - .00030	.030	8
3	7487429		.990	.0005	.99000 - .00006	.030	4
3	7487431		.990	.002	.98990 - .00009	.030	4
3	7487432		.990	.004	.98980 - .00012	.030	8
3	7487434		.990	.008 AND UP	.98960 - .00030	.030	8
3	7487436		.991	.0005	.99100 - .00006	.030	4
3	7487438		.991	.002	.99090 - .00009	.030	4
3	7487439		.991	.004	.99080 - .00012	.030	8
3	7487441		.991	.008 AND UP	.99060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487443		.992	.0005	.99200 - .00006	.030	4
3	7487445		.992	.002	.99190 - .00009	.030	4
3	7487446		.992	.004	.99180 - .00012	.030	8
3	7487448		.992	.008 AND UP	.99160 - .00030	.030	8
3	7487450		.993	.0005	.99300 - .00006	.030	4
3	7487452		.993	.002	.99290 - .00009	.030	4
3	7487453		.993	.004	.99280 - .00012	.030	8
3	7487455		.993	.008 AND UP	.99260 - .00030	.030	8
3	7487457		.994	.0005	.99400 - .00006	.030	4
3	7487459		.994	.002	.99390 - .00009	.030	4
3	7487460		.994	.004	.99380 - .00012	.030	8
3	7487462		.994	.008 AND UP	.99360 - .00030	.030	8
3	7487464		.995	.0005	.99500 - .00006	.030	4
3	7487466		.995	.002	.99490 - .00009	.030	4
3	7487467		.995	.004	.99480 - .00012	.030	8
3	7487469		.995	.008 AND UP	.99460 - .00030	.030	8
3	7487471		.996	.0005	.99600 - .00006	.030	4
3	7487473		.996	.002	.99590 - .00009	.030	4
3	7487474		.996	.004	.99580 - .00012	.030	8
3	7487476		.996	.008 AND UP	.99560 - .00030	.030	8
3	7487478		.997	.0005	.99700 - .00006	.030	4
3	7487480		.997	.002	.99690 - .00009	.030	4
3	7487481		.997	.004	.99680 - .00012	.030	8
3	7487483		.997	.008 AND UP	.99660 - .00030	.030	8
3	7487485		.998	.0005	.99800 - .00006	.030	4
3	7487487		.998	.002	.99790 - .00009	.030	4
3	7487488		.998	.004	.99780 - .00012	.030	8
3	7487490		.998	.008 AND UP	.99760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487492		.999	.0005	.99900 - .00006	.030	4
3	7487494		.999	.002	.99890 - .00009	.030	4
3	7487495		.999	.004	.99880 - .00012	.030	8
3	7487497		.999	.008 AND UP	.99860 - .00030	.030	8
3	7487499		1.000	.0005	1.00000 - .00006	.030	4
3	7487501		1.000	.002	.99990 - .00009	.030	4
3	7487502		1.000	.004	.99980 - .00012	.030	8
3	7487504		1.000	.008 AND UP	.99960 - .00030	.030	8
3	7487506		1.001	.0005	1.00100 - .00006	.030	4
3	7487508		1.001	.002	1.00090 - .00009	.030	4
3	7487509		1.001	.004	1.00080 - .00012	.030	8
3	7487511		1.001	.008 AND UP	1.00060 - .00030	.030	8
3	7487513		1.002	.0005	1.00200 - .00006	.030	4
3	7487515		1.002	.002	1.00190 - .00009	.030	4
3	7487516		1.002	.004	1.00180 - .00012	.030	8
3	7487518		1.002	.008 AND UP	1.00160 - .00030	.030	8
3	7487520		1.003	.0005	1.00300 - .00006	.030	4
3	7487522		1.003	.002	1.00290 - .00009	.030	4
3	7487523		1.003	.004	1.00280 - .00012	.030	8
3	7487525		1.003	.008 AND UP	1.00260 - .00030	.030	8
3	7487527		1.004	.0005	1.00400 - .00006	.030	4
3	7487529		1.004	.002	1.00390 - .00009	.030	4
3	7487530		1.004	.004	1.00380 - .00012	.030	8
3	7487532		1.004	.008 AND UP	1.00360 - .00030	.030	8
3	7487534		1.005	.0005	1.00500 - .00006	.030	4
3	7487536		1.005	.002	1.00490 - .00009	.030	4
3	7487537		1.005	.004	1.00480 - .00012	.030	8
3	7487539		1.005	.008 AND UP	1.00460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487541		1.006	.0005	1.00600 - .00006	.030	4
3	7487543		1.006	.002	1.00590 - .00009	.030	4
3	7487544		1.006	.004	1.00580 - .00012	.030	8
3	7487546		1.006	.008 AND UP	1.00560 - .00030	.030	8
3	7487548		1.007	.0005	1.00700 - .00006	.030	4
3	7487550		1.007	.002	1.00690 - .00009	.030	4
3	7487551		1.007	.004	1.00680 - .00012	.030	8
3	7487553		1.007	.008 AND UP	1.00660 - .00030	.030	8
3	7487555		1.008	.0005	1.00800 - .00006	.030	4
3	7487557		1.008	.002	1.00790 - .00009	.030	4
3	7487558		1.008	.004	1.00780 - .00012	.030	8
3	7487560		1.008	.008 AND UP	1.00760 - .00030	.030	8
3	7487562		1.009	.0005	1.00900 - .00006	.030	4
3	7487564		1.009	.002	1.00890 - .00009	.030	4
3	7487565		1.009	.004	1.00880 - .00012	.030	8
3	7487567		1.009	.008 AND UP	1.00860 - .00030	.030	8
3	7487569		1.010	.0005	1.01000 - .00006	.030	4
3	7487571		1.010	.002	1.00990 - .00009	.030	4
3	7487572		1.010	.004	1.00980 - .00012	.030	8
3	7487574		1.010	.008 AND UP	1.00960 - .00030	.030	8
3	7487576		1.011	.0005	1.01100 - .00006	.030	4
3	7487578		1.011	.002	1.01090 - .00009	.030	4
3	7487579		1.011	.004	1.01080 - .00012	.030	8
3	7487581		1.011	.008 AND UP	1.01060 - .00030	.030	8
3	7487583		1.012	.0005	1.01200 - .00006	.030	4
3	7487585		1.012	.002	1.01190 - .00009	.030	4
3	7487586		1.012	.004	1.01180 - .00012	.030	8
3	7487588		1.012	.008 AND UP	1.01160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7487590		1.013	.0005	1.01300 - .00006	.030	4
3	7487592		1.013	.002	1.01290 - .00009	.030	4
3	7487593		1.013	.004	1.01280 - .00012	.030	8
3	7487595		1.013	.008 AND UP	1.01260 - .00030	.030	8
3	7487597		1.014	.0005	1.01400 - .00006	.030	4
3	7487599		1.014	.002	1.01390 - .00009	.030	4
3	7487600		1.014	.004	1.01380 - .00012	.030	8
3	7487602		1.014	.008 AND UP	1.01360 - .00030	.030	8
3	7487604		1.015	.0005	1.01500 - .00006	.030	4
3	7487606		1.015	.002	1.01490 - .00009	.030	4
3	7487607		1.015	.004	1.01480 - .00012	.030	8
3	7487609		1.015	.008 AND UP	1.01460 - .00030	.030	8
3	7487611		1.016	.0005	1.01600 - .00006	.030	4
3	7487613		1.016	.002	1.01590 - .00009	.030	4
3	7487614		1.016	.004	1.01580 - .00012	.030	8
3	7487616		1.016	.008 AND UP	1.01560 - .00030	.030	8
3	7487618		1.017	.0005	1.01700 - .00006	.030	4
3	7487620		1.017	.002	1.01690 - .00009	.030	4
3	7487621		1.017	.004	1.01680 - .00012	.030	8
3	7487623		1.017	.008 AND UP	1.01660 - .00030	.030	8
3	7487625		1.018	.0005	1.01800 - .00006	.030	4
3	7487627		1.018	.002	1.01790 - .00009	.030	4
3	7487628		1.018	.004	1.01780 - .00012	.030	8
3	7487630		1.018	.008 AND UP	1.01760 - .00030	.030	8
3	7487632		1.019	.0005	1.01900 - .00006	.030	4
3	7487634		1.019	.002	1.01890 - .00009	.030	4
3	7487635		1.019	.004	1.01880 - .00012	.030	8
3	7487637		1.019	.008 AND UP	1.01860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487639		1.020	.0005	1.02000 - .00006	.030	4
3	7487641		1.020	.002	1.01990 - .00009	.030	4
3	7487642		1.020	.004	1.01980 - .00012	.030	8
3	7487644		1.020	.008 AND UP	1.01960 - .00030	.030	8
3	7487646		1.021	.0005	1.02100 - .00006	.030	4
3	7487648		1.021	.002	1.02090 - .00009	.030	4
3	7487649		1.021	.004	1.02080 - .00012	.030	8
3	7487651		1.021	.008 AND UP	1.02060 - .00030	.030	8
3	7487653		1.022	.0005	1.02200 - .00006	.030	4
3	7487655		1.022	.002	1.02190 - .00009	.030	4
3	7487656		1.022	.004	1.02180 - .00012	.030	8
3	7487658		1.022	.008 AND UP	1.02160 - .00030	.030	8
3	7487660		1.023	.0005	1.02300 - .00006	.030	4
3	7487662		1.023	.002	1.02290 - .00009	.030	4
3	7487663		1.023	.004	1.02280 - .00012	.030	8
3	7487665		1.023	.008 AND UP	1.02260 - .00030	.030	8
3	7487667		1.024	.0005	1.02400 - .00006	.030	4
3	7487669		1.024	.002	1.02390 - .00009	.030	4
3	7487670		1.024	.004	1.02380 - .00012	.030	8
3	7487672		1.024	.008 AND UP	1.02360 - .00030	.030	8
3	7487674		1.025	.0005	1.02500 - .00006	.030	4
3	7487676		1.025	.002	1.02490 - .00009	.030	4
3	7487677		1.025	.004	1.02480 - .00012	.030	8
3	7487679		1.025	.008 AND UP	1.02460 - .00030	.030	8
3	7487681		1.026	.0005	1.02600 - .00006	.030	4
3	7487683		1.026	.002	1.02590 - .00009	.030	4
3	7487684		1.026	.004	1.02580 - .00012	.030	8
3	7487686		1.026	.008 AND UP	1.02560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487688		1.027	.0005	1.02700 - .00006	.030	4
3	7487690		1.027	.002	1.02690 - .00009	.030	4
3	7487691		1.027	.004	1.02680 - .00012	.030	8
3	7487693		1.027	.008 AND UP	1.02660 - .00030	.030	8
3	7487695		1.028	.0005	1.02800 - .00006	.030	4
3	7487697		1.028	.002	1.02790 - .00009	.030	4
3	7487698		1.028	.004	1.02780 - .00012	.030	8
3	7487700		1.028	.008 AND UP	1.02760 - .00030	.030	8
3	7487702		1.029	.0005	1.02900 - .00006	.030	4
3	7487704		1.029	.002	1.02890 - .00009	.030	4
3	7487705		1.029	.004	1.02880 - .00012	.030	8
3	7487707		1.029	.008 AND UP	1.02860 - .00030	.030	8
3	7487709		1.030	.0005	1.03000 - .00006	.030	4
3	7487711		1.030	.002	1.02990 - .00009	.030	4
3	7487712		1.030	.004	1.02980 - .00012	.030	8
3	7487714		1.030	.008 AND UP	1.02960 - .00030	.030	8
3	7487716		1.031	.0005	1.03100 - .00006	.030	4
3	7487718		1.031	.002	1.03090 - .00009	.030	4
3	7487719		1.031	.004	1.03080 - .00012	.030	8
3	7487721		1.031	.008 AND UP	1.03060 - .00030	.030	8
3	7487723		1.03125	.0005 AND UP	1.03125 - .00006	.030	4
3	7487724		1.032	.0005	1.03200 - .00006	.030	4
3	7487726		1.032	.002	1.03190 - .00009	.030	4
3	7487727		1.032	.004	1.03180 - .00012	.030	8
3	7487729		1.032	.008 AND UP	1.03160 - .00030	.030	8
3	7487731		1.033	.0005	1.03300 - .00006	.030	4
3	7487733		1.033	.002	1.03290 - .00009	.030	4
3	7487734		1.033	.004	1.03280 - .00012	.030	8
3	7487736		1.033	.008 AND UP	1.03260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487738		1.034	.0005	1.03400 - .00006	.030	4
3	7487740		1.034	.002	1.03390 - .00009	.030	4
3	7487741		1.034	.004	1.03380 - .00012	.030	8
3	7487743		1.034	.008 AND UP	1.03360 - .00030	.030	8
3	7487745		1.035	.0005	1.03500 - .00006	.030	4
3	7487747		1.035	.002	1.03490 - .00009	.030	4
3	7487748		1.035	.004	1.03480 - .00012	.030	8
3	7487750		1.035	.008 AND UP	1.03460 - .00030	.030	8
3	7487752		1.036	.0005	1.03600 - .00006	.030	4
3	7487754		1.036	.002	1.03590 - .00009	.030	4
3	7487755		1.036	.004	1.03580 - .00012	.030	8
3	7487757		1.036	.008 AND UP	1.03560 - .00030	.030	8
3	7487759		1.037	.0005	1.03700 - .00006	.030	4
3	7487761		1.037	.002	1.03690 - .00009	.030	4
3	7487762		1.037	.004	1.03680 - .00012	.030	8
3	7487764		1.037	.008 AND UP	1.03660 - .00030	.030	8
3	7487766		1.038	.0005	1.03800 - .00006	.030	4
3	7487768		1.038	.002	1.03790 - .00009	.030	4
3	7487769		1.038	.004	1.03780 - .00012	.030	8
3	7487771		1.038	.008 AND UP	1.03760 - .00030	.030	8
3	7487773		1.039	.0005	1.03900 - .00006	.030	4
3	7487775		1.039	.002	1.03890 - .00009	.030	4
3	7487776		1.039	.004	1.03880 - .00012	.030	8
3	7487778		1.039	.008 AND UP	1.03860 - .00030	.030	8
3	7487780		1.040	.0005	1.04000 - .00006	.030	4
3	7487782		1.040	.002	1.03990 - .00009	.030	4
3	7487783		1.040	.004	1.03980 - .00012	.030	8
3	7487785		1.040	.008 AND UP	1.03960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487787		1.041	.0005	1.04100 - .00006	.030	4
3	7487789		1.041	.002	1.04090 - .00009	.030	4
3	7487790		1.041	.004	1.04080 - .00012	.030	8
3	7487792		1.041	.008 AND UP	1.04060 - .00030	.030	8
3	7487794		1.042	.0005	1.04200 - .00006	.030	4
3	7487796		1.042	.002	1.04190 - .00009	.030	4
3	7487797		1.042	.004	1.04180 - .00012	.030	8
3	7487799		1.042	.008 AND UP	1.04160 - .00030	.030	8
3	7487801		1.043	.0005	1.04300 - .00006	.030	4
3	7487803		1.043	.002	1.04290 - .00009	.030	4
3	7487804		1.043	.004	1.04280 - .00012	.030	8
3	7487806		1.043	.008 AND UP	1.04260 - .00030	.030	8
3	7487808		1.044	.0005	1.04400 - .00006	.030	4
3	7487810		1.044	.002	1.04390 - .00009	.030	4
3	7487811		1.044	.004	1.04380 - .00012	.030	8
3	7487813		1.044	.008 AND UP	1.04360 - .00030	.030	8
3	7487815		1.045	.0005	1.04500 - .00006	.030	4
3	7487817		1.045	.002	1.04490 - .00009	.030	4
3	7487818		1.045	.004	1.04480 - .00012	.030	8
3	7487820		1.045	.008 AND UP	1.04460 - .00030	.030	8
3	7487822		1.046	.0005	1.04600 - .00006	.030	4
3	7487824		1.046	.002	1.04590 - .00009	.030	4
3	7487825		1.046	.004	1.04580 - .00012	.030	8
3	7487827		1.046	.008 AND UP	1.04560 - .00030	.030	8
3	7487829		1.047	.0005	1.04700 - .00006	.030	4
3	7487831		1.047	.002	1.04690 - .00009	.030	4
3	7487832		1.047	.004	1.04680 - .00012	.030	8
3	7487834		1.047	.008 AND UP	1.04660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487836		1.048	.0005	1.04800 - .00006	.030	4
3	7487838		1.048	.002	1.04790 - .00009	.030	4
3	7487839		1.048	.004	1.04780 - .00012	.030	8
3	7487841		1.048	.008 AND UP	1.04760 - .00030	.030	8
3	7487843		1.049	.0005	1.04900 - .00006	.030	4
3	7487845		1.049	.002	1.04890 - .00009	.030	4
3	7487846		1.049	.004	1.04880 - .00012	.030	8
3	7487848		1.049	.008 AND UP	1.04860 - .00030	.030	8
3	7487850		1.050	.0005	1.05000 - .00006	.030	4
3	7487852		1.050	.002	1.04990 - .00009	.030	4
3	7487853		1.050	.004	1.04980 - .00012	.030	8
3	7487855		1.050	.008 AND UP	1.04960 - .00030	.030	8
3	7487857		1.051	.0005	1.05100 - .00006	.030	4
3	7487859		1.051	.002	1.05090 - .00009	.030	4
3	7487860		1.051	.004	1.05080 - .00012	.030	8
3	7487862		1.051	.008 AND UP	1.05060 - .00030	.030	8
3	7487864		1.052	.0005	1.05200 - .00006	.030	4
3	7487866		1.052	.002	1.05190 - .00009	.030	4
3	7487867		1.052	.004	1.05180 - .00012	.030	8
3	7487869		1.052	.008 AND UP	1.05160 - .00030	.030	8
3	7487871		1.053	.0005	1.05300 - .00006	.030	4
3	7487873		1.053	.002	1.05290 - .00009	.030	4
3	7487874		1.053	.004	1.05280 - .00012	.030	8
3	7487876		1.053	.008 AND UP	1.05260 - .00030	.030	8
3	7487878		1.054	.0005	1.05400 - .00006	.030	4
3	7487880		1.054	.002	1.05390 - .00009	.030	4
3	7487881		1.054	.004	1.05380 - .00012	.030	8
3	7487883		1.054	.008 AND UP	1.05360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487885		1.055	.0005	1.05500 - .00006	.030	4
3	7487887		1.055	.002	1.05490 - .00009	.030	4
3	7487888		1.055	.004	1.05480 - .00012	.030	8
3	7487890		1.055	.008 AND UP	1.05460 - .00030	.030	8
3	7487892		1.056	.0005	1.05600 - .00006	.030	4
3	7487894		1.056	.002	1.05590 - .00009	.030	4
3	7487895		1.056	.004	1.05580 - .00012	.030	8
3	7487897		1.056	.008 AND UP	1.05560 - .00030	.030	8
3	7487899		1.057	.0005	1.05700 - .00006	.030	4
3	7487901		1.057	.002	1.05690 - .00009	.030	4
3	7487902		1.057	.004	1.05680 - .00012	.030	8
3	7487904		1.057	.008 AND UP	1.05660 - .00030	.030	8
3	7487906		1.058	.0005	1.05800 - .00006	.030	4
3	7487908		1.058	.002	1.05790 - .00009	.030	4
3	7487909		1.058	.004	1.05780 - .00012	.030	8
3	7487911		1.058	.008 AND UP	1.05760 - .00030	.030	8
3	7487913		1.059	.0005	1.05900 - .00006	.030	4
3	7487915		1.059	.002	1.05890 - .00009	.030	4
3	7487916		1.059	.004	1.05880 - .00012	.030	8
3	7487918		1.059	.008 AND UP	1.05860 - .00030	.030	8
3	7487920		1.060	.0005	1.06000 - .00006	.030	4
3	7487922		1.060	.002	1.05990 - .00009	.030	4
3	7487923		1.060	.004	1.05980 - .00012	.030	8
3	7487925		1.060	.008 AND UP	1.05960 - .00030	.030	8
3	7487927		1.061	.0005	1.06100 - .00006	.030	4
3	7487929		1.061	.002	1.06090 - .00009	.030	4
3	7487930		1.061	.004	1.06080 - .00012	.030	8
3	7487932		1.061	.008 AND UP	1.06060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487934		1.062	.0005	1.06200 - .00006	.030	4
3	7487936		1.062	.002	1.06190 - .00009	.030	4
3	7487937		1.062	.004	1.06180 - .00012	.030	8
3	7487939		1.062	.008 AND UP	1.06160 - .00030	.030	8
3	7487941		1.0625	.0005 AND UP	1.06250 - .00006	.030	4
3	7487942		1.063	.0005	1.06300 - .00006	.030	4
3	7487944		1.063	.002	1.06290 - .00009	.030	4
3	7487945		1.063	.004	1.06280 - .00012	.030	8
3	7487947		1.063	.008 AND UP	1.06260 - .00030	.030	8
3	7487949		1.064	.0005	1.06400 - .00006	.030	4
3	7487951		1.064	.002	1.06390 - .00009	.030	4
3	7487952		1.064	.004	1.06380 - .00012	.030	8
3	7487954		1.064	.008 AND UP	1.06360 - .00030	.030	8
3	7487956		1.065	.0005	1.06500 - .00006	.030	4
3	7487958		1.065	.002	1.06490 - .00009	.030	4
3	7487959		1.065	.004	1.06480 - .00012	.030	8
3	7487961		1.065	.008 AND UP	1.06460 - .00030	.030	8
3	7487963		1.066	.0005	1.06600 - .00006	.030	4
3	7487965		1.066	.002	1.06590 - .00009	.030	4
3	7487966		1.066	.004	1.06580 - .00012	.030	8
3	7487968		1.066	.008 AND UP	1.06560 - .00030	.030	8
3	7487970		1.067	.0005	1.06700 - .00006	.030	4
3	7487972		1.067	.002	1.06690 - .00009	.030	4
3	7487973		1.067	.004	1.06680 - .00012	.030	8
3	7487975		1.067	.008 AND UP	1.06660 - .00030	.030	8
3	7487977		1.068	.0005	1.06800 - .00006	.030	4
3	7487979		1.068	.002	1.06790 - .00009	.030	4
3	7487980		1.068	.004	1.06780 - .00012	.030	8
3	7487982		1.068	.008 AND UP	1.06760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7487984		1.069	.0005	1.06900 - .00006	.030	4
3	7487986		1.069	.002	1.06890 - .00009	.030	4
3	7487987		1.069	.004	1.06880 - .00012	.030	8
3	7487989		1.069	.008 AND UP	1.06860 - .00030	.030	8
3	7487991		1.070	.0005	1.07000 - .00006	.030	4
3	7487993		1.070	.002	1.06990 - .00009	.030	4
3	7487994		1.070	.004	1.06980 - .00012	.030	8
3	7487996		1.070	.008 AND UP	1.06960 - .00030	.030	8
3	7487998		1.071	.0005	1.07100 - .00006	.030	4
3	7488000		1.071	.002	1.07090 - .00009	.030	4
3	7488001		1.071	.004	1.07080 - .00012	.030	8
3	7488003		1.071	.008 AND UP	1.07060 - .00030	.030	8
3	7488005		1.072	.0005	1.07200 - .00006	.030	4
3	7488007		1.072	.002	1.07190 - .00009	.030	4
3	7488008		1.072	.004	1.07180 - .00012	.030	8
3	7488010		1.072	.008 AND UP	1.07160 - .00030	.030	8
3	7488012		1.073	.0005	1.07300 - .00006	.030	4
3	7488014		1.073	.002	1.07290 - .00009	.030	4
3	7488015		1.073	.004	1.07280 - .00012	.030	8
3	7488017		1.073	.008 AND UP	1.07260 - .00030	.030	8
3	7488019		1.074	.0005	1.07400 - .00006	.030	4
3	7488021		1.074	.002	1.07390 - .00009	.030	4
3	7488022		1.074	.004	1.07380 - .00012	.030	8
3	7488024		1.074	.008 AND UP	1.07360 - .00030	.030	8
3	7488026		1.075	.0005	1.07500 - .00006	.030	4
3	7488028		1.075	.002	1.07490 - .00009	.030	4
3	7488029		1.075	.004	1.07480 - .00012	.030	8
3	7488031		1.075	.008 AND UP	1.07460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488033		1.076	.0005	1.07600 - .00006	.030	4
3	7488035		1.076	.002	1.07590 - .00009	.030	4
3	7488036		1.076	.004	1.07580 - .00012	.030	8
3	7488038		1.076	.008 AND UP	1.07560 - .00030	.030	8
3	7488040		1.077	.0005	1.07700 - .00006	.030	4
3	7488042		1.077	.002	1.07690 - .00009	.030	4
3	7488043		1.077	.004	1.07680 - .00012	.030	8
3	7488045		1.077	.008 AND UP	1.07660 - .00030	.030	8
3	7488047		1.078	.0005	1.07800 - .00006	.030	4
3	7488049		1.078	.002	1.07790 - .00009	.030	4
3	7488050		1.078	.004	1.07780 - .00012	.030	8
3	7488052		1.078	.008 AND UP	1.07760 - .00030	.030	8
3	7488054		1.079	.0005	1.07900 - .00006	.030	4
3	7488056		1.079	.002	1.07890 - .00009	.030	4
3	7488057		1.079	.004	1.07880 - .00012	.030	8
3	7488059		1.079	.008 AND UP	1.07860 - .00030	.030	8
3	7488061		1.080	.0005	1.08000 - .00006	.030	4
3	7488063		1.080	.002	1.07990 - .00009	.030	4
3	7488064		1.080	.004	1.07980 - .00012	.030	8
3	7488066		1.080	.008 AND UP	1.07960 - .00030	.030	8
3	7488068		1.081	.0005	1.08100 - .00006	.030	4
3	7488070		1.081	.002	1.08090 - .00009	.030	4
3	7488071		1.081	.004	1.08080 - .00012	.030	8
3	7488073		1.081	.008 AND UP	1.08060 - .00030	.030	8
3	7488075		1.082	.0005	1.08200 - .00006	.030	4
3	7488077		1.082	.002	1.08190 - .00009	.030	4
3	7488078		1.082	.004	1.08180 - .00012	.030	8
3	7488080		1.082	.008 AND UP	1.08160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488082		1.083	.0005	1.08300 - .00006	.030	4
3	7488084		1.083	.002	1.08290 - .00009	.030	4
3	7488085		1.083	.004	1.08280 - .00012	.030	8
3	7488087		1.083	.008 AND UP	1.08260 - .00030	.030	8
3	7488089		1.084	.0005	1.08400 - .00006	.030	4
3	7488091		1.084	.002	1.08390 - .00009	.030	4
3	7488092		1.084	.004	1.08380 - .00012	.030	8
3	7488094		1.084	.008 AND UP	1.08360 - .00030	.030	8
3	7488096		1.085	.0005	1.08500 - .00006	.030	4
3	7488098		1.085	.002	1.08490 - .00009	.030	4
3	7488099		1.085	.004	1.08480 - .00012	.030	8
3	7488101		1.085	.008 AND UP	1.08460 - .00030	.030	8
3	7488103		1.086	.0005	1.08600 - .00006	.030	4
3	7488105		1.086	.002	1.08590 - .00009	.030	4
3	7488106		1.086	.004	1.08580 - .00012	.030	8
3	7488108		1.086	.008 AND UP	1.08560 - .00030	.030	8
3	7488110		1.087	.0005	1.08700 - .00006	.030	4
3	7488112		1.087	.002	1.08690 - .00009	.030	4
3	7488113		1.087	.004	1.08680 - .00012	.030	8
3	7488115		1.087	.008 AND UP	1.08660 - .00030	.030	8
3	7488117		1.088	.0005	1.08800 - .00006	.030	4
3	7488119		1.088	.002	1.08790 - .00009	.030	4
3	7488120		1.088	.004	1.08780 - .00012	.030	8
3	7488122		1.088	.008 AND UP	1.08760 - .00030	.030	8
3	7488124		1.089	.0005	1.08900 - .00006	.030	4
3	7488126		1.089	.002	1.08890 - .00009	.030	4
3	7488127		1.089	.004	1.08880 - .00012	.030	8
3	7488129		1.089	.008 AND UP	1.08860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488131		1.090	.0005	1.09000 - .00006	.030	4
3	7488133		1.090	.002	1.08990 - .00009	.030	4
3	7488134		1.090	.004	1.08980 - .00012	.030	8
3	7488136		1.090	.008 AND UP	1.08960 - .00030	.030	8
3	7488138		1.091	.0005	1.09100 - .00006	.030	4
3	7488140		1.091	.002	1.09090 - .00009	.030	4
3	7488141		1.091	.004	1.09080 - .00012	.030	8
3	7488143		1.091	.008 AND UP	1.09060 - .00030	.030	8
3	7488145		1.092	.0005	1.09200 - .00006	.030	4
3	7488147		1.092	.002	1.09190 - .00009	.030	4
3	7488148		1.092	.004	1.09180 - .00012	.030	8
3	7488150		1.092	.008 AND UP	1.09160 - .00030	.030	8
3	7488152		1.093	.0005	1.09300 - .00006	.030	4
3	7488154		1.093	.002	1.09290 - .00009	.030	4
3	7488155		1.093	.004	1.09280 - .00012	.030	8
3	7488157		1.093	.008 AND UP	1.09260 - .00030	.030	8
3	7488159		1.09375	.0005 AND UP	1.09375 - .00006	.030	4
3	7488160		1.094	.0005	1.09400 - .00006	.030	4
3	7488162		1.094	.002	1.09390 - .00009	.030	4
3	7488163		1.094	.004	1.09380 - .00012	.030	8
3	7488165		1.094	.008 AND UP	1.09360 - .00030	.030	8
3	7488167		1.095	.0005	1.09500 - .00006	.030	4
3	7488169		1.095	.002	1.09490 - .00009	.030	4
3	7488170		1.095	.004	1.09480 - .00012	.030	8
3	7488172		1.095	.008 AND UP	1.09460 - .00030	.030	8
3	7488174		1.096	.0005	1.09600 - .00006	.030	4
3	7488176		1.096	.002	1.09590 - .00009	.030	4
3	7488177		1.096	.004	1.09580 - .00012	.030	8
3	7488179		1.096	.008 AND UP	1.09560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488181		1.097	.0005	1.09700 - .00006	.030	4
3	7488183		1.097	.002	1.09690 - .00009	.030	4
3	7488184		1.097	.004	1.09680 - .00012	.030	8
3	7488186		1.097	.008 AND UP	1.09660 - .00030	.030	8
3	7488188		1.098	.0005	1.09800 - .00006	.030	4
3	7488190		1.098	.002	1.09790 - .00009	.030	4
3	7488191		1.098	.004	1.09780 - .00012	.030	8
3	7488193		1.098	.008 AND UP	1.09760 - .00030	.030	8
3	7488195		1.099	.0005	1.09900 - .00006	.030	4
3	7488197		1.099	.002	1.09890 - .00009	.030	4
3	7488198		1.099	.004	1.09880 - .00012	.030	8
3	7488200		1.099	.008 AND UP	1.09860 - .00030	.030	8
3	7488202		1.100	.0005	1.10000 - .00006	.030	4
3	7488204		1.100	.002	1.09990 - .00009	.030	4
3	7488205		1.100	.004	1.09980 - .00012	.030	8
3	7488207		1.100	.008 AND UP	1.09960 - .00030	.030	8
3	7488209		1.101	.0005	1.10100 - .00006	.030	4
3	7488211		1.101	.002	1.10090 - .00009	.030	4
3	7488212		1.101	.004	1.10080 - .00012	.030	8
3	7488214		1.101	.008 AND UP	1.10060 - .00030	.030	8
3	7488216		1.102	.0005	1.10200 - .00006	.030	4
3	7488218		1.102	.002	1.10190 - .00009	.030	4
3	7488219		1.102	.004	1.10180 - .00012	.030	8
3	7488221		1.102	.008 AND UP	1.10160 - .00030	.030	8
3	7488223		1.103	.0005	1.10300 - .00006	.030	4
3	7488225		1.103	.002	1.10290 - .00009	.030	4
3	7488226		1.103	.004	1.10280 - .00012	.030	8
3	7488228		1.103	.008 AND UP	1.10260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FHN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488230		1.104	.0005	1.10400 - .00006	.030	4
3	7488232		1.104	.002	1.10390 - .00009	.030	4
3	7488233		1.104	.004	1.10380 - .00012	.030	8
3	7488235		1.104	.008 AND UP	1.10360 - .00030	.030	8
3	7488237		1.105	.0005	1.10500 - .00006	.030	4
3	7488239		1.105	.002	1.10490 - .00009	.030	4
3	7488240		1.105	.004	1.10480 - .00012	.030	8
3	7488242		1.105	.008 AND UP	1.10460 - .00030	.030	8
3	7488244		1.106	.0005	1.10600 - .00006	.030	4
3	7488246		1.106	.002	1.10590 - .00009	.030	4
3	7488247		1.106	.004	1.10580 - .00012	.030	8
3	7488249		1.106	.008 AND UP	1.10560 - .00030	.030	8
3	7488251		1.107	.0005	1.10700 - .00006	.030	4
3	7488253		1.107	.002	1.10690 - .00009	.030	4
3	7488254		1.107	.004	1.10680 - .00012	.030	8
3	7488256		1.107	.008 AND UP	1.10660 - .00030	.030	8
3	7488258		1.108	.0005	1.10800 - .00006	.030	4
3	7488260		1.108	.002	1.10790 - .00009	.030	4
3	7488261		1.108	.004	1.10780 - .00012	.030	8
3	7488263		1.108	.008 AND UP	1.10760 - .00030	.030	8
3	7488265		1.109	.0005	1.10900 - .00006	.030	4
3	7488267		1.109	.002	1.10890 - .00009	.030	4
3	7488268		1.109	.004	1.10889 - .00012	.030	8
3	7488270		1.109	.008 AND UP	1.10860 - .00030	.030	8
3	7488272		1.110	.0005	1.11000 - .00006	.030	4
3	7488274		1.110	.002	1.10990 - .00009	.030	4
3	7488275		1.110	.004	1.10980 - .00012	.030	8
3	7488277		1.110	.008 AND UP	1.10960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488279		1.111	.0005	1.11100 - .00006	.030	4
3	7488281		1.111	.002	1.11090 - .00009	.030	4
3	7488282		1.111	.004	1.11080 - .00012	.030	8
3	7488284		1.111	.008 AND UP	1.11060 - .00030	.030	8
3	7488286		1.112	.0005	1.11200 - .00006	.030	4
3	7488288		1.112	.002	1.11190 - .00009	.030	4
3	7488289		1.112	.004	1.11180 - .00012	.030	8
3	7488291		1.112	.008 AND UP	1.11160 - .00030	.030	8
3	7488293		1.113	.0005	1.11300 - .00006	.030	4
3	7488295		1.113	.002	1.11290 - .00009	.030	4
3	7488296		1.113	.004	1.11280 - .00012	.030	8
3	7488298		1.113	.008 AND UP	1.11260 - .00030	.030	8
3	7488300		1.114	.0005	1.11400 - .00006	.030	4
3	7488302		1.114	.002	1.11390 - .00009	.030	4
3	7488303		1.114	.004	1.11380 - .00012	.030	8
3	7488305		1.114	.008 AND UP	1.11360 - .00030	.030	8
3	7488307		1.115	.0005	1.11500 - .00006	.030	4
3	7488309		1.115	.002	1.11490 - .00009	.030	4
3	7488310		1.115	.004	1.11480 - .00012	.030	8
3	7488312		1.115	.008 AND UP	1.11460 - .00030	.030	8
3	7488314		1.116	.0005	1.11600 - .00006	.030	4
3	7488316		1.116	.002	1.11590 - .00009	.030	4
3	7488317		1.116	.004	1.11580 - .00012	.030	8
3	7488319		1.116	.008 AND UP	1.11560 - .00030	.030	8
3	7488321		1.117	.0005	1.11700 - .00006	.030	4
3	7488323		1.117	.002	1.11690 - .00009	.030	4
3	7488324		1.117	.004	1.11680 - .00012	.030	8
3	7488326		1.117	.008 AND UP	1.11660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488328		1.118	.0005	1.11800 - .00006	.030	4
	7488330		1.118	.002	1.11790 - .00009	.030	4
	7488331		1.118	.004	1.11780 - .00012	.030	8
	7488333		1.118	.008 AND UP	1.11760 - .00030	.030	8
	7488335		1.119	.0005	1.11900 - .00006	.030	4
	7488337		1.119	.002	1.11890 - .00009	.030	4
	7488338		1.119	.004	1.11880 - .00012	.030	8
	7488340		1.119	.008 AND UP	1.11860 - .00030	.030	8
	7488342		1.120	.0005	1.12000 - .00006	.030	4
	7488344		1.120	.002	1.11990 - .00009	.030	4
	7488345		1.120	.004	1.11980 - .00012	.030	8
	7488347		1.120	.008 AND UP	1.11960 - .00030	.030	8
	7488349		1.121	.0005	1.12100 - .00006	.030	4
	7488351		1.121	.002	1.12090 - .00009	.030	4
	7488352		1.121	.004	1.12080 - .00012	.030	8
	7488354		1.121	.008 AND UP	1.12060 - .00030	.030	8
	7488356		1.122	.0005	1.12200 - .00006	.030	4
	7488358		1.122	.002	1.12190 - .00009	.030	4
	7488359		1.122	.004	1.12180 - .00012	.030	8
	7488361		1.122	.008 AND UP	1.12160 - .00030	.030	8
3	7488363		1.123	.0005	1.12300 - .00006	.030	4
3	7488365		1.123	.002	1.12290 - .00009	.030	4
3	7488366		1.123	.004	1.12280 - .00012	.030	8
3	7488368		1.123	.008 AND UP	1.12260 - .00030	.030	8
3	7488370		1.124	.0005	1.12400 - .00006	.030	4
3	7488372		1.124	.002	1.12390 - .00009	.030	4
3	7488373		1.124	.004	1.12380 - .00012	.030	8
3	7488375		1.124	.008 AND UP	1.12360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488377		1.125	.0005	1.12500 - .00006	.030	4
3	7488379		1.125	.002	1.12490 - .00009	.030	4
3	7488380		1.125	.004	1.12480 - .00012	.030	8
3	7488382		1.125	.008 AND UP	1.12460 - .00030	.030	8
3	7488384		1.126	.0005	1.12600 - .00006	.030	4
3	7488386		1.126	.002	1.12590 - .00009	.030	4
3	7488387		1.126	.004	1.12580 - .00012	.030	8
3	7488389		1.126	.008 AND UP	1.12560 - .00030	.030	8
3	7488391		1.127	.0005	1.12700 - .00006	.030	4
3	7488393		1.127	.002	1.12690 - .00009	.030	4
3	7488394		1.127	.004	1.12680 - .00012	.030	8
3	7488396		1.127	.008 AND UP	1.12660 - .00030	.030	8
3	7488398		1.128	.0005	1.12800 - .00006	.030	4
3	7488400		1.128	.002	1.12790 - .00009	.030	4
3	7488401		1.128	.004	1.12780 - .00012	.030	8
3	7488403		1.128	.008 AND UP	1.12760 - .00030	.030	8
3	7488405		1.129	.0005	1.12900 - .00006	.030	4
3	7488407		1.129	.002	1.12890 - .00009	.030	4
3	7488408		1.129	.004	1.12880 - .00012	.030	8
3	7488410		1.129	.008 AND UP	1.12860 - .00030	.030	8
3	7488412		1.130	.0005	1.13000 - .00006	.030	4
3	7488414		1.130	.002	1.12990 - .00009	.030	4
3	7488415		1.130	.004	1.12980 - .00012	.030	8
3	7488417		1.130	.008 AND UP	1.12960 - .00030	.030	8
3	7488419		1.131	.0005	1.13100 - .00006	.030	4
3	7488421		1.131	.002	1.13090 - .00009	.030	4
3	7488422		1.131	.004	1.13080 - .00012	.030	8
3	7488424		1.131	.008 AND UP	1.13060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488426		1.132	.0005	1.13200 - .00006	.030	4
3	7488428		1.132	.002	1.13190 - .00009	.030	4
3	7488429		1.132	.004	1.13180 - .00012	.030	8
3	7488431		1.132	.008 AND UP	1.13160 - .00030	.030	8
3	7488433		1.133	.0005	1.13300 - .00006	.030	4
3	7488435		1.133	.002	1.13290 - .00009	.030	4
3	7488436		1.133	.004	1.13280 - .00012	.030	8
3	7488438		1.133	.008 AND UP	1.13260 - .00030	.030	8
3	7488440		1.134	.0005	1.13400 - .00006	.030	4
3	7488442		1.134	.002	1.13390 - .00009	.030	4
3	7488443		1.134	.004	1.13380 - .00012	.030	8
3	7488445		1.134	.008 AND UP	1.13360 - .00030	.030	8
3	7488447		1.135	.0005	1.13500 - .00006	.030	4
3	7488449		1.135	.002	1.13490 - .00009	.030	4
3	7488450		1.135	.004	1.13480 - .00012	.030	8
3	7488452		1.135	.008 AND UP	1.13460 - .00030	.030	8
3	7488454		1.136	.0005	1.13600 - .00006	.030	4
3	7488456		1.136	.002	1.13590 - .00009	.030	4
3	7488457		1.136	.004	1.13580 - .00012	.030	8
3	7488459		1.136	.008 AND UP	1.13560 - .00030	.030	8
3	7488461		1.137	.0005	1.13700 - .00006	.030	4
3	7488463		1.137	.002	1.13690 - .00009	.030	4
3	7488464		1.137	.004	1.13680 - .00012	.030	8
3	7488466		1.137	.008 AND UP	1.13660 - .00030	.030	8
3	7488468		1.138	.0005	1.13800 - .00006	.030	4
3	7488470		1.138	.002	1.13790 - .00009	.030	4
3	7488471		1.138	.004	1.13780 - .00012	.030	8
3	7488473		1.138	.008 AND UP	1.13760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488475		1.139	.0005	1.13900 - .00006	.030	4
3	7488477		1.139	.002	1.13890 - .00009	.030	4
3	7488478		1.139	.004	1.13880 - .00012	.030	8
3	7488480		1.139	.008 AND UP	1.13860 - .00030	.030	8
3	7488482		1.140	.0005	1.14000 - .00006	.030	4
3	7488484		1.140	.002	1.13990 - .00009	.030	4
3	7488485		1.140	.004	1.13980 - .00012	.030	8
3	7488487		1.140	.008 AND UP	1.13960 - .00030	.030	8
3	7488489		1.141	.0005	1.14100 - .00006	.030	4
3	7488491		1.141	.002	1.14090 - .00009	.030	4
3	7488492		1.141	.004	1.14080 - .00012	.030	8
3	7488494		1.141	.008 AND UP	1.14060 - .00030	.030	8
3	7488496		1.142	.0005	1.14200 - .00006	.030	4
3	7488498		1.142	.002	1.14190 - .00009	.030	4
3	7488499		1.142	.004	1.14180 - .00012	.030	8
3	7488501		1.142	.008 AND UP	1.14160 - .00030	.030	8
3	7488503		1.143	.0005	1.14300 - .00006	.030	4
3	7488505		1.143	.002	1.14290 - .00009	.030	4
3	7488506		1.143	.004	1.14280 - .00012	.030	8
3	7488508		1.143	.008 AND UP	1.14260 - .00030	.030	8
3	7488510		1.144	.0005	1.14400 - .00006	.030	4
3	7488512		1.144	.002	1.14390 - .00009	.030	4
3	7488513		1.144	.004	1.14380 - .00012	.030	8
3	7488515		1.144	.008 AND UP	1.14360 - .00030	.030	8
3	7488517		1.145	.0005	1.14500 - .00006	.030	4
3	7488519		1.145	.002	1.14490 - .00009	.030	4
3	7488520		1.145	.004	1.14480 - .00012	.030	8
3	7488522		1.145	.008 AND UP	1.14460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488524		1.146	.0005	1.14600 - .00006	.030	4
3	7488526		1.146	.002	1.14590 - .00009	.030	4
3	7488527		1.146	.004	1.14580 - .00012	.030	8
3	7488529		1.146	.008 AND UP	1.14560 - .00030	.030	8
3	7488531		1.147	.0005	1.14700 - .00006	.030	4
3	7488533		1.147	.002	1.14690 - .00009	.030	4
3	7488534		1.147	.004	1.14680 - .00012	.030	8
3	7488536		1.147	.008 AND UP	1.14660 - .00030	.030	8
3	7488538		1.148	.0005	1.14800 - .00006	.030	4
3	7488540		1.148	.002	1.14790 - .00009	.030	4
3	7488541		1.148	.004	1.14780 - .00012	.030	8
3	7488543		1.148	.008 AND UP	1.14760 - .00030	.030	8
3	7488545		1.149	.0005	1.14900 - .00006	.030	4
3	7488547		1.149	.002	1.14890 - .00009	.030	4
3	7488548		1.149	.004	1.14880 - .00012	.030	8
3	7488550		1.149	.008 AND UP	1.14860 - .00030	.030	8
3	7488552		1.150	.0005	1.15000 - .00006	.030	4
3	7488554		1.150	.002	1.14990 - .00009	.030	4
3	7488555		1.150	.004	1.14980 - .00012	.030	8
3	7488557		1.150	.008 AND UP	1.14960 - .00030	.030	8
3	7488559		1.151	.0005	1.15100 - .00006	.030	4
3	7488561		1.151	.002	1.15090 - .00009	.030	4
3	7488562		1.151	.004	1.15080 - .00012	.030	8
3	7488564		1.151	.008 AND UP	1.15060 - .00030	.030	8
3	7488566		1.152	.0005	1.15200 - .00006	.030	4
3	7488568		1.152	.002	1.15190 - .00009	.030	4
3	7488569		1.152	.004	1.15180 - .00012	.030	8
3	7488571		1.152	.008 AND UP	1.15160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488573		1.153	.0005	1.15300 - .00006	.030	4
3	7488575		1.153	.002	1.15290 - .00009	.030	4
3	7488576		1.153	.004	1.15280 - .00012	.030	8
3	7488578		1.153	.008 AND UP	1.15260 - .00030	.030	8
3	7488580		1.154	.0005	1.15400 - .00006	.030	4
3	7488582		1.154	.002	1.15390 - .00009	.030	4
3	7488583		1.154	.004	1.15380 - .00012	.030	8
3	7488585		1.154	.008 AND UP	1.15360 - .00030	.030	8
3	7488587		1.155	.0005	1.15500 - .00006	.030	4
3	7488589		1.155	.002	1.15490 - .00009	.030	4
3	7488590		1.155	.004	1.15480 - .00012	.030	8
3	7488592		1.155	.008 AND UP	1.15460 - .00030	.030	8
3	7488594		1.156	.0005	1.15600 - .00006	.030	4
3	7488596		1.156	.002	1.15590 - .00009	.030	4
3	7488597		1.156	.004	1.15580 - .00012	.030	8
3	7488599		1.156	.008 AND UP	1.15560 - .00030	.030	8
3	7488601		1.15625	.0005 AND UP	1.15625 - .00006	.030	4
3	7488602		1.157	.0005	1.15700 - .00006	.030	4
3	7488604		1.157	.002	1.15690 - .00009	.030	4
3	7488605		1.157	.004	1.15680 - .00012	.030	8
3	7488607		1.157	.008 AND UP	1.15660 - .00030	.030	8
3	7488609		1.158	.0005	1.15800 - .00006	.030	4
3	7488611		1.158	.002	1.15790 - .00009	.030	4
3	7488612		1.158	.004	1.15780 - .00012	.030	8
3	7488614		1.158	.008 AND UP	1.15760 - .00030	.030	8
3	7488616		1.159	.0005	1.15900 - .00006	.030	4
3	7488618		1.159	.002	1.15890 - .00009	.030	4
3	7488619		1.159	.004	1.15880 - .00012	.030	8
3	7488621		1.159	.008 AND UP	1.15860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488623		1.160	.0005	1.16000 - .00006	.030	4
3	7488625		1.160	.002	1.15990 - .00009	.030	4
3	7488626		1.160	.004	1.15980 - .00012	.030	8
3	7488628		1.160	.008 AND UP	1.15960 - .00030	.030	8
3	7488630		1.161	.0005	1.16100 - .00006	.030	4
3	7488632		1.161	.002	1.16090 - .00009	.030	4
3	7488633		1.161	.004	1.16080 - .00012	.030	8
3	7488635		1.161	.008 AND UP	1.16060 - .00030	.030	8
3	7488637		1.162	.0005	1.16200 - .00006	.030	4
3	7488639		1.162	.002	1.16190 - .00009	.030	4
3	7488640		1.162	.004	1.16180 - .00012	.030	8
3	7488642		1.162	.008 AND UP	1.16160 - .00030	.030	8
3	7488644		1.163	.0005	1.16300 - .00006	.030	4
3	7488646		1.163	.002	1.16290 - .00009	.030	4
3	7488647		1.163	.004	1.16280 - .00012	.030	8
3	7488649		1.163	.008 AND UP	1.16260 - .00030	.030	8
3	7488651		1.164	.0005	1.16400 - .00006	.030	4
3	7488653		1.164	.002	1.16390 - .00009	.030	4
3	7488654		1.164	.004	1.16380 - .00012	.030	8
3	7488656		1.164	.008 AND UP	1.16360 - .00030	.030	8
3	7488658		1.165	.0005	1.16500 - .00006	.030	4
3	7488660		1.165	.002	1.16490 - .00009	.030	4
3	7488661		1.165	.004	1.16480 - .00012	.030	8
3	7488663		1.165	.008 AND UP	1.16460 - .00030	.030	8
3	7488665		1.166	.0005	1.16600 - .00006	.030	4
3	7488667		1.166	.002	1.16590 - .00009	.030	4
3	7488668		1.166	.004	1.16580 - .00012	.030	8
3	7488670		1.166	.008 AND UP	1.16560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488672		1.167	.0005	1.16700 - .00006	.030	4
3	7488674		1.167	.002	1.16690 - .00009	.030	4
3	7488675		1.167	.004	1.16680 - .00012	.030	8
3	7488677		1.167	.008 AND UP	1.16660 - .00030	.030	8
3	7488679		1.168	.0005	1.16800 - .00006	.030	4
3	7488681		1.168	.002	1.16790 - .00009	.030	4
3	7488682		1.168	.004	1.16780 - .00012	.030	8
3	7488684		1.168	.008 AND UP	1.16760 - .00030	.030	8
3	7488686		1.169	.0005	1.16900 - .00006	.030	4
3	7488688		1.169	.002	1.16890 - .00009	.030	4
3	7488689		1.169	.004	1.16880 - .00012	.030	8
3	7488691		1.169	.008 AND UP	1.16860 - .00030	.030	8
3	7488693		1.170	.0005	1.17000 - .00006	.030	4
3	7488695		1.170	.002	1.16990 - .00009	.030	4
3	7488696		1.170	.004	1.16980 - .00012	.030	8
3	7488698		1.170	.008 AND UP	1.16960 - .00030	.030	8
3	7488700		1.171	.0005	1.17100 - .00006	.030	4
3	7488702		1.171	.002	1.17090 - .00009	.030	4
3	7488703		1.171	.004	1.17080 - .00012	.030	8
3	7488705		1.171	.008 AND UP	1.17060 - .00030	.030	8
3	7488707		1.172	.0005	1.17200 - .00006	.030	4
3	7488709		1.172	.002	1.17190 - .00009	.030	4
3	7488710		1.172	.004	1.17180 - .00012	.030	8
3	7488712		1.172	.008 AND UP	1.17160 - .00030	.030	8
3	7488714		1.173	.0005	1.17300 - .00006	.030	4
3	7488716		1.173	.002	1.17290 - .00009	.030	4
3	7488717		1.173	.004	1.17280 - .00012	.030	8
3	7488719		1.173	.008 AND UP	1.17260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488721		1.174	.0005	1.17400 - .00006	.030	4
3	7488723		1.174	.002	1.17390 - .00009	.030	4
3	7488724		1.174	.004	1.17380 - .00012	.030	8
3	7488726		1.174	.008 AND UP	1.17360 - .00030	.030	8
3	7488728		1.175	.0005	1.17500 - .00006	.030	4
3	7488730		1.175	.002	1.17490 - .00009	.030	4
3	7488731		1.175	.004	1.17480 - .00012	.030	8
3	7488733		1.175	.008 AND UP	1.17460 - .00030	.030	8
3	7488735		1.176	.0005	1.17600 - .00006	.030	4
3	7488737		1.176	.002	1.17590 - .00009	.030	4
3	7488738		1.176	.004	1.17580 - .00012	.030	8
3	7488740		1.176	.008 AND UP	1.17560 - .00030	.030	8
3	7488742		1.177	.0005	1.17700 - .00006	.030	4
3	7488744		1.177	.002	1.17690 - .00009	.030	4
3	7488745		1.177	.004	1.17680 - .00012	.030	8
3	7488747		1.177	.008 AND UP	1.17660 - .00030	.030	8
3	7488749		1.178	.0005	1.17800 - .00006	.030	4
3	7488751		1.178	.002	1.17790 - .00009	.030	4
3	7488752		1.178	.004	1.17780 - .00012	.030	8
3	7488754		1.178	.008 AND UP	1.17760 - .00030	.030	8
3	7488756		1.179	.0005	1.17900 - .00006	.030	4
3	7488758		1.179	.002	1.17890 - .00009	.030	4
3	7488759		1.179	.004	1.17880 - .00012	.030	8
3	7488761		1.179	.008 AND UP	1.17860 - .00030	.030	8
3	7488763		1.180	.0005	1.18000 - .00006	.030	4
3	7488765		1.180	.002	1.17990 - .00009	.030	4
3	7488766		1.180	.004	1.17980 - .00012	.030	8
3	7488768		1.180	.008 AND UP	1.17960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488770		1.181	.0005	1.18100 - .00006	.030	4
3	7488772		1.181	.002	1.18090 - .00009	.030	4
3	7488773		1.181	.004	1.18080 - .00012	.030	8
3	7488775		1.181	.008 AND UP	1.18060 - .00030	.030	8
3	7488777		1.182	.0005	1.18200 - .00006	.030	4
3	7488779		1.182	.002	1.18190 - .00009	.030	4
3	7488780		1.182	.004	1.18180 - .00012	.030	8
3	7488782		1.182	.008 AND UP	1.18160 - .00030	.030	8
3	7488784		1.183	.0005	1.18300 - .00006	.030	4
3	7488786		1.183	.002	1.18290 - .00009	.030	4
3	7488787		1.183	.004	1.18280 - .00012	.030	8
3	7488789		1.183	.008 AND UP	1.18260 - .00030	.030	8
3	7488791		1.184	.0005	1.18400 - .00006	.030	4
3	7488793		1.184	.002	1.18390 - .00009	.030	4
3	7488794		1.184	.004	1.18380 - .00012	.030	8
3	7488796		1.184	.008 AND UP	1.18360 - .00030	.030	8
3	7488798		1.185	.0005	1.18500 - .00006	.030	4
3	7488800		1.185	.002	1.18490 - .00009	.030	4
3	7488801		1.185	.004	1.18480 - .00012	.030	8
3	7488803		1.185	.008 AND UP	1.18460 - .00030	.030	8
3	7488805		1.186	.0005	1.18600 - .00006	.030	4
3	7488807		1.186	.002	1.18590 - .00009	.030	4
3	7488808		1.186	.004	1.18580 - .00012	.030	8
3	7488810		1.186	.008 AND UP	1.18560 - .00030	.030	8
3	7488812		1.187	.0005	1.18700 - .00006	.030	4
3	7488814		1.187	.002	1.18690 - .00009	.030	4
3	7488815		1.187	.004	1.18680 - .00012	.030	8
3	7488817		1.187	.008 AND UP	1.18660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488819		1.1875	.0005 AND UP	1.18750 - .00006	.030	4
3	7488820		1.188	.0005	1.18800 - .00006	.030	4
3	7488822		1.188	.002	1.18790 - .00009	.030	4
3	7488823		1.188	.004	1.18780 - .00012	.030	8
3	7488825		1.188	.008 AND UP	1.18760 - .00030	.030	8
3	7488827		1.189	.0005	1.18900 - .00006	.030	4
3	7488829		1.189	.002	1.18890 - .00009	.030	4
3	7488830		1.189	.004	1.18880 - .00012	.030	8
3	7488832		1.189	.008 AND UP	1.18860 - .00030	.030	8
3	7488834		1.190	.0005	1.19000 - .00006	.030	4
3	7488836		1.190	.002	1.18990 - .00009	.030	4
3	7488837		1.190	.004	1.18980 - .00012	.030	8
3	7488839		1.190	.008 AND UP	1.18960 - .00030	.030	8
3	7488841		1.191	.0005	1.19100 - .00006	.030	4
3	7488843		1.191	.002	1.19090 - .00009	.030	4
3	7488844		1.191	.004	1.19080 - .00012	.030	8
3	7488846		1.191	.008 AND UP	1.19060 - .00030	.030	8
3	7488848		1.192	.0005	1.19200 - .00006	.030	4
3	7488850		1.192	.002	1.19190 - .00009	.030	4
3	7488851		1.192	.004	1.19180 - .00012	.030	8
3	7488853		1.192	.008 AND UP	1.19160 - .00030	.030	8
3	7488855		1.193	.0005	1.19300 - .00006	.030	4
3	7488857		1.193	.002	1.19290 - .00009	.030	4
3	7488858		1.193	.004	1.19280 - .00012	.030	8
3	7488860		1.193	.008 AND UP	1.19260 - .00030	.030	8
3	7488862		1.194	.0005	1.19400 - .00006	.030	4
3	7488864		1.194	.002	1.19390 - .00009	.030	4
3	7488865		1.194	.004	1.19380 - .00012	.030	8
3	7488867		1.194	.008 AND UP	1.19360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488869		1.195	.0005	1.19500 - .00006	.030	4
3	7488871		1.195	.002	1.19490 - .00009	.030	4
3	7488872		1.195	.004	1.19480 - .00012	.030	8
3	7488874		1.195	.008 AND UP	1.19460 - .00030	.030	8
3	7488876		1.196	.0005	1.19600 - .00006	.030	4
3	7488878		1.196	.002	1.19590 - .00009	.030	4
3	7488879		1.196	.004	1.19580 - .00012	.030	8
3	7488881		1.196	.008 AND UP	1.19560 - .00030	.030	8
3	7488883		1.197	.0005	1.19700 - .00006	.030	4
3	7488885		1.197	.002	1.19690 - .00009	.030	4
3	7488886		1.197	.004	1.19680 - .00012	.030	8
3	7488888		1.197	.008 AND UP	1.19660 - .00030	.030	8
3	7488890		1.198	.0005	1.19800 - .00006	.030	4
3	7488892		1.198	.002	1.19790 - .00009	.030	4
3	7488893		1.198	.004	1.19780 - .00012	.030	8
3	7488895		1.198	.008 AND UP	1.19760 - .00030	.030	8
3	7488897		1.199	.0005	1.19900 - .00006	.030	4
3	7488899		1.199	.002	1.19890 - .00009	.030	4
3	7488900		1.199	.004	1.19880 - .00012	.030	8
3	7488902		1.199	.008 AND UP	1.19860 - .00030	.030	8
3	7488904		1.200	.0005	1.20000 - .00006	.030	4
3	7488906		1.200	.002	1.19990 - .00009	.030	4
3	7488907		1.200	.004	1.19980 - .00012	.030	8
3	7488909		1.200	.008 AND UP	1.19960 - .00030	.030	8
3	7488911		1.201	.0005	1.20100 - .00006	.030	4
3	7488913		1.201	.002	1.20090 - .00009	.030	4
3	7488914		1.201	.004	1.20080 - .00012	.030	8
3	7488916		1.201	.008 AND UP	1.20060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488918		1.202	.0005	1.20200 - .00006	.030	4
3	7488920		1.202	.002	1.20190 - .00009	.030	4
3	7488921		1.202	.004	1.20180 - .00012	.030	8
3	7488923		1.202	.008 AND UP	1.20160 - .00030	.030	8
3	7488925		1.203	.0005	1.20300 - .00006	.030	4
3	7488927		1.203	.002	1.20290 - .00009	.030	4
3	7488928		1.203	.004	1.20280 - .00012	.030	8
3	7488930		1.203	.008 AND UP	1.20260 - .00030	.030	8
3	7488932		1.204	.0005	1.20400 - .00006	.030	4
3	7488934		1.204	.002	1.20390 - .00009	.030	4
3	7488935		1.204	.004	1.20380 - .00012	.030	8
3	7488937		1.204	.008 AND UP	1.20360 - .00030	.030	8
3	7488939		1.205	.0005	1.20500 - .00006	.030	4
3	7488941		1.205	.002	1.20490 - .00009	.030	4
3	7488942		1.205	.004	1.20480 - .00012	.030	8
3	7488944		1.205	.008 AND UP	1.20460 - .00030	.030	8
3	7488946		1.206	.0005	1.20600 - .00006	.030	4
3	7488948		1.206	.002	1.20590 - .00009	.030	4
3	7488949		1.206	.004	1.20580 - .00012	.030	8
3	7488951		1.206	.008 AND UP	1.20560 - .00030	.030	8
3	7488953		1.207	.0005	1.20700 - .00006	.030	4
3	7488955		1.207	.002	1.20690 - .00009	.030	4
3	7488956		1.207	.004	1.20680 - .00012	.030	8
3	7488958		1.207	.008 AND UP	1.20660 - .00030	.030	8
3	7488960		1.208	.0005	1.20800 - .00006	.030	4
3	7488962		1.208	.002	1.20790 - .00009	.030	4
3	7488963		1.208	.004	1.20780 - .00012	.030	8
3	7488965		1.208	.008 AND UP	1.20760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7488967		1.209	.0005	1.20900 - .00006	.030	4
3	7488969		1.209	.002	1.20890 - .00009	.030	4
3	7488970		1.209	.004	1.20880 - .00012	.030	8
3	7488972		1.209	.008 AND UP	1.20860 - .00030	.030	8
3	7488974		1.210	.0005	1.21000 - .00006	.030	4
3	7488976		1.210	.002	1.20990 - .00009	.030	4
3	7488977		1.210	.004	1.20980 - .00012	.030	8
3	7488979		1.210	.008 AND UP	1.20960 - .00030	.030	8
3	7488981		1.211	.0005	1.21100 - .00006	.030	4
3	7488983		1.211	.002	1.21090 - .00009	.030	4
3	7488984		1.211	.004	1.21080 - .00012	.030	8
3	7488986		1.211	.008 AND UP	1.21060 - .00030	.030	8
3	7488988		1.212	.0005	1.21200 - .00006	.030	4
3	7488990		1.212	.002	1.21190 - .00009	.030	4
3	7488991		1.212	.004	1.21180 - .00012	.030	8
3	7488993		1.212	.008 AND UP	1.21160 - .00030	.030	8
3	7488995		1.213	.0005	1.21300 - .00006	.030	4
3	7488997		1.213	.002	1.21290 - .00009	.030	4
3	7488998		1.213	.004	1.21280 - .00012	.030	8
3	7489000		1.213	.008 AND UP	1.21260 - .00030	.030	8
3	7489002		1.214	.0005	1.21400 - .00006	.030	4
3	7489004		1.214	.002	1.21390 - .00009	.030	4
3	7489005		1.214	.004	1.21380 - .00012	.030	8
3	7489007		1.214	.008 AND UP	1.21360 - .00030	.030	8
3	7489009		1.215	.0005	1.21500 - .00006	.030	4
3	7489011		1.215	.002	1.21490 - .00009	.030	4
3	7489012		1.215	.004	1.21480 - .00012	.030	8
3	7489014		1.215	.008 AND UP	1.21460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489016		1.216	.0005	1.21600 - .00006	.030	4
3	7489018		1.216	.002	1.21590 - .00009	.030	4
3	7489019		1.216	.004	1.21580 - .00012	.030	8
3	7489021		1.216	.008 AND UP	1.21560 - .00030	.030	8
3	7489023		1.217	.0005	1.21700 - .00006	.030	4
3	7489025		1.217	.002	1.21690 - .00009	.030	4
3	7489026		1.217	.004	1.21680 - .00012	.030	8
3	7489028		1.217	.008 AND UP	1.21660 - .00030	.030	8
3	7489030		1.218	.0005	1.21800 - .00006	.030	4
3	7489032		1.218	.002	1.21790 - .00009	.030	4
3	7489033		1.218	.004	1.21780 - .00012	.030	8
3	7489035		1.218	.008 AND UP	1.21760 - .00030	.030	8
3	7489037		1.21875	.0005 AND UP	1.21875 - .00006	.030	4
3	7489038		1.219	.0005	1.21900 - .00006	.030	4
3	7489040		1.219	.002	1.21890 - .00009	.030	4
3	7489041		1.219	.004	1.21880 - .00012	.030	8
3	7489043		1.219	.008 AND UP	1.21860 - .00030	.030	8
3	7489045		1.220	.0005	1.22000 - .00006	.030	4
3	7489047		1.220	.002	1.21990 - .00009	.030	4
3	7489048		1.220	.004	1.21980 - .00012	.030	8
3	7489050		1.220	.008 AND UP	1.21960 - .00030	.030	8
3	7489052		1.221	.0005	1.22100 - .00006	.030	4
3	7489054		1.221	.002	1.22090 - .00009	.030	4
3	7489055		1.221	.004	1.22080 - .00012	.030	8
3	7489057		1.221	.008 AND UP	1.22060 - .00030	.030	8
3	7489059		1.222	.0005	1.22200 - .00006	.030	4
3	7489061		1.222	.002	1.22190 - .00009	.030	4
3	7489062		1.222	.004	1.22180 - .00012	.030	8
3	7489064		1.222	.008 AND UP	1.22160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489066		1.223	.0005	1.22300 - .00006	.030	4
3	7489068		1.223	.002	1.22290 - .00009	.030	4
3	7489069		1.223	.004	1.22280 - .00012	.030	8
3	7489071		1.223	.008 AND UP	1.22260 - .00030	.030	8
3	7489073		1.224	.0005	1.22400 - .00006	.030	4
3	7489075		1.224	.002	1.22390 - .00009	.030	4
3	7489076		1.224	.004	1.22380 - .00012	.030	8
3	7489078		1.224	.008 AND UP	1.22360 - .00030	.030	8
3	7489080		1.225	.0005	1.22500 - .00006	.030	4
3	7489082		1.225	.002	1.22490 - .00009	.030	4
3	7489083		1.225	.004	1.22480 - .00012	.030	8
3	7489085		1.225	.008 AND UP	1.22460 - .00030	.030	8
3	7489087		1.226	.0005	1.22600 - .00006	.030	4
3	7489089		1.226	.002	1.22590 - .00009	.030	4
3	7489090		1.226	.004	1.22580 - .00012	.030	8
3	7489092		1.226	.008 AND UP	1.22560 - .00030	.030	8
3	7489094		1.227	.0005	1.22700 - .00006	.030	4
3	7489096		1.227	.002	1.22690 - .00009	.030	4
3	7489097		1.227	.004	1.22680 - .00012	.030	8
3	7489099		1.227	.008 AND UP	1.22660 - .00030	.030	8
3	7489101		1.228	.0005	1.22800 - .00006	.030	4
3	7489103		1.228	.002	1.22790 - .00009	.030	4
3	7489104		1.228	.004	1.22780 - .00012	.030	8
3	7489106		1.228	.008 AND UP	1.22760 - .00030	.030	8
3	7489108		1.229	.0005	1.22900 - .00006	.030	4
3	7489110		1.229	.002	1.22890 - .00009	.030	4
3	7489111		1.229	.004	1.22880 - .00012	.030	8
3	7489113		1.229	.008 AND UP	1.22860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489115		1.230	.0005	1.23000 - .00006	.030	4
3	7489117		1.230	.002	1.22990 - .00009	.030	4
3	7489118		1.230	.004	1.22980 - .00012	.030	8
3	7489120		1.230	.008 AND UP	1.22960 - .00030	.030	8
3	7489122		1.231	.0005	1.23100 - .00006	.030	4
3	7489124		1.231	.002	1.23090 - .00009	.030	4
3	7489125		1.231	.004	1.23080 - .00012	.030	8
3	7489127		1.231	.008 AND UP	1.23060 - .00030	.030	8
3	7489129		1.232	.0005	1.23200 - .00006	.030	4
3	7489131		1.232	.002	1.23190 - .00009	.030	4
3	7489132		1.232	.004	1.23180 - .00012	.030	8
3	7489134		1.232	.008 AND UP	1.23160 - .00030	.030	8
3	7489136		1.233	.0005	1.23300 - .00006	.030	4
3	7489138		1.233	.002	1.23290 - .00009	.030	4
3	7489139		1.233	.004	1.23280 - .00012	.030	8
3	7489141		1.233	.008 AND UP	1.23260 - .00030	.030	8
3	7489143		1.234	.0005	1.23400 - .00006	.030	4
3	7489145		1.234	.002	1.23390 - .00009	.030	4
3	7489146		1.234	.004	1.23380 - .00012	.030	8
3	7489148		1.234	.008 AND UP	1.23360 - .00030	.030	8
3	7489150		1.235	.0005	1.23500 - .00006	.030	4
3	7489152		1.235	.002	1.23490 - .00009	.030	4
3	7489153		1.235	.004	1.23480 - .00012	.030	8
3	7489155		1.235	.008 AND UP	1.23460 - .00030	.030	8
3	7489157		1.236	.0005	1.23600 - .00006	.030	4
3	7489159		1.236	.002	1.23590 - .00009	.030	4
3	7489160		1.236	.004	1.23580 - .00012	.030	8
3	7489162		1.236	.008 AND UP	1.23560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489164		1.237	.0005	1.23700 - .00006	.030	4
3	7489166		1.237	.002	1.23690 - .00009	.030	4
3	7489167		1.237	.004	1.23680 - .00012	.030	8
3	7489169		1.237	.008 AND UP	1.23660 - .00030	.030	8
3	7489171		1.238	.0005	1.23800 - .00006	.030	4
3	7489173		1.238	.002	1.23790 - .00009	.030	4
3	7489174		1.238	.004	1.23780 - .00012	.030	8
3	7489176		1.238	.008 AND UP	1.23760 - .00030	.030	8
3	7489178		1.239	.0005	1.23900 - .00006	.030	4
3	7489180		1.239	.002	1.23890 - .00009	.030	4
3	7489181		1.239	.004	1.23880 - .00012	.030	8
3	7489183		1.239	.008 AND UP	1.23860 - .00030	.030	8
3	7489185		1.240	.0005	1.24000 - .00006	.030	4
3	7489187		1.240	.002	1.23990 - .00009	.030	4
3	7489188		1.240	.004	1.23980 - .00012	.030	8
3	7489190		1.240	.008 AND UP	1.23960 - .00030	.030	8
3	7489192		1.241	.0005	1.24100 - .00006	.030	4
3	7489194		1.241	.002	1.24090 - .00009	.030	4
3	7489195		1.241	.004	1.24080 - .00012	.030	8
3	7489197		1.241	.008 AND UP	1.24060 - .00030	.030	8
3	7489199		1.242	.0005	1.24200 - .00006	.030	4
3	7489201		1.242	.002	1.24190 - .00009	.030	4
3	7489202		1.242	.004	1.24180 - .00012	.030	8
3	7489204		1.242	.008 AND UP	1.24160 - .00030	.030	8
3	7489206		1.243	.0005	1.24300 - .00006	.030	4
3	7489208		1.243	.002	1.24290 - .00009	.030	4
3	7489209		1.243	.004	1.24280 - .00012	.030	8
3	7489211		1.243	.008 AND UP	1.24260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489213		1.244	.0005	1.24400 - .00006	.030	4
3	7489215		1.244	.002	1.24390 - .00009	.030	4
3	7489216		1.244	.004	1.24380 - .00012	.030	8
3	7489218		1.244	.008 AND UP	1.24360 - .00030	.030	8
3	7489220		1.245	.0005	1.24500 - .00006	.030	4
3	7489222		1.245	.002	1.24490 - .00009	.030	4
3	7489223		1.245	.004	1.24480 - .00012	.030	8
3	7489225		1.245	.008 AND UP	1.24460 - .00030	.030	8
3	7489227		1.246	.0005	1.24600 - .00006	.030	4
3	7489229		1.246	.002	1.24590 - .00009	.030	4
3	7489230		1.246	.004	1.24580 - .00012	.030	8
3	7489232		1.246	.008 AND UP	1.24560 - .00030	.030	8
3	7489234		1.247	.0005	1.24700 - .00006	.030	4
3	7489236		1.247	.002	1.24690 - .00009	.030	4
3	7489237		1.247	.004	1.24680 - .00012	.030	8
3	7489239		1.247	.008 AND UP	1.24660 - .00030	.030	8
3	7489241		1.248	.0005	1.24800 - .00006	.030	4
3	7489243		1.248	.002	1.24790 - .00009	.030	4
3	7489244		1.248	.004	1.24780 - .00012	.030	8
3	7489246		1.248	.008 AND UP	1.24760 - .00030	.030	8
3	7489248		1.249	.0005	1.24900 - .00006	.030	4
3	7489250		1.249	.002	1.24890 - .00009	.030	4
3	7489251		1.249	.004	1.24880 - .00012	.030	8
3	7489253		1.249	.008 AND UP	1.24860 - .00030	.030	8
3	7489255		1.250	.0005	1.25000 - .00006	.030	4
3	7489257		1.250	.002	1.24990 - .00009	.030	4
3	7489258		1.250	.004	1.24980 - .00012	.030	8
3	7489260		1.250	.008 AND UP	1.24960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489262		1.251	.0005	1.25100 - .00006	.030	4
3	7489264		1.251	.002	1.25090 - .00009	.030	4
3	7489265		1.251	.004	1.25080 - .00012	.030	8
3	7489267		1.251	.008 AND UP	1.25060 - .00030	.030	8
3	7489269		1.252	.0005	1.25200 - .00006	.030	4
3	7489271		1.252	.002	1.25190 - .00009	.030	4
3	7489272		1.252	.004	1.25180 - .00012	.030	8
3	7489274		1.252	.008 AND UP	1.25160 - .00030	.030	8
3	7489276		1.253	.0005	1.25300 - .00006	.030	4
3	7489278		1.253	.002	1.25290 - .00009	.030	4
3	7489279		1.253	.004	1.25280 - .00012	.030	8
3	7489281		1.253	.008 AND UP	1.25260 - .00030	.030	8
3	7489283		1.254	.0005	1.25400 - .00006	.030	4
3	7489285		1.254	.002	1.25390 - .00009	.030	4
3	7489286		1.254	.004	1.25380 - .00012	.030	8
3	7489288		1.254	.008 AND UP	1.25360 - .00030	.030	8
3	7489290		1.255	.0005	1.25500 - .00006	.030	4
3	7489292		1.255	.002	1.25490 - .00009	.030	4
3	7489293		1.255	.004	1.25480 - .00012	.030	8
3	7489295		1.255	.008 AND UP	1.25460 - .00030	.030	8
3	7489297		1.256	.0005	1.25600 - .00006	.030	4
3	7489299		1.256	.002	1.25590 - .00009	.030	4
3	7489300		1.256	.004	1.25580 - .00012	.030	8
3	7489302		1.256	.008 AND UP	1.25560 - .00030	.030	8
3	7489304		1.257	.0005	1.25700 - .00006	.030	4
3	7489306		1.257	.002	1.25690 - .00009	.030	4
3	7489307		1.257	.004	1.25680 - .00012	.030	8
3	7489309		1.257	.008 AND UP	1.25660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489311		1.258	.0005	1.25800 - .00006	.030	4
3	7489313		1.258	.002	1.25790 - .00009	.030	4
3	7489314		1.258	.004	1.25780 - .00012	.030	8
3	7489316		1.258	.008 AND UP	1.25760 - .00030	.030	8
3	7489318		1.259	.0005	1.25900 - .00006	.030	4
3	7489320		1.259	.002	1.25890 - .00009	.030	4
3	7489321		1.259	.004	1.25880 - .00012	.030	8
3	7489323		1.259	.008 AND UP	1.25860 - .00030	.030	8
3	7489325		1.260	.0005	1.26000 - .00006	.030	4
3	7489327		1.260	.002	1.25990 - .00009	.030	4
3	7489328		1.260	.004	1.25980 - .00012	.030	8
3	7489330		1.260	.008 AND UP	1.25960 - .00030	.030	8
3	7489332		1.261	.0005	1.26100 - .00006	.030	4
3	7489334		1.261	.002	1.26090 - .00009	.030	4
3	7489335		1.261	.004	1.26080 - .00012	.030	8
3	7489337		1.261	.008 AND UP	1.26060 - .00030	.030	8
3	7489339		1.262	.0005	1.26200 - .00006	.030	4
3	7489341		1.262	.002	1.26190 - .00009	.030	4
3	7489342		1.262	.004	1.26180 - .00012	.030	8
3	7489344		1.262	.008 AND UP	1.26160 - .00030	.030	8
3	7489346		1.263	.0005	1.26300 - .00006	.030	4
3	7489348		1.263	.002	1.26290 - .00009	.030	4
3	7489349		1.263	.004	1.26280 - .00012	.030	8
3	7489351		1.263	.008 AND UP	1.26260 - .00030	.030	8
3	7489353		1.264	.0005	1.26400 - .00006	.030	4
3	7489355		1.264	.002	1.26390 - .00009	.030	4
3	7489356		1.264	.004	1.26380 - .00012	.030	8
3	7489358		1.264	.008 AND UP	1.26360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489360		1.265	.0005	1.26500 - .00006	.030	4
3	7489362		1.265	.002	1.26490 - .00009	.030	4
3	7489363		1.265	.004	1.26480 - .00012	.030	8
3	7489365		1.265	.008 AND UP	1.26460 - .00030	.030	8
3	7489367		1.266	.0005	1.26600 - .00006	.030	4
3	7489369		1.266	.002	1.26590 - .00009	.030	4
3	7489370		1.266	.004	1.26580 - .00012	.030	8
3	7489372		1.266	.008 AND UP	1.26560 - .00030	.030	8
3	7489374		1.267	.0005	1.26700 - .00006	.030	4
3	7489376		1.267	.002	1.26690 - .00009	.030	4
3	7489377		1.267	.004	1.26680 - .00012	.030	8
3	7489379		1.267	.008 AND UP	1.26660 - .00030	.030	8
3	7489381		1.268	.0005	1.26800 - .00006	.030	4
3	7489383		1.268	.002	1.26790 - .00009	.030	4
3	7489384		1.268	.004	1.26780 - .00012	.030	8
3	7489386		1.268	.008 AND UP	1.26760 - .00030	.030	8
3	7489388		1.269	.0005	1.26900 - .00006	.030	4
3	7489390		1.269	.002	1.26890 - .00009	.030	4
3	7489391		1.269	.004	1.26880 - .00012	.030	8
3	7489393		1.269	.008 AND UP	1.26860 - .00030	.030	8
3	7489395		1.270	.0005	1.27000 - .00006	.030	4
3	7489397		1.270	.002	1.26990 - .00009	.030	4
3	7489398		1.270	.004	1.26980 - .00012	.030	8
3	7489400		1.270	.008 AND UP	1.26960 - .00030	.030	8
3	7489402		1.271	.0005	1.27100 - .00006	.030	4
3	7489404		1.271	.002	1.27090 - .00009	.030	4
3	7489405		1.271	.004	1.27080 - .00012	.030	8
3	7489407		1.271	.008 AND UP	1.27060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489409		1.272	.0005	1.27200 - .00006	.030	4
3	7489411		1.272	.002	1.27190 - .00009	.030	4
3	7489412		1.272	.004	1.27180 - .00012	.030	8
3	7489414		1.272	.008 AND UP	1.27160 - .00030	.030	8
3	7489416		1.273	.0005	1.27300 - .00006	.030	4
3	7489418		1.273	.002	1.27290 - .00009	.030	4
3	7489419		1.273	.004	1.27280 - .00012	.030	8
3	7489421		1.273	.008 AND UP	1.27260 - .00030	.030	8
3	7489423		1.274	.0005	1.27400 - .00006	.030	4
3	7489425		1.274	.002	1.27390 - .00009	.030	4
3	7489426		1.274	.004	1.27380 - .00012	.030	8
3	7489428		1.274	.008 AND UP	1.27360 - .00030	.030	8
3	7489430		1.275	.0005	1.27500 - .00006	.030	4
3	7489432		1.275	.002	1.27490 - .00009	.030	4
3	7489433		1.275	.004	1.27480 - .00012	.030	8
3	7489435		1.275	.008 AND UP	1.27460 - .00030	.030	8
3	7489437		1.276	.0005	1.27600 - .00006	.030	4
3	7489439		1.276	.002	1.27590 - .00009	.030	4
3	7489440		1.276	.004	1.27580 - .00012	.030	8
3	7489442		1.276	.008 AND UP	1.27560 - .00030	.030	8
3	7489444		1.277	.0005	1.27700 - .00006	.030	4
3	7489446		1.277	.002	1.27690 - .00009	.030	4
3	7489447		1.277	.004	1.27680 - .00012	.030	8
3	7489449		1.277	.008 AND UP	1.27660 - .00030	.030	8
3	7489451		1.278	.0005	1.27800 - .00006	.030	4
3	7489453		1.278	.002	1.27790 - .00009	.030	4
3	7489454		1.278	.004	1.27780 - .00012	.030	8
3	7489456		1.278	.008 AND UP	1.27760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489458		1.279	.0005	1.27900 - .00006	.030	4
3	7489460		1.279	.002	1.27890 - .00009	.030	4
3	7489461		1.279	.004	1.27880 - .00012	.030	8
3	7489463		1.279	.008 AND UP	1.27860 - .00030	.030	8
3	7489465		1.280	.0005	1.28000 - .00006	.030	4
3	7489467		1.280	.002	1.27990 - .00009	.030	4
3	7489468		1.280	.004	1.27980 - .00012	.030	8
3	7489470		1.280	.008 AND UP	1.27960 - .00030	.030	8
3	7489472		1.281	.0005	1.28100 - .00006	.030	4
3	7489474		1.281	.002	1.28090 - .00009	.030	4
3	7489475		1.281	.004	1.28080 - .00012	.030	8
3	7489477		1.281	.008 AND UP	1.28060 - .00030	.030	8
3	7489479		1.28125	.0005 AND UP	1.28125 - .00006	.030	4
3	7489480		1.282	.0005	1.28200 - .00006	.030	4
3	7489482		1.282	.002	1.28190 - .00009	.030	4
3	7489483		1.282	.004	1.28180 - .00012	.030	8
3	7489485		1.282	.008 AND UP	1.28160 - .00030	.030	8
3	7489487		1.283	.0005	1.28300 - .00006	.030	4
3	7489489		1.283	.002	1.28290 - .00009	.030	4
3	7489490		1.283	.004	1.28280 - .00012	.030	8
3	7489492		1.283	.008 AND UP	1.28260 - .00030	.030	8
3	7489494		1.284	.0005	1.28400 - .00006	.030	4
3	7489496		1.284	.002	1.28390 - .00009	.030	4
3	7489497		1.284	.004	1.28380 - .00012	.030	8
3	7489499		1.284	.008 AND UP	1.28360 - .00030	.030	8
3	7489501		1.285	.0005	1.28500 - .00006	.030	4
3	7489503		1.285	.002	1.28490 - .00009	.030	4
3	7489504		1.285	.004	1.28480 - .00012	.030	8
3	7489506		1.285	.008 AND UP	1.28460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489508		1.286	.0005	1.28600 - .00006	.030	4
3	7489510		1.286	.002	1.28590 - .00009	.030	4
3	7489511		1.286	.004	1.28580 - .00012	.030	8
3	7489513		1.286	.008 AND UP	1.28560 - .00030	.030	8
3	7489515		1.287	.0005	1.28700 - .00006	.030	4
3	7489517		1.287	.002	1.28690 - .00009	.030	4
3	7489518		1.287	.004	1.28680 - .00012	.030	8
3	7489520		1.287	.008 AND UP	1.28660 - .00030	.030	8
3	7489522		1.288	.0005	1.28800 - .00006	.030	4
3	7489524		1.288	.002	1.28790 - .00009	.030	4
3	7489525		1.288	.004	1.28780 - .00012	.030	8
3	7489527		1.288	.008 AND UP	1.28760 - .00030	.030	8
3	7489529		1.289	.0005	1.28900 - .00006	.030	4
3	7489531		1.289	.002	1.28890 - .00009	.030	4
3	7489532		1.289	.004	1.28880 - .00012	.030	8
3	7489534		1.289	.008 AND UP	1.28860 - .00030	.030	8
3	7489536		1.290	.0005	1.29000 - .00006	.030	4
3	7489538		1.290	.002	1.28990 - .00009	.030	4
3	7489539		1.290	.004	1.28980 - .00012	.030	8
3	7489541		1.290	.008 AND UP	1.28960 - .00030	.030	8
3	7489543		1.291	.0005	1.29100 - .00006	.030	4
3	7489545		1.291	.002	1.29090 - .00009	.030	4
3	7489546		1.291	.004	1.29080 - .00012	.030	8
3	7489548		1.291	.008 AND UP	1.29060 - .00030	.030	8
3	7489550		1.292	.0005	1.29200 - .00006	.030	4
3	7489552		1.292	.002	1.29190 - .00009	.030	4
3	7489553		1.292	.004	1.29180 - .00012	.030	8
3	7489555		1.292	.008 AND UP	1.29160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489557		1.293	.0005	1.29300 - .00006	.030	4
3	7489559		1.293	.002	1.29290 - .00009	.030	4
3	7489560		1.293	.004	1.29280 - .00012	.030	8
3	7489562		1.293	.008 AND UP	1.29260 - .00030	.030	8
3	7489564		1.294	.0005	1.29400 - .00006	.030	4
3	7489566		1.294	.002	1.29390 - .00009	.030	4
3	7489567		1.294	.004	1.29380 - .00012	.030	8
3	7489569		1.294	.008 AND UP	1.29360 - .00030	.030	8
3	7489571		1.295	.0005	1.29500 - .00006	.030	4
3	7489573		1.295	.002	1.29490 - .00009	.030	4
3	7489574		1.295	.004	1.29480 - .00012	.030	8
3	7489576		1.295	.008 AND UP	1.29460 - .00030	.030	8
3	7489578		1.296	.0005	1.29600 - .00006	.030	4
3	7489580		1.296	.002	1.29590 - .00009	.030	4
3	7489581		1.296	.004	1.29580 - .00012	.030	8
3	7489583		1.296	.008 AND UP	1.29560 - .00030	.030	8
3	7489585		1.297	.0005	1.29700 - .00006	.030	4
3	7489587		1.297	.002	1.29690 - .00009	.030	4
3	7489588		1.297	.004	1.29680 - .00012	.030	8
3	7489590		1.297	.008 AND UP	1.29660 - .00030	.030	8
3	7489592		1.298	.0005	1.29800 - .00006	.030	4
3	7489594		1.298	.002	1.29790 - .00009	.030	4
3	7489595		1.298	.004	1.29780 - .00012	.030	8
3	7489597		1.298	.008 AND UP	1.29760 - .00030	.030	8
3	7489599		1.299	.0005	1.29900 - .00006	.030	4
3	7489601		1.299	.002	1.29890 - .00009	.030	4
3	7489602		1.299	.004	1.29880 - .00012	.030	8
3	7489604		1.299	.008 AND UP	1.29860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489606		1.300	.0005	1.30000 - .00006	.030	4
3	7489608		1.300	.002	1.29990 - .00009	.030	4
3	7489609		1.300	.004	1.29980 - .00012	.030	8
3	7489611		1.300	.008 AND UP	1.29960 - .00030	.030	8
3	7489613		1.301	.0005	1.30100 - .00006	.030	4
3	7489615		1.301	.002	1.30090 - .00009	.030	4
3	7489616		1.301	.004	1.30080 - .00012	.030	8
3	7489618		1.301	.008 AND UP	1.30060 - .00030	.030	8
3	7489620		1.302	.0005	1.30200 - .00006	.030	4
3	7489622		1.302	.002	1.30190 - .00009	.030	4
3	7489623		1.302	.004	1.30180 - .00012	.030	8
3	7489625		1.302	.008 AND UP	1.30160 - .00030	.030	8
3	7489627		1.303	.0005	1.30300 - .00006	.030	4
3	7489629		1.303	.002	1.30290 - .00009	.030	4
3	7489630		1.303	.004	1.30280 - .00012	.030	8
3	7489632		1.303	.008 AND UP	1.30260 - .00030	.030	8
3	7489634		1.304	.0005	1.30400 - .00006	.030	4
3	7489636		1.304	.002	1.30390 - .00009	.030	4
3	7489637		1.304	.004	1.30380 - .00012	.030	8
3	7489639		1.304	.008 AND UP	1.30360 - .00030	.030	8
3	7489641		1.305	.0005	1.30500 - .00006	.030	4
3	7489643		1.305	.002	1.30490 - .00009	.030	4
3	7489644		1.305	.004	1.30480 - .00012	.030	8
3	7489646		1.305	.008 AND UP	1.30460 - .00030	.030	8
3	7489648		1.306	.0005	1.30600 - .00006	.030	4
3	7489650		1.306	.002	1.30590 - .00009	.030	4
3	7489651		1.306	.004	1.30580 - .00012	.030	8
3	7489653		1.306	.008 AND UP	1.30560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489655		1.307	.0005	1.30700 - .00006	.030	4
3	7489657		1.307	.002	1.30690 - .00009	.030	4
3	7489658		1.307	.004	1.30680 - .00012	.030	8
3	7489660		1.307	.008 AND UP	1.30660 - .00030	.030	8
3	7489662		1.308	.0005	1.30800 - .00006	.030	4
3	7489664		1.308	.002	1.30790 - .00009	.030	4
3	7489665		1.308	.004	1.30780 - .00012	.030	8
3	7489667		1.308	.008 AND UP	1.30760 - .00030	.030	8
3	7489669		1.309	.0005	1.30900 - .00006	.030	4
3	7489671		1.309	.002	1.30890 - .00009	.030	4
3	7489672		1.309	.004	1.30880 - .00012	.030	8
3	7489674		1.309	.008 AND UP	1.30860 - .00030	.030	8
3	7489676		1.310	.0005	1.31000 - .00006	.030	4
3	7489678		1.310	.002	1.30990 - .00009	.030	4
3	7489679		1.310	.004	1.30980 - .00012	.030	8
3	7489681		1.310	.008 AND UP	1.30960 - .00030	.030	8
3	7489683		1.311	.0005	1.31100 - .00006	.030	4
3	7489685		1.311	.002	1.31090 - .00009	.030	4
3	7489686		1.311	.004	1.31080 - .00012	.030	8
3	7489688		1.311	.008 AND UP	1.31060 - .00030	.030	8
3	7489690		1.312	.0005	1.31200 - .00006	.030	4
3	7489692		1.312	.002	1.31190 - .00009	.030	4
3	7489693		1.312	.004	1.31180 - .00012	.030	8
3	7489695		1.312	.008 AND UP	1.31160 - .00030	.030	8
3	7489697		1.3125	.0005 AND UP	1.31250 - .00006	.030	4
3	7489698		1.313	.0005	1.31300 - .00006	.030	4
3	7489700		1.313	.002	1.31290 - .00009	.030	4
3	7489701		1.313	.004	1.31280 - .00012	.030	8
3	7489703		1.313	.008 AND UP	1.31260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489705		1.314	.0005	1.31400 - .00006	.030	4
3	7489707		1.314	.002	1.31390 - .00009	.030	4
3	7489708		1.314	.004	1.31380 - .00012	.030	8
3	7489710		1.314	.008 AND UP	1.31360 - .00030	.030	8
3	7489712		1.315	.0005	1.31500 - .00006	.030	4
3	7489714		1.315	.002	1.31490 - .00009	.030	4
3	7489715		1.315	.004	1.31480 - .00012	.030	8
3	7489717		1.315	.008 AND UP	1.31460 - .00030	.030	8
3	7489719		1.316	.0005	1.31600 - .00006	.030	4
3	7489721		1.316	.002	1.31590 - .00009	.030	4
3	7489722		1.316	.004	1.31580 - .00012	.030	8
3	7489724		1.316	.008 AND UP	1.31560 - .00030	.030	8
3	7489726		1.317	.0005	1.31700 - .00006	.030	4
3	7489728		1.317	.002	1.31690 - .00009	.030	4
3	7489729		1.317	.004	1.31680 - .00012	.030	8
3	7489731		1.317	.008 AND UP	1.31660 - .00030	.030	8
3	7489733		1.318	.0005	1.31800 - .00006	.030	4
3	7489735		1.318	.002	1.31790 - .00009	.030	4
3	7489736		1.318	.004	1.31780 - .00012	.030	8
3	7489738		1.318	.008 AND UP	1.31760 - .00030	.030	8
3	7489740		1.319	.0005	1.31900 - .00006	.030	4
3	7489742		1.319	.002	1.31890 - .00009	.030	4
3	7489743		1.319	.004	1.31880 - .00012	.030	8
3	7489745		1.319	.008 AND UP	1.31860 - .00030	.030	8
3	7489747		1.320	.0005	1.32000 - .00006	.030	4
3	7489749		1.320	.002	1.31990 - .00009	.030	4
3	7489750		1.320	.004	1.31980 - .00012	.030	8
3	7489752		1.320	.008 AND UP	1.31960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489754		1.321	.0005	1.32100 - .00006	.030	4
3	7489756		1.321	.002	1.32090 - .00009	.030	4
3	7489757		1.321	.004	1.32080 - .00012	.030	8
3	7489759		1.321	.008 AND UP	1.32060 - .00030	.030	8
3	7489761		1.322	.0005	1.32200 - .00006	.030	4
3	7489763		1.322	.002	1.32190 - .00009	.030	4
3	7489764		1.322	.004	1.32180 - .00012	.030	8
3	7489766		1.322	.008 AND UP	1.32160 - .00030	.030	8
3	7489768		1.323	.0005	1.32300 - .00006	.030	4
3	7489770		1.323	.002	1.32290 - .00009	.030	4
3	7489771		1.323	.004	1.32280 - .00012	.030	8
3	7489773		1.323	.008 AND UP	1.32260 - .00030	.030	8
3	7489775		1.324	.0005	1.32400 - .00006	.030	4
3	7489777		1.324	.002	1.32390 - .00009	.030	4
3	7489778		1.324	.004	1.32380 - .00012	.030	8
3	7489780		1.324	.008 AND UP	1.32360 - .00030	.030	8
3	7489782		1.325	.0005	1.32500 - .00006	.030	4
3	7489784		1.325	.002	1.32490 - .00009	.030	4
3	7489785		1.325	.004	1.32480 - .00012	.030	8
3	7489787		1.325	.008 AND UP	1.32460 - .00030	.030	8
3	7489789		1.326	.0005	1.32600 - .00006	.030	4
3	7489791		1.326	.002	1.32590 - .00009	.030	4
3	7489792		1.326	.004	1.32580 - .00012	.030	8
3	7489794		1.326	.008 AND UP	1.32560 - .00030	.030	8
3	7489796		1.327	.0005	1.32700 - .00006	.030	4
3	7489798		1.327	.002	1.32690 - .00009	.030	4
3	7489799		1.327	.004	1.32680 - .00012	.030	8
3	7489801		1.327	.008 AND UP	1.32660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489803		1.328	.0005	1.32800 - .00006	.030	4
3	7489805		1.328	.002	1.32790 - .00009	.030	4
3	7489806		1.328	.004	1.32780 - .00012	.030	8
3	7489808		1.328	.008 AND UP	1.32760 - .00030	.030	8
3	7489810		1.329	.0005	1.32900 - .00006	.030	4
3	7489812		1.329	.002	1.32890 - .00009	.030	4
3	7489813		1.329	.004	1.32880 - .00012	.030	8
3	7489815		1.329	.008 AND UP	1.32860 - .00030	.030	8
3	7489817		1.330	.0005	1.33000 - .00006	.030	4
3	7489819		1.330	.002	1.32990 - .00009	.030	4
3	7489820		1.330	.004	1.32980 - .00012	.030	8
3	7489822		1.330	.008 AND UP	1.32960 - .00030	.030	8
3	7489824		1.331	.0005	1.33100 - .00006	.030	4
3	7489826		1.331	.002	1.33090 - .00009	.030	4
3	7489827		1.331	.004	1.33080 - .00012	.030	8
3	7489829		1.331	.008 AND UP	1.33060 - .00030	.030	8
3	7489831		1.332	.0005	1.33200 - .00006	.030	4
3	7489833		1.332	.002	1.33190 - .00009	.030	4
3	7489834		1.332	.004	1.33180 - .00012	.030	8
3	7489836		1.332	.008 AND UP	1.33160 - .00030	.030	8
3	7489838		1.333	.0005	1.33300 - .00006	.030	4
3	7489840		1.333	.002	1.33290 - .00009	.030	4
3	7489841		1.333	.004	1.33280 - .00012	.030	8
3	7489843		1.333	.008 AND UP	1.33260 - .00030	.030	8
3	7489845		1.334	.0005	1.33400 - .00006	.030	4
3	7489847		1.334	.002	1.33390 - .00009	.030	4
3	7489848		1.334	.004	1.33380 - .00012	.030	8
3	7489850		1.334	.008 AND UP	1.33360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489852		1.335	.0005	1.33500 - .00006	.030	4
3	7489854		1.335	.002	1.33490 - .00009	.030	4
3	7489855		1.335	.004	1.33480 - .00012	.030	8
3	7489857		1.335	.008 AND UP	1.33460 - .00030	.030	8
3	7489859		1.336	.0005	1.33600 - .00006	.030	4
3	7489861		1.336	.002	1.33590 - .00009	.030	4
3	7489862		1.336	.004	1.33580 - .00012	.030	8
3	7489864		1.336	.008 AND UP	1.33560 - .00030	.030	8
3	7489866		1.337	.0005	1.33700 - .00006	.030	4
3	7489868		1.337	.002	1.33690 - .00009	.030	4
3	7489869		1.337	.004	1.33680 - .00012	.030	8
3	7489871		1.337	.008 AND UP	1.33660 - .00030	.030	8
3	7489873		1.338	.0005	1.33800 - .00006	.030	4
3	7489875		1.338	.002	1.33790 - .00009	.030	4
3	7489876		1.338	.004	1.33780 - .00012	.030	8
3	7489878		1.338	.008 AND UP	1.33760 - .00030	.030	8
3	7489880		1.339	.0005	1.33900 - .00006	.030	4
3	7489882		1.339	.002	1.33890 - .00009	.030	4
3	7489883		1.339	.004	1.33880 - .00012	.030	8
3	7489885		1.339	.008 AND UP	1.33860 - .00030	.030	8
3	7489887		1.340	.0005	1.34000 - .00006	.030	4
3	7489889		1.340	.002	1.33990 - .00009	.030	4
3	7489890		1.340	.004	1.33980 - .00012	.030	8
3	7489892		1.340	.008 AND UP	1.33960 - .00030	.030	8
3	7489894		1.341	.0005	1.34100 - .00006	.030	4
3	7489896		1.341	.002	1.34090 - .00009	.030	4
3	7489897		1.341	.004	1.34080 - .00012	.030	8
3	7489899		1.341	.008 AND UP	1.34060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489901		1.342	.0005	1.34200 - .00006	.030	4
3	7489903		1.342	.002	1.34190 - .00009	.030	4
3	7489904		1.342	.004	1.34180 - .00012	.030	8
3	7489906		1.342	.008 AND UP	1.34160 - .00030	.030	8
3	7489908		1.343	.0005	1.34300 - .00006	.030	4
3	7489910		1.343	.002	1.34290 - .00009	.030	4
3	7489911		1.343	.004	1.34280 - .00012	.030	8
3	7489913		1.343	.008 AND UP	1.34260 - .00030	.030	8
3	7489915		1.34375	.0005 AND UP	1.34375 - .00006	.030	4
3	7489916		1.344	.0005	1.34400 - .00006	.030	4
3	7489918		1.344	.002	1.34390 - .00009	.030	4
3	7489919		1.344	.004	1.34380 - .00012	.030	8
3	7489921		1.344	.008 AND UP	1.34360 - .00030	.030	8
3	7489923		1.345	.0005	1.34500 - .00006	.030	4
3	7489925		1.345	.002	1.34490 - .00009	.030	4
3	7489926		1.345	.004	1.34480 - .00012	.030	8
3	7489928		1.345	.008 AND UP	1.34460 - .00030	.030	8
3	7489930		1.346	.0005	1.34600 - .00006	.030	4
3	7489932		1.346	.002	1.34590 - .00009	.030	4
3	7489933		1.346	.004	1.34580 - .00012	.030	8
3	7489935		1.346	.008 AND UP	1.34560 - .00030	.030	8
3	7489937		1.347	.0005	1.34700 - .00006	.030	4
3	7489939		1.347	.002	1.34690 - .00009	.030	4
3	7489940		1.347	.004	1.34680 - .00012	.030	8
3	7489942		1.347	.008 AND UP	1.34660 - .00030	.030	8
3	7489944		1.348	.0005	1.34800 - .00006	.030	4
3	7489946		1.348	.002	1.34790 - .00009	.030	4
3	7489947		1.348	.004	1.34780 - .00012	.030	8
3	7489949		1.348	.008 AND UP	1.34760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7489951		1.349	.0005	1.34900 - .00006	.030	4
3	7489953		1.349	.002	1.34890 - .00009	.030	4
3	7489954		1.349	.004	1.34880 - .00012	.030	8
3	7489956		1.349	.008 AND UP	1.34860 - .00030	.030	8
3	7489958		1.350	.0005	1.35000 - .00006	.030	4
3	7489960		1.350	.002	1.34990 - .00009	.030	4
3	7489961		1.350	.004	1.34980 - .00012	.030	8
3	7489963		1.350	.008 AND UP	1.34960 - .00030	.030	8
3	7489965		1.351	.0005	1.35100 - .00006	.030	4
3	7489967		1.351	.002	1.35090 - .00009	.030	4
3	7489968		1.351	.004	1.35080 - .00012	.030	8
3	7489970		1.351	.008 AND UP	1.35060 - .00030	.030	8
3	7489972		1.352	.0005	1.35200 - .00006	.030	4
3	7489974		1.352	.002	1.35190 - .00009	.030	4
3	7489975		1.352	.004	1.35180 - .00012	.030	8
3	7489977		1.352	.008 AND UP	1.35160 - .00030	.030	8
3	7489979		1.353	.0005	1.35300 - .00006	.030	4
3	7489981		1.353	.002	1.35290 - .00009	.030	4
3	7489982		1.353	.004	1.35280 - .00012	.030	8
3	7489984		1.353	.008 AND UP	1.35260 - .00030	.030	8
3	7489986		1.354	.0005	1.35400 - .00006	.030	4
3	7489988		1.354	.002	1.35390 - .00009	.030	4
3	7489989		1.354	.004	1.35380 - .00012	.030	8
3	7489991		1.354	.008 AND UP	1.35360 - .00030	.030	8
3	7489993		1.355	.0005	1.35500 - .00006	.030	4
3	7489995		1.355	.002	1.35490 - .00009	.030	4
3	7489996		1.355	.004	1.35480 - .00012	.030	8
3	7489998		1.355	.008 AND UP	1.35460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490000		1.356	.0005	1.35600 - .00006	.030	4
3	7490002		1.356	.002	1.35590 - .00009	.030	4
3	7490003		1.356	.004	1.35580 - .00012	.030	8
3	7490005		1.356	.008 AND UP	1.35560 - .00030	.030	8
3	7490007		1.357	.0005	1.35700 - .00006	.030	4
3	7490009		1.357	.002	1.35690 - .00009	.030	4
3	7490010		1.357	.004	1.35680 - .00012	.030	8
3	7490012		1.357	.008 AND UP	1.35660 - .00030	.030	8
3	7490014		1.358	.0005	1.35800 - .00006	.030	4
3	7490016		1.358	.002	1.35790 - .00009	.030	4
3	7490017		1.358	.004	1.35780 - .00012	.030	8
3	7490019		1.358	.008 AND UP	1.35760 - .00030	.030	8
3	7490021		1.359	.0005	1.35900 - .00006	.030	4
3	7490023		1.359	.002	1.35890 - .00009	.030	4
3	7490024		1.359	.004	1.35880 - .00012	.030	8
3	7490026		1.359	.008 AND UP	1.35860 - .00030	.030	8
3	7490028		1.360	.0005	1.36000 - .00006	.030	4
3	7490030		1.360	.002	1.35990 - .00009	.030	4
3	7490031		1.360	.004	1.35980 - .00012	.030	8
3	7490033		1.360	.008 AND UP	1.35960 - .00030	.030	8
3	7490035		1.361	.0005	1.36100 - .00006	.030	4
3	7490037		1.361	.002	1.36090 - .00009	.030	4
3	7490038		1.361	.004	1.36080 - .00012	.030	8
3	7490040		1.361	.008 AND UP	1.36060 - .00030	.030	8
3	7490042		1.362	.0005	1.36200 - .00006	.030	4
3	7490044		1.362	.002	1.36190 - .00009	.030	4
3	7490045		1.362	.004	1.36180 - .00012	.030	8
3	7490047		1.362	.008 AND UP	1.36160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490049		1.363	.0005	1.36300 - .00006	.030	4
3	7490051		1.363	.002	1.36290 - .00009	.030	4
3	7490052		1.363	.004	1.36280 - .00012	.030	8
3	7490054		1.363	.008 AND UP	1.36260 - .00030	.030	8
3	7490056		1.364	.0005	1.36400 - .00006	.030	4
3	7490058		1.364	.002	1.36390 - .00009	.030	4
3	7490059		1.364	.004	1.36380 - .00012	.030	8
3	7490061		1.364	.008 AND UP	1.36360 - .00030	.030	8
3	7490063		1.365	.0005	1.36500 - .00006	.030	4
3	7490065		1.365	.002	1.36490 - .00009	.030	4
3	7490066		1.365	.004	1.36480 - .00012	.030	8
3	7490068		1.365	.008 AND UP	1.36460 - .00030	.030	8
3	7490070		1.366	.0005	1.36600 - .00006	.030	4
3	7490072		1.366	.002	1.36590 - .00009	.030	4
3	7490073		1.366	.004	1.36580 - .00012	.030	8
3	7490075		1.366	.008 AND UP	1.36560 - .00030	.030	8
3	7490077		1.367	.0005	1.36700 - .00006	.030	4
3	7490079		1.367	.002	1.36690 - .00009	.030	4
3	7490080		1.367	.004	1.36680 - .00012	.030	8
3	7490082		1.367	.008 AND UP	1.36660 - .00030	.030	8
3	7490084		1.368	.0005	1.36800 - .00006	.030	4
3	7490086		1.368	.002	1.36790 - .00009	.030	4
3	7490087		1.368	.004	1.36780 - .00012	.030	8
3	7490089		1.368	.008 AND UP	1.36760 - .00030	.030	8
3	7490091		1.369	.0005	1.36900 - .00006	.030	4
3	7490093		1.369	.002	1.36890 - .00009	.030	4
3	7490094		1.369	.004	1.36880 - .00012	.030	8
3	7490096		1.369	.008 AND UP	1.36860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN— GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490098		1.370	.0005	1.37000 - .00006	.030	4
3	7490100		1.370	.002	1.36990 - .00009	.030	4
3	7490101		1.370	.004	1.36980 - .00012	.030	8
3	7490103		1.370	.008 AND UP	1.36960 - .00030	.030	8
3	7490105		1.371	.0005	1.37100 - .00006	.030	4
3	7490107		1.371	.002	1.37090 - .00009	.030	4
3	7490108		1.371	.004	1.37080 - .00012	.030	8
3	7490110		1.371	.008 AND UP	1.37060 - .00030	.030	8
3	7490112		1.372	.0005	1.37200 - .00006	.030	4
3	7490114		1.372	.002	1.37190 - .00009	.030	4
3	7490115		1.372	.004	1.37180 - .00012	.030	8
3	7490117		1.372	.008 AND UP	1.37160 - .00030	.030	8
3	7490119		1.373	.0005	1.37300 - .00006	.030	4
3	7490121		1.373	.002	1.37290 - .00009	.030	4
3	7490122		1.373	.004	1.37280 - .00012	.030	8
3	7490124		1.373	.008 AND UP	1.37260 - .00030	.030	8
3	7490126		1.374	.0005	1.37400 - .00006	.030	4
3	7490128		1.374	.002	1.37390 - .00009	.030	4
3	7490129		1.374	.004	1.37380 - .00012	.030	8
3	7490131		1.374	.008 AND UP	1.37360 - .00030	.030	8
3	7490133		1.375	.0005	1.37500 - .00006	.030	4
3	7490135		1.375	.002	1.37490 - .00009	.030	4
3	7490136		1.375	.004	1.37480 - .00012	.030	8
3	7490138		1.375	.008 AND UP	1.37460 - .00030	.030	8
3	7490140		1.376	.0005	1.37600 - .00006	.030	4
3	7490142		1.376	.002	1.37590 - .00009	.030	4
3	7490143		1.376	.004	1.37580 - .00012	.030	8
3	7490145		1.376	.008 AND UP	1.37560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490147		1.377	.0005	1.37700 - .00006	.030	4
3	7490149		1.377	.002	1.37690 - .00009	.030	4
3	7490150		1.377	.004	1.37680 - .00012	.030	8
3	7490152		1.377	.008 AND UP	1.37660 - .00030	.030	8
3	7490154		1.378	.0005	1.37800 - .00006	.030	4
3	7490156		1.378	.002	1.37790 - .00009	.030	4
3	7490157		1.378	.004	1.37780 - .00012	.030	8
3	7490159		1.378	.008 AND UP	1.37760 - .00030	.030	8
3	7490161		1.379	.0005	1.37900 - .00006	.030	4
3	7490163		1.379	.002	1.37890 - .00009	.030	4
3	7490164		1.379	.004	1.37880 - .00012	.030	8
3	7490166		1.379	.008 AND UP	1.37860 - .00030	.030	8
3	7490168		1.380	.0005	1.38000 - .00006	.030	4
3	7490170		1.380	.002	1.37990 - .00009	.030	4
3	7490171		1.380	.004	1.37980 - .00012	.030	8
3	7490173		1.380	.008 AND UP	1.37960 - .00030	.030	8
3	7490175		1.381	.0005	1.38100 - .00006	.030	4
3	7490177		1.381	.002	1.38090 - .00009	.030	4
3	7490178		1.381	.004	1.38080 - .00012	.030	8
3	7490180		1.381	.008 AND UP	1.38060 - .00030	.030	8
3	7490182		1.382	.0005	1.38200 - .00006	.030	4
3	7490184		1.382	.002	1.38190 - .00009	.030	4
3	7490185		1.382	.004	1.38180 - .00012	.030	8
3	7490187		1.382	.008 AND UP	1.38160 - .00030	.030	8
3	7490189		1.383	.0005	1.38300 - .00006	.030	4
3	7490191		1.383	.002	1.38290 - .00009	.030	4
3	7490192		1.383	.004	1.38280 - .00012	.030	8
3	7490194		1.383	.008 AND UP	1.38260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490196		1.384	.0005	1.38400 - .00006	.030	4
3	7490198		1.384	.002	1.38390 - .00009	.030	4
3	7490199		1.384	.004	1.38380 - .00012	.030	8
3	7490201		1.384	.008 AND UP	1.38360 - .00030	.030	8
3	7490203		1.385	.0005	1.38500 - .00006	.030	4
3	7490205		1.385	.002	1.38490 - .00009	.030	4
3	7490206		1.385	.004	1.38480 - .00012	.030	8
3	7490208		1.385	.008 AND UP	1.38460 - .00030	.030	8
3	7490210		1.386	.0005	1.38600 - .00006	.030	4
3	7490212		1.386	.002	1.38590 - .00009	.030	4
3	7490213		1.386	.004	1.38580 - .00012	.030	8
3	7490215		1.386	.008 AND UP	1.38560 - .00030	.030	8
3	7490217		1.387	.0005	1.38700 - .00006	.030	4
3	7490219		1.387	.002	1.38690 - .00009	.030	4
3	7490220		1.387	.004	1.38680 - .00012	.030	8
3	7490222		1.387	.008 AND UP	1.38660 - .00030	.030	8
3	7490224		1.388	.0005	1.38800 - .00006	.030	4
3	7490226		1.388	.002	1.38790 - .00009	.030	4
3	7490227		1.388	.004	1.38780 - .00012	.030	8
3	7490229		1.388	.008 AND UP	1.38760 - .00030	.030	8
3	7490231		1.389	.0005	1.38900 - .00006	.030	4
3	7490233		1.389	.002	1.38890 - .00009	.030	4
3	7490234		1.389	.004	1.38880 - .00012	.030	8
3	7490236		1.389	.008 AND UP	1.38860 - .00030	.030	8
3	7490238		1.390	.0005	1.39000 - .00006	.030	4
3	7490240		1.390	.002	1.38990 - .00009	.030	4
3	7490241		1.390	.004	1.38980 - .00012	.030	8
3	7490243		1.390	.008 AND UP	1.38960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490245		1.391	.0005	1.39100 - .00006	.030	4
3	7490247		1.391	.002	1.39090 - .00009	.030	4
3	7490248		1.391	.004	1.39080 - .00012	.030	8
3	7490250		1.391	.008 AND UP	1.39060 - .00030	.030	8
3	7490252		1.392	.0005	1.39200 - .00006	.030	4
3	7490254		1.392	.002	1.39190 - .00009	.030	4
3	7490255		1.392	.004	1.39180 - .00012	.030	8
3	7490257		1.392	.008 AND UP	1.39160 - .00030	.030	8
3	7490259		1.393	.0005	1.39300 - .00006	.030	4
3	7490261		1.393	.002	1.39290 - .00009	.030	4
3	7490262		1.393	.004	1.39280 - .00012	.030	8
3	7490264		1.393	.008 AND UP	1.39260 - .00030	.030	8
3	7490266		1.394	.0005	1.39400 - .00006	.030	4
3	7490268		1.394	.002	1.39390 - .00009	.030	4
3	7490269		1.394	.004	1.39380 - .00012	.030	8
3	7490271		1.394	.008 AND UP	1.39360 - .00030	.030	8
3	7490273		1.395	.0005	1.39500 - .00006	.030	4
3	7490275		1.395	.002	1.39490 - .00009	.030	4
3	7490276		1.395	.004	1.39480 - .00012	.030	8
3	7490278		1.395	.008 AND UP	1.39460 - .00030	.030	8
3	7490280		1.396	.0005	1.39600 - .00006	.030	4
3	7490282		1.396	.002	1.39590 - .00009	.030	4
3	7490283		1.396	.004	1.39580 - .00012	.030	8
3	7490285		1.396	.008 AND UP	1.39560 - .00030	.030	8
3	7490287		1.397	.0005	1.39700 - .00006	.030	4
3	7490289		1.397	.002	1.39690 - .00009	.030	4
3	7490290		1.397	.004	1.39680 - .00012	.030	8
3	7490292		1.397	.008 AND UP	1.39660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490294		1.398	.0005	1.39800 - .00006	.030	4
3	7490296		1.398	.002	1.39790 - .00009	.030	4
3	7490297		1.398	.004	1.39780 - .00012	.030	8
3	7490299		1.398	.008 AND UP	1.39760 - .00030	.030	8
3	7490301		1.399	.0005	1.39900 - .00006	.030	4
3	7490303		1.399	.002	1.39890 - .00009	.030	4
3	7490304		1.399	.004	1.39880 - .00012	.030	8
3	7490306		1.399	.008 AND UP	1.39860 - .00030	.030	8
3	7490308		1.400	.0005	1.40000 - .00006	.030	4
3	7490310		1.400	.002	1.39990 - .00009	.030	4
3	7490311		1.400	.004	1.39980 - .00012	.030	8
3	7490313		1.400	.008 AND UP	1.39960 - .00030	.030	8
3	7490315		1.401	.0005	1.40100 - .00006	.030	4
3	7490317		1.401	.002	1.40090 - .00009	.030	4
3	7490318		1.401	.004	1.40080 - .00012	.030	8
3	7490320		1.401	.008 AND UP	1.40060 - .00030	.030	8
3	7490322		1.402	.0005	1.40200 - .00006	.030	4
3	7490324		1.402	.002	1.40190 - .00009	.030	4
3	7490325		1.402	.004	1.40180 - .00012	.030	8
3	7490327		1.402	.008 AND UP	1.40160 - .00030	.030	8
3	7490329		1.403	.0005	1.40300 - .00006	.030	4
3	7490331		1.403	.002	1.40290 - .00009	.030	4
3	7490332		1.403	.004	1.40280 - .00012	.030	8
3	7490334		1.403	.008 AND UP	1.40260 - .00030	.030	8
3	7490336		1.404	.0005	1.40400 - .00006	.030	4
3	7490338		1.404	.002	1.40390 - .00009	.030	4
3	7490339		1.404	.004	1.40380 - .00012	.030	8
3	7490341		1.404	.008 AND UP	1.40360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490343		1.405	.0005	1.40500 - .00006	.030	4
3	7490345		1.405	.002	1.40490 - .00009	.030	4
3	7490346		1.405	.004	1.40480 - .00012	.030	8
3	7490348		1.405	.008 AND UP	1.40460 - .00030	.030	8
3	7490350		1.406	.0005	1.40600 - .00006	.030	4
3	7490352		1.406	.002	1.40590 - .00009	.030	4
3	7490353		1.406	.004	1.40580 - .00012	.030	8
3	7490355		1.406	.008 AND UP	1.40560 - .00030	.030	8
3	7490357		1.40625	.0005 AND UP	1.40625 - .00006	.030	4
3	7490358		1.407	.0005	1.40700 - .00006	.030	4
3	7490360		1.407	.002	1.40690 - .00009	.030	4
3	7490361		1.407	.004	1.40680 - .00012	.030	8
3	7490363		1.407	.008 AND UP	1.40660 - .00030	.030	8
3	7490365		1.408	.0005	1.40800 - .00006	.030	4
3	7490367		1.408	.002	1.40790 - .00009	.030	4
3	7490368		1.408	.004	1.40780 - .00012	.030	8
3	7490370		1.408	.008 AND UP	1.40760 - .00030	.030	8
3	7490372		1.409	.0005	1.40900 - .00006	.030	4
3	7490374		1.409	.002	1.40890 - .00009	.030	4
3	7490375		1.409	.004	1.40880 - .00012	.030	8
3	7490377		1.409	.008 AND UP	1.40860 - .00030	.030	8
3	7490379		1.410	.0005	1.41000 - .00006	.030	4
3	7490381		1.410	.002	1.40990 - .00009	.030	4
3	7490382		1.410	.004	1.40980 - .00012	.030	8
3	7490384		1.410	.008 AND UP	1.40960 - .00030	.030	8
3	7490386		1.411	.0005	1.41100 - .00006	.030	4
3	7490388		1.411	.002	1.41090 - .00009	.030	4
3	7490389		1.411	.004	1.41080 - .00012	.030	8
3	7490391		1.411	.008 AND UP	1.41060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490393		1.412	.0005	1.41200 - .00006	.030	4
3	7490395		1.412	.002	1.41190 - .00009	.030	4
3	7490396		1.412	.004	1.41180 - .00012	.030	8
3	7490398		1.412	.008 AND UP	1.41160 - .00030	.030	8
3	7490400		1.413	.0005	1.41300 - .00006	.030	4
3	7490402		1.413	.002	1.41290 - .00009	.030	4
3	7490403		1.413	.004	1.41280 - .00012	.030	8
3	7490405		1.413	.008 AND UP	1.41260 - .00030	.030	8
3	7490407		1.414	.0005	1.41400 - .00006	.030	4
3	7490409		1.414	.002	1.41390 - .00009	.030	4
3	7490410		1.414	.004	1.41380 - .00012	.030	8
3	7490412		1.414	.008 AND UP	1.41360 - .00030	.030	8
3	7490414		1.415	.0005	1.41500 - .00006	.030	4
3	7490416		1.415	.002	1.41490 - .00009	.030	4
3	7490417		1.415	.004	1.41480 - .00012	.030	8
3	7490419		1.415	.008 AND UP	1.41460 - .00030	.030	8
3	7490421		1.416	.0005	1.41600 - .00006	.030	4
3	7490423		1.416	.002	1.41590 - .00009	.030	4
3	7490424		1.416	.004	1.41580 - .00012	.030	8
3	7490426		1.416	.008 AND UP	1.41560 - .00030	.030	8
3	7490428		1.417	.0005	1.41700 - .00006	.030	4
3	7490430		1.417	.002	1.41690 - .00009	.030	4
3	7490431		1.417	.004	1.41680 - .00012	.030	8
3	7490433		1.417	.008 AND UP	1.41660 - .00030	.030	8
3	7490435		1.418	.0005	1.41800 - .00006	.030	4
3	7490437		1.418	.002	1.41790 - .00009	.030	4
3	7490438		1.418	.004	1.41780 - .00012	.030	8
3	7490440		1.418	.008 AND UP	1.41760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490442		1.419	.0005	1.41900 - .00006	.030	4
3	7490444		1.419	.002	1.41890 - .00009	.030	4
3	7490445		1.419	.004	1.41880 - .00012	.030	8
3	7490447		1.419	.008 AND UP	1.41860 - .00030	.030	8
3	7490449		1.420	.0005	1.42000 - .00006	.030	4
3	7490451		1.420	.002	1.41990 - .00009	.030	4
3	7490452		1.420	.004	1.41980 - .00012	.030	8
3	7490454		1.420	.008 AND UP	1.41960 - .00030	.030	8
3	7490456		1.421	.0005	1.42100 - .00006	.030	4
3	7490458		1.421	.002	1.42090 - .00009	.030	4
3	7490459		1.421	.004	1.42080 - .00012	.030	8
3	7490461		1.421	.008 AND UP	1.42060 - .00030	.030	8
3	7490463		1.422	.0005	1.42200 - .00006	.030	4
3	7490465		1.422	.002	1.42190 - .00009	.030	4
3	7490466		1.422	.004	1.42180 - .00012	.030	8
3	7490468		1.422	.008 AND UP	1.42160 - .00030	.030	8
3	7490470		1.423	.0005	1.42300 - .00006	.030	4
3	7490472		1.423	.002	1.42290 - .00009	.030	4
3	7490473		1.423	.004	1.42280 - .00012	.030	8
3	7490475		1.423	.008 AND UP	1.42260 - .00030	.030	8
3	7490477		1.424	.0005	1.42400 - .00006	.030	4
3	7490479		1.424	.002	1.42390 - .00009	.030	4
3	7490480		1.424	.004	1.42380 - .00012	.030	8
3	7490482		1.424	.008 AND UP	1.42360 - .00030	.030	8
3	7490484		1.425	.0005	1.42500 - .00006	.030	4
3	7490486		1.425	.002	1.42490 - .00009	.030	4
3	7490487		1.425	.004	1.42480 - .00012	.030	8
3	7490489		1.425	.008 AND UP	1.42460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490491		1.426	.0005	1.42600 - .00006	.030	4
3	7490493		1.426	.002	1.42590 - .00009	.030	4
3	7490494		1.426	.004	1.42580 - .00012	.030	8
3	7490496		1.426	.008 AND UP	1.42560 - .00030	.030	8
3	7490498		1.427	.0005	1.42700 - .00006	.030	4
3	7490500		1.427	.002	1.42690 - .00009	.030	4
3	7490501		1.427	.004	1.42680 - .00012	.030	8
3	7490503		1.427	.008 AND UP	1.42660 - .00030	.030	8
3	7490505		1.428	.0005	1.42800 - .00006	.030	4
3	7490507		1.428	.002	1.42790 - .00009	.030	4
3	7490508		1.428	.004	1.42780 - .00012	.030	8
3	7490510		1.428	.008 AND UP	1.42760 - .00030	.030	8
3	7490512		1.429	.0005	1.42900 - .00006	.030	4
3	7490514		1.429	.002	1.42890 - .00009	.030	4
3	7490515		1.429	.004	1.42880 - .00012	.030	8
3	7490517		1.429	.008 AND UP	1.42860 - .00030	.030	8
3	7490519		1.430	.0005	1.43000 - .00006	.030	4
3	7490521		1.430	.002	1.42990 - .00009	.030	4
3	7490522		1.430	.004	1.42980 - .00012	.030	8
3	7490524		1.430	.008 AND UP	1.42960 - .00030	.030	8
3	7490526		1.431	.0005	1.43100 - .00006	.030	4
3	7490528		1.431	.002	1.43090 - .00009	.030	4
3	7490529		1.431	.004	1.43080 - .00012	.030	8
3	7490531		1.431	.008 AND UP	1.43060 - .00030	.030	8
3	7490533		1.432	.0005	1.43200 - .00006	.030	4
3	7490535		1.432	.002	1.43190 - .00009	.030	4
3	7490536		1.432	.004	1.43180 - .00012	.030	8
3	7490538		1.432	.008 AND UP	1.43160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490540		1.433	.0005	1.43300 - .00006	.030	4
3	7490542		1.433	.002	1.43290 - .00009	.030	4
3	7490543		1.433	.004	1.43280 - .00012	.030	8
3	7490545		1.433	.008 AND UP	1.43260 - .00030	.030	8
3	7490547		1.434	.0005	1.43400 - .00006	.030	4
3	7490549		1.434	.002	1.43390 - .00009	.030	4
3	7490550		1.434	.004	1.43380 - .00012	.030	8
3	7490552		1.434	.008 AND UP	1.43360 - .00030	.030	8
3	7490554		1.435	.0005	1.43500 - .00006	.030	4
3	7490556		1.435	.002	1.43490 - .00009	.030	4
3	7490557		1.435	.004	1.43480 - .00012	.030	8
3	7490559		1.435	.008 AND UP	1.43460 - .00030	.030	8
3	7490561		1.436	.0005	1.43600 - .00006	.030	4
3	7490563		1.436	.002	1.43590 - .00009	.030	4
3	7490564		1.436	.004	1.43580 - .00012	.030	8
3	7490566		1.436	.008 AND UP	1.43560 - .00030	.030	8
3	7490568		1.437	.0005	1.43700 - .00006	.030	4
3	7490570		1.437	.002	1.43690 - .00009	.030	4
3	7490571		1.437	.004	1.43680 - .00012	.030	8
3	7490573		1.437	.008 AND UP	1.43660 - .00030	.030	8
3	7490575		1.4375	.0005 AND UP	1.43750 - .00006	.030	4
3	7490576		1.438	.0005	1.43800 - .00006	.030	4
3	7490578		1.438	.002	1.43790 - .00009	.030	4
3	7490579		1.438	.004	1.43780 - .00012	.030	8
3	7490581		1.438	.008 AND UP	1.43760 - .00030	.030	8
3	7490583		1.439	.0005	1.43900 - .00006	.030	4
3	7490585		1.439	.002	1.43890 - .00009	.030	4
3	7490586		1.439	.004	1.43880 - .00012	.030	8
3	7490588		1.439	.008 AND UP	1.43860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490590		1.440	.0005	1.44000 - .00006	.030	4
3	7490592		1.440	.002	1.43990 - .00009	.030	4
3	7490593		1.440	.004	1.43980 - .00012	.030	8
3	7490595		1.440	.008 AND UP	1.43960 - .00030	.030	8
3	7490597		1.441	.0005	1.44100 - .00006	.030	4
3	7490599		1.441	.002	1.44090 - .00009	.030	4
3	7490600		1.441	.004	1.44080 - .00012	.030	8
3	7490602		1.441	.008 AND UP	1.44060 - .00030	.030	8
3	7490604		1.442	.0005	1.44200 - .00006	.030	4
3	7490606		1.442	.002	1.44190 - .00009	.030	4
3	7490607		1.442	.004	1.44180 - .00012	.030	8
3	7490609		1.442	.008 AND UP	1.44160 - .00030	.030	8
3	7490611		1.443	.0005	1.44300 - .00006	.030	4
3	7490613		1.443	.002	1.44290 - .00009	.030	4
3	7490614		1.443	.004	1.44280 - .00012	.030	8
3	7490616		1.443	.008 AND UP	1.44260 - .00030	.030	8
3	7490618		1.444	.0005	1.44400 - .00006	.030	4
3	7490620		1.444	.002	1.44390 - .00009	.030	4
3	7490621		1.444	.004	1.44380 - .00012	.030	8
3	7490623		1.444	.008 AND UP	1.44360 - .00030	.030	8
3	7490625		1.445	.0005	1.44500 - .00006	.030	4
3	7490627		1.445	.002	1.44490 - .00009	.030	4
3	7490628		1.445	.004	1.44480 - .00012	.030	8
3	7490630		1.445	.008 AND UP	1.44460 - .00030	.030	8
3	7490632		1.446	.0005	1.44600 - .00006	.030	4
3	7490634		1.446	.002	1.44590 - .00009	.030	4
3	7490635		1.446	.004	1.44580 - .00012	.030	8
3	7490637		1.446	.008 AND UP	1.44560 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK -					
A	B	C	D	E	F	G	H
3	7490639		1.447	.0005	1.44700 - .00006	.030	4
3	7490641		1.447	.002	1.44690 - .00009	.030	4
3	7490642		1.447	.004	1.44680 - .00012	.030	8
3	7490644		1.447	.008 AND UP	1.44660 - .00030	.030	8
3	7490646		1.448	.0005	1.44800 - .00006	.030	4
3	7490648		1.448	.002	1.44790 - .00009	.030	4
3	7490649		1.448	.004	1.44780 - .00012	.030	8
3	7490651		1.448	.008 AND UP	1.44760 - .00030	.030	8
3	7490653		1.449	.0005	1.44900 - .00006	.030	4
3	7490655		1.449	.002	1.44890 - .00009	.030	4
3	7490656		1.449	.004	1.44880 - .00012	.030	8
3	7490658		1.449	.008 AND UP	1.44860 - .00030	.030	8
3	7490660		1.450	.0005	1.45000 - .00006	.030	4
3	7490662		1.450	.002	1.44990 - .00009	.030	4
3	7490663		1.450	.004	1.44980 - .00012	.030	8
3	7490665		1.450	.008 AND UP	1.44960 - .00030	.030	8
3	7490667		1.451	.0005	1.45100 - .00006	.030	4
3	7490669		1.451	.002	1.45090 - .00009	.030	4
3	7490670		1.451	.004	1.45080 - .00012	.030	8
3	7490672		1.451	.008 AND UP	1.45060 - .00030	.030	8
3	7490674		1.452	.0005	1.45200 - .00006	.030	4
3	7490676		1.452	.002	1.45190 - .00009	.030	4
3	7490677		1.452	.004	1.45180 - .00012	.030	8
3	7490679		1.452	.008 AND UP	1.45160 - .00030	.030	8
3	7490681		1.453	.0005	1.45300 - .00006	.030	4
3	7490683		1.453	.002	1.45290 - .00009	.030	4
3	7490684		1.453	.004	1.45280 - .00012	.030	8
3	7490686		1.453	.008 AND UP	1.45260 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490688		1.454	.0005	1.45400 - .00006	.030	4
3	7490690		1.454	.002	1.45390 - .00009	.030	4
3	7490691		1.454	.004	1.45380 - .00012	.030	8
3	7490693		1.454	.008 AND UP	1.45360 - .00030	.030	8
3	7490695		1.455	.0005	1.45500 - .00006	.030	4
3	7490697		1.455	.002	1.45490 - .00009	.030	4
3	7490698		1.455	.004	1.45480 - .00012	.030	8
3	7490700		1.455	.008 AND UP	1.45460 - .00030	.030	8
3	7490702		1.456	.0005	1.45600 - .00006	.030	4
3	7490704		1.456	.002	1.45590 - .00009	.030	4
3	7490705		1.456	.004	1.45580 - .00012	.030	8
3	7490707		1.456	.008 AND UP	1.45560 - .00030	.030	8
3	7490709		1.457	.0005	1.45700 - .00006	.030	4
3	7490711		1.457	.002	1.45690 - .00009	.030	4
3	7490712		1.457	.004	1.45680 - .00012	.030	8
3	7490714		1.457	.008 AND UP	1.45660 - .00030	.030	8
3	7490716		1.458	.0005	1.45800 - .00006	.030	4
3	7490718		1.458	.002	1.45790 - .00009	.030	4
3	7490719		1.458	.004	1.45780 - .00012	.030	8
3	7490721		1.458	.008 AND UP	1.45760 - .00030	.030	8
3	7490723		1.459	.0005	1.45900 - .00006	.030	4
3	7490725		1.459	.002	1.45890 - .00009	.030	4
3	7490726		1.459	.004	1.45880 - .00012	.030	8
3	7490728		1.459	.008 AND UP	1.45860 - .00030	.030	8
3	7490730		1.460	.0005	1.46000 - .00006	.030	4
3	7490732		1.460	.002	1.45990 - .00009	.030	4
3	7490733		1.460	.004	1.45980 - .00012	.030	8
3	7490735		1.460	.008 AND UP	1.45960 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490737		1.461	.0005	1.46100 - .00006	.030	4
3	7490739		1.461	.002	1.46090 - .00009	.030	4
3	7490740		1.461	.004	1.46080 - .00012	.030	8
3	7490742		1.461	.008 AND UP	1.46060 - .00030	.030	8
3	7490744		1.462	.0005	1.46200 - .00006	.030	4
3	7490746		1.462	.002	1.46190 - .00009	.030	4
3	7490747		1.462	.004	1.46180 - .00012	.030	8
3	7490749		1.462	.008 AND UP	1.46160 - .00030	.030	8
3	7490751		1.463	.0005	1.46300 - .00006	.030	4
3	7490753		1.463	.002	1.46290 - .00009	.030	4
3	7490754		1.463	.004	1.46280 - .00012	.030	8
3	7490756		1.463	.008 AND UP	1.46260 - .00030	.030	8
3	7490758		1.464	.0005	1.46400 - .00006	.030	4
3	7490760		1.464	.002	1.46390 - .00009	.030	4
3	7490761		1.464	.004	1.46380 - .00012	.030	8
3	7490763		1.464	.008 AND UP	1.46360 - .00030	.030	8
3	7490765		1.465	.0005	1.46500 - .00006	.030	4
3	7490767		1.465	.002	1.46490 - .00009	.030	4
3	7490768		1.465	.004	1.46480 - .00012	.030	8
3	7490770		1.465	.008 AND UP	1.46460 - .00030	.030	8
3	7490772		1.466	.0005	1.46600 - .00006	.030	4
3	7490774		1.466	.002	1.46590 - .00009	.030	4
3	7490775		1.466	.004	1.46580 - .00012	.030	8
3	7490777		1.466	.008 AND UP	1.46560 - .00030	.030	8
3	7490779		1.467	.0005	1.46700 - .00006	.030	4
3	7490781		1.467	.002	1.46690 - .00009	.030	4
3	7490782		1.467	.004	1.46680 - .00012	.030	8
3	7490784		1.467	.008 AND UP	1.46660 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490786		1.468	.0005	1.46800 - .00006	.030	4
3	7490788		1.468	.002	1.46790 - .00009	.030	4
3	7490789		1.468	.004	1.46780 - .00012	.030	8
3	7490791		1.468	.008 AND UP	1.46760 - .00030	.030	8
3	7490793		1.46875	.0005 AND UP	1.46875 - .00006	.030	4
3	7490794		1.469	.0005	1.46900 - .00006	.030	4
3	7490796		1.469	.002	1.46890 - .00009	.030	4
3	7490797		1.469	.004	1.46880 - .00012	.030	8
3	7490799		1.469	.008 AND UP	1.46860 - .00030	.030	8
3	7490801		1.470	.0005	1.47000 - .00006	.030	4
3	7490803		1.470	.002	1.46990 - .00009	.030	4
3	7490804		1.470	.004	1.46980 - .00012	.030	8
3	7490806		1.470	.008 AND UP	1.46960 - .00030	.030	8
3	7490808		1.471	.0005	1.47100 - .00006	.030	4
3	7490810		1.471	.002	1.47090 - .00009	.030	4
3	7490811		1.471	.004	1.47080 - .00012	.030	8
3	7490813		1.471	.008 AND UP	1.47060 - .00030	.030	8
3	7490815		1.472	.0005	1.47200 - .00006	.030	4
3	7490817		1.472	.002	1.47190 - .00009	.030	4
3	7490818		1.472	.004	1.47180 - .00012	.030	8
3	7490820		1.472	.008 AND UP	1.47160 - .00030	.030	8
3	7490822		1.473	.0005	1.47300 - .00006	.030	4
3	7490824		1.473	.002	1.47290 - .00009	.030	4
3	7490825		1.473	.004	1.47280 - .00012	.030	8
3	7490827		1.473	.008 AND UP	1.47260 - .00030	.030	8
3	7490829		1.474	.0005	1.47400 - .00006	.030	4
3	7490831		1.474	.002	1.47390 - .00009	.030	4
3	7490832		1.474	.004	1.47380 - .00012	.030	8
3	7490834		1.474	.008 AND UP	1.47360 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490836		1.475	.0005	1.47500 - .00006	.030	4
3	7490838		1.475	.002	1.47490 - .00009	.030	4
3	7490839		1.475	.004	1.47480 - .00012	.030	8
3	7490841		1.475	.008 AND UP	1.47460 - .00030	.030	8
3	7490843		1.476	.0005	1.47600 - .00006	.030	4
3	7490845		1.476	.002	1.47590 - .00009	.030	4
3	7490846		1.476	.004	1.47580 - .00012	.030	8
3	7490848		1.476	.008 AND UP	1.47560 - .00030	.030	8
3	7490850		1.477	.0005	1.47700 - .00006	.030	4
3	7490852		1.477	.002	1.47690 - .00009	.030	4
3	7490853		1.477	.004	1.47680 - .00012	.030	8
3	7490855		1.477	.008 AND UP	1.47660 - .00030	.030	8
3	7490857		1.478	.0005	1.47800 - .00006	.030	4
3	7490859		1.478	.002	1.47790 - .00009	.030	4
3	7490860		1.478	.004	1.47780 - .00012	.030	8
3	7490862		1.478	.008 AND UP	1.47760 - .00030	.030	8
3	7490864		1.479	.0005	1.47900 - .00006	.030	4
3	7490866		1.479	.002	1.47890 - .00009	.030	4
3	7490867		1.479	.004	1.47880 - .00012	.030	8
3	7490869		1.479	.008 AND UP	1.47860 - .00030	.030	8
3	7490871		1.480	.0005	1.48000 - .00006	.030	4
3	7490873		1.480	.002	1.47990 - .00009	.030	4
3	7490874		1.480	.004	1.47980 - .00012	.030	8
3	7490876		1.480	.008 AND UP	1.47960 - .00030	.030	8
3	7490878		1.481	.0005	1.48100 - .00006	.030	4
3	7490880		1.481	.002	1.48090 - .00009	.030	4
3	7490881		1.481	.004	1.48080 - .00012	.030	8
3	7490883		1.481	.008 AND UP	1.48060 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490885		1.482	.0005	1.48200 - .00006	.030	4
3	7490887		1.482	.002	1.48190 - .00009	.030	4
3	7490888		1.482	.004	1.48180 - .00012	.030	8
3	7490890		1.482	.008 AND UP	1.48160 - .00030	.030	8
3	7490892		1.483	.0005	1.48300 - .00006	.030	4
3	7490894		1.483	.002	1.48290 - .00009	.030	4
3	7490895		1.483	.004	1.48280 - .00012	.030	8
3	7490897		1.483	.008 AND UP	1.48260 - .00030	.030	8
3	7490899		1.484	.0005	1.48400 - .00006	.030	4
3	7490901		1.484	.002	1.48390 - .00009	.030	4
3	7490902		1.484	.004	1.48380 - .00012	.030	8
3	7490904		1.484	.008 AND UP	1.48360 - .00030	.030	8
3	7490906		1.485	.0005	1.48500 - .00006	.030	4
3	7490908		1.485	.002	1.48490 - .00009	.030	4
3	7490909		1.485	.004	1.48480 - .00012	.030	8
3	7490911		1.485	.008 AND UP	1.48460 - .00030	.030	8
3	7490913		1.486	.0005	1.48600 - .00006	.030	4
3	7490915		1.486	.002	1.48590 - .00009	.030	4
3	7490916		1.486	.004	1.48580 - .00012	.030	8
3	7490918		1.486	.008 AND UP	1.48560 - .00030	.030	8
3	7490920		1.487	.0005	1.48700 - .00006	.030	4
3	7490922		1.487	.002	1.48690 - .00009	.030	4
3	7490923		1.487	.004	1.48680 - .00012	.030	8
3	7490925		1.487	.008 AND UP	1.48660 - .00030	.030	8
3	7490927		1.488	.0005	1.48800 - .00006	.030	4
3	7490929		1.488	.002	1.48790 - .00009	.030	4
3	7490930		1.488	.004	1.48780 - .00012	.030	8
3	7490932		1.488	.008 AND UP	1.48760 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490934		1.489	.0005	1.48900 - .00006	.030	4
3	7490936		1.489	.002	1.48890 - .00009	.030	4
3	7490937		1.489	.004	1.48880 - .00012	.030	8
3	7490939		1.489	.008 AND UP	1.48860 - .00030	.030	8
3	7490941		1.490	.0005	1.49000 - .00006	.030	4
3	7490943		1.490	.002	1.48990 - .00009	.030	4
3	7490944		1.490	.004	1.48980 - .00012	.030	8
3	7490946		1.490	.008 AND UP	1.48960 - .00030	.030	8
3	7490948		1.491	.0005	1.49100 - .00006	.030	4
3	7490950		1.491	.002	1.49090 - .00009	.030	4
3	7490951		1.491	.004	1.49080 - .00012	.030	8
3	7490953		1.491	.008 AND UP	1.49060 - .00030	.030	8
3	7490955		1.492	.0005	1.49200 - .00006	.030	4
3	7490957		1.492	.002	1.49190 - .00009	.030	4
3	7490958		1.492	.004	1.49180 - .00012	.030	8
3	7490960		1.492	.008 AND UP	1.49160 - .00030	.030	8
3	7490962		1.493	.0005	1.49300 - .00006	.030	4
3	7490964		1.493	.002	1.49290 - .00009	.030	4
3	7490965		1.493	.004	1.49280 - .00012	.030	8
3	7490967		1.493	.008 AND UP	1.49260 - .00030	.030	8
3	7490969		1.494	.0005	1.49400 - .00006	.030	4
3	7490971		1.494	.002	1.49390 - .00009	.030	4
3	7490972		1.494	.004	1.49380 - .00012	.030	8
3	7490974		1.494	.008 AND UP	1.49360 - .00030	.030	8
3	7490976		1.495	.0005	1.49500 - .00006	.030	4
3	7490978		1.495	.002	1.49490 - .00009	.030	4
3	7490979		1.495	.004	1.49480 - .00012	.030	8
3	7490981		1.495	.008 AND UP	1.49460 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7490983		1.496	.0005	1.49600 - .00006	.030	4
3	7490985		1.496	.002	1.49590 - .00009	.030	4
3	7490986		1.496	.004	1.49580 - .00012	.030	8
3	7490988		1.496	.008 AND UP	1.49560 - .00030	.030	8
3	7490990		1.497	.0005	1.49700 - .00006	.030	4
3	7490992		1.497	.002	1.49690 - .00009	.030	4
3	7490993		1.497	.004	1.49680 - .00012	.030	8
3	7490995		1.497	.008 AND UP	1.49660 - .00030	.030	8
3	7490997		1.498	.0005	1.49800 - .00006	.030	4
3	7490999		1.498	.002	1.49790 - .00009	.030	4
3	7491000		1.498	.004	1.49780 - .00012	.030	8
3	7491002		1.498	.008 AND UP	1.49760 - .00030	.030	8
3	7491004		1.499	.0005	1.49900 - .00006	.030	4
3	7491006		1.499	.002	1.49890 - .00009	.030	4
3	7491007		1.499	.004	1.49880 - .00012	.030	8
3	7491009		1.499	.008 AND UP	1.49860 - .00030	.030	8
3	7491011		1.500	.0005	1.50000 - .00006	.030	4
3	7491013		1.500	.002	1.49990 - .00009	.030	4
3	7491014		1.500	.004	1.49980 - .00012	.030	8
3	7491016		1.500	.008 AND UP	1.49960 - .00030	.030	8
3	7491018		1.501	.0005	1.50100 - .00006	.030	4
3	7491020		1.501	.002	1.50090 - .00009	.030	4
3	7491021		1.501	.004	1.50080 - .00012	.030	8
3	7491023		1.501	.008 AND UP	1.50060 - .00030	.030	8
3	7491025		1.502	.0005	1.50200 - .00006	.030	4
3	7491027		1.502	.002	1.50190 - .00009	.030	4
3	7491028		1.502	.004	1.50180 - .00012	.030	8
3	7491030		1.502	.008 AND UP	1.50160 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
3	7491032		1.503	.0005	1.50300 - .00006	.030	4
3	7491034		1.503	.002	1.50290 - .00009	.030	4
3	7491035		1.503	.004	1.50280 - .00012	.030	8
3	7491037		1.503	.008 AND UP	1.50260 - .00030	.030	8
3	7491039		1.504	.0005	1.50400 - .00006	.030	4
3	7491041		1.504	.002	1.50390 - .00009	.030	4
3	7491042		1.504	.004	1.50380 - .00012	.030	8
3	7491044		1.504	.008 AND UP	1.50360 - .00030	.030	8
3	7491046		1.505	.0005	1.50500 - .00006	.030	4
3	7491048		1.505	.002	1.50490 - .00009	.030	4
3	7491049		1.505	.004	1.50480 - .00012	.030	8
3	7491051		1.505	.008 AND UP	1.50460 - .00030	.030	8
3	7491053		1.506	.0005	1.50600 - .00006	.030	4
3	7491055		1.506	.002	1.50590 - .00009	.030	4
3	7491056		1.506	.004	1.50580 - .00012	.030	8
3	7491058		1.506	.008 AND UP	1.50560 - .00030	.030	8
3	7491060		1.507	.0005	1.50700 - .00006	.030	4
3	7491062		1.507	.002	1.50690 - .00009	.030	4
3	7491063		1.507	.004	1.50680 - .00012	.030	8
3	7491065		1.507	.008 AND UP	1.50660 - .00030	.030	8
3	7491067		1.508	.0005	1.50800 - .00006	.030	4
3	7491069		1.508	.002	1.50790 - .00009	.030	4
3	7491070		1.508	.004	1.50780 - .00012	.030	8
3	7491072		1.508	.008 AND UP	1.50760 - .00030	.030	8
3	7491074		1.509	.0005	1.50900 - .00006	.030	4
3	7491076		1.509	.002	1.50890 - .00009	.030	4
3	7491077		1.509	.004	1.50880 - .00012	.030	8
3	7491079		1.509	.008 AND UP	1.50860 - .00030	.030	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
3	7491081		1.510	.0005	1.51000 - .00006	.030	4
3	7491083		1.510	.002	1.50990 - .00009	.030	4
3	7491084		1.510	.004	1.50980 - .00012	.030	8
3	7491086		1.510	.008 AND UP	1.50960 - .00030	.030	8
4	7491088		1.511	.001	1.51100 - .00008	.050	4
4	7491089		1.511	.002	1.51092 - .00012	.050	4
4	7491090		1.511	.004	1.51080 - .00016	.050	8
4	7491092		1.511	.008 AND UP	1.51060 - .00040	.050	8
4	7491094		1.512	.001	1.51200 - .00008	.050	4
4	7491095		1.512	.002	1.51192 - .00012	.050	4
4	7491096		1.512	.004	1.51180 - .00016	.050	8
4	7491098		1.512	.008 AND UP	1.51160 - .00040	.050	8
4	7491100		1.513	.001	1.51300 - .00008	.050	4
4	7491101		1.513	.002	1.51292 - .00012	.050	4
4	7491102		1.513	.004	1.51280 - .00016	.050	8
4	7491104		1.513	.008 AND UP	1.51260 - .00040	.050	8
4	7491106		1.514	.001	1.51400 - .00008	.050	4
4	7491107		1.514	.002	1.51392 - .00012	.050	4
4	7491108		1.514	.004	1.51380 - .00016	.050	8
4	7491110		1.514	.008 AND UP	1.51360 - .00040	.050	8
4	7491112		1.515	.001	1.51500 - .00008	.050	4
4	7491113		1.515	.002	1.51492 - .00012	.050	4
4	7491114		1.515	.004	1.51480 - .00016	.050	8
4	7491116		1.515	.008 AND UP	1.51460 - .00040	.050	8
4	7491118		1.516	.001	1.51600 - .00008	.050	4
4	7491119		1.516	.002	1.51592 - .00012	.050	4
4	7491120		1.516	.004	1.51580 - .00016	.050	8
4	7491122		1.516	.008 AND UP	1.51560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				ø DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491124		1.517	.001	1.51700 - .00008	.050	4
4	7491125		1.517	.002	1.51692 - .00012	.050	4
4	7491126		1.517	.004	1.51680 - .00016	.050	8
4	7491128		1.517	.008 AND UP	1.51660 - .00040	.050	8
4	7491130		1.518	.001	1.51800 - .00008	.050	4
4	7491131		1.518	.002	1.51792 - .00012	.050	4
4	7491132		1.518	.004	1.51780 - .00016	.050	8
4	7491134		1.518	.008 AND UP	1.51760 - .00040	.050	8
4	7491136		1.519	.001	1.51900 - .00008	.050	4
4	7491137		1.519	.002	1.51892 - .00012	.050	4
4	7491138		1.519	.004	1.51880 - .00016	.050	8
4	7491140		1.519	.008 AND UP	1.51860 - .00040	.050	8
4	7491142		1.520	.001	1.52000 - .00008	.050	4
4	7491143		1.520	.002	1.51992 - .00012	.050	4
4	7491144		1.520	.004	1.51980 - .00016	.050	8
4	7491146		1.520	.008 AND UP	1.51960 - .00040	.050	8
4	7491148		1.521	.001	1.52100 - .00008	.050	4
4	7491149		1.521	.002	1.52092 - .00012	.050	4
4	7491150		1.521	.004	1.52080 - .00016	.050	8
4	7491152		1.521	.008 AND UP	1.52060 - .00040	.050	8
4	7491154		1.522	.001	1.52200 - .00008	.050	4
4	7491155		1.522	.002	1.52192 - .00012	.050	4
4	7491156		1.522	.004	1.52180 - .00016	.050	8
4	7491158		1.522	.008 AND UP	1.52160 - .00040	.050	8
4	7491160		1.523	.001	1.52300 - .00008	.050	4
4	7491161		1.523	.002	1.52292 - .00012	.050	4
4	7491162		1.523	.004	1.52280 - .00016	.050	8
4	7491164		1.523	.008 AND UP	1.52260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491166		1.524	.001	1.52400 - .00008	.050	4
4	7491167		1.524	.002	1.52392 - .00012	.050	4
4	7491168		1.524	.004	1.52380 - .00016	.050	8
4	7491170		1.524	.008 AND UP	1.52360 - .00040	.050	8
4	7491172		1.525	.001	1.52500 - .00008	.050	4
4	7491173		1.525	.002	1.52492 - .00012	.050	4
4	7491174		1.525	.004	1.52480 - .00016	.050	8
4	7491176		1.525	.008 AND UP	1.52460 - .00040	.050	8
4	7491178		1.526	.001	1.52600 - .00008	.050	4
4	7491179		1.526	.002	1.52592 - .00012	.050	4
4	7491180		1.526	.004	1.52580 - .00016	.050	8
4	7491182		1.526	.008 AND UP	1.52560 - .00040	.050	8
4	7491184		1.527	.001	1.52700 - .00008	.050	4
4	7491185		1.527	.002	1.52692 - .00012	.050	4
4	7491186		1.527	.004	1.52680 - .00016	.050	8
4	7491188		1.527	.008 AND UP	1.52660 - .00040	.050	8
4	7491190		1.528	.001	1.52800 - .00008	.050	4
4	7491191		1.528	.002	1.52792 - .00012	.050	4
4	7491192		1.528	.004	1.52780 - .00016	.050	8
4	7491194		1.528	.008 AND UP	1.52760 - .00040	.050	8
4	7491196		1.529	.001	1.52900 - .00008	.050	4
4	7491197		1.529	.002	1.52892 - .00012	.050	4
4	7491198		1.529	.004	1.52880 - .00016	.050	8
4	7491200		1.529	.008 AND UP	1.52860 - .00040	.050	8
4	7491202		1.530	.001	1.53000 - .00008	.050	4
4	7491203		1.530	.002	1.52992 - .00012	.050	4
4	7491204		1.530	.004	1.52980 - .00016	.050	8
4	7491206		1.530	.008 AND UP	1.52960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491208		1.531	.001	1.53100 - .00008	.050	4
4	7491209		1.531	.002	1.53092 - .00012	.050	4
4	7491210		1.531	.004	1.53080 - .00016	.050	8
4	7491212		1.531	.008 AND UP	1.53060 - .00040	.050	8
4	7491214		1.53125	.001 AND UP	1.53125 - .00008	.050	4
4	7491215		1.532	.001	1.53200 - .00008	.050	4
4	7491216		1.532	.002	1.53192 - .00012	.050	4
4	7491217		1.532	.004	1.53180 - .00016	.050	8
4	7491219		1.532	.008 AND UP	1.53160 - .00040	.050	8
4	7491221		1.533	.001	1.53300 - .00008	.050	4
4	7491222		1.533	.002	1.53292 - .00012	.050	4
4	7491223		1.533	.004	1.53280 - .00016	.050	8
4	7491225		1.533	.008 AND UP	1.53260 - .00040	.050	8
4	7491227		1.534	.001	1.53400 - .00008	.050	4
4	7491228		1.534	.002	1.53392 - .00012	.050	4
4	7491229		1.534	.004	1.53380 - .00016	.050	8
4	7491231		1.534	.008 AND UP	1.53360 - .00040	.050	8
4	7491233		1.535	.001	1.53500 - .00008	.050	4
4	7491234		1.535	.002	1.53492 - .00012	.050	4
4	7491235		1.535	.004	1.53480 - .00016	.050	8
4	7491237		1.535	.008 AND UP	1.53460 - .00040	.050	8
4	7491239		1.536	.001	1.53600 - .00008	.050	4
4	7491240		1.536	.002	1.53592 - .00012	.050	4
4	7491241		1.536	.004	1.53580 - .00016	.050	8
4	7491243		1.536	.008 AND UP	1.53560 - .00040	.050	8
4	7491245		1.537	.001	1.53700 - .00008	.050	4
4	7491246		1.537	.002	1.53692 - .00012	.050	4
4	7491247		1.537	.004	1.53680 - .00016	.050	8
4	7491249		1.537	.008 AND UP	1.53660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491251		1.538	.001	1.53800 - .00008	.050	4
4	7491252		1.538	.002	1.53792 - .00012	.050	4
4	7491253		1.538	.004	1.53780 - .00016	.050	8
4	7491255		1.538	.008 AND UP	1.53760 - .00040	.050	8
4	7491257		1.539	.001	1.53900 - .00008	.050	4
4	7491258		1.539	.002	1.53892 - .00012	.050	4
4	7491259		1.539	.004	1.53880 - .00016	.050	8
4	7491261		1.539	.008 AND UP	1.53860 - .00040	.050	8
4	7491263		1.540	.001	1.54000 - .00008	.050	4
4	7491264		1.540	.002	1.53992 - .00012	.050	4
4	7491265		1.540	.004	1.53980 - .00016	.050	8
4	7491267		1.540	.008 AND UP	1.53960 - .00040	.050	8
4	7491269		1.541	.001	1.54100 - .00008	.050	4
4	7491270		1.541	.002	1.54092 - .00012	.050	4
4	7491271		1.541	.004	1.54080 - .00016	.050	8
4	7491273		1.541	.008 AND UP	1.54060 - .00040	.050	8
4	7491275		1.542	.001	1.54200 - .00008	.050	4
4	7491276		1.542	.002	1.54192 - .00012	.050	4
4	7491277		1.542	.004	1.54180 - .00016	.050	8
4	7491279		1.542	.008 AND UP	1.54160 - .00040	.050	8
4	7491281		1.543	.001	1.54300 - .00008	.050	4
4	7491282		1.543	.002	1.54292 - .00012	.050	4
4	7491283		1.543	.004	1.54280 - .00016	.050	8
4	7491285		1.543	.008 AND UP	1.54260 - .00040	.050	8
4	7491287		1.544	.001	1.54400 - .00008	.050	4
4	7491288		1.544	.002	1.54392 - .00012	.050	4
4	7491289		1.544	.004	1.54380 - .00016	.050	8
4	7491291		1.544	.008 AND UP	1.54360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491293		1.545	.001	1.54500 - .00008	.050	4
4	7491294		1.545	.002	1.54492 - .00012	.050	4
4	7491295		1.545	.004	1.54480 - .00016	.050	8
4	7491297		1.545	.008 AND UP	1.54460 - .00040	.050	8
4	7491299		1.546	.001	1.54600 - .00008	.050	4
4	7491300		1.546	.002	1.54592 - .00012	.050	4
4	7491301		1.546	.004	1.54580 - .00016	.050	8
4	7491303		1.546	.008 AND UP	1.54560 - .00040	.050	8
4	7491305		1.547	.001	1.54700 - .00008	.050	4
4	7491306		1.547	.002	1.54692 - .00012	.050	4
4	7491307		1.547	.004	1.54680 - .00016	.050	8
4	7491309		1.547	.008 AND UP	1.54660 - .00040	.050	8
4	7491311		1.548	.001	1.54800 - .00008	.050	4
4	7491312		1.548	.002	1.54792 - .00012	.050	4
4	7491313		1.548	.004	1.54780 - .00016	.050	8
4	7491315		1.548	.008 AND UP	1.54760 - .00040	.050	8
4	7491317		1.549	.001	1.54900 - .00008	.050	4
4	7491318		1.549	.002	1.54892 - .00012	.050	4
4	7491319		1.549	.004	1.54880 - .00016	.050	8
4	7491321		1.549	.008 AND UP	1.54860 - .00040	.050	8
4	7491323		1.550	.001	1.55000 - .00008	.050	4
4	7491324		1.550	.002	1.54992 - .00012	.050	4
4	7491325		1.550	.004	1.54980 - .00016	.050	8
4	7491327		1.550	.008 AND UP	1.54960 - .00040	.050	8
4	7491329		1.551	.001	1.55100 - .00008	.050	4
4	7491330		1.551	.002	1.55092 - .00012	.050	4
4	7491331		1.551	.004	1.55080 - .00016	.050	8
4	7491333		1.551	.008 AND UP	1.55060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491335		1.552	.001	1.55200 - .00008	.050	4
4	7491336		1.552	.002	1.55192 - .00012	.050	4
4	7491337		1.552	.004	1.55180 - .00016	.050	8
4	7491339		1.552	.008 AND UP	1.55160 - .00040	.050	8
4	7491341		1.553	.001	1.55300 - .00008	.050	4
4	7491342		1.553	.002	1.55292 - .00012	.050	4
4	7491343		1.553	.004	1.55280 - .00016	.050	8
4	7491345		1.553	.008 AND UP	1.55260 - .00040	.050	8
4	7491347		1.554	.001	1.55400 - .00008	.050	4
4	7491348		1.554	.002	1.55392 - .00012	.050	4
4	7491349		1.554	.004	1.55380 - .00016	.050	8
4	7491351		1.554	.008 AND UP	1.55360 - .00040	.050	8
4	7491353		1.555	.001	1.55500 - .00008	.050	4
4	7491354		1.555	.002	1.55492 - .00012	.050	4
4	7491355		1.555	.004	1.55480 - .00016	.050	8
4	7491357		1.555	.008 AND UP	1.55460 - .00040	.050	8
4	7491359		1.556	.001	1.55600 - .00008	.050	4
4	7491360		1.556	.002	1.55592 - .00012	.050	4
4	7491361		1.556	.004	1.55580 - .00016	.050	8
4	7491363		1.556	.008 AND UP	1.55560 - .00040	.050	8
4	7491365		1.557	.001	1.55700 - .00008	.050	4
4	7491366		1.557	.002	1.55692 - .00012	.050	4
4	7491367		1.557	.004	1.55680 - .00016	.050	8
4	7491369		1.557	.008 AND UP	1.55660 - .00040	.050	8
4	7491371		1.558	.001	1.55800 - .00008	.050	4
4	7491372		1.558	.002	1.55792 - .00012	.050	4
4	7491373		1.558	.004	1.55780 - .00016	.050	8
4	7491375		1.558	.008 AND UP	1.55760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FAN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491377		1.559	.001	1.55900 - .00008	.050	4
4	7491378		1.559	.002	1.55892 - .00012	.050	4
4	7491379		1.559	.004	1.55880 - .00016	.050	8
4	7491381		1.559	.008 AND UP	1.55860 - .00040	.050	8
4	7491383		1.560	.001	1.56000 - .00008	.050	4
4	7491384		1.560	.002	1.55992 - .00012	.050	4
4	7491385		1.560	.004	1.55980 - .00016	.050	8
4	7491387		1.560	.008 AND UP	1.55960 - .00040	.050	8
4	7491389		1.561	.001	1.56100 - .00008	.050	4
4	7491390		1.561	.002	1.56092 - .00012	.050	4
4	7491391		1.561	.004	1.56080 - .00016	.050	8
4	7491393		1.561	.008 AND UP	1.56060 - .00040	.050	8
4	7491395		1.562	.001	1.56200 - .00008	.050	4
4	7491396		1.562	.002	1.56192 - .00012	.050	4
4	7491397		1.562	.004	1.56180 - .00016	.050	8
4	7491399		1.562	.008 AND UP	1.56160 - .00040	.050	8
4	7491401		1.5625	.001 AND UP	1.56250 - .00008	.050	4
4	7491402		1.563	.001	1.56300 - .00008	.050	4
4	7491403		1.563	.002	1.56292 - .00012	.050	4
4	7491404		1.563	.004	1.56280 - .00016	.050	8
4	7491406		1.563	.008 AND UP	1.56260 - .00040	.050	8
4	7491408		1.564	.001	1.56400 - .00008	.050	4
4	7491409		1.564	.002	1.56392 - .00012	.050	4
4	7491410		1.564	.004	1.56380 - .00016	.050	8
4	7491412		1.564	.008 AND UP	1.56360 - .00040	.050	8
4	7491414		1.565	.001	1.56500 - .00008	.050	4
4	7491415		1.565	.002	1.56492 - .00012	.050	4
4	7491416		1.565	.004	1.56480 - .00016	.050	8
4	7491418		1.565	.008 AND UP	1.56460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491420		1.566	.001	1.56600 - .00008	.050	4
4	7491421		1.566	.002	1.56592 - .00012	.050	4
4	7491422		1.566	.004	1.56580 - .00016	.050	8
4	7491424		1.566	.008 AND UP	1.56560 - .00040	.050	8
4	7491426		1.567	.001	1.56700 - .00008	.050	4
4	7491427		1.567	.002	1.56692 - .00012	.050	4
4	7491428		1.567	.004	1.56680 - .00016	.050	8
4	7491430		1.567	.008 AND UP	1.56660 - .00040	.050	8
4	7491432		1.568	.001	1.56800 - .00008	.050	4
4	7491433		1.568	.002	1.56792 - .00012	.050	4
4	7491434		1.568	.004	1.56780 - .00016	.050	8
4	7491436		1.568	.008 AND UP	1.56760 - .00040	.050	8
4	7491438		1.569	.001	1.56900 - .00008	.050	4
4	7491439		1.569	.002	1.56892 - .00012	.050	4
4	7491440		1.569	.004	1.56880 - .00016	.050	8
4	7491442		1.569	.008 AND UP	1.56860 - .00040	.050	8
4	7491444		1.570	.001	1.57000 - .00008	.050	4
4	7491445		1.570	.002	1.56992 - .00012	.050	4
4	7491446		1.570	.004	1.56980 - .00016	.050	8
4	7491448		1.570	.008 AND UP	1.56960 - .00040	.050	8
4	7491450		1.571	.001	1.57100 - .00008	.050	4
4	7491451		1.571	.002	1.57092 - .00012	.050	4
4	7491452		1.571	.004	1.57080 - .00016	.050	8
4	7491454		1.571	.008 AND UP	1.57060 - .00040	.050	8
4	7491456		1.572	.001	1.57200 - .00008	.050	4
4	7491457		1.572	.002	1.57192 - .00012	.050	4
4	7491458		1.572	.004	1.57180 - .00016	.050	8
4	7491460		1.572	.008 AND UP	1.57160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491462		1.573	.001	1.57300 - .00008	.050	4
4	7491463		1.573	.002	1.57292 - .00012	.050	4
4	7491464		1.573	.004	1.57280 - .00016	.050	8
4	7491466		1.573	.008 AND UP	1.57260 - .00040	.050	8
4	7491468		1.574	.001	1.57400 - .00008	.050	4
4	7491469		1.574	.002	1.57392 - .00012	.050	4
4	7491470		1.574	.004	1.57380 - .00016	.050	8
4	7491472		1.574	.008 AND UP	1.57360 - .00040	.050	8
4	7491474		1.575	.001	1.57500 - .00008	.050	4
4	7491475		1.575	.002	1.57492 - .00012	.050	4
4	7491476		1.575	.004	1.57480 - .00016	.050	8
4	7491478		1.575	.008 AND UP	1.57460 - .00040	.050	8
4	7491480		1.576	.001	1.57600 - .00008	.050	4
4	7491481		1.576	.002	1.57592 - .00012	.050	4
4	7491482		1.576	.004	1.57580 - .00016	.050	8
4	7491484		1.576	.008 AND UP	1.57560 - .00040	.050	8
4	7491486		1.577	.001	1.57700 - .00008	.050	4
4	7491487		1.577	.002	1.57692 - .00012	.050	4
4	7491488		1.577	.004	1.57680 - .00016	.050	8
4	7491490		1.577	.008 AND UP	1.57660 - .00040	.050	8
4	7491492		1.578	.001	1.57800 - .00008	.050	4
4	7491493		1.578	.002	1.57792 - .00012	.050	4
4	7491494		1.578	.004	1.57780 - .00016	.050	8
4	7491496		1.578	.008 AND UP	1.57760 - .00040	.050	8
4	7491498		1.579	.001	1.57900 - .00008	.050	4
4	7491499		1.579	.002	1.57892 - .00012	.050	4
4	7491500		1.579	.004	1.57880 - .00016	.050	8
4	7491502		1.579	.008 AND UP	1.57860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491504		1.580	.001	1.58000 - .00008	.050	4
4	7491505		1.580	.002	1.57992 - .00012	.050	4
4	7491506		1.580	.004	1.57980 - .00016	.050	8
4	7491508		1.580	.008 AND UP	1.57960 - .00040	.050	8
4	7491510		1.581	.001	1.58100 - .00008	.050	4
4	7491511		1.581	.002	1.58092 - .00012	.050	4
4	7491512		1.581	.004	1.58080 - .00016	.050	8
4	7491514		1.581	.008 AND UP	1.58060 - .00040	.050	8
4	7491516		1.582	.001	1.58200 - .00008	.050	4
4	7491517		1.582	.002	1.58192 - .00012	.050	4
4	7491518		1.582	.004	1.58180 - .00016	.050	8
4	7491520		1.582	.008 AND UP	1.58160 - .00040	.050	8
4	7491522		1.583	.001	1.58300 - .00008	.050	4
4	7491523		1.583	.002	1.58292 - .00012	.050	4
4	7491524		1.583	.004	1.58280 - .00016	.050	8
4	7491526		1.583	.008 AND UP	1.58260 - .00040	.050	8
4	7491528		1.584	.001	1.58400 - .00008	.050	4
4	7491529		1.584	.002	1.58392 - .00012	.050	4
4	7491530		1.584	.004	1.58380 - .00016	.050	8
4	7491532		1.584	.008 AND UP	1.58360 - .00040	.050	8
4	7491534		1.585	.001	1.58500 - .00008	.050	4
4	7491535		1.585	.002	1.58492 - .00012	.050	4
4	7491536		1.585	.004	1.58480 - .00016	.050	8
4	7491538		1.585	.008 AND UP	1.58460 - .00040	.050	8
4	7491540		1.586	.001	1.58600 - .00008	.050	4
4	7491541		1.586	.002	1.58592 - .00012	.050	4
4	7491542		1.586	.004	1.58580 - .00016	.050	8
4	7491544		1.586	.008 AND UP	1.58560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491546		1.587	.001	1.58700 - .00008	.050	4
4	7491547		1.587	.002	1.58692 - .00012	.050	4
4	7491548		1.587	.004	1.58680 - .00016	.050	8
4	7491550		1.587	.008 AND UP	1.58660 - .00040	.050	8
4	7491552		1.588	.001	1.58800 - .00008	.050	4
4	7491553		1.588	.002	1.58792 - .00012	.050	4
4	7491554		1.588	.004	1.58780 - .00016	.050	8
4	7491556		1.588	.008 AND UP	1.58760 - .00040	.050	8
4	7491558		1.589	.001	1.58900 - .00008	.050	4
4	7491559		1.589	.002	1.58892 - .00012	.050	4
4	7491560		1.589	.004	1.58880 - .00016	.050	8
4	7491562		1.589	.008 AND UP	1.58860 - .00040	.050	8
4	7491564		1.590	.001	1.59000 - .00008	.050	4
4	7491565		1.590	.002	1.58992 - .00012	.050	4
4	7491566		1.590	.004	1.58980 - .00016	.050	8
4	7491568		1.590	.008 AND UP	1.58960 - .00040	.050	8
4	7491570		1.591	.001	1.59100 - .00008	.050	4
4	7491571		1.591	.002	1.59092 - .00012	.050	4
4	7491572		1.591	.004	1.59080 - .00016	.050	8
4	7491574		1.591	.008 AND UP	1.59060 - .00040	.050	8
4	7491576		1.592	.001	1.59200 - .00008	.050	4
4	7491577		1.592	.002	1.59192 - .00012	.050	4
4	7491578		1.592	.004	1.59180 - .00016	.050	8
4	7491580		1.592	.008 AND UP	1.59160 - .00040	.050	8
4	7491582		1.593	.001	1.59300 - .00008	.050	4
4	7491583		1.593	.002	1.59292 - .00012	.050	4
4	7491584		1.593	.004	1.59280 - .00016	.050	8
4	7491586		1.593	.008 AND UP	1.59260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491588		1.59375	.001 AND UP	1.59375 - .00008	.050	4
4	7491589		1.594	.001	1.59400 - .00008	.050	4
4	7491590		1.594	.002	1.59392 - .00012	.050	4
4	7491591		1.594	.004	1.59380 - .00016	.050	8
4	7491593		1.594	.008 AND UP	1.59360 - .00040	.050	8
4	7491595		1.595	.001	1.59500 - .00008	.050	4
4	7491596		1.595	.002	1.59492 - .00012	.050	4
4	7491597		1.595	.004	1.59480 - .00016	.050	8
4	7491599		1.595	.008 AND UP	1.59460 - .00040	.050	8
4	7491601		1.596	.001	1.59600 - .00008	.050	4
4	7491602		1.596	.002	1.59592 - .00012	.050	4
4	7491603		1.596	.004	1.59580 - .00016	.050	8
4	7491605		1.596	.008 AND UP	1.59560 - .00040	.050	8
4	7491607		1.597	.001	1.59700 - .00008	.050	4
4	7491608		1.597	.002	1.59692 - .00012	.050	4
4	7491609		1.597	.004	1.59680 - .00016	.050	8
4	7491611		1.597	.008 AND UP	1.59660 - .00040	.050	8
4	7491613		1.598	.001	1.59800 - .00008	.050	4
4	7491614		1.598	.002	1.59792 - .00012	.050	4
4	7491615		1.598	.004	1.59780 - .00016	.050	8
4	7491617		1.598	.008 AND UP	1.59760 - .00040	.050	8
4	7491619		1.599	.001	1.59900 - .00008	.050	4
4	7491620		1.599	.002	1.59892 - .00012	.050	4
4	7491621		1.599	.004	1.59880 - .00016	.050	8
4	7491623		1.599	.008 AND UP	1.59860 - .00040	.050	8
4	7491625		1.600	.001	1.60000 - .00008	.050	4
4	7491626		1.600	.002	1.59992 - .00012	.050	4
4	7491627		1.600	.004	1.59980 - .00016	.050	8
4	7491629		1.600	.008 AND UP	1.59960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491631		1.601	.001	1.60100 - .00008	.050	4
4	7491632		1.601	.002	1.60092 - .00012	.050	4
4	7491633		1.601	.004	1.60080 - .00016	.050	8
4	7491635		1.601	.008 AND UP	1.60060 - .00040	.050	8
4	7491637		1.602	.001	1.60200 - .00008	.050	4
4	7491638		1.602	.002	1.60192 - .00012	.050	4
4	7491639		1.602	.004	1.60180 - .00016	.050	8
4	7491641		1.602	.008 AND UP	1.60160 - .00040	.050	8
4	7491643		1.603	.001	1.60300 - .00008	.050	4
4	7491644		1.603	.002	1.60292 - .00012	.050	4
4	7491645		1.603	.004	1.60280 - .00016	.050	8
4	7491647		1.603	.008 AND UP	1.60260 - .00040	.050	8
4	7491649		1.604	.001	1.60400 - .00008	.050	4
4	7491650		1.604	.002	1.60392 - .00012	.050	4
4	7491651		1.604	.004	1.60380 - .00016	.050	8
4	7491653		1.604	.008 AND UP	1.60360 - .00040	.050	8
4	7491655		1.605	.001	1.60500 - .00008	.050	4
4	7491656		1.605	.002	1.60492 - .00012	.050	4
4	7491657		1.605	.004	1.60480 - .00016	.050	8
4	7491659		1.605	.008 AND UP	1.60460 - .00040	.050	8
4	7491661		1.606	.001	1.60600 - .00008	.050	4
4	7491662		1.606	.002	1.60592 - .00012	.050	4
4	7491663		1.606	.004	1.60580 - .00016	.050	8
4	7491665		1.606	.008 AND UP	1.60560 - .00040	.050	8
4	7491667		1.607	.001	1.60700 - .00008	.050	4
4	7491668		1.607	.002	1.60692 - .00012	.050	4
4	7491669		1.607	.004	1.60680 - .00016	.050	8
4	7491671		1.607	.008 AND UP	1.60660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491673		1.608	.001	1.60800 - .00008	.050	4
4	7491674		1.608	.002	1.60792 - .00012	.050	4
4	7491675		1.608	.004	1.60780 - .00016	.050	8
4	7491677		1.608	.008 AND UP	1.60760 - .00040	.050	8
4	7491679		1.609	.001	1.60900 - .00008	.050	4
4	7491680		1.609	.002	1.60892 - .00012	.050	4
4	7491681		1.609	.004	1.60880 - .00016	.050	8
4	7491683		1.609	.008 AND UP	1.60860 - .00040	.050	8
4	7491685		1.610	.001	1.61000 - .00008	.050	4
4	7491686		1.610	.002	1.60992 - .00012	.050	4
4	7491687		1.610	.004	1.60980 - .00016	.050	8
4	7491689		1.610	.008 AND UP	1.60960 - .00040	.050	8
4	7491691		1.611	.001	1.61100 - .00008	.050	4
4	7491692		1.611	.002	1.61092 - .00012	.050	4
4	7491693		1.611	.004	1.61080 - .00016	.050	8
4	7491695		1.611	.008 AND UP	1.61060 - .00040	.050	8
4	7491697		1.612	.001	1.61200 - .00008	.050	4
4	7491698		1.612	.002	1.61192 - .00012	.050	4
4	7491699		1.612	.004	1.61180 - .00016	.050	8
4	7491701		1.612	.008 AND UP	1.61160 - .00040	.050	8
4	7491703		1.613	.001	1.61300 - .00008	.050	4
4	7491704		1.613	.002	1.61292 - .00012	.050	4
4	7491705		1.613	.004	1.61280 - .00016	.050	8
4	7491707		1.613	.008 AND UP	1.61260 - .00040	.050	8
4	7491709		1.614	.001	1.61400 - .00008	.050	4
4	7491710		1.614	.002	1.61392 - .00012	.050	4
4	7491711		1.614	.004	1.61380 - .00016	.050	8
4	7491713		1.614	.008 AND UP	1.61360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491715		1.615	.001	1.61500 - .00008	.050	4
4	7491716		1.615	.002	1.61492 - .00012	.050	4
4	7491717		1.615	.004	1.61480 - .00016	.050	8
4	7491719		1.615	.008 AND UP	1.61460 - .00040	.050	8
4	7491721		1.616	.001	1.61600 - .00008	.050	4
4	7491722		1.616	.002	1.61592 - .00012	.050	4
4	7491723		1.616	.004	1.61580 - .00016	.050	8
4	7491725		1.616	.008 AND UP	1.61560 - .00040	.050	8
4	7491727		1.617	.001	1.61700 - .00008	.050	4
4	7491728		1.617	.002	1.61692 - .00012	.050	4
4	7491729		1.617	.004	1.61680 - .00016	.050	8
4	7491731		1.617	.008 AND UP	1.61660 - .00040	.050	8
4	7491733		1.618	.001	1.61800 - .00008	.050	4
4	7491734		1.618	.002	1.61792 - .00012	.050	4
4	7491735		1.618	.004	1.61780 - .00016	.050	8
4	7491737		1.618	.008 AND UP	1.61760 - .00040	.050	8
4	7491739		1.619	.001	1.61900 - .00008	.050	4
4	7491740		1.619	.002	1.61892 - .00012	.050	4
4	7491741		1.619	.004	1.61880 - .00016	.050	8
4	7491743		1.619	.008 AND UP	1.61860 - .00040	.050	8
4	7491745		1.620	.001	1.62000 - .00008	.050	4
4	7491746		1.620	.002	1.61992 - .00012	.050	4
4	7491747		1.620	.004	1.61980 - .00016	.050	8
4	7491749		1.620	.008 AND UP	1.61960 - .00040	.050	8
4	7491751		1.621	.001	1.62100 - .00008	.050	4
4	7491752		1.621	.002	1.62092 - .00012	.050	4
4	7491753		1.621	.004	1.62080 - .00016	.050	8
4	7491755		1.621	.008 AND UP	1.62060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491757		1.622	.001	1.62200 - .00008	.050	4
4	7491758		1.622	.002	1.62192 - .00012	.050	4
4	7491759		1.622	.004	1.62180 - .00016	.050	8
4	7491761		1.622	.008 AND UP	1.62160 - .00040	.050	8
4	7491763		1.623	.001	1.62300 - .00008	.050	4
4	7491764		1.623	.002	1.62292 - .00012	.050	4
4	7491765		1.623	.004	1.62280 - .00016	.050	8
4	7491767		1.623	.008 AND UP	1.62260 - .00040	.050	8
4	7491769		1.624	.001	1.62400 - .00008	.050	4
4	7491770		1.624	.002	1.62392 - .00012	.050	4
4	7491771		1.624	.004	1.62380 - .00016	.050	8
4	7491773		1.624	.008 AND UP	1.62360 - .00040	.050	8
4	7491775		1.625	.001	1.62500 - .00008	.050	4
4	7491776		1.625	.002	1.62492 - .00012	.050	4
4	7491777		1.625	.004	1.62480 - .00016	.050	8
4	7491779		1.625	.008 AND UP	1.62460 - .00040	.050	8
4	7491781		1.626	.001	1.62600 - .00008	.050	4
4	7491782		1.626	.002	1.62592 - .00012	.050	4
4	7491783		1.626	.004	1.62580 - .00016	.050	8
4	7491785		1.626	.008 AND UP	1.62560 - .00040	.050	8
4	7491787		1.627	.001	1.62700 - .00008	.050	4
4	7491788		1.627	.002	1.62692 - .00012	.050	4
4	7491789		1.627	.004	1.62680 - .00016	.050	8
4	7491791		1.627	.008 AND UP	1.62660 - .00040	.050	8
4	7491793		1.628	.001	1.62800 - .00008	.050	4
4	7491794		1.628	.002	1.62792 - .00012	.050	4
4	7491795		1.628	.004	1.62780 - .00016	.050	8
4	7491797		1.628	.008 AND UP	1.62760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491799		1.629	.001	1.62900 - .00008	.050	4
4	7491800		1.629	.002	1.62892 - .00012	.050	4
4	7491801		1.629	.004	1.62880 - .00016	.050	8
4	7491803		1.629	.008 AND UP	1.62860 - .00040	.050	8
4	7491805		1.630	.001	1.63000 - .00008	.050	4
4	7491806		1.630	.002	1.62992 - .00012	.050	4
4	7491807		1.630	.004	1.62980 - .00016	.050	8
4	7491809		1.630	.008 AND UP	1.62960 - .00040	.050	8
4	7491811		1.631	.001	1.63100 - .00008	.050	4
4	7491812		1.631	.002	1.63092 - .00012	.050	4
4	7491813		1.631	.004	1.63080 - .00016	.050	8
4	7491815		1.631	.008 AND UP	1.63060 - .00040	.050	8
4	7491817		1.632	.001	1.63200 - .00008	.050	4
4	7491818		1.632	.002	1.63192 - .00012	.050	4
4	7491819		1.632	.004	1.63180 - .00016	.050	8
4	7491821		1.632	.008 AND UP	1.63160 - .00040	.050	8
4	7491823		1.633	.001	1.63300 - .00008	.050	4
4	7491824		1.633	.002	1.63292 - .00012	.050	4
4	7491825		1.633	.004	1.63280 - .00016	.050	8
4	7491827		1.633	.008 AND UP	1.63260 - .00040	.050	8
4	7491829		1.634	.001	1.63400 - .00008	.050	4
4	7491830		1.634	.002	1.63392 - .00012	.050	4
4	7491831		1.634	.004	1.63380 - .00016	.050	8
4	7491833		1.634	.008 AND UP	1.63360 - .00040	.050	8
4	7491835		1.635	.001	1.63500 - .00008	.050	4
4	7491836		1.635	.002	1.63492 - .00012	.050	4
4	7491837		1.635	.004	1.63480 - .00016	.050	8
4	7491839		1.635	.008 AND UP	1.63460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491841		1.636	.001	1.63600 - .00008	.050	4
4	7491842		1.636	.002	1.63592 - .00012	.050	4
4	7491843		1.636	.004	1.63580 - .00016	.050	8
4	7491845		1.636	.008 AND UP	1.63560 - .00040	.050	8
4	7491847		1.637	.001	1.63700 - .00008	.050	4
4	7491848		1.637	.002	1.63692 - .00012	.050	4
4	7491849		1.637	.004	1.63680 - .00016	.050	8
4	7491851		1.637	.008 AND UP	1.63660 - .00040	.050	8
4	7491853		1.638	.001	1.63800 - .00008	.050	4
4	7491854		1.638	.002	1.63792 - .00012	.050	4
4	7491855		1.638	.004	1.63780 - .00016	.050	8
4	7491857		1.638	.008 AND UP	1.63760 - .00040	.050	8
4	7491859		1.639	.001	1.63900 - .00008	.050	4
4	7491860		1.639	.002	1.63892 - .00012	.050	4
4	7491861		1.639	.004	1.63880 - .00016	.050	8
4	7491863		1.639	.008 AND UP	1.63860 - .00040	.050	8
4	7491865		1.640	.001	1.64000 - .00008	.050	4
4	7491866		1.640	.002	1.63992 - .00012	.050	4
4	7491867		1.640	.004	1.63980 - .00016	.050	8
4	7491869		1.640	.008 AND UP	1.63960 - .00040	.050	8
4	7491871		1.641	.001	1.64100 - .00008	.050	4
4	7491872		1.641	.002	1.64092 - .00012	.050	4
4	7491873		1.641	.004	1.64080 - .00016	.050	8
4	7491875		1.641	.008 AND UP	1.64060 - .00040	.050	8
4	7491877		1.642	.001	1.64200 - .00008	.050	4
4	7491878		1.642	.002	1.64192 - .00012	.050	4
4	7491879		1.642	.004	1.64180 - .00016	.050	8
4	7491881		1.642	.008 AND UP	1.64160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491883		1.643	.001	1.64300 - .00008	.050	4
4	7491884		1.643	.002	1.64292 - .00012	.050	4
4	7491885		1.643	.004	1.64280 - .00016	.050	8
4	7491887		1.643	.008 AND UP	1.64260 - .00040	.050	8
4	7491889		1.644	.001	1.64400 - .00008	.050	4
4	7491890		1.644	.002	1.64392 - .00012	.050	4
4	7491891		1.644	.004	1.64380 - .00016	.050	8
4	7491893		1.644	.008 AND UP	1.64360 - .00040	.050	8
4	7491895		1.645	.001	1.64500 - .00008	.050	4
4	7491896		1.645	.002	1.64492 - .00012	.050	4
4	7491897		1.645	.004	1.64480 - .00016	.050	8
4	7491899		1.645	.008 AND UP	1.64460 - .00040	.050	8
4	7491901		1.646	.001	1.64600 - .00008	.050	4
4	7491902		1.646	.002	1.64592 - .00012	.050	4
4	7491903		1.646	.004	1.64580 - .00016	.050	8
4	7491905		1.646	.008 AND UP	1.64560 - .00040	.050	8
4	7491907		1.647	.001	1.64700 - .00008	.050	4
4	7491908		1.647	.002	1.64692 - .00012	.050	4
4	7491909		1.647	.004	1.64680 - .00016	.050	8
4	7491911		1.647	.008 AND UP	1.64660 - .00040	.050	8
4	7491913		1.648	.001	1.64800 - .00008	.050	4
4	7491914		1.648	.002	1.64792 - .00012	.050	4
4	7491915		1.648	.004	1.64780 - .00016	.050	8
4	7491917		1.648	.008 AND UP	1.64760 - .00040	.050	8
4	7491919		1.649	.001	1.64900 - .00008	.050	4
4	7491920		1.649	.002	1.64892 - .00012	.050	4
4	7491921		1.649	.004	1.64880 - .00016	.050	8
4	7491923		1.649	.008 AND UP	1.64860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491925		1.650	.001	1.65000 - .00008	.050	4
4	7491926		1.650	.002	1.64992 - .00012	.050	4
4	7491927		1.650	.004	1.64980 - .00016	.050	8
4	7491929		1.650	.008 AND UP	1.64960 - .00040	.050	8
4	7491931		1.651	.001	1.65100 - .00008	.050	4
4	7491932		1.651	.002	1.65092 - .00012	.050	4
4	7491933		1.651	.004	1.65080 - .00016	.050	8
4	7491935		1.651	.008 AND UP	1.65060 - .00040	.050	8
4	7491937		1.652	.001	1.65200 - .00008	.050	4
4	7491938		1.652	.002	1.65192 - .00012	.050	4
4	7491939		1.652	.004	1.65180 - .00016	.050	8
4	7491941		1.652	.008 AND UP	1.65160 - .00040	.050	8
4	7491943		1.653	.001	1.65300 - .00008	.050	4
4	7491944		1.653	.002	1.65292 - .00012	.050	4
4	7491945		1.653	.004	1.65280 - .00016	.050	8
4	7491947		1.653	.008 AND UP	1.65260 - .00040	.050	8
4	7491949		1.654	.001	1.65400 - .00008	.050	4
4	7491950		1.654	.002	1.65392 - .00012	.050	4
4	7491951		1.654	.004	1.65380 - .00016	.050	8
4	7491953		1.654	.008 AND UP	1.65360 - .00040	.050	8
4	7491955		1.655	.001	1.65500 - .00008	.050	4
4	7491956		1.655	.002	1.65492 - .00012	.050	4
4	7491957		1.655	.004	1.65480 - .00016	.050	8
4	7491959		1.655	.008 AND UP	1.65460 - .00040	.050	8
4	7491961		1.656	.001	1.65600 - .00008	.050	4
4	7491962		1.656	.002	1.65592 - .00012	.050	4
4	7491963		1.656	.004	1.65580 - .00016	.050	8
4	7491965		1.656	.008 AND UP	1.65560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7491967		1.65625	.001 AND UP	1.65625 - .00008	.050	4
4	7491968		1.657	.001	1.65700 - .00008	.050	4
4	7491969		1.657	.002	1.65692 - .00012	.050	4
4	7491970		1.657	.004	1.65680 - .00016	.050	8
4	7491972		1.657	.008 AND UP	1.65660 - .00040	.050	8
4	7491974		1.658	.001	1.65800 - .00008	.050	4
4	7491975		1.658	.002	1.65792 - .00012	.050	4
4	7491976		1.658	.004	1.65780 - .00016	.050	8
4	7491978		1.658	.008 AND UP	1.65760 - .00040	.050	8
4	7491980		1.659	.001	1.65900 - .00008	.050	4
4	7491981		1.659	.002	1.65892 - .00012	.050	4
4	7491982		1.659	.004	1.65880 - .00016	.050	8
4	7491984		1.659	.008 AND UP	1.65860 - .00040	.050	8
4	7491986		1.660	.001	1.66000 - .00008	.050	4
4	7491987		1.660	.002	1.65992 - .00012	.050	4
4	7491988		1.660	.004	1.65980 - .00016	.050	8
4	7491990		1.660	.008 AND UP	1.65960 - .00040	.050	8
4	7491992		1.661	.001	1.66100 - .00008	.050	4
4	7491993		1.661	.002	1.66092 - .00012	.050	4
4	7491994		1.661	.004	1.66080 - .00016	.050	8
4	7491996		1.661	.008 AND UP	1.66060 - .00040	.050	8
4	7491998		1.662	.001	1.66200 - .00008	.050	4
4	7491999		1.662	.002	1.66192 - .00012	.050	4
4	7492000		1.662	.004	1.66180 - .00016	.050	8
4	7492002		1.662	.008 AND UP	1.66160 - .00040	.050	8
4	7492004		1.663	.001	1.66300 - .00008	.050	4
4	7492005		1.663	.002	1.66292 - .00012	.050	4
4	7492006		1.663	.004	1.66280 - .00016	.050	8
4	7492008		1.663	.008 AND UP	1.66260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492010		1.664	.001	1.66400 - .00008	.050	4
4	7492011		1.664	.002	1.66392 - .00012	.050	4
4	7492012		1.664	.004	1.66380 - .00016	.050	8
4	7492014		1.664	.008 AND UP	1.66360 - .00040	.050	8
4	7492016		1.665	.001	1.66500 - .00008	.050	4
4	7492017		1.665	.002	1.66492 - .00012	.050	4
4	7492018		1.665	.004	1.66480 - .00016	.050	8
4	7492020		1.665	.008 AND UP	1.66460 - .00040	.050	8
4	7492022		1.666	.001	1.66600 - .00008	.050	4
4	7492023		1.666	.002	1.66592 - .00012	.050	4
4	7492024		1.666	.004	1.66580 - .00016	.050	8
4	7492026		1.666	.008 AND UP	1.66560 - .00040	.050	8
4	7492028		1.667	.001	1.66700 - .00008	.050	4
4	7492029		1.667	.002	1.66692 - .00012	.050	4
4	7492030		1.667	.004	1.66680 - .00016	.050	8
4	7492032		1.667	.008 AND UP	1.66660 - .00040	.050	8
4	7492034		1.668	.001	1.66800 - .00008	.050	4
4	7492035		1.668	.002	1.66792 - .00012	.050	4
4	7492036		1.668	.004	1.66780 - .00016	.050	8
4	7492038		1.668	.008 AND UP	1.66760 - .00040	.050	8
4	7492040		1.669	.001	1.66900 - .00008	.050	4
4	7492041		1.669	.002	1.66892 - .00012	.050	4
4	7492042		1.669	.004	1.66880 - .00016	.050	8
4	7492044		1.669	.008 AND UP	1.66860 - .00040	.050	8
4	7492046		1.670	.001	1.67000 - .00008	.050	4
4	7492047		1.670	.002	1.66992 - .00012	.050	4
4	7492048		1.670	.004	1.66980 - .00016	.050	8
4	7492050		1.670	.008 AND UP	1.66960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492052		1.671	.001	1.67100 - .00008	.050	4
4	7492053		1.671	.002	1.67092 - .00012	.050	4
4	7492054		1.671	.004	1.67080 - .00016	.050	8
4	7492056		1.671	.008 AND UP	1.67060 - .00040	.050	8
4	7492058		1.672	.001	1.67200 - .00008	.050	4
4	7492059		1.672	.002	1.67192 - .00012	.050	4
4	7492060		1.672	.004	1.67180 - .00016	.050	8
4	7492062		1.672	.008 AND UP	1.67160 - .00040	.050	8
4	7492064		1.673	.001	1.67300 - .00008	.050	4
4	7492065		1.673	.002	1.67292 - .00012	.050	4
4	7492066		1.673	.004	1.67280 - .00016	.050	8
4	7492068		1.673	.008 AND UP	1.67260 - .00040	.050	8
4	7492070		1.674	.001	1.67400 - .00008	.050	4
4	7492071		1.674	.002	1.67392 - .00012	.050	4
4	7492072		1.674	.004	1.67380 - .00016	.050	8
4	7492074		1.674	.008 AND UP	1.67360 - .00040	.050	8
4	7492076		1.675	.001	1.67500 - .00008	.050	4
4	7492077		1.675	.002	1.67492 - .00012	.050	4
4	7492078		1.675	.004	1.67480 - .00016	.050	8
4	7492080		1.675	.008 AND UP	1.67460 - .00040	.050	8
4	7492082		1.676	.001	1.67600 - .00008	.050	4
4	7492083		1.676	.002	1.67592 - .00012	.050	4
4	7492084		1.676	.004	1.67580 - .00016	.050	8
4	7492086		1.676	.008 AND UP	1.67560 - .00040	.050	8
4	7492088		1.677	.001	1.67700 - .00008	.050	4
4	7492089		1.677	.002	1.67692 - .00012	.050	4
4	7492090		1.677	.004	1.67680 - .00016	.050	8
4	7492092		1.677	.008 AND UP	1.67660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492094		1.678	.001	1.67800 - .00008	.050	4
4	7492095		1.678	.002	1.67792 - .00012	.050	4
4	7492096		1.678	.004	1.67780 - .00016	.050	8
4	7492098		1.678	.008 AND UP	1.67760 - .00040	.050	8
4	7492100		1.679	.001	1.67900 - .00008	.050	4
4	7492101		1.679	.002	1.67892 - .00012	.050	4
4	7492102		1.679	.004	1.67880 - .00016	.050	8
4	7492104		1.679	.008 AND UP	1.67860 - .00040	.050	8
4	7492106		1.680	.001	1.68000 - .00008	.050	4
4	7492107		1.680	.002	1.67992 - .00012	.050	4
4	7492108		1.680	.004	1.67980 - .00016	.050	8
4	7492110		1.680	.008 AND UP	1.67960 - .00040	.050	8
4	7492112		1.681	.001	1.68100 - .00008	.050	4
4	7492113		1.681	.002	1.68092 - .00012	.050	4
4	7492114		1.681	.004	1.68080 - .00016	.050	8
4	7492116		1.681	.008 AND UP	1.68060 - .00040	.050	8
4	7492118		1.682	.001	1.68200 - .00008	.050	4
4	7492119		1.682	.002	1.68192 - .00012	.050	4
4	7492120		1.682	.004	1.68180 - .00016	.050	8
4	7492122		1.682	.008 AND UP	1.68160 - .00040	.050	8
4	7492124		1.683	.001	1.68300 - .00008	.050	4
4	7492125		1.683	.002	1.68292 - .00012	.050	4
4	7492126		1.683	.004	1.68280 - .00016	.050	8
4	7492128		1.683	.008 AND UP	1.68260 - .00040	.050	8
4	7492130		1.684	.001	1.68400 - .00008	.050	4
4	7492131		1.684	.002	1.68392 - .00012	.050	4
4	7492132		1.684	.004	1.68380 - .00016	.050	8
4	7492134		1.684	.008 AND UP	1.68360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492136		1.685	.001	1.68500 - .00008	.050	4
4	7492137		1.685	.002	1.68492 - .00012	.050	4
4	7492138		1.685	.004	1.68480 - .00016	.050	8
4	7492140		1.685	.008 AND UP	1.68460 - .00040	.050	8
4	7492142		1.686	.001	1.68600 - .00008	.050	4
4	7492143		1.686	.002	1.68592 - .00012	.050	4
4	7492144		1.686	.004	1.68580 - .00016	.050	8
4	7492146		1.686	.008 AND UP	1.68560 - .00040	.050	8
4	7492148		1.687	.001	1.68700 - .00008	.050	4
4	7492149		1.687	.002	1.68692 - .00012	.050	4
4	7492150		1.687	.004	1.68680 - .00016	.050	8
4	7492152		1.687	.008 AND UP	1.68660 - .00040	.050	8
4	7492154		1.6875	.001 AND UP	1.68750 - .00008	.050	4
4	7492155		1.688	.001	1.68800 - .00008	.050	4
4	7492156		1.688	.002	1.68792 - .00012	.050	4
4	7492157		1.688	.004	1.68780 - .00016	.050	8
4	7492159		1.688	.008 AND UP	1.68760 - .00040	.050	8
4	7492161		1.689	.001	1.68900 - .00008	.050	4
4	7492162		1.689	.002	1.68892 - .00012	.050	4
4	7492163		1.689	.004	1.68880 - .00016	.050	8
4	7492165		1.689	.008 AND UP	1.68860 - .00040	.050	8
4	7492167		1.690	.001	1.69000 - .00008	.050	4
4	7492168		1.690	.002	1.68992 - .00012	.050	4
4	7492169		1.690	.004	1.68980 - .00016	.050	8
4	7492171		1.690	.008 AND UP	1.68960 - .00040	.050	8
4	7492173		1.691	.001	1.69100 - .00008	.050	4
4	7492174		1.691	.002	1.69092 - .00012	.050	4
4	7492175		1.691	.004	1.69080 - .00016	.050	8
4	7492177		1.691	.008 AND UP	1.69060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492179		1.692	.001	1.69200 - .00008	.050	4
4	7492180		1.692	.002	1.69192 - .00012	.050	4
4	7492181		1.692	.004	1.69180 - .00016	.050	8
4	7492183		1.692	.008 AND UP	1.69160 - .00040	.050	8
4	7492185		1.693	.001	1.69300 - .00008	.050	4
4	7492186		1.693	.002	1.69292 - .00012	.050	4
4	7492187		1.693	.004	1.69280 - .00016	.050	8
4	7492189		1.693	.008 AND UP	1.69260 - .00040	.050	8
4	7492191		1.694	.001	1.69400 - .00008	.050	4
4	7492192		1.694	.002	1.69392 - .00012	.050	4
4	7492193		1.694	.004	1.69380 - .00016	.050	8
4	7492195		1.694	.008 AND UP	1.69360 - .00040	.050	8
4	7492197		1.695	.001	1.69500 - .00008	.050	4
4	7492198		1.695	.002	1.69492 - .00012	.050	4
4	7492199		1.695	.004	1.69480 - .00016	.050	8
4	7492201		1.695	.008 AND UP	1.69460 - .00040	.050	8
4	7492203		1.696	.001	1.69600 - .00008	.050	4
4	7492204		1.696	.002	1.69592 - .00012	.050	4
4	7492205		1.696	.004	1.69580 - .00016	.050	8
4	7492207		1.696	.008 AND UP	1.69560 - .00040	.050	8
4	7492209		1.697	.001	1.69700 - .00008	.050	4
4	7492210		1.697	.002	1.69692 - .00012	.050	4
4	7492211		1.697	.004	1.69680 - .00016	.050	8
4	7492213		1.697	.008 AND UP	1.69660 - .00040	.050	8
4	7492215		1.698	.001	1.69800 - .00008	.050	4
4	7492216		1.698	.002	1.69792 - .00012	.050	4
4	7492217		1.698	.004	1.69780 - .00016	.050	8
4	7492219		1.698	.008 AND UP	1.69760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492221		1.699	.001	1.69900 - .00008	.050	4
4	7492222		1.699	.002	1.69892 - .00012	.050	4
4	7492223		1.699	.004	1.69880 - .00016	.050	8
4	7492225		1.699	.008 AND UP	1.69860 - .00040	.050	8
4	7492227		1.700	.001	1.70000 - .00008	.050	4
4	7492228		1.700	.002	1.69992 - .00012	.050	4
4	7492229		1.700	.004	1.69980 - .00016	.050	8
4	7492231		1.700	.008 AND UP	1.69960 - .00040	.050	8
4	7492233		1.701	.001	1.70100 - .00008	.050	4
4	7492234		1.701	.002	1.70092 - .00012	.050	4
4	7492235		1.701	.004	1.70080 - .00016	.050	8
4	7492237		1.701	.008 AND UP	1.70060 - .00040	.050	8
4	7492239		1.702	.001	1.70200 - .00008	.050	4
4	7492240		1.702	.002	1.70192 - .00012	.050	4
4	7492241		1.702	.004	1.70180 - .00016	.050	8
4	7492243		1.702	.008 AND UP	1.70160 - .00040	.050	8
4	7492245		1.703	.001	1.70300 - .00008	.050	4
4	7492246		1.703	.002	1.70292 - .00012	.050	4
4	7492247		1.703	.004	1.70280 - .00016	.050	8
4	7492249		1.703	.008 AND UP	1.70260 - .00040	.050	8
4	7492251		1.704	.001	1.70400 - .00008	.050	4
4	7492252		1.704	.002	1.70392 - .00012	.050	4
4	7492253		1.704	.004	1.70380 - .00016	.050	8
4	7492255		1.704	.008 AND UP	1.70360 - .00040	.050	8
4	7492257		1.705	.001	1.70500 - .00008	.050	4
4	7492258		1.705	.002	1.70492 - .00012	.050	4
4	7492259		1.705	.004	1.70480 - .00016	.050	8
4	7492261		1.705	.008 AND UP	1.70460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492263		1.706	.001	1.70600 - .00008	.050	4
4	7492264		1.706	.002	1.70592 - .00012	.050	4
4	7492265		1.706	.004	1.70580 - .00016	.050	8
4	7492267		1.706	.008 AND UP	1.70560 - .00040	.050	8
4	7492269		1.707	.001	1.70700 - .00008	.050	4
4	7492270		1.707	.002	1.70692 - .00012	.050	4
4	7492271		1.707	.004	1.70680 - .00016	.050	8
4	7492273		1.707	.008 AND UP	1.70660 - .00040	.050	8
4	7492275		1.708	.001	1.70800 - .00008	.050	4
4	7492276		1.708	.002	1.70792 - .00012	.050	4
4	7492277		1.708	.004	1.70780 - .00016	.050	8
4	7492279		1.708	.008 AND UP	1.70760 - .00040	.050	8
4	7492281		1.709	.001	1.70900 - .00008	.050	4
4	7492282		1.709	.002	1.70892 - .00012	.050	4
4	7492283		1.709	.004	1.70880 - .00016	.050	8
4	7492285		1.709	.008 AND UP	1.70860 - .00040	.050	8
4	7492287		1.710	.001	1.71000 - .00008	.050	4
4	7492288		1.710	.002	1.70992 - .00012	.050	4
4	7492289		1.710	.004	1.70980 - .00016	.050	8
4	7492291		1.710	.008 AND UP	1.70960 - .00040	.050	8
4	7492293		1.711	.001	1.71100 - .00008	.050	4
4	7492294		1.711	.002	1.71092 - .00012	.050	4
4	7492295		1.711	.004	1.71080 - .00016	.050	8
4	7492297		1.711	.008 AND UP	1.71060 - .00040	.050	8
4	7492299		1.712	.001	1.71200 - .00008	.050	4
4	7492300		1.712	.002	1.71192 - .00012	.050	4
4	7492301		1.712	.004	1.71180 - .00016	.050	8
4	7492303		1.712	.008 AND UP	1.71160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492305		1.713	.001	1.71300 - .00008	.050	4
4	7492306		1.713	.002	1.71292 - .00012	.050	4
4	7492307		1.713	.004	1.71280 - .00016	.050	8
4	7492309		1.713	.008 AND UP	1.71260 - .00040	.050	8
4	7492311		1.714	.001	1.71400 - .00008	.050	4
4	7492312		1.714	.002	1.71392 - .00012	.050	4
4	7492313		1.714	.004	1.71380 - .00016	.050	8
4	7492315		1.714	.008 AND UP	1.71360 - .00040	.050	8
4	7492317		1.715	.001	1.71500 - .00008	.050	4
4	7492318		1.715	.002	1.71492 - .00012	.050	4
4	7492319		1.715	.004	1.71480 - .00016	.050	8
4	7492321		1.715	.008 AND UP	1.71460 - .00040	.050	8
4	7492323		1.716	.001	1.71600 - .00008	.050	4
4	7492324		1.716	.002	1.71592 - .00012	.050	4
4	7492325		1.716	.004	1.71580 - .00016	.050	8
4	7492327		1.716	.008 AND UP	1.71560 - .00040	.050	8
4	7492329		1.717	.001	1.71700 - .00008	.050	4
4	7492330		1.717	.002	1.71692 - .00012	.050	4
4	7492331		1.717	.004	1.71680 - .00016	.050	8
4	7492333		1.717	.008 AND UP	1.71660 - .00040	.050	8
4	7492335		1.718	.001	1.71800 - .00008	.050	4
4	7492336		1.718	.002	1.71792 - .00012	.050	4
4	7492337		1.718	.004	1.71780 - .00016	.050	8
4	7492339		1.718	.008 AND UP	1.71760 - .00040	.050	8
4	7492341		1.71875	.001 AND UP	1.71875 - .00008	.050	4
4	7492342		1.719	.001	1.71900 - .00008	.050	4
4	7492343		1.719	.002	1.71892 - .00012	.050	4
4	7492344		1.719	.004	1.71880 - .00016	.050	8
4	7492346		1.719	.008 AND UP	1.71860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492348		1.720	.001	1.72000 - .00008	.050	4
4	7492349		1.720	.002	1.71992 - .00012	.050	4
4	7492350		1.720	.004	1.71980 - .00016	.050	8
4	7492352		1.720	.008 AND UP	1.71960 - .00040	.050	8
4	7492354		1.721	.001	1.72100 - .00008	.050	4
4	7492355		1.721	.002	1.72092 - .00012	.050	4
4	7492356		1.721	.004	1.72080 - .00016	.050	8
4	7492358		1.721	.008 AND UP	1.72060 - .00040	.050	8
4	7492360		1.722	.001	1.72200 - .00008	.050	4
4	7492361		1.722	.002	1.72192 - .00012	.050	4
4	7492362		1.722	.004	1.72180 - .00016	.050	8
4	7492364		1.722	.008 AND UP	1.72160 - .00040	.050	8
4	7492366		1.723	.001	1.72300 - .00008	.050	4
4	7492367		1.723	.002	1.72292 - .00012	.050	4
4	7492368		1.723	.004	1.72280 - .00016	.050	8
4	7492370		1.723	.008 AND UP	1.72260 - .00040	.050	8
4	7492372		1.724	.001	1.72400 - .00008	.050	4
4	7492373		1.724	.002	1.72392 - .00012	.050	4
4	7492374		1.724	.004	1.72380 - .00016	.050	8
4	7492376		1.724	.008 AND UP	1.72360 - .00040	.050	8
4	7492378		1.725	.001	1.72500 - .00008	.050	4
4	7492379		1.725	.002	1.72492 - .00012	.050	4
4	7492380		1.725	.004	1.72480 - .00016	.050	8
4	7492382		1.725	.008 AND UP	1.72460 - .00040	.050	8
4	7492384		1.726	.001	1.72600 - .00008	.050	4
4	7492385		1.726	.002	1.72592 - .00012	.050	4
4	7492386		1.726	.004	1.72580 - .00016	.050	8
4	7492388		1.726	.008 AND UP	1.72560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.						
	RING GAGE	ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7492390		1.727	.001	1.72700 - .00008	.050	4
4	7492391		1.727	.002	1.72692 - .00012	.050	4
4	7492392		1.727	.004	1.72680 - .00016	.050	8
4	7492394		1.727	.008 AND UP	1.72660 - .00040	.050	8
4	7492396		1.728	.001	1.72800 - .00008	.050	4
4	7492397		1.728	.002	1.72792 - .00012	.050	4
4	7492398		1.728	.004	1.72780 - .00016	.050	8
4	7492400		1.728	.008 AND UP	1.72760 - .00040	.050	8
4	7492402		1.729	.001	1.72900 - .00008	.050	4
4	7492403		1.729	.002	1.72892 - .00012	.050	4
4	7492404		1.729	.004	1.72880 - .00016	.050	8
4	7492406		1.729	.008 AND UP	1.72860 - .00040	.050	8
4	7492408		1.730	.001	1.73000 - .00008	.050	4
4	7492409		1.730	.002	1.72992 - .00012	.050	4
4	7492410		1.730	.004	1.72980 - .00016	.050	8
4	7492412		1.730	.008 AND UP	1.72960 - .00040	.050	8
4	7492414		1.731	.001	1.73100 - .00008	.050	4
4	7492415		1.731	.002	1.73092 - .00012	.050	4
4	7492416		1.731	.004	1.73080 - .00016	.050	8
4	7492418		1.731	.008 AND UP	1.73060 - .00040	.050	8
4	7492420		1.732	.001	1.73200 - .00008	.050	4
4	7492421		1.732	.002	1.73192 - .00012	.050	4
4	7492422		1.732	.004	1.73180 - .00016	.050	8
4	7492424		1.732	.008 AND UP	1.73160 - .00040	.050	8
4	7492426		1.733	.001	1.73300 - .00008	.050	4
4	7492427		1.733	.002	1.73292 - .00012	.050	4
4	7492428		1.733	.004	1.73280 - .00016	.050	8
4	7492430		1.733	.008 AND UP	1.73260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO. GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		[redacted]
	FIIN—GAGE STOCK NO.				DIAMETER	CHA[redacted]	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492432		1.734	.001	1.73400 - .00008	.050	4
4	7492433		1.734	.002	1.73392 - .00012	.050	4
4	7492434		1.734	.004	1.73380 - .00016	.050	8
4	7492436		1.734	.008 AND UP	1.73360 - .00040	.050	8
4	7492438		1.735	.001	1.73500 - .00008	.050	4
4	7492439		1.735	.002	1.73492 - .00012	.050	4
4	7492440		1.735	.004	1.73480 - .00016	.050	8
4	7492442		1.735	.008 AND UP	1.73460 - .00040	.050	8
4	7492444		1.736	.001	1.73600 - .00008	.050	4
4	7492445		1.736	.002	1.73592 - .00012	.050	4
4	7492446		1.736	.004	1.73580 - .00016	.050	8
4	7492448		1.736	.008 AND UP	1.73560 - .00040	.050	8
4	7492450		1.737	.001	1.73700 - .00008	.050	4
4	7492451		1.737	.002	1.73692 - .00012	.050	4
4	7492452		1.737	.004	1.73680 - .00016	.050	8
4	7492454		1.737	.008 AND UP	1.73660 - .00040	.050	8
4	7492456		1.738	.001	1.73800 - .00008	.050	4
4	7492457		1.738	.002	1.73792 - .00012	.050	4
4	7492458		1.738	.004	1.73780 - .00016	.050	8
4	7492460		1.738	.008 AND UP	1.73760 - .00040	.050	8
4	7492462		1.739	.001	1.73900 - .00008	.050	4
4	7492463		1.739	.002	1.73892 - .00012	.050	4
4	7492464		1.739	.004	1.73880 - .00016	.050	8
4	7492466		1.739	.008 AND UP	1.73860 - .00040	.050	8
4	7492468		1.740	.001	1.74000 - .00008	.050	4
4	7492469		1.740	.002	1.73992 - .00012	.050	4
4	7492470		1.740	.004	1.73980 - .00016	.050	8
4	7492472		1.740	.008 AND UP	1.73960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492474		1.741	.001	1.74100 - .00008	.050	4
4	7492475		1.741	.002	1.74092 - .00012	.050	4
4	7492476		1.741	.004	1.74080 - .00016	.050	8
4	7492478		1.741	.008 AND UP	1.74060 - .00040	.050	8
4	7492480		1.742	.001	1.74200 - .00008	.050	4
4	7492481		1.742	.002	1.74192 - .00012	.050	4
4	7492482		1.742	.004	1.74180 - .00016	.050	8
4	7492484		1.742	.008 AND UP	1.74160 - .00040	.050	8
4	7492486		1.743	.001	1.74300 - .00008	.050	4
4	7492487		1.743	.002	1.74292 - .00012	.050	4
4	7492488		1.743	.004	1.74280 - .00016	.050	8
4	7492490		1.743	.008 AND UP	1.74260 - .00040	.050	8
4	7492492		1.744	.001	1.74400 - .00008	.050	4
4	7492493		1.744	.002	1.74392 - .00012	.050	4
4	7492494		1.744	.004	1.74380 - .00016	.050	8
4	7492496		1.744	.008 AND UP	1.74360 - .00040	.050	8
4	7492498		1.745	.001	1.74500 - .00008	.050	4
4	7492499		1.745	.002	1.74492 - .00012	.050	4
4	7492500		1.745	.004	1.74480 - .00016	.050	8
4	7492502		1.745	.008 AND UP	1.74460 - .00040	.050	8
4	7492504		1.746	.001	1.74600 - .00008	.050	4
4	7492505		1.746	.002	1.74592 - .00012	.050	4
4	7492506		1.746	.004	1.74580 - .00016	.050	8
4	7492508		1.746	.008 AND UP	1.74560 - .00040	.050	8
4	7492510		1.747	.001	1.74700 - .00008	.050	4
4	7492511		1.747	.002	1.74692 - .00012	.050	4
4	7492512		1.747	.004	1.74680 - .00016	.050	8
4	7492514		1.747	.008 AND UP	1.74660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492516		1.748	.001	1.74800 - .00008	.050	4
4	7492517		1.748	.002	1.74792 - .00012	.050	4
4	7492518		1.748	.004	1.74780 - .00016	.050	8
4	7492520		1.748	.008 AND UP	1.74760 - .00040	.050	8
4	7492522		1.749	.001	1.74900 - .00008	.050	4
4	7492523		1.749	.002	1.74892 - .00012	.050	4
4	7492524		1.749	.004	1.74880 - .00016	.050	8
4	7492526		1.749	.008 AND UP	1.74860 - .00040	.050	8
4	7492528		1.750	.001	1.75000 - .00008	.050	4
4	7492529		1.750	.002	1.74992 - .00012	.050	4
4	7492530		1.750	.004	1.74980 - .00016	.050	8
4	7492532		1.750	.008 AND UP	1.74960 - .00040	.050	8
4	7492534		1.751	.001	1.75100 - .00008	.050	4
4	7492535		1.751	.002	1.75092 - .00012	.050	4
4	7492536		1.751	.004	1.75080 - .00016	.050	8
4	7492538		1.751	.008 AND UP	1.75060 - .00040	.050	8
4	7492540		1.752	.001	1.75200 - .00008	.050	4
4	7492541		1.752	.002	1.75192 - .00012	.050	4
4	7492542		1.752	.004	1.75180 - .00016	.050	8
4	7492544		1.752	.008 AND UP	1.75160 - .00040	.050	8
4	7492546		1.753	.001	1.75300 - .00008	.050	4
4	7492547		1.753	.002	1.75292 - .00012	.050	4
4	7492548		1.753	.004	1.75280 - .00016	.050	8
4	7492550		1.753	.008 AND UP	1.75260 - .00040	.050	8
4	7492552		1.754	.001	1.75400 - .00008	.050	4
4	7492553		1.754	.002	1.75392 - .00012	.050	4
4	7492554		1.754	.004	1.75380 - .00016	.050	8
4	7492556		1.754	.008 AND UP	1.75360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492558		1.755	.001	1.75500 - .00008	.050	4
4	7492559		1.755	.002	1.75492 - .00012	.050	4
4	7492560		1.755	.004	1.75480 - .00016	.050	8
4	7492562		1.755	.008 AND UP	1.75460 - .00040	.050	8
4	7492564		1.756	.001	1.75600 - .00008	.050	4
4	7492565		1.756	.002	1.75592 - .00012	.050	4
4	7492566		1.756	.004	1.75580 - .00016	.050	8
4	7492568		1.756	.008 AND UP	1.75560 - .00040	.050	8
4	7492570		1.757	.001	1.75700 - .00008	.050	4
4	7492571		1.757	.002	1.75692 - .00012	.050	4
4	7492572		1.757	.004	1.75680 - .00016	.050	8
4	7492574		1.757	.008 AND UP	1.75660 - .00040	.050	8
4	7492576		1.758	.001	1.75800 - .00008	.050	4
4	7492577		1.758	.002	1.75792 - .00012	.050	4
4	7492578		1.758	.004	1.75780 - .00016	.050	8
4	7492580		1.758	.008 AND UP	1.75760 - .00040	.050	8
4	7492582		1.759	.001	1.75900 - .00008	.050	4
4	7492583		1.759	.002	1.75892 - .00012	.050	4
4	7492584		1.759	.004	1.75880 - .00016	.050	8
4	7492586		1.759	.008 AND UP	1.75860 - .00040	.050	8
4	7492588		1.760	.001	1.76000 - .00008	.050	4
4	7492589		1.760	.002	1.75992 - .00012	.050	4
4	7492590		1.760	.004	1.75980 - .00016	.050	8
4	7492592		1.760	.008 AND UP	1.75960 - .00040	.050	8
4	7492594		1.761	.001	1.76100 - .00008	.050	4
4	7492595		1.761	.002	1.76092 - .00012	.050	4
4	7492596		1.761	.004	1.76080 - .00016	.050	8
4	7492598		1.761	.008 AND UP	1.76060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492600		1.762	.001	1.76200 - .00008	.050	4
4	7492601		1.762	.002	1.76192 - .00012	.050	4
4	7492602		1.762	.004	1.76180 - .00016	.050	8
4	7492604		1.762	.008 AND UP	1.76160 - .00040	.050	8
4	7492606		1.763	.001	1.76300 - .00008	.050	4
4	7492607		1.763	.002	1.76292 - .00012	.050	4
4	7492608		1.763	.004	1.76280 - .00016	.050	8
4	7492610		1.763	.008 AND UP	1.76260 - .00040	.050	8
4	7492612		1.764	.001	1.76400 - .00008	.050	4
4	7492613		1.764	.002	1.76392 - .00012	.050	4
4	7492614		1.764	.004	1.76380 - .00016	.050	8
4	7492616		1.764	.008 AND UP	1.76360 - .00040	.050	8
4	7492618		1.765	.001	1.76500 - .00008	.050	4
4	7492619		1.765	.002	1.76492 - .00012	.050	4
4	7492620		1.765	.004	1.76480 - .00016	.050	8
4	7492622		1.765	.008 AND UP	1.76460 - .00040	.050	8
4	7492624		1.766	.001	1.76600 - .00008	.050	4
4	7492625		1.766	.002	1.76592 - .00012	.050	4
4	7492626		1.766	.004	1.76580 - .00016	.050	8
4	7492628		1.766	.008 AND UP	1.76560 - .00040	.050	8
4	7492630		1.767	.001	1.76700 - .00008	.050	4
4	7492631		1.767	.002	1.76692 - .00012	.050	4
4	7492632		1.767	.004	1.76680 - .00016	.050	8
4	7492634		1.767	.008 AND UP	1.76660 - .00040	.050	8
4	7492636		1.768	.001	1.76800 - .00008	.050	4
4	7492637		1.768	.002	1.76792 - .00012	.050	4
4	7492638		1.768	.004	1.76780 - .00016	.050	8
4	7492640		1.768	.008 AND UP	1.76760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492642		1.769	.001	1.76900 - .00008	.050	4
4	7492643		1.769	.002	1.76892 - .00012	.050	4
4	7492644		1.769	.004	1.76880 - .00016	.050	8
4	7492646		1.769	.008 AND UP	1.76860 - .00040	.050	8
4	7492648		1.770	.001	1.77000 - .00008	.050	4
4	7492649		1.770	.002	1.76992 - .00012	.050	4
4	7492650		1.770	.004	1.76980 - .00016	.050	8
4	7492652		1.770	.008 AND UP	1.76960 - .00040	.050	8
4	7492654		1.771	.001	1.77100 - .00008	.050	4
4	7492655		1.771	.002	1.77092 - .00012	.050	4
4	7492656		1.771	.004	1.77080 - .00016	.050	8
4	7492658		1.771	.008 AND UP	1.77060 - .00040	.050	8
4	7492660		1.772	.001	1.77200 - .00008	.050	4
4	7492661		1.772	.002	1.77192 - .00012	.050	4
4	7492662		1.772	.004	1.77180 - .00016	.050	8
4	7492664		1.772	.008 AND UP	1.77160 - .00040	.050	8
4	7492666		1.773	.001	1.77300 - .00008	.050	4
4	7492667		1.773	.002	1.77292 - .00012	.050	4
4	7492668		1.773	.004	1.77280 - .00016	.050	8
4	7492670		1.773	.008 AND UP	1.77260 - .00040	.050	8
4	7492672		1.774	.001	1.77400 - .00008	.050	4
4	7492673		1.774	.002	1.77392 - .00012	.050	4
4	7492674		1.774	.004	1.77380 - .00016	.050	8
4	7492676		1.774	.008 AND UP	1.77360 - .00040	.050	8
4	7492678		1.775	.001	1.77500 - .00008	.050	4
4	7492679		1.775	.002	1.77492 - .00012	.050	4
4	7492680		1.775	.004	1.77480 - .00016	.050	8
4	7492682		1.775	.008 AND UP	1.77460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492684		1.776	.001	1.77600 - .00008	.050	4
4	7492685		1.776	.002	1.77592 - .00012	.050	4
4	7492686		1.776	.004	1.77580 - .00016	.050	8
4	7492688		1.776	.008 AND UP	1.77560 - .00040	.050	8
4	7492690		1.777	.001	1.77700 - .00008	.050	4
4	7492691		1.777	.002	1.77692 - .00012	.050	4
4	7492692		1.777	.004	1.77680 - .00016	.050	8
4	7492694		1.777	.008 AND UP	1.77660 - .00040	.050	8
4	7492696		1.778	.001	1.77800 - .00008	.050	4
4	7492697		1.778	.002	1.77792 - .00012	.050	4
4	7492698		1.778	.004	1.77780 - .00016	.050	8
4	7492700		1.778	.008 AND UP	1.77760 - .00040	.050	8
4	7492702		1.779	.001	1.77900 - .00008	.050	4
4	7492703		1.779	.002	1.77892 - .00012	.050	4
4	7492704		1.779	.004	1.77880 - .00016	.050	8
4	7492706		1.779	.008 AND UP	1.77860 - .00040	.050	8
4	7492708		1.780	.001	1.78000 - .00008	.050	4
4	7492709		1.780	.002	1.77992 - .00012	.050	4
4	7492710		1.780	.004	1.77980 - .00016	.050	8
4	7492712		1.780	.008 AND UP	1.77960 - .00040	.050	8
4	7492714		1.781	.001	1.78100 - .00008	.050	4
4	7492715		1.781	.002	1.78092 - .00012	.050	4
4	7492716		1.781	.004	1.78080 - .00016	.050	8
4	7492718		1.781	.008 AND UP	1.78060 - .00040	.050	8
4	7492720		1.78125	.001 AND UP	1.78125 - .00008	.050	4
4	7492721		1.782	.001	1.78200 - .00008	.050	4
4	7492722		1.782	.002	1.78192 - .00012	.050	4
4	7492723		1.782	.004	1.78180 - .00016	.050	8
4	7492725		1.782	.008 AND UP	1.78160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN-GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492727		1.783	.001	1.78300 - .00008	.050	4
4	7492728		1.783	.002	1.78292 - .00012	.050	4
4	7492729		1.783	.004	1.78280 - .00016	.050	8
4	7492731		1.783	.008 AND UP	1.78260 - .00040	.050	8
4	7492733		1.784	.001	1.78400 - .00008	.050	4
4	7492734		1.784	.002	1.78392 - .00012	.050	4
4	7492735		1.784	.004	1.78380 - .00016	.050	8
4	7492737		1.784	.008 AND UP	1.78360 - .00040	.050	8
4	7492739		1.785	.001	1.78500 - .00008	.050	4
4	7492740		1.785	.002	1.78492 - .00012	.050	4
4	7492741		1.785	.004	1.78480 - .00016	.050	8
4	7492743		1.785	.008 AND UP	1.78460 - .00040	.050	8
4	7492745		1.786	.001	1.78600 - .00008	.050	4
4	7492746		1.786	.002	1.78592 - .00012	.050	4
4	7492747		1.786	.004	1.78580 - .00016	.050	8
4	7492749		1.786	.008 AND UP	1.78560 - .00040	.050	8
4	7492751		1.787	.001	1.78700 - .00008	.050	4
4	7492752		1.787	.002	1.78692 - .00012	.050	4
4	7492753		1.787	.004	1.78680 - .00016	.050	8
4	7492755		1.787	.008 AND UP	1.78660 - .00040	.050	8
4	7492757		1.788	.001	1.78800 - .00008	.050	4
4	7492758		1.788	.002	1.78792 - .00012	.050	4
4	7492759		1.788	.004	1.78780 - .00016	.050	8
4	7492761		1.788	.008 AND UP	1.78760 - .00040	.050	8
4	7492763		1.789	.001	1.78900 - .00008	.050	4
4	7492764		1.789	.002	1.78892 - .00012	.050	4
4	7492765		1.789	.004	1.78880 - .00016	.050	8
4	7492767		1.789	.008 AND UP	1.78860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492769		1.790	.001	1.79000 - .00008	.050	4
4	7492770		1.790	.002	1.78992 - .00012	.050	4
4	7492771		1.790	.004	1.78980 - .00016	.050	8
4	7492773		1.790	.008 AND UP	1.78960 - .00040	.050	8
4	7492775		1.791	.001	1.79100 - .00008	.050	4
4	7492776		1.791	.002	1.79092 - .00012	.050	4
4	7492777		1.791	.004	1.79080 - .00016	.050	8
4	7492779		1.791	.008 AND UP	1.79060 - .00040	.050	8
4	7492781		1.792	.001	1.79200 - .00008	.050	4
4	7492782		1.792	.002	1.79192 - .00012	.050	4
4	7492783		1.792	.004	1.79180 - .00016	.050	8
4	7492785		1.792	.008 AND UP	1.79160 - .00040	.050	8
4	7492787		1.793	.001	1.79300 - .00008	.050	4
4	7492788		1.793	.002	1.79292 - .00012	.050	4
4	7492789		1.793	.004	1.79280 - .00016	.050	8
4	7492791		1.793	.008 AND UP	1.79260 - .00040	.050	8
4	7492793		1.794	.001	1.79400 - .00008	.050	4
4	7492794		1.794	.002	1.79392 - .00012	.050	4
4	7492795		1.794	.004	1.79380 - .00016	.050	8
4	7492797		1.794	.008 AND UP	1.79360 - .00040	.050	8
4	7492799		1.795	.001	1.79500 - .00008	.050	4
4	7492800		1.795	.002	1.79492 - .00012	.050	4
4	7492801		1.795	.004	1.79480 - .00016	.050	8
4	7492803		1.795	.008 AND UP	1.79460 - .00040	.050	8
4	7492805		1.796	.001	1.79600 - .00008	.050	4
4	7492806		1.796	.002	1.79592 - .00012	.050	4
4	7492807		1.796	.004	1.79580 - .00016	.050	8
4	7492809		1.796	.008 AND UP	1.79560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492811		1.797	.001	1.79700 - .00008	.050	4
4	7492812		1.797	.002	1.79692 - .00012	.050	4
4	7492813		1.797	.004	1.79680 - .00016	.050	8
4	7492815		1.797	.008 AND UP	1.79660 - .00040	.050	8
4	7492817		1.798	.001	1.79800 - .00008	.050	4
4	7492818		1.798	.002	1.79792 - .00012	.050	4
4	7492819		1.798	.004	1.79780 - .00016	.050	8
4	7492821		1.798	.008 AND UP	1.79760 - .00040	.050	8
4	7492823		1.799	.001	1.79900 - .00008	.050	4
4	7492824		1.799	.002	1.79892 - .00012	.050	4
4	7492825		1.799	.004	1.79880 - .00016	.050	8
4	7492827		1.799	.008 AND UP	1.79860 - .00040	.050	8
4	7492829		1.800	.001	1.80000 - .00008	.050	4
4	7492830		1.800	.002	1.79992 - .00012	.050	4
4	7492831		1.800	.004	1.79980 - .00016	.050	8
4	7492833		1.800	.008 AND UP	1.79960 - .00040	.050	8
4	7492835		1.801	.001	1.80100 - .00008	.050	4
4	7492836		1.801	.002	1.80092 - .00012	.050	4
4	7492837		1.801	.004	1.80080 - .00016	.050	8
4	7492839		1.801	.008 AND UP	1.80060 - .00040	.050	8
4	7492841		1.802	.001	1.80200 - .00008	.050	4
4	7492842		1.802	.002	1.80192 - .00012	.050	4
4	7492843		1.802	.004	1.80180 - .00016	.050	8
4	7492845		1.802	.008 AND UP	1.80160 - .00040	.050	8
4	7492847		1.803	.001	1.80300 - .00008	.050	4
4	7492848		1.803	.002	1.80292 - .00012	.050	4
4	7492849		1.803	.004	1.80280 - .00016	.050	8
4	7492851		1.803	.008 AND UP	1.80260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492853		1.804	.001	1.80400 - .00008	.050	4
4	7492854		1.804	.002	1.80392 - .00012	.050	4
4	7492855		1.804	.004	1.80380 - .00016	.050	8
4	7492857		1.804	.008 AND UP	1.80360 - .00040	.050	8
4	7492859		1.805	.001	1.80500 - .00008	.050	4
4	7492860		1.805	.002	1.80492 - .00012	.050	4
4	7492861		1.805	.004	1.80480 - .00016	.050	8
4	7492863		1.805	.008 AND UP	1.80460 - .00040	.050	8
4	7492865		1.806	.001	1.80600 - .00008	.050	4
4	7492866		1.806	.002	1.80592 - .00012	.050	4
4	7492867		1.806	.004	1.80580 - .00016	.050	8
4	7492869		1.806	.008 AND UP	1.80560 - .00040	.050	8
4	7492871		1.807	.001	1.80700 - .00008	.050	4
4	7492872		1.807	.002	1.80692 - .00012	.050	4
4	7492873		1.807	.004	1.80680 - .00016	.050	8
4	7492875		1.807	.008 AND UP	1.80660 - .00040	.050	8
4	7492877		1.808	.001	1.80800 - .00008	.050	4
4	7492878		1.808	.002	1.80792 - .00012	.050	4
4	7492879		1.808	.004	1.80780 - .00016	.050	8
4	7492881		1.808	.008 AND UP	1.80760 - .00040	.050	8
4	7492883		1.809	.001	1.80900 - .00008	.050	4
4	7492884		1.809	.002	1.80892 - .00012	.050	4
4	7492885		1.809	.004	1.80880 - .00016	.050	8
4	7492887		1.809	.008 AND UP	1.80860 - .00040	.050	8
4	7492889		1.810	.001	1.81000 - .00008	.050	4
4	7492890		1.810	.002	1.80992 - .00012	.050	4
4	7492891		1.810	.004	1.80980 - .00016	.050	8
4	7492893		1.810	.008 AND UP	1.80960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492895		1.811	.001	1.81100 - .00008	.050	4
4	7492896		1.811	.002	1.81092 - .00012	.050	4
4	7492897		1.811	.004	1.81080 - .00016	.050	8
4	7492899		1.811	.008 AND UP	1.81060 - .00040	.050	8
4	7492901		1.812	.001	1.81200 - .00008	.050	4
4	7492902		1.812	.002	1.81192 - .00012	.050	4
4	7492903		1.812	.004	1.81180 - .00016	.050	8
4	7492905		1.812	.008 AND UP	1.81160 - .00040	.050	8
4	7492907		1.8125	.001 AND UP	1.81250 - .00008	.050	4
4	7492908		1.813	.001	1.81300 - .00008	.050	4
4	7492909		1.813	.002	1.81292 - .00012	.050	4
4	7492910		1.813	.004	1.81280 - .00016	.050	8
4	7492912		1.813	.008 AND UP	1.81260 - .00040	.050	8
4	7492914		1.814	.001	1.81400 - .00008	.050	4
4	7492915		1.814	.002	1.81392 - .00012	.050	4
4	7492916		1.814	.004	1.81380 - .00016	.050	8
4	7492918		1.814	.008 AND UP	1.81360 - .00040	.050	8
4	7492920		1.815	.001	1.81500 - .00008	.050	4
4	7492921		1.815	.002	1.81492 - .00012	.050	4
4	7492922		1.815	.004	1.81480 - .00016	.050	8
4	7492924		1.815	.008 AND UP	1.81460 - .00040	.050	8
4	7492926		1.816	.001	1.81600 - .00008	.050	4
4	7492927		1.816	.002	1.81592 - .00012	.050	4
4	7492928		1.816	.004	1.81580 - .00016	.050	8
4	7492930		1.816	.008 AND UP	1.81560 - .00040	.050	8
4	7492932		1.817	.001	1.81700 - .00008	.050	4
4	7492933		1.817	.002	1.81692 - .00012	.050	4
4	7492934		1.817	.004	1.81680 - .00016	.050	8
4	7492936		1.817	.008 AND UP	1.81660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492938		1.818	.001	1.81800 - .00008	.050	4
4	7492939		1.818	.002	1.81792 - .00012	.050	4
4	7492940		1.818	.004	1.81780 - .00016	.050	8
4	7492942		1.818	.008 AND UP	1.81760 - .00040	.050	8
4	7492944		1.819	.001	1.81900 - .00008	.050	4
4	7492945		1.819	.002	1.81892 - .00012	.050	4
4	7492946		1.819	.004	1.81880 - .00016	.050	8
4	7492948		1.819	.008 AND UP	1.81860 - .00040	.050	8
4	7492950		1.820	.001	1.82000 - .00008	.050	4
4	7492951		1.820	.002	1.81992 - .00012	.050	4
4	7492952		1.820	.004	1.81980 - .00016	.050	8
4	7492954		1.820	.008 AND UP	1.81960 - .00040	.050	8
4	7492956		1.821	.001	1.82100 - .00008	.050	4
4	7492957		1.821	.002	1.82092 - .00012	.050	4
4	7492958		1.821	.004	1.82080 - .00016	.050	8
4	7492960		1.821	.008 AND UP	1.82060 - .00040	.050	8
4	7492962		1.822	.001	1.82200 - .00008	.050	4
4	7492963		1.822	.002	1.82192 - .00012	.050	4
4	7492964		1.822	.004	1.82180 - .00016	.050	8
4	7492966		1.822	.008 AND UP	1.82160 - .00040	.050	8
4	7492968		1.823	.001	1.82300 - .00008	.050	4
4	7492969		1.823	.002	1.82292 - .00012	.050	4
4	7492970		1.823	.004	1.82280 - .00016	.050	8
4	7492972		1.823	.008 AND UP	1.82260 - .00040	.050	8
4	7492974		1.824	.001	1.82400 - .00008	.050	4
4	7492975		1.824	.002	1.82392 - .00012	.050	4
4	7492976		1.824	.004	1.82380 - .00016	.050	8
4	7492978		1.824	.008 AND UP	1.82360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7492980		1.825	.001	1.82500 - .00008	.050	4
4	7492981		1.825	.002	1.82492 - .00012	.050	4
4	7492982		1.825	.004	1.82480 - .00016	.050	8
4	7492984		1.825	.008 AND UP	1.82460 - .00040	.050	8
4	7492986		1.826	.001	1.82600 - .00008	.050	4
4	7492987		1.826	.002	1.82592 - .00012	.050	4
4	7492983		1.826	.004	1.82580 - .00016	.050	8
4	7492990		1.826	.008 AND UP	1.82560 - .00040	.050	8
4	7492992		1.827	.001	1.82700 - .00008	.050	4
4	7492993		1.827	.002	1.82692 - .00012	.050	4
4	7492994		1.827	.004	1.82680 - .00016	.050	8
4	7492996		1.827	.008 AND UP	1.82660 - .00040	.050	8
4	7492998		1.828	.001	1.82800 - .00008	.050	4
4	7492999		1.828	.002	1.82792 - .00012	.050	4
4	7493000		1.828	.004	1.82780 - .00016	.050	8
4	7493002		1.828	.008 AND UP	1.82760 - .00040	.050	8
4	7493004		1.829	.001	1.82900 - .00008	.050	4
4	7493005		1.829	.002	1.82892 - .00012	.050	4
4	7493006		1.829	.004	1.82880 - .00016	.050	8
4	7493008		1.829	.008 AND UP	1.82860 - .00040	.050	8
4	7493010		1.830	.001	1.83000 - .00008	.050	4
4	7493011		1.830	.002	1.82992 - .00012	.050	4
4	7493012		1.830	.004	1.82980 - .00016	.050	8
4	7493014		1.830	.008 AND UP	1.82960 - .00040	.050	8
4	7493016		1.831	.001	1.83100 - .00008	.050	4
4	7493017		1.831	.002	1.83092 - .00012	.050	4
4	7493018		1.831	.004	1.83080 - .00016	.050	8
4	7493020		1.831	.008 AND UP	1.83060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493022		1.832	.001	1.83200 - .00008	.050	4
4	7493023		1.832	.002	1.83192 - .00012	.050	4
4	7493024		1.832	.004	1.83180 - .00016	.050	8
4	7493026		1.832	.008 AND UP	1.83160 - .00040	.050	8
4	7493028		1.833	.001	1.83300 - .00008	.050	4
4	7493029		1.833	.002	1.83292 - .00012	.050	4
4	7493030		1.833	.004	1.83280 - .00016	.050	8
4	7493032		1.833	.008 AND UP	1.83260 - .00040	.050	8
4	7493034		1.834	.001	1.83400 - .00008	.050	4
4	7493035		1.834	.002	1.83392 - .00012	.050	4
4	7493036		1.834	.004	1.83380 - .00016	.050	8
4	7493038		1.834	.008 AND UP	1.83360 - .00040	.050	8
4	7493040		1.835	.001	1.83500 - .00008	.050	4
4	7493041		1.835	.002	1.83492 - .00012	.050	4
4	7493042		1.835	.004	1.83480 - .00016	.050	8
4	7493044		1.835	.008 AND UP	1.83460 - .00040	.050	8
4	7493046		1.836	.001	1.83600 - .00008	.050	4
4	7493047		1.836	.002	1.83592 - .00012	.050	4
4	7493048		1.836	.004	1.83580 - .00016	.050	8
4	7493050		1.836	.008 AND UP	1.83560 - .00040	.050	8
4	7493052		1.837	.001	1.83700 - .00008	.050	4
4	7493053		1.837	.002	1.83692 - .00012	.050	4
4	7493054		1.837	.004	1.83680 - .00016	.050	8
4	7493056		1.837	.008 AND UP	1.83660 - .00040	.050	8
4	7493058		1.838	.001	1.83800 - .00008	.050	4
4	7493059		1.838	.002	1.83792 - .00012	.050	4
4	7493060		1.838	.004	1.83780 - .00016	.050	8
4	7493062		1.838	.008 AND UP	1.83760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493064		1.839	.001	1.83900 - .00008	.050	4
4	7493065		1.839	.002	1.83892 - .00012	.050	4
4	7493066		1.839	.004	1.83880 - .00016	.050	8
4	7493068		1.839	.008 AND UP	1.83860 - .00040	.050	8
4	7493070		1.840	.001	1.84000 - .00008	.050	4
4	7493071		1.840	.002	1.83992 - .00012	.050	4
4	7493072		1.840	.004	1.83980 - .00016	.050	8
4	7493074		1.840	.008 AND UP	1.83960 - .00040	.050	8
4	7493076		1.841	.001	1.84100 - .00008	.050	4
4	7493077		1.841	.002	1.84092 - .00012	.050	4
4	7493078		1.841	.004	1.84080 - .00016	.050	8
4	7493080		1.841	.008 AND UP	1.84060 - .00040	.050	8
4	7493082		1.842	.001	1.84200 - .00008	.050	4
4	7493083		1.842	.002	1.84192 - .00012	.050	4
4	7493084		1.842	.004	1.84180 - .00016	.050	8
4	7493086		1.842	.008 AND UP	1.84160 - .00040	.050	8
4	7493088		1.843	.001	1.84300 - .00008	.050	4
4	7493089		1.843	.002	1.84292 - .00012	.050	4
4	7493090		1.843	.004	1.84280 - .00016	.050	8
4	7493092		1.843	.008 AND UP	1.84260 - .00040	.050	8
4	7493094		1.84375	.001 AND UP	1.84375 - .00008	.050	4
4	7493095		1.844	.001	1.84400 - .00008	.050	4
4	7493096		1.844	.002	1.84392 - .00012	.050	4
4	7493097		1.844	.004	1.84380 - .00016	.050	8
4	7493099		1.844	.008 AND UP	1.84360 - .00040	.050	8
4	7493101		1.845	.001	1.84500 - .00008	.050	4
4	7493102		1.845	.002	1.84492 - .00012	.050	4
4	7493103		1.845	.004	1.84480 - .00016	.050	8
4	7493105		1.845	.008 AND UP	1.84460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493107		1.846	.001	1.84600 - .00008	.050	4
4	7493108		1.846	.002	1.84592 - .00012	.050	4
4	7493109		1.846	.004	1.84580 - .00016	.050	8
4	7493111		1.846	.008 AND UP	1.84560 - .00040	.050	8
4	7493113		1.847	.001	1.84700 - .00008	.050	4
4	7493114		1.847	.002	1.84692 - .00012	.050	4
4	7493115		1.847	.004	1.84680 - .00016	.050	8
4	7493117		1.847	.008 AND UP	1.84660 - .00040	.050	8
4	7493119		1.848	.001	1.84800 - .00008	.050	4
4	7493120		1.848	.002	1.84792 - .00012	.050	4
4	7493121		1.848	.004	1.84780 - .00016	.050	8
4	7493123		1.848	.008 AND UP	1.84760 - .00040	.050	8
4	7493125		1.849	.001	1.84900 - .00008	.050	4
4	7493126		1.849	.002	1.84892 - .00012	.050	4
4	7493127		1.849	.004	1.84880 - .00016	.050	8
4	7493129		1.849	.008 AND UP	1.84860 - .00040	.050	8
4	7493131		1.850	.001	1.85000 - .00008	.050	4
4	7493132		1.850	.002	1.84992 - .00012	.050	4
4	7493133		1.850	.004	1.84980 - .00016	.050	8
4	7493135		1.850	.008 AND UP	1.84960 - .00040	.050	8
4	7493137		1.851	.001	1.85100 - .00008	.050	4
4	7493138		1.851	.002	1.85092 - .00012	.050	4
4	7493139		1.851	.004	1.85080 - .00016	.050	8
4	7493141		1.851	.008 AND UP	1.85060 - .00040	.050	8
4	7493143		1.852	.001	1.85200 - .00008	.050	4
4	7493144		1.852	.002	1.85192 - .00012	.050	4
4	7493145		1.852	.004	1.85180 - .00016	.050	8
4	7493147		1.852	.008 AND UP	1.85160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493149		1.853	.001	1.85300 - .00008	.050	4
4	7493150		1.853	.002	1.85292 - .00012	.050	4
4	7493151		1.853	.004	1.85280 - .00016	.050	8
4	7493153		1.853	.008 AND UP	1.85260 - .00040	.050	8
4	7493155		1.854	.001	1.85400 - .00008	.050	4
4	7493156		1.854	.002	1.85392 - .00012	.050	4
4	7493157		1.854	.004	1.85380 - .00016	.050	8
4	7493159		1.854	.008 AND UP	1.85360 - .00040	.050	8
4	7493161		1.855	.001	1.85500 - .00008	.050	4
4	7493162		1.855	.002	1.85492 - .00012	.050	4
4	7493163		1.855	.004	1.85480 - .00016	.050	8
4	7493165		1.855	.008 AND UP	1.85460 - .00040	.050	8
4	7493167		1.856	.001	1.85600 - .00008	.050	4
4	7493168		1.856	.002	1.85592 - .00012	.050	4
4	7493169		1.856	.004	1.85580 - .00016	.050	8
4	7493171		1.856	.008 AND UP	1.85560 - .00040	.050	8
4	7493173		1.857	.001	1.85700 - .00008	.050	4
4	7493174		1.857	.002	1.85692 - .00012	.050	4
4	7493175		1.857	.004	1.85680 - .00016	.050	8
4	7493177		1.857	.008 AND UP	1.85660 - .00040	.050	8
4	7493179		1.858	.001	1.85800 - .00008	.050	4
4	7493180		1.858	.002	1.85792 - .00012	.050	4
4	7493181		1.858	.004	1.85780 - .00016	.050	8
4	7493183		1.858	.008 AND UP	1.85760 - .00040	.050	8
4	7493185		1.859	.001	1.85900 - .00008	.050	4
4	7493186		1.859	.002	1.85892 - .00012	.050	4
4	7493187		1.859	.004	1.85880 - .00016	.050	8
4	7493189		1.859	.008 AND UP	1.85860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493191		1.860	.001	1.86000 - .00008	.050	4
4	7493192		1.860	.002	1.85992 - .00012	.050	4
4	7493193		1.860	.004	1.85980 - .00016	.050	8
4	7493195		1.860	.008 AND UP	1.85960 - .00040	.050	8
4	7493197		1.861	.001	1.86100 - .00008	.050	4
4	7493198		1.861	.002	1.86092 - .00012	.050	4
4	7493199		1.861	.004	1.86080 - .00016	.050	8
4	7493201		1.861	.008 AND UP	1.86060 - .00040	.050	8
4	7493203		1.862	.001	1.86200 - .00008	.050	4
4	7493204		1.862	.002	1.86192 - .00012	.050	4
4	7493205		1.862	.004	1.86180 - .00016	.050	8
4	7493207		1.862	.008 AND UP	1.86160 - .00040	.050	8
4	7493209		1.863	.001	1.86300 - .00008	.050	4
4	7493210		1.863	.002	1.86292 - .00012	.050	4
4	7493211		1.863	.004	1.86280 - .00016	.050	8
4	7493213		1.863	.008 AND UP	1.86260 - .00040	.050	8
4	7493215		1.864	.001	1.86400 - .00008	.050	4
4	7493216		1.864	.002	1.86392 - .00012	.050	4
4	7493217		1.864	.004	1.86380 - .00016	.050	8
4	7493219		1.864	.008 AND UP	1.86360 - .00040	.050	8
4	7493221		1.865	.001	1.86500 - .00008	.050	4
4	7493222		1.865	.002	1.86492 - .00012	.050	4
4	7493223		1.865	.004	1.86480 - .00016	.050	8
4	7493225		1.865	.008 AND UP	1.86460 - .00040	.050	8
4	7493227		1.866	.001	1.86600 - .00008	.050	4
4	7493228		1.866	.002	1.86592 - .00012	.050	4
4	7493229		1.866	.004	1.86580 - .00016	.050	8
4	7493231		1.866	.008 AND UP	1.86560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493233		1.867	.001	1.86700 - .00008	.050	4
4	7493234		1.867	.002	1.86692 - .00012	.050	4
4	7493235		1.867	.004	1.86680 - .00016	.050	8
4	7493237		1.867	.008 AND UP	1.86660 - .00040	.050	8
4	7493239		1.868	.001	1.86800 - .00008	.050	4
4	7493240		1.868	.002	1.86792 - .00012	.050	4
4	7493241		1.868	.004	1.86780 - .00016	.050	8
4	7493243		1.868	.008 AND UP	1.86760 - .00040	.050	8
4	7493245		1.869	.001	1.86900 - .00008	.050	4
4	7493246		1.869	.002	1.86892 - .00012	.050	4
4	7493247		1.869	.004	1.86880 - .00016	.050	8
4	7493249		1.869	.008 AND UP	1.86860 - .00040	.050	8
4	7493251		1.870	.001	1.87000 - .00008	.050	4
4	7493252		1.870	.002	1.86992 - .00012	.050	4
4	7493253		1.870	.004	1.86980 - .00016	.050	8
4	7493255		1.870	.008 AND UP	1.86960 - .00040	.050	8
4	7493257		1.871	.001	1.87100 - .00008	.050	4
4	7493258		1.871	.002	1.87092 - .00012	.050	4
4	7493259		1.871	.004	1.87080 - .00016	.050	8
4	7493261		1.871	.008 AND UP	1.87060 - .00040	.050	8
4	7493263		1.872	.001	1.87200 - .00008	.050	4
4	7493264		1.872	.002	1.87192 - .00012	.050	4
4	7493265		1.872	.004	1.87180 - .00016	.050	8
4	7493267		1.872	.008 AND UP	1.87160 - .00040	.050	8
4	7493269		1.873	.001	1.87300 - .00008	.050	4
4	7493270		1.873	.002	1.87292 - .00012	.050	4
4	7493271		1.873	.004	1.87280 - .00016	.050	8
4	7493273		1.873	.008 AND UP	1.87260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493275		1.874	.001	1.87400 - .00008	.050	4
4	7493276		1.874	.002	1.87392 - .00012	.050	4
4	7493277		1.874	.004	1.87380 - .00016	.050	8
4	7493279		1.874	.008 AND UP	1.87360 - .00040	.050	8
4	7493281		1.875	.001	1.87500 - .00008	.050	4
4	7493282		1.875	.002	1.87492 - .00012	.050	4
4	7493283		1.875	.004	1.87480 - .00016	.050	8
4	7493285		1.875	.008 AND UP	1.87460 - .00040	.050	8
4	7493287		1.876	.001	1.87600 - .00008	.050	4
4	7493288		1.876	.002	1.87592 - .00012	.050	4
4	7493289		1.876	.004	1.87580 - .00016	.050	8
4	7493291		1.876	.008 AND UP	1.87560 - .00040	.050	8
4	7493293		1.877	.001	1.87700 - .00008	.050	4
4	7493294		1.877	.002	1.87692 - .00012	.050	4
4	7493295		1.877	.004	1.87680 - .00016	.050	8
4	7493297		1.877	.008 AND UP	1.87660 - .00040	.050	8
4	7493299		1.878	.001	1.87800 - .00008	.050	4
4	7493300		1.878	.002	1.87792 - .00012	.050	4
4	7493301		1.878	.004	1.87780 - .00016	.050	8
4	7493303		1.878	.008 AND UP	1.87760 - .00040	.050	8
4	7493305		1.879	.001	1.87900 - .00008	.050	4
4	7493306		1.879	.002	1.87892 - .00012	.050	4
4	7493307		1.879	.004	1.87880 - .00016	.050	8
4	7493309		1.879	.008 AND UP	1.87860 - .00040	.050	8
4	7493311		1.880	.001	1.88000 - .00008	.050	4
4	7493312		1.880	.002	1.87992 - .00012	.050	4
4	7493313		1.880	.004	1.87980 - .00016	.050	8
4	7493315		1.880	.008 AND UP	1.87960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493317		1.881	.001	1.88100 - .00008	.050	4
4	7493318		1.881	.002	1.88092 - .00012	.050	4
4	7493319		1.881	.004	1.88080 - .00016	.050	8
4	7493321		1.881	.008 AND UP	1.88060 - .00040	.050	8
4	7493323		1.882	.001	1.88200 - .00008	.050	4
4	7493324		1.882	.002	1.88192 - .00012	.050	4
4	7493325		1.882	.004	1.88180 - .00016	.050	8
4	7493327		1.882	.008 AND UP	1.88160 - .00040	.050	8
4	7493329		1.883	.001	1.88300 - .00008	.050	4
4	7493330		1.883	.002	1.88292 - .00012	.050	4
4	7493331		1.883	.004	1.88280 - .00016	.050	8
4	7493333		1.883	.008 AND UP	1.88260 - .00040	.050	8
4	7493335		1.884	.001	1.88400 - .00008	.050	4
4	7493336		1.884	.002	1.88392 - .00012	.050	4
4	7493337		1.884	.004	1.88380 - .00016	.050	8
4	7493339		1.884	.008 AND UP	1.88360 - .00040	.050	8
4	7493341		1.885	.001	1.88500 - .00008	.050	4
4	7493342		1.885	.002	1.88492 - .00012	.050	4
4	7493343		1.885	.004	1.88480 - .00016	.050	8
4	7493345		1.885	.008 AND UP	1.88460 - .00040	.050	8
4	7493347		1.886	.001	1.88600 - .00008	.050	4
4	7493348		1.886	.002	1.88592 - .00012	.050	4
4	7493349		1.886	.004	1.88580 - .00016	.050	8
4	7493351		1.886	.008 AND UP	1.88560 - .00040	.050	8
4	7493353		1.887	.001	1.88700 - .00008	.050	4
4	7493354		1.887	.002	1.88692 - .00012	.050	4
4	7493355		1.887	.004	1.88680 - .00016	.050	8
4	7493357		1.887	.008 AND UP	1.88660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493359		1.888	.001	1.88800 - .00008	.050	4
4	7493360		1.888	.002	1.88792 - .00012	.050	4
4	7493361		1.888	.004	1.88780 - .00016	.050	8
4	7493363		1.888	.008 AND UP	1.88760 - .00040	.050	8
4	7493365		1.889	.001	1.88900 - .00008	.050	4
4	7493366		1.889	.002	1.88892 - .00012	.050	4
4	7493367		1.889	.004	1.88880 - .00016	.050	8
4	7493369		1.889	.008 AND UP	1.88860 - .00040	.050	8
4	7493371		1.890	.001	1.89000 - .00008	.050	4
4	7493372		1.890	.002	1.88992 - .00012	.050	4
4	7493373		1.890	.004	1.88980 - .00016	.050	8
4	7493375		1.890	.008 AND UP	1.88960 - .00040	.050	8
4	7493377		1.891	.001	1.89100 - .00008	.050	4
4	7493378		1.891	.002	1.89092 - .00012	.050	4
4	7493379		1.891	.004	1.89080 - .00016	.050	8
4	7493381		1.891	.008 AND UP	1.89060 - .00040	.050	8
4	7493383		1.892	.001	1.89200 - .00008	.050	4
4	7493384		1.892	.002	1.89192 - .00012	.050	4
4	7493385		1.892	.004	1.89180 - .00016	.050	8
4	7493387		1.892	.008 AND UP	1.89160 - .00040	.050	8
4	7493389		1.893	.001	1.89300 - .00008	.050	4
4	7493390		1.893	.002	1.89292 - .00012	.050	4
4	7493391		1.893	.004	1.89280 - .00016	.050	8
4	7493393		1.893	.008 AND UP	1.89260 - .00040	.050	8
4	7493395		1.894	.001	1.89400 - .00008	.050	4
4	7493396		1.894	.002	1.89392 - .00012	.050	4
4	7493397		1.894	.004	1.89380 - .00016	.050	8
4	7493399		1.894	.008 AND UP	1.89360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493401		1.895	.001	1.89500 - .00008	.050	4
4	7493402		1.895	.002	1.89492 - .00012	.050	4
4	7493403		1.895	.004	1.89480 - .00016	.050	8
4	7493405		1.895	.008 AND UP	1.89460 - .00040	.050	8
4	7493407		1.896	.001	1.89600 - .00008	.050	4
4	7493408		1.896	.002	1.89592 - .00012	.050	4
4	7493409		1.896	.004	1.89580 - .00016	.050	8
4	7493411		1.896	.008 AND UP	1.89560 - .00040	.050	8
4	7493413		1.897	.001	1.89700 - .00008	.050	4
4	7493414		1.897	.002	1.89692 - .00012	.050	4
4	7493415		1.897	.004	1.89680 - .00016	.050	8
4	7493417		1.897	.008 AND UP	1.89660 - .00040	.050	8
4	7493419		1.898	.001	1.89800 - .00008	.050	4
4	7493420		1.898	.002	1.89792 - .00012	.050	4
4	7493421		1.898	.004	1.89780 - .00016	.050	8
4	7493423		1.898	.008 AND UP	1.89760 - .00040	.050	8
4	7493425		1.899	.001	1.89900 - .00008	.050	4
4	7493426		1.899	.002	1.89892 - .00012	.050	4
4	7493427		1.899	.004	1.89880 - .00016	.050	8
4	7493429		1.899	.008 AND UP	1.89860 - .00040	.050	8
4	7493431		1.900	.001	1.90000 - .00008	.050	4
4	7493432		1.900	.002	1.89992 - .00012	.050	4
4	7493433		1.900	.004	1.89980 - .00016	.050	8
4	7493435		1.900	.008 AND UP	1.89960 - .00040	.050	8
4	7493437		1.901	.001	1.90100 - .00008	.050	4
4	7493438		1.901	.002	1.90092 - .00012	.050	4
4	7493439		1.901	.004	1.90080 - .00016	.050	8
4	7493441		1.901	.008 AND UP	1.90060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493443		1.902	.001	1.90200 - .00008	.050	4
4	7493444		1.902	.002	1.90192 - .00012	.050	4
4	7493445		1.902	.004	1.90180 - .00016	.050	8
4	7493447		1.902	.008 AND UP	1.90160 - .00040	.050	8
4	7493449		1.903	.001	1.90300 - .00008	.050	4
4	7493450		1.903	.002	1.90292 - .00012	.050	4
4	7493451		1.903	.004	1.90280 - .00016	.050	8
4	7493453		1.903	.008 AND UP	1.90260 - .00040	.050	8
4	7493455		1.904	.001	1.90400 - .00008	.050	4
4	7493456		1.904	.002	1.90392 - .00012	.050	4
4	7493457		1.904	.004	1.90380 - .00016	.050	8
4	7493459		1.904	.008 AND UP	1.90360 - .00040	.050	8
4	7493461		1.905	.001	1.90500 - .00008	.050	4
4	7493462		1.905	.002	1.90492 - .00012	.050	4
4	7493463		1.905	.004	1.90480 - .00016	.050	8
4	7493465		1.905	.008 AND UP	1.90460 - .00040	.050	8
4	7493467		1.906	.001	1.90600 - .00008	.050	4
4	7493468		1.906	.002	1.90592 - .00012	.050	4
4	7493469		1.906	.004	1.90580 - .00016	.050	8
4	7493471		1.906	.008 AND UP	1.90560 - .00040	.050	8
4	7493473		1.90625	.001 AND UP	1.90625 - .00008	.050	4
4	7493474		1.907	.001	1.90700 - .00008	.050	4
4	7493475		1.907	.002	1.90692 - .00012	.050	4
4	7493476		1.907	.004	1.90680 - .00016	.050	8
4	7493478		1.907	.008 AND UP	1.90660 - .00040	.050	8
4	7493480		1.908	.001	1.90800 - .00008	.050	4
4	7493481		1.908	.002	1.90792 - .00012	.050	4
4	7493482		1.908	.004	1.90780 - .00016	.050	8
4	7493484		1.908	.008 AND UP	1.90760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE / RING GAGE	STOCK NO. / ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7493486		1.909	.001	1.90900 - .00008	.050	4
4	7493487		1.909	.002	1.90892 - .00012	.050	4
4	7493488		1.909	.004	1.90880 - .00016	.050	8
4	7493490		1.909	.008 AND UP	1.90860 - .00040	.050	8
4	7493492		1.910	.001	1.91000 - .00008	.050	4
4	7493493		1.910	.002	1.90992 - .00012	.050	4
4	7493494		1.910	.004	1.90980 - .00016	.050	8
4	7493496		1.910	.008 AND UP	1.90960 - .00040	.050	8
4	7493498		1.911	.001	1.91100 - .00008	.050	4
4	7493499		1.911	.002	1.91092 - .00012	.050	4
4	7493500		1.911	.004	1.91080 - .00016	.050	8
4	7493502		1.911	.008 AND UP	1.91060 - .00040	.050	8
4	7493504		1.912	.001	1.91200 - .00008	.050	4
4	7493505		1.912	.002	1.91192 - .00012	.050	4
4	7493506		1.912	.004	1.91180 - .00016	.050	8
4	7493508		1.912	.008 AND UP	1.91160 - .00040	.050	8
4	7493510		1.913	.001	1.91300 - .00008	.050	4
4	7493511		1.913	.002	1.91292 - .00012	.050	4
4	7493512		1.913	.004	1.91280 - .00016	.050	8
4	7493514		1.913	.008 AND UP	1.91260 - .00040	.050	8
4	7493516		1.914	.001	1.91400 - .00008	.050	4
4	7493517		1.914	.002	1.91392 - .00012	.050	4
4	7493518		1.914	.004	1.91380 - .00016	.050	8
4	7493520		1.914	.008 AND UP	1.91360 - .00040	.050	8
4	7493522		1.915	.001	1.91500 - .00008	.050	4
4	7493523		1.915	.002	1.91492 - .00012	.050	4
4	7493524		1.915	.004	1.91480 - .00016	.050	8
4	7493526		1.915	.008 AND UP	1.91460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493528		1.916	.001	1.91600 - .00008	.050	4
4	7493529		1.916	.002	1.91592 - .00012	.050	4
4	7493530		1.916	.004	1.91580 - .00016	.050	8
4	7493532		1.916	.008 AND UP	1.91560 - .00040	.050	8
4	7493534		1.917	.001	1.91700 - .00008	.050	4
4	7493535		1.917	.002	1.91692 - .00012	.050	4
4	7493536		1.917	.004	1.91680 - .00016	.050	8
4	7493538		1.917	.008 AND UP	1.91660 - .00040	.050	8
4	7493540		1.918	.001	1.91800 - .00008	.050	4
4	7493541		1.918	.002	1.91792 - .00012	.050	4
4	7493542		1.918	.004	1.91780 - .00016	.050	8
4	7493544		1.918	.008 AND UP	1.91760 - .00040	.050	8
4	7493546		1.919	.001	1.91900 - .00008	.050	4
4	7493547		1.919	.002	1.91892 - .00012	.050	4
4	7493548		1.919	.004	1.91880 - .00016	.050	8
4	7493550		1.919	.008 AND UP	1.91860 - .00040	.050	8
4	7493552		1.920	.001	1.92000 - .00008	.050	4
4	7493553		1.920	.002	1.91992 - .00012	.050	4
4	7493554		1.920	.004	1.91980 - .00016	.050	8
4	7493556		1.920	.008 AND UP	1.91960 - .00040	.050	8
4	7493558		1.921	.001	1.92100 - .00008	.050	4
4	7493559		1.921	.002	1.92092 - .00012	.050	4
4	7493560		1.921	.004	1.92080 - .00016	.050	8
4	7493562		1.921	.008 AND UP	1.92060 - .00040	.050	8
4	7493564		1.922	.001	1.92200 - .00008	.050	4
4	7493565		1.922	.002	1.92192 - .00012	.050	4
4	7493566		1.922	.004	1.92180 - .00016	.050	8
4	7493568		1.922	.008 AND UP	1.92160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493570		1.923	.001	1.92300 - .00008	.050	4
4	7493571		1.923	.002	1.92292 - .00012	.050	4
4	7493572		1.923	.004	1.92280 - .00016	.050	8
4	7493574		1.923	.008 AND UP	1.92260 - .00040	.050	8
4	7493576		1.924	.001	1.92400 - .00008	.050	4
4	7493577		1.924	.002	1.92392 - .00012	.050	4
4	7493578		1.924	.004	1.92380 - .00016	.050	8
4	7493580		1.924	.008 AND UP	1.92360 - .00040	.050	8
4	7493582		1.925	.001	1.92500 - .00008	.050	4
4	7493583		1.925	.002	1.92492 - .00012	.050	4
4	7493584		1.925	.004	1.92480 - .00016	.050	8
4	7493586		1.925	.008 AND UP	1.92460 - .00040	.050	8
4	7493588		1.926	.001	1.92600 - .00008	.050	4
4	7493589		1.926	.002	1.92592 - .00012	.050	4
4	7493590		1.926	.004	1.92580 - .00016	.050	8
4	7493592		1.926	.008 AND UP	1.92560 - .00040	.050	8
4	7493594		1.927	.001	1.92700 - .00008	.050	4
4	7493595		1.927	.002	1.92692 - .00012	.050	4
4	7493596		1.927	.004	1.92680 - .00016	.050	8
4	7493598		1.927	.008 AND UP	1.92660 - .00040	.050	8
4	7493600		1.928	.001	1.92800 - .00008	.050	4
4	7493601		1.928	.002	1.92792 - .00012	.050	4
4	7493602		1.928	.004	1.92780 - .00016	.050	8
4	7493604		1.928	.008 AND UP	1.92760 - .00040	.050	8
4	7493606		1.929	.001	1.92900 - .00008	.050	4
4	7493607		1.929	.002	1.92892 - .00012	.050	4
4	7493608		1.929	.004	1.92880 - .00016	.050	8
4	7493610		1.929	.008 AND UP	1.92860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493612		1.930	.001	1.93000 - .00008	.050	4
4	7493613		1.930	.002	1.92992 - .00012	.050	4
4	7493614		1.930	.004	1.92980 - .00016	.050	8
4	7493616		1.930	.008 AND UP	1.92960 - .00040	.050	8
4	7493618		1.931	.001	1.93100 - .00008	.050	4
4	7493619		1.931	.002	1.93092 - .00012	.050	4
4	7493620		1.931	.004	1.93080 - .00016	.050	8
4	7493622		1.931	.008 AND UP	1.93060 - .00040	.050	8
4	7493624		1.932	.001	1.93200 - .00008	.050	4
4	7493625		1.932	.002	1.93192 - .00012	.050	4
4	7493626		1.932	.004	1.93180 - .00016	.050	8
4	7493628		1.932	.008 AND UP	1.93160 - .00040	.050	8
4	7493630		1.933	.001	1.93300 - .00008	.050	4
4	7493631		1.933	.002	1.93292 - .00012	.050	4
4	7493632		1.933	.004	1.93280 - .00016	.050	8
4	7493634		1.933	.008 AND UP	1.93260 - .00040	.050	8
4	7493636		1.934	.001	1.93400 - .00008	.050	4
4	7493637		1.934	.002	1.93392 - .00012	.050	4
4	7493638		1.934	.004	1.93380 - .00016	.050	8
4	7493640		1.934	.008 AND UP	1.93360 - .00040	.050	8
4	7493642		1.935	.001	1.93500 - .00008	.050	4
4	7493643		1.935	.002	1.93492 - .00012	.050	4
4	7493644		1.935	.004	1.93480 - .00016	.050	8
4	7493646		1.935	.008 AND UP	1.93460 - .00040	.050	8
4	7493648		1.936	.001	1.93600 - .00008	.050	4
4	7493649		1.936	.002	1.93592 - .00012	.050	4
4	7493650		1.936	.004	1.93580 - .00016	.050	8
4	7493652		1.936	.008 AND UP	1.93560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493654		1.937	.001	1.93700 - .00008	.050	4
4	7493655		1.937	.002	1.93692 - .00012	.050	4
4	7493656		1.937	.004	1.93680 - .00016	.050	8
4	7493658		1.937	.008 AND UP	1.93660 - .00040	.050	8
4	7493660		1.9375	.001 AND UP	1.93750 - .00008	.050	4
4	7493661		1.938	.001	1.93800 - .00008	.050	4
4	7493662		1.938	.002	1.93792 - .00012	.050	4
4	7493663		1.938	.004	1.93780 - .00016	.050	8
4	7493665		1.938	.008 AND UP	1.93760 - .00040	.050	8
4	7493667		1.939	.001	1.93900 - .00008	.050	4
4	7493668		1.939	.002	1.93892 - .00012	.050	4
4	7493669		1.939	.004	1.93880 - .00016	.050	8
4	7493671		1.939	.008 AND UP	1.93860 - .00040	.050	8
4	7493673		1.940	.001	1.94000 - .00008	.050	4
4	7493674		1.940	.002	1.93992 - .00012	.050	4
4	7493675		1.940	.004	1.93980 - .00016	.050	8
4	7493677		1.940	.008 AND UP	1.93960 - .00040	.050	8
4	7493679		1.941	.001	1.94100 - .00008	.050	4
4	7493680		1.941	.002	1.94092 - .00012	.050	4
4	7493681		1.941	.004	1.94080 - .00016	.050	8
4	7493683		1.941	.008 AND UP	1.94060 - .00040	.050	8
4	7493685		1.942	.001	1.94200 - .00008	.050	4
4	7493686		1.942	.002	1.94192 - .00012	.050	4
4	7493687		1.942	.004	1.94180 - .00016	.050	8
4	7493689		1.942	.008 AND UP	1.94160 - .00040	.050	8
4	7493691		1.943	.001	1.94300 - .00008	.050	4
4	7493692		1.943	.002	1.94292 - .00012	.050	4
4	7493693		1.943	.004	1.94280 - .00016	.050	8
4	7493695		1.943	.008 AND UP	1.94260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7493697		1.944	.001	1.94400 - .00008	.050	4
4	7493698		1.944	.002	1.94392 - .00012	.050	4
4	7493699		1.944	.004	1.94380 - .00016	.050	8
4	7493701		1.944	.008 AND UP	1.94360 - .00040	.050	8
4	7493703		1.945	.001	1.94500 - .00008	.050	4
4	7493704		1.945	.002	1.94492 - .00012	.050	4
4	7493705		1.945	.004	1.94480 - .00016	.050	8
4	7493707		1.945	.008 AND UP	1.94460 - .00040	.050	8
4	7493709		1.946	.001	1.94600 - .00008	.050	4
4	7493710		1.946	.002	1.94592 - .00012	.050	4
4	7493711		1.946	.004	1.94580 - .00016	.050	8
4	7493713		1.946	.008 AND UP	1.94560 - .00040	.050	8
4	7493715		1.947	.001	1.94700 - .00008	.050	4
4	7493716		1.947	.002	1.94692 - .00012	.050	4
4	7493717		1.947	.004	1.94680 - .00016	.050	8
4	7493719		1.947	.008 AND UP	1.94660 - .00040	.050	8
4	7493721		1.948	.001	1.94800 - .00008	.050	4
4	7493722		1.948	.002	1.94792 - .00012	.050	4
4	7493723		1.948	.004	1.94780 - .00016	.050	8
4	7493725		1.948	.008 AND UP	1.94760 - .00040	.050	8
4	7493727		1.949	.001	1.94900 - .00008	.050	4
4	7493728		1.949	.002	1.94892 - .00012	.050	4
4	7493729		1.949	.004	1.94880 - .00016	.050	8
4	7493731		1.949	.008 AND UP	1.94860 - .00040	.050	8
4	7493733		1.950	.001	1.95000 - .00008	.050	4
4	7493734		1.950	.002	1.94992 - .00012	.050	4
4	7493735		1.950	.004	1.94980 - .00016	.050	8
4	7493737		1.950	.008 AND UP	1.94960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493739		1.951	.001	1.95100 - .00008	.050	4
4	7493740		1.951	.002	1.95092 - .00012	.050	4
4	7493741		1.951	.004	1.95080 - .00016	.050	8
4	7493743		1.951	.008 AND UP	1.95060 - .00040	.050	8
4	7493745		1.952	.001	1.95200 - .00008	.050	4
4	7493746		1.952	.002	1.95192 - .00012	.050	4
4	7493747		1.952	.004	1.95180 - .00016	.050	8
4	7493749		1.952	.008 AND UP	1.95160 - .00040	.050	8
4	7493751		1.953	.001	1.95300 - .00008	.050	4
4	7493752		1.953	.002	1.95292 - .00012	.050	4
4	7493753		1.953	.004	1.95280 - .00016	.050	8
4	7493755		1.953	.008 AND UP	1.95260 - .00040	.050	8
4	7493757		1.954	.001	1.95400 - .00008	.050	4
4	7493758		1.954	.002	1.95392 - .00012	.050	4
4	7493759		1.954	.004	1.95380 - .00016	.050	8
4	7493761		1.954	.008 AND UP	1.95360 - .00040	.050	8
4	7493763		1.955	.001	1.95500 - .00008	.050	4
4	7493764		1.955	.002	1.95492 - .00012	.050	4
4	7493765		1.955	.004	1.95480 - .00016	.050	8
4	7493767		1.955	.008 AND UP	1.95460 - .00040	.050	8
4	7493769		1.956	.001	1.95600 - .00008	.050	4
4	7493770		1.956	.002	1.95592 - .00012	.050	4
4	7493771		1.956	.004	1.95580 - .00016	.050	8
4	7493773		1.956	.008 AND UP	1.95560 - .00040	.050	8
4	7493775		1.957	.001	1.95700 - .00008	.050	4
4	7493776		1.957	.002	1.95692 - .00012	.050	4
4	7493777		1.957	.004	1.95680 - .00016	.050	8
4	7493779		1.957	.008 AND UP	1.95660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK			DIAMETER	CHUMPER	
A	B	C	D	E	F	G	H
4	7493781		1.958	.001	1.95800 - .00008	.050	4
4	7493782		1.958	.002	1.95792 - .00012	.050	4
4	7493783		1.958	.004	1.95780 - .00016	.050	8
4	7493785		1.958	.008 AND UP	1.95760 - .00040	.050	8
4	7493787		1.959	.001	1.95900 - .00008	.050	4
4	7493788		1.959	.002	1.95892 - .00012	.050	4
4	7493789		1.959	.004	1.95880 - .00016	.050	8
4	7493791		1.959	.008 AND UP	1.95860 - .00040	.050	8
4	7493793		1.960	.001	1.96000 - .00008	.050	4
4	7493794		1.960	.002	1.95992 - .00012	.050	4
4	7493795		1.960	.004	1.95980 - .00016	.050	8
4	7493797		1.960	.008 AND UP	1.95960 - .00040	.050	8
4	7493799		1.961	.001	1.96100 - .00008	.050	4
4	7493800		1.961	.002	1.96092 - .00012	.050	4
4	7493801		1.961	.004	1.96080 - .00016	.050	8
4	7493803		1.961	.008 AND UP	1.96060 - .00040	.050	8
4	7493805		1.962	.001	1.96200 - .00008	.050	4
4	7493806		1.962	.002	1.96192 - .00012	.050	4
4	7493807		1.962	.004	1.96180 - .00016	.050	8
4	7493809		1.962	.008 AND UP	1.96160 - .00040	.050	8
4	7493811		1.963	.001	1.96300 - .00008	.050	4
4	7493812		1.963	.002	1.96292 - .00012	.050	4
4	7493813		1.963	.004	1.96280 - .00016	.050	8
4	7493815		1.963	.008 AND UP	1.96260 - .00040	.050	8
4	7493817		1.964	.001	1.96400 - .00008	.050	4
4	7493818		1.964	.002	1.96392 - .00012	.050	4
4	7493819		1.964	.004	1.96380 - .00016	.050	8
4	7493821		1.964	.008 AND UP	1.96360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493823		1.965	.001	1.96500 - .00008	.050	4
4	7493824		1.965	.002	1.96492 - .00012	.050	4
4	7493825		1.965	.004	1.96480 - .00016	.050	8
4	7493827		1.965	.008 AND UP	1.96460 - .00040	.050	8
4	7493829		1.966	.001	1.96600 - .00008	.050	4
4	7493830		1.966	.002	1.96592 - .00012	.050	4
4	7493831		1.966	.004	1.96580 - .00016	.050	8
4	7493833		1.966	.008 AND UP	1.96560 - .00040	.050	8
4	7493835		1.967	.001	1.96700 - .00008	.050	4
4	7493836		1.967	.002	1.96692 - .00012	.050	4
4	7493837		1.967	.004	1.96680 - .00016	.050	8
4	7493839		1.967	.008 AND UP	1.96660 - .00040	.050	8
4	7493841		1.968	.001	1.96900 - .00008	.050	4
4	7493842		1.968	.002	1.96792 - .00012	.050	4
4	7493843		1.968	.004	1.96780 - .00016	.050	8
4	7493845		1.968	.008 AND UP	1.96760 - .00040	.050	8
4	7493847		1.96875	.001 AND UP	1.96875 - .00008	.050	4
4	7493848		1.969	.001	1.96900 - .00008	.050	4
4	7493849		1.969	.002	1.96892 - .00012	.050	4
4	7493850		1.969	.004	1.96880 - .00016	.050	8
4	7493852		1.969	.008 AND UP	1.96860 - .00040	.050	8
4	7493854		1.970	.001	1.97000 - .00008	.050	4
4	7493855		1.970	.002	1.96992 - .00012	.050	4
4	7493856		1.970	.004	1.96980 - .00016	.050	8
4	7493858		1.970	.008 AND UP	1.96960 - .00040	.050	8
4	7493860		1.971	.001	1.97100 - .00008	.050	4
4	7493861		1.971	.002	1.97092 - .00012	.050	4
4	7493862		1.971	.004	1.97080 - .00016	.050	8
4	7493864		1.971	.008 AND UP	1.97060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493866		1.972	.001	1.97200 - .00008	.050	4
4	7493867		1.972	.002	1.97192 - .00012	.050	4
4	7493868		1.972	.004	1.97180 - .00016	.050	8
4	7493870		1.972	.008 AND UP	1.97160 - .00040	.050	8
4	7493872		1.973	.001	1.97300 - .00008	.050	4
4	7493873		1.973	.002	1.97292 - .00012	.050	4
4	7493874		1.973	.004	1.97280 - .00016	.050	8
4	7493876		1.973	.008 AND UP	1.97260 - .00040	.050	8
4	7493878		1.974	.001	1.97400 - .00008	.050	4
4	7493879		1.974	.002	1.97392 - .00012	.050	4
4	7493880		1.974	.004	1.97380 - .00016	.050	8
4	7493882		1.974	.008 AND UP	1.97360 - .00040	.050	8
4	7493884		1.975	.001	1.97500 - .00008	.050	4
4	7493885		1.975	.002	1.97492 - .00012	.050	4
4	7493886		1.975	.004	1.97480 - .00016	.050	8
4	7493888		1.975	.008 AND UP	1.97460 - .00040	.050	8
4	7493890		1.976	.001	1.97600 - .00008	.050	4
4	7493891		1.976	.002	1.97592 - .00012	.050	4
4	7493892		1.976	.004	1.97580 - .00016	.050	8
4	7493894		1.976	.008 AND UP	1.97560 - .00040	.050	8
4	7493896		1.977	.001	1.97700 - .00008	.050	4
4	7493897		1.977	.002	1.97692 - .00012	.050	4
4	7493898		1.977	.004	1.97680 - .00016	.050	8
4	7493900		1.977	.008 AND UP	1.97660 - .00040	.050	8
4	7493902		1.978	.001	1.97800 - .00008	.050	4
4	7493903		1.978	.002	1.97792 - .00012	.050	4
4	7493904		1.978	.004	1.97780 - .00016	.050	8
4	7493906		1.978	.008 AND UP	1.97760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FHN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493908		1.979	.001	1.97900 - .00008	.050	4
4	7493909		1.979	.002	1.97892 - .00012	.050	4
4	7493910		1.979	.004	1.97880 - .00016	.050	8
4	7493912		1.979	.008 AND UP	1.97860 - .00040	.050	8
4	7493914		1.980	.001	1.98000 - .00008	.050	4
4	7493915		1.980	.002	1.97992 - .00012	.050	4
4	7493916		1.980	.004	1.97980 - .00016	.050	8
4	7493918		1.980	.008 AND UP	1.97960 - .00040	.050	8
4	7493920		1.981	.001	1.98100 - .00008	.050	4
4	7493921		1.981	.002	1.98092 - .00012	.050	4
4	7493922		1.981	.004	1.98080 - .00016	.050	8
4	7493924		1.981	.008 AND UP	1.98060 - .00040	.050	8
4	7493926		1.982	.001	1.98200 - .00008	.050	4
4	7493927		1.982	.002	1.98192 - .00012	.050	4
4	7493928		1.982	.004	1.98180 - .00016	.050	8
4	7493930		1.982	.008 AND UP	1.98160 - .00040	.050	8
4	7493932		1.983	.001	1.98300 - .00008	.050	4
4	7493933		1.983	.002	1.98292 - .00012	.050	4
4	7493934		1.983	.004	1.98280 - .00016	.050	8
4	7493936		1.983	.008 AND UP	1.98260 - .00040	.050	8
4	7493938		1.984	.001	1.98400 - .00008	.050	4
4	7493939		1.984	.002	1.98392 - .00012	.050	4
4	7493940		1.984	.004	1.98380 - .00016	.050	8
4	7493942		1.984	.008 AND UP	1.98360 - .00040	.050	8
4	7493944		1.985	.001	1.98500 - .00008	.050	4
4	7493945		1.985	.002	1.98492 - .00012	.050	4
4	7493946		1.985	.004	1.98480 - .00016	.050	8
4	7493948		1.985	.008 AND UP	1.98460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493950		1.986	.001	1.98600 - .00008	.050	4
4	7493951		1.986	.002	1.98592 - .00012	.050	4
4	7493952		1.986	.004	1.98580 - .00016	.050	8
4	7493954		1.986	.008 AND UP	1.98560 - .00040	.050	8
4	7493956		1.987	.001	1.98700 - .00008	.050	4
4	7493957		1.987	.002	1.98692 - .00012	.050	4
4	7493958		1.987	.004	1.98680 - .00016	.050	8
4	7493960		1.987	.008 AND UP	1.98660 - .00040	.050	8
4	7493962		1.988	.001	1.98800 - .00008	.050	4
4	7493963		1.988	.002	1.98792 - .00012	.050	4
4	7493964		1.988	.004	1.98780 - .00016	.050	8
4	7493966		1.988	.008 AND UP	1.98760 - .00040	.050	8
4	7493968		1.989	.001	1.98900 - .00008	.050	4
4	7493969		1.989	.002	1.98892 - .00012	.050	4
4	7493970		1.989	.004	1.98880 - .00016	.050	8
4	7493972		1.989	.008 AND UP	1.98860 - .00040	.050	8
4	7493974		1.990	.001	1.99000 - .00008	.050	4
4	7493975		1.990	.002	1.98992 - .00012	.050	4
4	7493976		1.990	.004	1.98980 - .00016	.050	8
4	7493978		1.990	.008 AND UP	1.98960 - .00040	.050	8
4	7493980		1.991	.001	1.99100 - .00008	.050	4
4	7493981		1.991	.002	1.99092 - .00012	.050	4
4	7493982		1.991	.004	1.99080 - .00016	.050	8
4	7493984		1.991	.008 AND UP	1.99060 - .00040	.050	8
4	7493986		1.992	.001	1.99200 - .00008	.050	4
4	7493987		1.992	.002	1.99192 - .00012	.050	4
4	7493988		1.992	.004	1.99180 - .00016	.050	8
4	7493990		1.992	.008 AND UP	1.99160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7493992		1.993	.001	1.99300 - .00008	.050	4
4	7493993		1.993	.002	1.99292 - .00012	.050	4
4	7493994		1.993	.004	1.99280 - .00016	.050	8
4	7493996		1.993	.008 AND UP	1.99260 - .00040	.050	8
4	7493998		1.994	.001	1.99400 - .00008	.050	4
4	7493999		1.994	.002	1.99392 - .00012	.050	4
4	7494000		1.994	.004	1.99380 - .00016	.050	8
4	7494002		1.994	.008 AND UP	1.99360 - .00040	.050	8
4	7494004		1.995	.001	1.99500 - .00008	.050	4
4	7494005		1.995	.002	1.99492 - .00012	.050	4
4	7494006		1.995	.004	1.99480 - .00016	.050	8
4	7494008		1.995	.008 AND UP	1.99460 - .00040	.050	8
4	7494010		1.996	.001	1.99600 - .00008	.050	4
4	7494011		1.996	.002	1.99592 - .00012	.050	4
4	7494012		1.996	.004	1.99580 - .00016	.050	8
4	7494014		1.996	.008 AND UP	1.99560 - .00040	.050	8
4	7494016		1.997	.001	1.99700 - .00008	.050	4
4	7494017		1.997	.002	1.99692 - .00012	.050	4
4	7494018		1.997	.004	1.99680 - .00016	.050	8
4	7494020		1.997	.008 AND UP	1.99660 - .00040	.050	8
4	7494022		1.998	.001	1.99800 - .00008	.050	4
4	7494023		1.998	.002	1.99792 - .00012	.050	4
4	7494024		1.998	.004	1.99780 - .00016	.050	8
4	7494026		1.998	.008 AND UP	1.99760 - .00040	.050	8
4	7494028		1.999	.001	1.99900 - .00008	.050	4
4	7494029		1.999	.002	1.99892 - .00012	.050	4
4	7494030		1.999	.004	1.99880 - .00016	.050	8
4	7494032		1.999	.008 AND UP	1.99860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494034		2.000	.001	2.00000 - .00008	.050	4
4	7494035		2.000	.002	1.99992 - .00012	.050	4
4	7494036		2.000	.004	1.99980 - .00016	.050	8
4	7494038		2.000	.008 AND UP	1.99960 - .00040	.050	8
4	7494040		2.001	.001	2.00100 - .00008	.050	4
4	7494041		2.001	.002	2.00092 - .00012	.050	4
4	7494042		2.001	.004	2.00080 - .00016	.050	8
4	7494044		2.001	.008 AND UP	2.00060 - .00040	.050	8
4	7494046		2.002	.001	2.00200 - .00008	.050	4
4	7494047		2.002	.002	2.00192 - .00012	.050	4
4	7494048		2.002	.004	2.00180 - .00016	.050	8
4	7494050		2.002	.008 AND UP	2.00160 - .00040	.050	8
4	7494052		2.003	.001	2.00300 - .00008	.050	4
4	7494053		2.003	.002	2.00292 - .00012	.050	4
4	7494054		2.003	.004	2.00280 - .00016	.050	8
4	7494056		2.003	.008 AND UP	2.00260 - .00040	.050	8
4	7494058		2.004	.001	2.00400 - .00008	.050	4
4	7494059		2.004	.002	2.00392 - .00012	.050	4
4	7494060		2.004	.004	2.00380 - .00016	.050	8
4	7494062		2.004	.008 AND UP	2.00360 - .00040	.050	8
4	7494064		2.005	.001	2.00500 - .00008	.050	4
4	7494065		2.005	.002	2.00492 - .00012	.050	4
4	7494066		2.005	.004	2.00480 - .00016	.050	8
4	7494068		2.005	.008 AND UP	2.00460 - .00040	.050	8
4	7494070		2.006	.001	2.00600 - .00008	.050	4
4	7494071		2.006	.002	2.00592 - .00012	.050	4
4	7494072		2.006	.004	2.00580 - .00016	.050	8
4	7494074		2.006	.008 AND UP	2.00560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494076		2.007	.001	2.00700 - .00008	.050	4
4	7494077		2.007	.002	2.00692 - .00012	.050	4
4	7494078		2.007	.004	2.00680 - .00016	.050	8
4	7494080		2.007	.008 AND UP	2.00660 - .00040	.050	8
4	7494082		2.008	.001	2.00800 - .00008	.050	4
4	7494083		2.008	.002	2.00792 - .00012	.050	4
4	7494084		2.008	.004	2.00780 - .00016	.050	8
4	7494086		2.008	.008 AND UP	2.00760 - .00040	.050	8
4	7494088		2.009	.001	2.00900 - .00008	.050	4
4	7494089		2.009	.002	2.00892 - .00012	.050	4
4	7494090		2.009	.004	2.00880 - .00016	.050	8
4	7494092		2.009	.008 AND UP	2.00860 - .00040	.050	8
4	7494094		2.010	.001	2.01000 - .00008	.050	4
4	7494095		2.010	.002	2.00992 - .00012	.050	4
4	7494096		2.010	.004	2.00980 - .00016	.050	8
4	7494098		2.010	.008 AND UP	2.00960 - .00040	.050	8
4	7494100		2.011	.001	2.01100 - .00008	.050	4
4	7494101		2.011	.002	2.01092 - .00012	.050	4
4	7494102		2.011	.004	2.01080 - .00016	.050	8
4	7494104		2.011	.008 AND UP	2.01060 - .00040	.050	8
4	7494106		2.012	.001	2.01200 - .00008	.050	4
4	7494107		2.012	.002	2.01192 - .00012	.050	4
4	7494108		2.012	.004	2.01180 - .00016	.050	8
4	7494110		2.012	.008 AND UP	2.01160 - .00040	.050	8
4	7494112		2.013	.001	2.01300 - .00008	.050	4
4	7494113		2.013	.002	2.01292 - .00012	.050	4
4	7494114		2.013	.004	2.01280 - .00016	.050	8
4	7494116		2.013	.008 AND UP	2.01260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494118		2.014	.001	2.01400 - .00008	.050	4
4	7494119		2.014	.002	2.01392 - .00012	.050	4
4	7494120		2.014	.004	2.01380 - .00016	.050	8
4	7494122		2.014	.008 AND UP	2.01360 - .00040	.050	8
4	7494124		2.015	.001	2.01500 - .00008	.050	4
4	7494125		2.015	.002	2.01492 - .00012	.050	4
4	7494126		2.015	.004	2.01480 - .00016	050	8
4	7494128		2.015	.008 AND UP	2.01460 - .00040	.050	8
4	7494130		2.016	.001	2.01600 - .00008	.050	4
4	7494131		2.016	.002	2.01592 - .00012	.050	4
4	7494132		2.016	.004	2.01580 - .00016	.050	8
4	7494134		2.016	.008 AND UP	2.01560 - .00040	.050	8
4	7494136		2.017	.001	2.01700 - .00008	.050	4
4	7494137		2.017	.002	2.01692 - .00012	.050	4
4	7494138		2.017	.004	2.01680 - .00016	.050	8
4	7494140		2.017	.008 AND UP	2.01660 - .00040	.050	8
4	7494142		2.018	.001	2.01800 - .00008	.050	4
4	7494143		2.018	.002	2.01792 - .00012	.050	4
4	7494144		2.018	.004	2.01780 - .00016	.050	8
4	7494146		2.018	.008 AND UP	2.01760 - .00040	.050	8
4	7494148		2.019	.001	2.01900 - .00008	.050	4
4	7494149		2.019	.002	2.01892 - .00012	.050	4
4	7494150		2.019	.004	2.01880 - .00016	.050	8
4	7494152		2.019	.008 AND UP	2.01860 - .00040	.050	8
4	7494154		2.020	.001	2.02000 - .00008	.050	4
4	7494155		2.020	.002	2.01992 - .00012	.050	4
4	7494156		2.020	.004	2.01980 - .00016	.050	8
4	7494158		2.020	.008 AND UP	2.01960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494160		2.021	.001	2.02100 - .00008	.050	4
4	7494161		2.021	.002	2.02092 - .00012	.050	4
4	7494162		2.021	.004	2.02080 - .00016	.050	8
4	7494164		2.021	.008 AND UP	2.02060 - .00040	.050	8
4	7494166		2.022	.001	2.02200 - .00008	.050	4
4	7494167		2.022	.002	2.02192 - .00012	.050	4
4	7494168		2.022	.004	2.02180 - .00016	.050	8
4	7494170		2.022	.008 AND UP	2.02160 - .00040	.050	8
4	7494172		2.023	.001	2.02300 - .00008	.050	4
4	7494173		2.023	.002	2.02292 - .00012	.050	4
4	7494174		2.023	.004	2.02280 - .00016	.050	8
4	7494176		2.023	.008 AND UP	2.02260 - .00040	.050	8
4	7494178		2.024	.001	2.02400 - .00008	.050	4
4	7494179		2.024	.002	2.02392 - .00012	.050	4
4	7494180		2.024	.004	2.02380 - .00016	.050	8
4	7494182		2.024	.008 AND UP	2.02360 - .00040	.050	8
4	7494184		2.025	.001	2.02500 - .00008	.050	4
4	7494185		2.025	.002	2.02492 - .00012	.050	4
4	7494186		2.025	.004	2.02480 - .00016	.050	8
4	7494188		2.025	.008 AND UP	2.02460 - .00040	.050	8
4	7494190		2.026	.001	2.02600 - .00008	.050	4
4	7494191		2.026	.002	2.02592 - .00012	.050	4
4	7494192		2.026	.004	2.02580 - .00016	.050	8
4	7494194		2.026	.008 AND UP	2.02560 - .00040	.050	8
4	7494196		2.027	.001	2.02700 - .00008	.050	4
4	7494197		2.027	.002	2.02692 - .00012	.050	4
4	7494198		2.027	.004	2.02680 - .00016	.050	8
4	7494200		2.027	.008 AND UP	2.02660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494202		2.028	.001	2.02800 - .00008	.050	4
4	7494203		2.028	.002	2.02792 - .00012	.050	4
4	7494204		2.028	.004	2.02780 - .00016	.050	8
4	7494206		2.028	.008 AND UP	2.02760 - .00040	.050	8
4	7494208		2.029	.001	2.02900 - .00008	.050	4
4	7494209		2.029	.002	2.02892 - .00012	.050	4
4	7494210		2.029	.004	2.02880 - .00016	.050	8
4	7494212		2.029	.008 AND UP	2.02860 - .00040	.050	8
4	7494214		2.030	.001	2.03000 - .00008	.050	4
4	7494215		2.030	.002	2.02992 - .00012	.050	4
4	7494216		2.030	.004	2.02980 - .00016	.050	8
4	7494218		2.030	.008 AND UP	2.02960 - .00040	.050	8
4	7494220		2.031	.001	2.03100 - .00008	.050	4
4	7494221		2.031	.002	2.03092 - .00012	.050	4
4	7494222		2.031	.004	2.03080 - .00016	.050	8
4	7494224		2.031	.008 AND UP	2.03060 - .00040	.050	8
4	7494226		2.03125	.001 AND UP	2.03125 - .00008	.050	4
4	7494227		2.032	.001	2.03200 - .00008	.050	4
4	7494228		2.032	.002	2.03192 - .00012	.050	4
4	7494229		2.032	.004	2.03180 - .00016	.050	8
4	7494231		2.032	.008 AND UP	2.03160 - .00040	.050	8
4	7494233		2.033	.001	2.03300 - .00008	.050	4
4	7494234		2.033	.002	2.03292 - .00012	.050	4
4	7494235		2.033	.004	2.03280 - .00016	.050	8
4	7494237		2.033	.008 AND UP	2.03260 - .00040	.050	8
4	7494239		2.034	.001	2.03400 - .00008	.050	4
4	7494240		2.034	.002	2.03392 - .00012	.050	4
4	7494241		2.034	.004	2.03380 - .00016	.050	8
4	7494243		2.034	.008 AND UP	2.03360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494245		2.035	.001	2.03500 - .00008	.050	4
4	7494246		2.035	.002	2.03492 - .00012	.050	4
4	7494247		2.035	.004	2.03480 - .00016	.050	8
4	7494249		2.035	.008 AND UP	2.03460 - .00040	.050	8
4	7494251		2.036	.001	2.03600 - .00008	.050	4
4	7494252		2.036	.002	2.03592 - .00012	.050	4
4	7494253		2.036	.004	2.03580 - .00016	.050	8
4	7494255		2.036	.008 AND UP	2.03560 - .00040	.050	8
4	7494257		2.037	.001	2.03700 - .00008	.050	4
4	7494258		2.037	.002	2.03692 - .00012	.050	4
4	7494259		2.037	.004	2.03680 - .00016	.050	8
4	7494261		2.037	.008 AND UP	2.03660 - .00040	.050	8
4	7494263		2.038	.001	2.03800 - .00008	.050	4
4	7494264		2.038	.002	2.03792 - .00012	.050	4
4	7494265		2.038	.004	2.03780 - .00016	.050	8
4	7494267		2.038	.008 AND UP	2.03760 - .00040	.050	8
4	7494269		2.039	.001	2.03900 - .00008	.050	4
4	7494270		2.039	.002	2.03892 - .00012	.050	4
4	7494271		2.039	.004	2.03880 - .00016	.050	8
4	7494273		2.039	.008 AND UP	2.03860 - .00040	.050	8
4	7494275		2.040	.001	2.04000 - .00008	.050	4
4	7494276		2.040	.002	2.03992 - .00012	.050	4
4	7494277		2.040	.004	2.03980 - .00016	.050	8
4	7494279		2.040	.008 AND UP	2.03960 - .00040	.050	8
4	7494281		2.041	.001	2.04100 - .00008	.050	4
4	7494282		2.041	.002	2.04092 - .00012	.050	4
4	7494283		2.041	.004	2.04080 - .00016	.050	8
4	7494285		2.041	.008 AND UP	2.04060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494287		2.042	.001	2.04200 - .00008	.050	4
4	7494288		2.042	.002	2.04192 - .00012	.050	4
4	7494289		2.042	.004	2.04180 - .00016	.050	8
4	7494291		2.042	.008 AND UP	2.04160 - .00040	.050	8
4	7494293		2.043	.001	2.04300 - .00008	.050	4
4	7494294		2.043	.002	2.04292 - .00012	.050	4
4	7494295		2.043	.004	2.04280 - .00016	.050	8
4	7494297		2.043	.008 AND UP	2.04260 - .00040	.050	8
4	7494299		2.044	.001	2.04400 - .00008	.050	4
4	7494300		2.044	.002	2.04392 - .00012	.050	4
4	7494301		2.044	.004	2.04380 - .00016	.050	8
4	7494303		2.044	.008 AND UP	2.04360 - .00040	.050	8
4	7494305		2.045	.001	2.04500 - .00008	.050	4
4	7494306		2.045	.002	2.04492 - .00012	.050	4
4	7494307		2.045	.004	2.04480 - .00016	.050	8
4	7494309		2.045	.008 AND UP	2.04460 - .00040	.050	8
4	7494311		2.046	.001	2.04600 - .00008	.050	4
4	7494312		2.046	.002	2.04592 - .00012	.050	4
4	7494313		2.046	.004	2.04580 - .00016	.050	8
4	7494315		2.046	.008 AND UP	2.04560 - .00040	.050	8
4	7494317		2.047	.001	2.04700 - .00008	.050	4
4	7494318		2.047	.002	2.04692 - .00012	.050	4
4	7494319		2.047	.004	2.04680 - .00016	.050	8
4	7494321		2.047	.008 AND UP	2.04660 - .00040	.050	8
4	7494323		2.048	.001	2.04800 - .00008	.050	4
4	7494324		2.048	.002	2.04792 - .00012	.050	4
4	7494325		2.048	.004	2.04780 - .00016	.050	8
4	7494327		2.048	.008 AND UP	2.04760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494329		2.049	.001	2.04900 - .00008	.050	4
4	7494330		2.049	.002	2.04892 - .00012	.050	4
4	7494331		2.049	.004	2.04880 - .00016	.050	8
4	7494333		2.049	.008 AND UP	2.04860 - .00040	.050	8
4	7494335		2.050	.001	2.05000 - .00008	.050	4
4	7494336		2.050	.002	2.04992 - .00012	.050	4
4	7494337		2.050	.004	2.04980 - .00016	.050	8
4	7494339		2.050	.008 AND UP	2.04960 - .00040	.050	8
4	7494341		2.051	.001	2.05100 - .00008	.050	4
4	7494342		2.051	.002	2.05092 - .00012	.050	4
4	7494343		2.051	.004	2.05080 - .00016	.050	8
4	7494345		2.051	.008 AND UP	2.05060 - .00040	.050	8
4	7494347		2.052	.001	2.05200 - .00008	.050	4
4	7494348		2.052	.002	2.05192 - .00012	.050	4
4	7494349		2.052	.004	2.05180 - .00016	.050	8
4	7494351		2.052	.008 AND UP	2.05160 - .00040	.050	8
4	7494353		2.053	.001	2.05300 - .00008	.050	4
4	7494354		2.053	.002	2.05292 - .00012	.050	4
4	7494355		2.053	.004	2.05280 - .00016	.050	8
4	7494357		2.053	.008 AND UP	2.05260 - .00040	.050	8
4	7494359		2.054	.001	2.05400 - .00008	.050	4
4	7494360		2.054	.002	2.05392 - .00012	.050	4
4	7494361		2.054	.004	2.05380 - .00016	.050	8
4	7494363		2.054	.008 AND UP	2.05360 - .00040	.050	8
4	7494365		2.055	.001	2.05500 - .00008	.050	4
4	7494366		2.055	.002	2.05492 - .00012	.050	4
4	7494367		2.055	.004	2.05480 - .00016	.050	8
4	7494369		2.055	.008 AND UP	2.05460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
4	7494371		2.056	.001	2.05600 - .00008	.050	4
4	7494372		2.056	.002	2.05592 - .00012	.050	4
4	7494373		2.056	.004	2.05580 - .00016	.050	8
4	7494375		2.056	.008 AND UP	2.05560 - .00040	.050	8
4	7494377		2.057	.001	2.05700 - .00008	.050	4
4	7494378		2.057	.002	2.05692 - .00012	.050	4
4	7494379		2.057	.004	2.05680 - .00016	.050	8
4	7494381		2.057	.008 AND UP	2.05660 - .00040	.050	8
4	7494383		2.058	.001	2.05800 - .00008	.050	4
4	7494384		2.058	.002	2.05792 - .00012	.050	4
4	7494385		2.058	.004	2.05780 - .00016	.050	8
4	7494387		2.058	.008 AND UP	2.05760 - .00040	.050	8
4	7494389		2.059	.001	2.05900 - .00008	.050	4
4	7494390		2.059	.002	2.05892 - .00012	.050	4
4	7494391		2.059	.004	2.05880 - .00016	.050	8
4	7494393		2.059	.008 AND UP	2.05860 - .00040	.050	8
4	7494395		2.060	.001	2.06000 - .00008	.050	4
4	7494396		2.060	.002	2.05992 - .00012	.050	4
4	7494397		2.060	.004	2.05980 - .00016	.050	8
4	7494399		2.060	.008 AND UP	2.05960 - .00040	.050	8
4	7494401		2.061	.001	2.06100 - .00008	.050	4
4	7494402		2.061	.002	2.06092 - .00012	.050	4
4	7494403		2.061	.004	2.06080 - .00016	.050	8
4	7494405		2.061	.008 AND UP	2.06060 - .00040	.050	8
4	7494407		2.062	.001	2.06200 - .00008	.050	4
4	7494408		2.062	.002	2.06192 - .00012	.050	4
4	7494409		2.062	.004	2.06180 - .00016	.050	8
4	7494411		2.062	.008 AND UP	2.06160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494413		2.0625	.001 AND UP	2.06250 - .00008	.050	4
4	7494414		2.063	.001	2.06300 - .00008	.050	4
4	7494415		2.063	.002	2.06292 - .00012	.050	4
4	7494416		2.063	.004	2.06280 - .00016	.050	8
4	7494418		2.063	.008 AND UP	2.06260 - .00040	.050	8
4	7494420		2.064	.001	2.06400 - .00008	.050	4
4	7494421		2.064	.002	2.06392 - .00012	.050	4
4	7494422		2.064	.004	2.06380 - .00016	.050	8
4	7494424		2.064	.008 AND UP	2.06360 - .00040	.050	8
4	7494426		2.065	.001	2.06500 - .00008	.050	4
4	7494427		2.065	.002	2.06492 - .00012	.050	4
4	7494428		2.065	.004	2.06480 - .00016	.050	8
4	7494430		2.065	.008 AND UP	2.06460 - .00040	.050	8
4	7494432		2.066	.001	2.06600 - .00008	.050	4
4	7494433		2.066	.002	2.06592 - .00012	.050	4
4	7494434		2.066	.004	2.06580 - .00016	.050	8
4	7494436		2.066	.008 AND UP	2.06560 - .00040	.050	8
4	7494438		2.067	.001	2.06700 - .00008	.050	4
4	7494439		2.067	.002	2.06692 - .00012	.050	4
4	7494440		2.067	.004	2.06680 - .00016	.050	8
4	7494442		2.067	.008 AND UP	2.06660 - .00040	.050	8
4	7494444		2.068	.001	2.06800 - .00008	.050	4
4	7494445		2.068	.002	2.06792 - .00012	.050	4
4	7494446		2.068	.004	2.06780 - .00016	.050	8
4	7494448		2.068	.008 AND UP	2.06760 - .00040	.050	8
4	7494450		2.069	.001	2.06900 - .00008	.050	4
4	7494451		2.069	.002	2.06892 - .00012	.050	4
4	7494452		2.069	.004	2.06880 - .00016	.050	8
4	7494454		2.069	.008 AND UP	2.06860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494456		2.070	.001	2.07000 - .00008	.050	4
4	7494457		2.070	.002	2.06992 - .00012	.050	4
4	7494458		2.070	.004	2.06980 - .00016	.050	8
4	7494460		2.070	.008 AND UP	2.06960 - .00040	.050	8
4	7494462		2.071	.001	2.07100 - .00008	.050	4
4	7494463		2.071	.002	2.07092 - .00012	.050	4
4	7494464		2.071	.004	2.07080 - .00016	.050	8
4	7494466		2.071	.008 AND UP	2.07060 - .00040	.050	8
4	7494468		2.072	.001	2.07200 - .00008	.050	4
4	7494469		2.072	.002	2.07192 - .00012	.050	4
4	7494470		2.072	.004	2.07180 - .00016	.050	8
4	7494472		2.072	.008 AND UP	2.07160 - .00040	.050	8
4	7494474		2.073	.001	2.07300 - .00008	.050	4
4	7494475		2.073	.002	2.07292 - .00012	.050	4
4	7494476		2.073	.004	2.07280 - .00016	.050	8
4	7494478		2.073	.008 AND UP	2.07260 - .00040	.050	8
4	7494480		2.074	.001	2.07400 - .00008	.050	4
4	7494481		2.074	.002	2.07392 - .00012	.050	4
4	7494482		2.074	.004	2.07380 - .00016	.050	8
4	7494484		2.074	.008 AND UP	2.07360 - .00040	.050	8
4	7494486		2.075	.001	2.07500 - .00008	.050	4
4	7494487		2.075	.002	2.07492 - .00012	.050	4
4	7494488		2.075	.004	2.07480 - .00016	.050	8
4	7494490		2.075	.008 AND UP	2.07460 - .00040	.050	8
4	7494492		2.076	.001	2.07600 - .00008	.050	4
4	7494493		2.076	.002	2.07592 - .00012	.050	4
4	7494494		2.076	.004	2.07580 - .00016	.050	8
4	7494496		2.076	.008 AND UP	2.07560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.						
	RING GAGE	ACCEPTANCE CHECK			DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7494498		2.077	.001	2.07700 - .00008	.050	4
4	7494499		2.077	.002	2.07692 - .00012	.050	4
4	7494500		2.077	.004	2.07680 - .00016	.050	8
4	7494502		2.077	.008 AND UP	2.07660 - .00040	.050	8
4	7494504		2.078	.001	2.07800 - .00008	.050	4
4	7494505		2.078	.002	2.07792 - .00012	.050	4
4	7494506		2.078	.004	2.07780 - .00016	.050	8
4	7494508		2.078	.008 AND UP	2.07760 - .00040	.050	8
4	7494510		2.079	.001	2.07900 - .00008	.050	4
4	7494511		2.079	.002	2.07892 - .00012	.050	4
4	7494512		2.079	.004	2.07880 - .00016	.050	8
4	7494514		2.079	.008 AND UP	2.07860 - .00040	.050	8
4	7494516		2.080	.001	2.08000 - .00008	.050	4
4	7494517		2.080	.002	2.07992 - .00012	.050	4
4	7494518		2.080	.004	2.07980 - .00016	.050	8
4	7494520		2.080	.008 AND UP	2.07960 - .00040	.050	8
4	7494522		2.081	.001	2.08100 - .00008	.050	4
4	7494523		2.081	.002	2.08092 - .00012	.050	4
4	7494524		2.081	.004	2.08080 - .00016	.050	8
4	7494526		2.081	.008 AND UP	2.08060 - .00040	.050	8
4	7494528		2.082	.001	2.08200 - .00008	.050	4
4	7494529		2.082	.002	2.08192 - .00012	.050	4
4	7494530		2.082	.004	2.08180 - .00016	.050	8
4	7494532		2.082	.008 AND UP	2.08160 - .00040	.050	8
4	7494534		2.083	.001	2.08300 - .00008	.050	4
4	7494535		2.083	.002	2.08292 - .00012	.050	4
4	7494536		2.083	.004	2.08280 - .00016	.050	8
4	7494538		2.083	.008 AND UP	2.08260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494540		2.084	.001	2.08400 - .00008	.050	4
4	7494541		2.084	.002	2.08392 - .00012	.050	4
4	7494542		2.084	.004	2.08380 - .00016	.050	8
4	7494544		2.084	.008 AND UP	2.08360 - .00040	.050	8
4	7494546		2.085	.001	2.08500 - .00008	.050	4
4	7494547		2.085	.002	2.08492 - .00012	.050	4
4	7494548		2.085	.004	2.08480 - .00016	.050	8
4	7494550		2.085	.008 AND UP	2.08460 - .00040	.050	8
4	7494552		2.086	.001	2.08600 - .00008	.050	4
4	7494553		2.086	.002	2.08592 - .00012	.050	4
4	7494554		2.086	.004	2.08580 - .00016	.050	8
4	7494556		2.086	.008 AND UP	2.08560 - .00040	.050	8
4	7494558		2.087	.001	2.08700 - .00008	.050	4
4	7494559		2.087	.002	2.08692 - .00012	.050	4
4	7494560		2.087	.004	2.08680 - .00016	.050	8
4	7494562		2.087	.008 AND UP	2.08660 - .00040	.050	8
4	7494564		2.088	.001	2.08800 - .00008	.050	4
4	7494565		2.088	.002	2.08792 - .00012	.050	4
4	7494566		2.088	.004	2.08780 - .00016	.050	8
4	7494568		2.088	.008 AND UP	2.08760 - .00040	.050	8
4	7494570		2.089	.001	2.08900 - .00008	.050	4
4	7494571		2.089	.002	2.08892 - .00012	.050	4
4	7494572		2.089	.004	2.08880 - .00016	.050	8
4	7494574		2.089	.008 AND UP	2.08860 - .00040	.050	8
4	7494576		2.090	.001	2.09000 - .00008	.050	4
4	7494577		2.090	.002	2.08992 - .00012	.050	4
4	7494578		2.090	.004	2.08980 - .00016	.050	8
4	7494580		2.090	.008 AND UP	2.08960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494582		2.091	.001	2.09100 - .00008	.050	4
4	7494583		2.091	.002	2.09092 - .00012	.050	4
4	7494584		2.091	.004	2.09080 - .00016	.050	8
4	7494586		2.091	.008 AND UP	2.09060 - .00040	.050	8
4	7494588		2.092	.001	2.09200 - .00008	.050	4
4	7494589		2.092	.002	2.09192 - .00012	.050	4
4	7494590		2.092	.004	2.09180 - .00016	.050	8
4	7494592		2.092	.008 AND UP	2.09160 - .00040	.050	8
4	7494594		2.093	.001	2.09300 - .00008	.050	4
4	7494595		2.093	.002	2.09292 - .00012	.050	4
4	7494596		2.093	.004	2.09280 - .00016	.050	8
4	7494598		2.093	.008 AND UP	2.09260 - .00040	.050	8
4	7494600		2.09375	.001 AND UP	2.09375 - .00008	.050	4
4	7494601		2.094	.001	2.09400 - .00008	.050	4
4	7494602		2.094	.002	2.09392 - .00012	.050	4
4	7494603		2.094	.004	2.09380 - .00016	.050	8
4	7494605		2.094	.008 AND UP	2.09360 - .00040	.050	8
4	7494607		2.095	.001	2.09500 - .00008	.050	4
4	7494608		2.095	.002	2.09492 - .00012	.050	4
4	7494609		2.095	.004	2.09480 - .00016	.050	8
4	7494611		2.095	.008 AND UP	2.09460 - .00040	.050	8
4	7494613		2.096	.001	2.09600 - .00008	.050	4
4	7494614		2.096	.002	2.09592 - .00012	.050	4
4	7494615		2.096	.004	2.09580 - .00016	.050	8
4	7494617		2.096	.008 AND UP	2.09560 - .00040	.050	8
4	7494619		2.097	.001	2.09700 - .00008	.050	4
4	7494620		2.097	.002	2.09692 - .00012	.050	4
4	7494621		2.097	.004	2.09680 - .00016	.050	8
4	7494623		2.097	.008 AND UP	2.09660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	.494625		2.098	.001	2.09800 - .00008	.050	4
4	7494626		2.098	.002	2.09792 - .00012	.050	4
4	7494627		2.098	.004	2.09780 - .00016	.050	8
4	7494629		2.098	.008 AND UP	2.09760 - .00040	.050	8
4	7494631		2.099	.001	2.09900 - .00008	.050	4
4	7494632		2.099	.002	2.09892 - .00012	.050	4
4	7494633		2.099	.004	2.09880 - .00016	.050	8
4	7494635		2.099	.008 AND UP	2.09860 - .00040	.050	8
4	7494637		2.100	.001	2.10000 - .00008	.050	4
4	7494638		2.100	.002	2.09992 - .00012	.050	4
4	7494639		2.100	.004	2.09980 - .00016	.050	8
4	7494641		2.100	.008 AND UP	2.09960 - .00040	.050	8
4	7494643		2.101	.001	2.10100 - .00008	.050	4
4	7494644		2.101	.002	2.10092 - .00012	.050	4
4	7494645		2.101	.004	2.10080 - .00016	.050	8
4	7494647		2.101	.008 AND UP	2.10060 - .00040	.050	8
4	7494649		2.102	.001	2.10200 - .00008	.050	4
4	7494650		2.102	.002	2.10192 - .00012	.050	4
4	7494651		2.102	.004	2.10180 - .00016	.050	8
4	7494653		2.102	.008 AND UP	2.10160 - .00040	.050	8
4	7494655		2.103	.001	2.10300 - .00008	.050	4
4	7494656		2.103	.002	2.10292 - .00012	.050	4
4	7494657		2.103	.004	2.10280 - .00016	.050	8
4	7494659		2.103	.008 AND UP	2.10260 - .00040	.050	8
4	7494661		2.104	.001	2.10400 - .00008	.050	4
4	7494662		2.104	.002	2.10392 - .00012	.050	4
4	7494663		2.104	.004	2.10380 - .00016	.050	8
4	7494665		2.104	.008 AND UP	2.10360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494667		2.105	.001	2.10500 - .00008	.050	4
4	7494668		2.105	.002	2.10492 - .00012	.050	4
4	7494669		2.105	.004	2.10480 - .00016	.050	8
4	7494671		2.105	.008 AND UP	2.10460 - .00040	.050	8
4	7494673		2.106	.001	2.10600 - .00008	.050	4
4	7494674		2.106	.002	2.10592 - .00012	.050	4
4	7494675		2.106	.004	2.10580 - .00016	.050	8
4	7494677		2.106	.008 AND UP	2.10560 - .00040	.050	8
4	7494679		2.107	.001	2.10700 - .00008	.050	4
4	7494680		2.107	.002	2.10692 - .00012	.050	4
4	7494681		2.107	.004	2.10680 - .00016	.050	8
4	7494683		2.107	.008 AND UP	2.10660 - .00040	.050	8
4	7494685		2.108	.001	2.10800 - .00008	.050	4
4	7494686		2.108	.002	2.10792 - .00012	.050	4
4	7494687		2.108	.004	2.10780 - .00016	.050	8
4	7494689		2.108	.008 AND UP	2.10760 - .00040	.050	8
4	7494691		2.109	.001	2.10900 - .00008	.050	4
4	7494692		2.109	.002	2.10892 - .00012	.050	4
4	7494693		2.109	.004	2.10880 - .00016	.050	8
4	7494695		2.109	.008 AND UP	2.10860 - .00040	.050	8
4	7494697		2.110	.001	2.11000 - .00008	.050	4
4	7494698		2.110	.002	2.10992 - .00012	.050	4
4	7494699		2.110	.004	2.10980 - .00016	.050	8
4	7494701		2.110	.008 AND UP	2.10960 - .00040	.050	8
4	7494703		2.111	.001	2.11100 - .00008	.050	4
4	7494704		2.111	.002	2.11092 - .00012	.050	4
4	7494705		2.111	.004	2.11080 - .00016	.050	8
4	7494707		2.111	.008 AND UP	2.11060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494709		2.112	.001	2.11200 - .00008	.050	4
4	7494710		2.112	.002	2.11192 - .00012	.050	4
4	7494711		2.112	.004	2.11180 - .00016	.050	8
4	7494713		2.112	.008 AND UP	2.11160 - .00040	.050	8
4	7494715		2.113	.001	2.11300 - .00008	.050	4
4	7494716		2.113	.002	2.11292 - .00012	.050	4
4	7494717		2.113	.004	2.11280 - .00016	.050	8
4	7494719		2.113	.008 AND UP	2.11260 - .00040	.050	8
4	7494721		2.114	.001	2.11400 - .00008	.050	4
4	7494722		2.114	.002	2.11392 - .00012	.050	4
4	7494723		2.114	.004	2.11380 - .00016	.050	8
4	7494725		2.114	.008 AND UP	2.11360 - .00040	.050	8
4	7494727		2.115	.001	2.11500 - .00008	.050	4
4	7494728		2.115	.002	2.11492 - .00012	.050	4
4	7494729		2.115	.004	2.11480 - .00016	.050	8
4	7494731		2.115	.008 AND UP	2.11460 - .00040	.050	8
4	7494733		2.116	.001	2.11600 - .00008	.050	4
4	7494734		2.116	.002	2.11592 - .00012	.050	4
4	7494735		2.116	.004	2.11580 - .00016	.050	8
4	7494737		2.116	.008 AND UP	2.11560 - .00040	.050	8
4	7494739		2.117	.001	2.11700 - .00008	.050	4
4	7494740		2.117	.002	2.11692 - .00012	.050	4
4	7494741		2.117	.004	2.11680 - .00016	.050	8
4	7494743		2.117	.008 AND UP	2.11660 - .00040	.050	8
4	7494745		2.118	.001	2.11800 - .00008	.050	4
4	7494746		2.118	.002	2.11792 - .00012	.050	4
4	7494747		2.118	.004	2.11780 - .00016	.050	8
4	7494749		2.118	.008 AND UP	2.11760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
4	7494751		2.119	.001	2.11900 - .00008	.050	4
4	7494752		2.119	.002	2.11892 - .00012	.050	4
4	7494753		2.119	.004	2.11880 - .00016	.050	8
4	7494755		2.119	.008 AND UP	2.11860 - .00040	.050	8
4	7494757		2.120	.001	2.12000 - .00008	.050	4
4	7494758		2.120	.002	2.11992 - .00012	.050	4
4	7494759		2.120	.004	2.11980 - .00016	.050	8
4	7494761		2.120	.008 AND UP	2.11960 - .00040	.050	8
4	7494763		2.121	.001	2.12100 - .00008	.050	4
4	7494764		2.121	.002	2.12092 - .00012	.050	4
4	7494765		2.121	.004	2.12080 - .00016	.050	8
4	7494767		2.121	.008 AND UP	2.12060 - .00040	.050	8
4	7494769		2.122	.001	2.12200 - .00008	.050	4
4	7494770		2.122	.002	2.12192 - .00012	.050	4
4	7494771		2.122	.004	2.12180 - .00016	.050	8
4	7494773		2.122	.008 AND UP	2.12160 - .00040	.050	8
4	7494775		2.123	.001	2.12300 - .00008	.050	4
4	7494776		2.123	.002	2.12292 - .00012	.050	4
4	7494777		2.123	.004	2.12280 - .00016	.050	8
4	7494779		2.123	.008 AND UP	2.12260 - .00040	.050	8
4	7494781		2.124	.001	2.12400 - .00008	.050	4
4	7494782		2.124	.002	2.12392 - .00012	.050	4
4	7494783		2.124	.004	2.12380 - .00016	.050	8
4	7494785		2.124	.008 AND UP	2.12360 - .00040	.050	8
4	7494787		2.125	.001	2.12500 - .00008	.050	4
4	7494788		2.125	.002	2.12492 - .00012	.050	4
4	7494789		2.125	.004	2.12480 - .00016	.050	8
4	7494791		2.125	.008 AND UP	2.12460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494793		2.126	.001	2.12600 - .00008	.050	4
4	7494794		2.126	.002	2.12592 - .00012	.050	4
4	7494795		2.126	.004	2.12580 - .00016	.050	8
4	7494797		2.126	.008 AND UP	2.12560 - .00040	.050	8
4	7494799		2.127	.001	2.12700 - .00008	.050	4
4	7494800		2.127	.002	2.12692 - .00012	.050	4
4	7494801		2.127	.004	2.12680 - .00016	.050	8
4	7494803		2.127	.008 AND UP	2.12660 - .00040	.050	8
4	7494805		2.128	.001	2.12800 - .00008	.050	4
4	7494806		2.128	.002	2.12792 - .00012	.050	4
4	7494807		2.128	.004	2.12780 - .00016	.050	8
4	7494809		2.128	.008 AND UP	2.12760 - .00040	.050	8
4	7494811		2.129	.001	2.12900 - .00008	.050	4
4	7494812		2.129	.002	2.12892 - .00012	.050	4
4	7494813		2.129	.004	2.12880 - .00016	.050	8
4	7494815		2.129	.008 AND UP	2.12860 - .00040	.050	8
4	7494817		2.130	.001	2.13000 - .00008	.050	4
4	7494818		2.130	.002	2.12992 - .00012	.050	4
4	7494819		2.130	.004	2.12980 - .00016	.050	8
4	7494821		2.130	.008 AND UP	2.12960 - .00040	.050	8
4	7494823		2.131	.001	2.13100 - .00008	.050	4
4	7494824		2.131	.002	2.13092 - .00012	.050	4
4	7494825		2.131	.004	2.13080 - .00016	.050	8
4	7494827		2.131	.008 AND UP	2.13060 - .00040	.050	8
4	7494829		2.132	.001	2.13200 - .00008	.050	4
4	7494830		2.132	.002	2.13192 - .00012	.050	4
4	7494831		2.132	.004	2.13180 - .00016	.050	8
4	7494833		2.132	.008 AND UP	2.13160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIRM—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494835		2.133	.001	2.13300 - .00008	.050	4
4	7494836		2.133	.002	2.13292 - .00012	.050	4
4	7494837		2.133	.004	2.13280 - .00016	.050	8
4	7494839		2.133	.008 AND UP	2.13260 - .00040	.050	8
4	7494841		2.134	.001	2.13400 - .00008	.050	4
4	7494842		2.134	.002	2.13392 - .00012	.050	4
4	7494843		2.134	.004	2.13380 - .00016	.050	8
4	7494845		2.134	.008 AND UP	2.13360 - .00040	.050	8
4	7494847		2.135	.001	2.13500 - .00008	.050	4
4	7494848		2.135	.002	2.13492 - .00012	.050	4
4	7494849		2.135	.004	2.13480 - .00016	.050	8
4	7494851		2.135	.008 AND UP	2.13460 - .00040	.050	8
4	7494853		2.136	.001	2.13600 - .00008	.050	4
4	7494854		2.136	.002	2.13592 - .00012	.050	4
4	7494855		2.136	.004	2.13580 - .00016	.050	8
4	7494857		2.136	.008 AND UP	2.13560 - .00040	.050	8
4	7494859		2.137	.001	2.13700 - .00008	.050	4
4	7494860		2.137	.002	2.13692 - .00012	.050	4
4	7494861		2.137	.004	2.13680 - .00016	.050	8
4	7494863		2.137	.008 AND UP	2.13660 - .00040	.050	8
4	7494865		2.138	.001	2.13800 - .00008	.050	4
4	7494866		2.138	.002	2.13792 - .00012	.050	4
4	7494867		2.138	.004	2.13780 - .00016	.050	8
4	7494869		2.138	.008 AND UP	2.13760 - .00040	.050	8
4	7494871		2.139	.001	2.13900 - .00008	.050	4
4	7494872		2.139	.002	2.13892 - .00012	.050	4
4	7494873		2.139	.004	2.13880 - .00016	.050	8
4	7494875		2.139	.008 AND UP	2.13860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494877		2.140	.001	2.14000 - .00008	.050	4
4	7494878		2.140	.002	2.13992 - .00012	.050	4
4	7494879		2.140	.004	2.13980 - .00016	.050	8
4	7494881		2.140	.008 AND UP	2.13960 - .00040	.050	8
4	7494883		2.141	.001	2.14100 - .00008	.050	4
4	7494884		2.141	.002	2.14092 - .00012	.050	4
4	7494885		2.141	.004	2.14080 - .00016	.050	8
4	7494887		2.141	.008 AND UP	2.14060 - .00040	.050	8
4	7494889		2.142	.001	2.14200 - .00008	.050	4
4	7494890		2.142	.002	2.14192 - .00012	.050	4
4	7494891		2.142	.004	2.14180 - .00016	.050	8
4	7494893		2.142	.008 AND UP	2.14160 - .00040	.050	8
4	7494895		2.143	.001	2.14300 - .00008	.050	4
4	7494896		2.143	.002	2.14292 - .00012	.050	4
4	7494897		2.143	.004	2.14280 - .00016	.050	8
4	7494899		2.143	.008 AND UP	2.14260 - .00040	.050	8
4	7494901		2.144	.001	2.14400 - .00008	.050	4
4	7494902		2.144	.002	2.14392 - .00012	.050	4
4	7494903		2.144	.004	2.14380 - .00016	.050	8
4	7494905		2.144	.008 AND UP	2.14360 - .00040	.050	8
4	7494907		2.145	.001	2.14500 - .00008	.050	4
4	7494908		2.145	.002	2.14492 - .00012	.050	4
4	7494909		2.145	.004	2.14480 - .00016	.050	8
4	7494911		2.145	.008 AND UP	2.14460 - .00040	.050	8
4	7494913		2.146	.001	2.14600 - .00008	.050	4
4	7494914		2.146	.002	2.14592 - .00012	.050	4
4	7494915		2.146	.004	2.14580 - .00016	.050	8
4	7494917		2.146	.008 AND UP	2.14560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494919		2.147	.001	2.14700 - .00008	.050	4
4	7494920		2.147	.002	2.14692 - .00012	.050	4
4	7494921		2.147	.004	2.14680 - .00016	.050	8
4	7494923		2.147	.008 AND UP	2.14660 - .00040	.050	8
4	7494925		2.148	.001	2.14800 - .00008	.050	4
4	7494926		2.148	.002	2.14792 - .00012	.050	4
4	7494927		2.148	.004	2.14780 - .00016	.050	8
4	7494929		2.148	.008 AND UP	2.14760 - .00040	.050	8
4	7494931		2.149	.001	2.14900 - .00008	.050	4
4	7494932		2.149	.002	2.14892 - .00012	.050	4
4	7494933		2.149	.004	2.14880 - .00016	.050	8
4	7494935		2.149	.008 AND UP	2.14860 - .00040	.050	8
4	7494937		2.150	.001	2.15000 - .00008	.050	4
4	7494938		2.150	.002	2.14992 - .00012	.050	4
4	7494939		2.150	.004	2.14980 - .00016	.050	8
4	7494941		2.150	.008 AND UP	2.14960 - .00040	.050	8
4	7494943		2.151	.001	2.15100 - .00008	.050	4
4	7494944		2.151	.002	2.15092 - .00012	.050	4
4	7494945		2.151	.004	2.15080 - .00016	.050	8
4	7494947		2.151	.008 AND UP	2.15060 - .00040	.050	8
4	7494949		2.152	.001	2.15200 - .00008	.050	4
4	7494950		2.152	.002	2.15192 - .00012	.050	4
4	7494951		2.152	.004	2.15180 - .00016	.050	8
4	7494953		2.152	.008 AND UP	2.15160 - .00040	.050	8
4	7494955		2.153	.001	2.15300 - .00008	.050	4
4	7494956		2.153	.002	2.15292 - .00012	.050	4
4	7494957		2.153	.004	2.15280 - .00016	.050	8
4	7494959		2.153	.008 AND UP	2.15260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7494961		2.154	.001	2.15400 - .00008	.050	4
4	7494962		2.154	.002	2.15392 - .00012	.050	4
4	7494963		2.154	.004	2.15380 - .00016	.050	8
4	7494965		2.154	.008 AND UP	2.15360 - .00040	.050	8
4	7494967		2.155	.001	2.15500 - .00008	.050	4
4	7494968		2.155	.002	2.15492 - .00012	.050	4
4	7494969		2.155	.004	2.15480 - .00016	.050	8
4	7494971		2.155	.008 AND UP	2.15460 - .00040	.050	8
4	7494973		2.156	.001	2.15600 - .00008	.050	4
4	7494974		2.156	.002	2.15592 - .00012	.050	4
4	7494975		2.156	.004	2.15580 - .00016	.050	8
4	7494977		2.156	.008 AND UP	2.15560 - .00040	.050	8
4	7494979		2.15625	.001 AND UP	2.15625 - .00008	.050	4
4	7494980		2.157	.001	2.15700 - .00008	.050	4
4	7494981		2.157	.002	2.15692 - .00012	.050	4
4	7494982		2.157	.004	2.15680 - .00016	.050	8
4	7494984		2.157	.008 AND UP	2.15660 - .00040	.050	8
4	7494986		2.158	.001	2.15800 - .00008	.050	4
4	7494987		2.158	.002	2.15792 - .00012	.050	4
4	7494988		2.158	.004	2.15780 - .00016	.050	8
4	7494990		2.158	.008 AND UP	2.15760 - .00040	.050	8
4	7494992		2.159	.001	2.15900 - .00008	.050	4
4	7494993		2.159	.002	2.15892 - .00012	.050	4
4	7494994		2.159	.004	2.15880 - .00016	.050	8
4	7494996		2.159	.008 AND UP	2.15860 - .00040	.050	8
4	7494998		2.160	.001	2.16000 - .00008	.050	4
4	7494999		2.160	.002	2.15992 - .00012	.050	4
4	7495000		2.160	.004	2.15980 - .00016	.050	8
4	7495002		2.160	.008 AND UP	2.15960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495004		2.161	.001	2.16100 - .00008	.050	4
4	7495005		2.161	.002	2.16092 - .00012	.050	4
4	7495006		2.161	.004	2.16080 - .00016	.050	8
4	7495008		2.161	.008 AND UP	2.16060 - .00040	.050	8
4	7495010		2.162	.001	2.16200 - .00008	.050	4
4	7495011		2.162	.002	2.16192 - .00012	.050	4
4	7495012		2.162	.004	2.16180 - .00016	.050	8
4	7495014		2.162	.008 AND UP	2.16160 - .00040	.050	8
4	7495016		2.163	.001	2.16300 - .00008	.050	4
4	7495017		2.163	.002	2.16292 - .00012	.050	4
4	7495018		2.163	.004	2.16280 - .00016	.050	8
4	7495020		2.163	.008 AND UP	2.16260 - .00040	.050	8
4	7495022		2.164	.001	2.16400 - .00008	.050	4
4	7495023		2.164	.002	2.16392 - .00012	.050	4
4	7495024		2.164	.004	2.16380 - .00016	.050	8
4	7495026		2.164	.008 AND UP	2.16360 - .00040	.050	8
4	7495028		2.165	.001	2.16500 - .00008	.050	4
4	7495029		2.165	.002	2.16492 - .00012	.050	4
4	7495030		2.165	.004	2.16480 - .00016	.050	8
4	7495032		2.165	.008 AND UP	2.16460 - .00040	.050	8
4	7495034		2.166	.001	2.16600 - .00008	.050	4
4	7495035		2.166	.002	2.16592 - .00012	.050	4
4	7495036		2.166	.004	2.16580 - .00016	.050	8
4	7495038		2.166	.008 AND UP	2.16560 - .00040	.050	8
4	7495040		2.167	.001	2.16700 - .00008	.050	4
4	7495041		2.167	.002	2.16692 - .00012	.050	4
4	7495042		2.167	.004	2.16680 - .00016	.050	8
4	7495044		2.167	.008 AND UP	2.16660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495046		2.168	.001	2.16800 - .00008	.050	4
4	7495047		2.168	.002	2.16792 - .00012	.050	4
4	7495048		2.168	.004	2.16780 - .00016	.050	8
4	7495050		2.168	.008 AND UP	2.16760 - .00040	.050	8
4	7495052		2.169	.001	2.16900 - .00008	.050	4
4	7495053		2.169	.002	2.16892 - .00012	.050	4
4	7495054		2.169	.004	2.16880 - .00016	.050	8
4	7495056		2.169	.008 AND UP	2.16860 - .00040	.050	8
4	7495058		2.170	.001	2.17000 - .00008	.050	4
4	7495059		2.170	.002	2.16992 - .00012	.050	4
4	7495060		2.170	.004	2.16980 - .00016	.050	8
4	7495062		2.170	.008 AND UP	2.16960 - .00040	.050	8
4	7495064		2.171	.001	2.17100 - .00008	.050	4
4	7495065		2.171	.002	2.17092 - .00012	.050	4
4	7495066		2.171	.004	2.17080 - .00016	.050	8
4	7495068		2.171	.008 AND UP	2.17060 - .00040	.050	8
4	7495070		2.172	.001	2.17200 - .00008	.050	4
4	7495071		2.172	.002	2.17192 - .00012	.050	4
4	7495072		2.172	.004	2.17180 - .00016	.050	8
4	7495074		2.172	.008 AND UP	2.17160 - .00040	.050	8
4	7495076		2.173	.001	2.17300 - .00008	.050	4
4	7495077		2.173	.002	2.17292 - .00012	.050	4
4	7495078		2.173	.004	2.17280 - .00016	.050	8
4	7495080		2.173	.008 AND UP	2.17260 - .00040	.050	8
4	7495082		2.174	.001	2.17400 - .00008	.050	4
4	7495083		2.174	.002	2.17392 - .00012	.050	4
4	7495084		2.174	.004	2.17380 - .00016	.050	8
4	7495086		2.174	.008 AND UP	2.17360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495088		2.175	.001	2.17500 - .00008	.050	4
4	7495089		2.175	.002	2.17492 - .00012	.050	4
4	7495090		2.175	.004	2.17480 - .00016	.050	8
4	7495092		2.175	.008 AND UP	2.17460 - .00040	.050	8
4	7495094		2.176	.001	2.17600 - .00008	.050	4
4	7495095		2.176	.002	2.17592 - .00012	.050	4
4	7495096		2.176	.004	2.17580 - .00016	.050	8
4	7495098		2.176	.008 AND UP	2.17560 - .00040	.050	8
4	7495100		2.177	.001	2.17700 - .00008	.050	4
4	7495101		2.177	.002	2.17692 - .00012	.050	4
4	7495102		2.177	.004	2.17680 - .00016	.050	8
4	7495104		2.177	.008 AND UP	2.17660 - .00040	.050	8
4	7495106		2.178	.001	2.17800 - .00008	.050	4
4	7495107		2.178	.002	2.17792 - .00012	.050	4
4	7495108		2.178	.004	2.17780 - .00016	.050	8
4	7495110		2.178	.008 AND UP	2.17760 - .00040	.050	8
4	7495112		2.179	.001	2.17900 - .00008	.050	4
4	7495113		2.179	.002	2.17892 - .00012	.050	4
4	7495114		2.179	.004	2.17880 - .00016	.050	8
4	7495116		2.179	.008 AND UP	2.17860 - .00040	.050	8
4	7495118		2.180	.001	2.18000 - .00008	.050	4
4	7495119		2.180	.002	2.17992 - .00012	.050	4
4	7495120		2.180	.004	2.17980 - .00016	.050	8
4	7495122		2.180	.008 AND UP	2.17960 - .00040	.050	8
4	7495124		2.181	.001	2.18100 - .00008	.050	4
4	7495125		2.181	.002	2.18092 - .00012	.050	4
4	7495126		2.181	.004	2.18080 - .00016	.050	8
4	7495128		2.181	.008 AND UP	2.18060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495130		2.182	.001	2.18200 - .00008	.050	4
4	7495131		2.182	.002	2.18192 - .00012	.050	4
4	7495132		2.182	.004	2.18180 - .00016	.050	8
4	7495134		2.182	.008 AND UP	2.18160 - .00040	.050	8
4	7495136		2.183	.001	2.18300 - .00008	.050	4
4	7495137		2.183	.002	2.18292 - .00012	.050	4
4	7495138		2.183	.004	2.18280 - .00016	.050	8
4	7495140		2.183	.008 AND UP	2.18260 - .00040	.050	8
4	7495142		2.184	.001	2.18400 - .00008	.050	4
4	7495143		2.184	.002	2.18392 - .00012	.050	4
4	7495144		2.184	.004	2.18380 - .00016	.050	8
4	7495146		2.184	.008 AND UP	2.18360 - .00040	.050	8
4	7495148		2.185	.001	2.18500 - .00008	.050	4
4	7495149		2.185	.002	2.18492 - .00012	.050	4
4	7495150		2.185	.004	2.18480 - .00016	.050	8
4	7495152		2.185	.008 AND UP	2.18460 - .00040	.050	8
4	7495154		2.186	.001	2.18600 - .00008	.050	4
4	7495155		2.186	.002	2.18592 - .00012	.050	4
4	7495156		2.186	.004	2.18580 - .00016	.050	8
4	7495158		2.186	.008 AND UP	2.18560 - .00040	.050	8
4	7495160		2.187	.001	2.18700 - .00008	.050	4
4	7495161		2.187	.002	2.18692 - .00012	.050	4
4	7495162		2.187	.004	2.18680 - .00016	.050	8
4	7495164		2.187	.008 AND UP	2.18660 - .00040	.050	8
4	7495166		2.1875	.001 AND UP	2.18750 - .00008	.050	4
4	7495167		2.188	.001	2.18800 - .00008	.050	4
4	7495168		2.188	.002	2.18792 - .00012	.050	4
4	7495169		2.188	.004	2.18780 - .00016	.050	8
4	7495171		2.188	.008 AND UP	2.18760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
4	7495173		2.189	.001	2.18900 - .00008	.050	4
4	7495174		2.189	.002	2.18892 - .00012	.050	4
4	7495175		2.189	.004	2.18880 - .00016	.050	8
4	7495177		2.189	.008 AND UP	2.18860 - .00040	.050	8
4	7495179		2.190	.001	2.19000 - .00008	.050	4
4	7495180		2.190	.002	2.18992 - .00012	.050	4
4	7495181		2.190	.004	2.18980 - .00016	.050	8
4	7495183		2.190	.008 AND UP	2.18960 - .00040	.050	8
4	7495185		2.191	.001	2.19100 - .00008	.050	4
4	7495186		2.191	.002	2.19092 - .00012	.050	4
4	7495187		2.191	.004	2.19080 - .00016	.050	8
4	7495189		2.191	.008 AND UP	2.19060 - .00040	.050	8
4	7495191		2.192	.001	2.19200 - .00008	.050	4
4	7495192		2.192	.002	2.19192 - .00012	.050	4
4	7495193		2.192	.004	2.19180 - .00016	.050	8
4	7495195		2.192	.008 AND UP	2.19160 - .00040	.050	8
4	7495197		2.193	.001	2.19300 - .00008	.050	4
4	7495198		2.193	.002	2.19292 - .00012	.050	4
4	7495199		2.193	.004	2.19280 - .00016	.050	8
4	7495201		2.193	.008 AND UP	2.19260 - .00040	.050	8
4	7495203		2.194	.001	2.19400 - .00008	.050	4
4	7495204		2.194	.002	2.19392 - .00012	.050	4
4	7495205		2.194	.004	2.19380 - .00016	.050	8
4	7495207		2.194	.008 AND UP	2.19360 - .00040	.050	8
4	7495209		2.195	.001	2.19500 - .00008	.050	4
4	7495210		2.195	.002	2.19492 - .00012	.050	4
4	7495211		2.195	.004	2.19480 - .00016	.050	8
4	7495213		2.195	.008 AND UP	2.19460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495215		2.196	.001	2.19600 - .00008	.050	4
4	7495216		2.196	.002	2.19592 - .00012	.050	4
4	7495217		2.196	.004	2.19580 - .00016	.050	8
4	7495219		2.196	.008 AND UP	2.19560 - .00040	.050	8
4	7495221		2.197	.001	2.19700 - .00008	.050	4
4	7495222		2.197	.002	2.19692 - .00012	.050	4
4	7495223		2.197	.004	2.19680 - .00016	.050	8
4	7495225		2.197	.008 AND UP	2.19660 - .00040	.050	8
4	7495227		2.198	.001	2.19800 - .00008	.050	4
4	7495228		2.198	.002	2.19792 - .00012	.050	4
4	7495229		2.198	.004	2.19780 - .00016	.050	8
4	7495231		2.198	.008 AND UP	2.19760 - .00040	.050	8
4	7495233		2.199	.001	2.19900 - .00008	.050	4
4	7495234		2.199	.002	2.19892 - .00012	.050	4
4	7495235		2.199	.004	2.19880 - .00016	.050	8
4	7495237		2.199	.008 AND UP	2.19860 - .00040	.050	8
4	7495239		2.200	.001	2.20000 - .00008	.050	4
4	7495240		2.200	.002	2.19992 - .00012	.050	4
4	7495241		2.200	.004	2.19980 - .00016	.050	8
4	7495243		2.200	.008 AND UP	2.19960 - .00040	.050	8
4	7495245		2.201	.001	2.20100 - .00008	.050	4
4	7495246		2.201	.002	2.20092 - .00012	.050	4
4	7495247		2.201	.004	2.20080 - .00016	.050	8
4	7495249		2.201	.008 AND UP	2.20060 - .00040	.050	8
4	7495251		2.202	.001	2.20200 - .00008	.050	4
4	7495252		2.202	.002	2.20192 - .00012	.050	4
4	7495253		2.202	.004	2.20180 - .00016	.050	8
4	7495255		2.202	.008 AND UP	2.20160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495257		2.203	.001	2.20300 - .00008	.050	4
4	7495258		2.203	.002	2.20292 - .00012	.050	4
4	7495259		2.203	.004	2.20280 - .00016	.050	8
4	7495261		2.203	.008 AND UP	2.20260 - .00040	.050	8
4	7495263		2.204	.001	2.20400 - .00008	.050	4
4	7495264		2.204	.002	2.20392 - .00012	.050	4
4	7495265		2.204	.004	2.20380 - .00016	.050	8
4	7495267		2.204	.008 AND UP	2.20360 - .00040	.050	8
4	7495269		2.205	.001	2.20500 - .00008	.050	4
4	7495270		2.205	.002	2.20492 - .00012	.050	4
4	7495271		2.205	.004	2.20480 - .00016	.050	8
4	7495273		2.205	.008 AND UP	2.20460 - .00040	.050	8
4	7495275		2.206	.001	2.20600 - .00008	.050	4
4	7495276		2.206	.002	2.20592 - .00012	.050	4
4	7495277		2.206	.004	2.20580 - .00016	.050	8
4	7495279		2.206	.008 AND UP	2.20560 - .00040	.050	8
4	7495281		2.207	.001	2.20700 - .00008	.050	4
4	7495282		2.207	.002	2.20692 - .00012	.050	4
4	7495283		2.207	.004	2.20680 - .00016	.050	8
4	7495285		2.207	.008 AND UP	2.20660 - .00040	.050	8
4	7495287		2.208	.001	2.20800 - .00008	.050	4
4	7495288		2.208	.002	2.20792 - .00012	.050	4
4	7495289		2.208	.004	2.20780 - .00016	.050	8
4	7495291		2.208	.008 AND UP	2.20760 - .00040	.050	8
4	7495293		2.209	.001	2.20900 - .00008	.050	4
4	7495294		2.209	.002	2.20892 - .00012	.050	4
4	7495295		2.209	.004	2.20880 - .00016	.050	8
4	7495297		2.209	.008 AND UP	2.20860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495299		2.210	.001	2.21000 - .00008	.050	4
4	7495300		2.210	.002	2.20992 - .00012	.050	4
4	7495301		2.210	.004	2.20980 - .00016	.050	8
4	7495303		2.210	.008 AND UP	2.20960 - .00040	.050	8
4	7495305		2.211	.001	2.21100 - .00008	.050	4
4	7495306		2.211	.002	2.21092 - .00012	.050	4
4	7495307		2.211	.004	2.21080 - .00016	.050	8
4	7495309		2.211	.008 AND UP	2.21060 - .00040	.050	8
4	7495311		2.212	.001	2.21200 - .00008	.050	4
4	7495312		2.212	.002	2.21192 - .00012	.050	4
4	7495313		2.212	.004	2.21180 - .00016	.050	8
4	7495315		2.212	.008 AND UP	2.21160 - .00040	.050	8
4	7495317		2.213	.001	2.21300 - .00008	.050	4
4	7495318		2.213	.002	2.21292 - .00012	.050	4
4	7495319		2.213	.004	2.21280 - .00016	.050	8
4	7495321		2.213	.008 AND UP	2.21260 - .00040	.050	8
4	7495323		2.214	.001	2.21400 - .00008	.050	4
4	7495324		2.214	.002	2.21392 - .00012	.050	4
4	7495325		2.214	.004	2.21380 - .00016	.050	8
4	7495327		2.214	.008 AND UP	2.21360 - .00040	.050	8
4	7495329		2.215	.001	2.21500 - .00008	.050	4
4	7495330		2.215	.002	2.21492 - .00012	.050	4
4	7495331		2.215	.004	2.21480 - .00016	.050	8
4	7495333		2.215	.008 AND UP	2.21460 - .00040	.050	8
4	7495335		2.216	.001	2.21600 - .00008	.050	4
4	7495336		2.216	.002	2.21592 - .00012	.050	4
4	7495337		2.216	.004	2.21580 - .00016	.050	8
4	7495339		2.216	.008 AND UP	2.21560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495341		2.217	.001	2.21700 - .00008	.050	4
4	7495342		2.217	.002	2.21692 - .00012	.050	4
4	7495343		2.217	.004	2.21680 - .00016	.050	8
4	7495345		2.217	.008 AND UP	2.21660 - .00040	.050	8
4	7495347		2.218	.001	2.21800 - .00008	.050	4
4	7495348		2.218	.002	2.21792 - .00012	.050	4
4	7495349		2.218	.004	2.21780 - .00016	.050	8
4	7495351		2.218	.008 AND UP	2.21760 - .00040	.050	8
4	7495353		2.21875	.001 AND UP	2.21875 - .00008	.050	4
4	7495354		2.219	.001	2.21900 - .00008	.050	4
4	7495355		2.219	.002	2.21892 - .00012	.050	4
4	7495356		2.219	.004	2.21880 - .00016	.050	8
4	7495358		2.219	.008 AND UP	2.21860 - .00040	.050	8
4	7495360		2.220	.001	2.22000 - .00008	.050	4
4	7495361		2.220	.002	2.21992 - .00012	.050	4
4	7495362		2.220	.004	2.21980 - .00016	.050	8
4	7495364		2.220	.008 AND UP	2.21960 - .00040	.050	8
4	7495366		2.221	.001	2.22100 - .00008	.050	4
4	7495367		2.221	.002	2.22092 - .00012	.050	4
4	7495368		2.221	.004	2.22080 - .00016	.050	8
4	7495370		2.221	.008 AND UP	2.22060 - .00040	.050	8
4	7495372		2.222	.001	2.22200 - .00008	.050	4
4	7495373		2.222	.002	2.22192 - .00012	.050	4
4	7495374		2.222	.004	2.22180 - .00016	.050	8
4	7495376		2.222	.008 AND UP	2.22160 - .00040	.050	8
4	7495378		2.223	.001	2.22300 - .00008	.050	4
4	7495379		2.223	.002	2.22292 - .00012	.050	4
4	7495380		2.223	.004	2.22280 - .00016	.050	8
4	7495382		2.223	.008 AND UP	2.22260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495384		2.224	.001	2.22400 - .00008	.050	4
4	7495385		2.224	.002	2.22392 - .00012	.050	4
4	7495386		2.224	.004	2.22380 - .00016	.050	8
4	7495388		2.224	.008 AND UP	2.22360 - .00040	.050	8
4	7495390		2.225	.001	2.22500 - .00008	.050	4
4	7495391		2.225	.002	2.22492 - .00012	.050	4
4	7495392		2.225	.004	2.22480 - .00016	.050	8
4	7495394		2.225	.008 AND UP	2.22460 - .00040	.050	8
4	7495396		2.226	.001	2.22600 - .00008	.050	4
4	7495397		2.226	.002	2.22592 - .00012	.050	4
4	7495398		2.226	.004	2.22580 - .00016	.050	8
4	7495400		2.226	.008 AND UP	2.22560 - .00040	.050	8
4	7495402		2.227	.001	2.22700 - .00008	.050	4
4	7495403		2.227	.002	2.22692 - .00012	.050	4
4	7495404		2.227	.004	2.22680 - .00016	.050	8
4	7495406		2.227	.008 AND UP	2.22660 - .00040	.050	8
4	7495408		2.228	.001	2.22800 - .00008	.050	4
4	7495409		2.228	.002	2.22792 - .00012	.050	4
4	7495410		2.228	.004	2.22780 - .00016	.050	8
4	7495412		2.228	.008 AND UP	2.22760 - .00040	.050	8
4	7495414		2.229	.001	2.22900 - .00008	.050	4
4	7495415		2.229	.002	2.22892 - .00012	.050	4
4	7495416		2.229	.004	2.22880 - .00016	.050	8
4	7495418		2.229	.008 AND UP	2.22860 - .00040	.050	8
4	7495420		2.230	.001	2.23000 - .00008	.050	4
4	7495421		2.230	.002	2.22992 - .00012	.050	4
4	7495422		2.230	.004	2.22980 - .00016	.050	8
4	7495424		2.230	.008 AND UP	2.22960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495426		2.231	.001	2.23100 - .00008	.050	4
4	7495427		2.231	.002	2.23092 - .00012	.050	4
4	7495428		2.231	.004	2.23080 - .00016	.050	8
4	7495430		2.231	.008 AND UP	2.23060 - .00040	.050	8
4	7495432		2.232	.001	2.23200 - .00008	.050	4
4	7495433		2.232	.002	2.23192 - .00012	.050	4
4	7495434		2.232	.004	2.23180 - .00016	.050	8
4	7495436		2.232	.008 AND UP	2.23160 - .00040	.050	8
4	7495438		2.233	.001	2.23300 - .00008	.050	4
4	7495439		2.233	.002	2.23292 - .00012	.050	4
4	7495440		2.233	.004	2.23280 - .00016	.050	8
4	7495442		2.233	.008 AND UP	2.23260 - .00040	.050	8
4	7495444		2.234	.001	2.23400 - .00008	.050	4
4	7495445		2.234	.002	2.23392 - .00012	.050	4
4	7495446		2.234	.004	2.23380 - .00016	.050	8
4	7495448		2.234	.008 AND UP	2.23360 - .00040	.050	8
4	7495450		2.235	.001	2.23500 - .00008	.050	4
4	7495451		2.235	.002	2.23492 - .00012	.050	4
4	7495452		2.235	.004	2.23480 - .00016	.050	8
4	7495454		2.235	.008 AND UP	2.23460 - .00040	.050	8
4	7495456		2.236	.001	2.23600 - .00008	.050	4
4	7495457		2.236	.002	2.23592 - .00012	.050	4
4	7495458		2.236	.004	2.23580 - .00016	.050	8
4	7495460		2.236	.008 AND UP	2.23560 - .00040	.050	8
4	7495462		2.237	.001	2.23700 - .00008	.050	4
4	7495463		2.237	.002	2.23692 - .00012	.050	4
4	7495464		2.237	.004	2.23680 - .00016	.050	8
4	7495466		2.237	.008 AND UP	2.23660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
4	7495468		2.238	.001	2.23800 - .00008	.050	4
4	7495469		2.238	.002	2.23792 - .00012	.050	4
4	7495470		2.238	.004	2.23780 - .00016	.050	8
4	7495472		2.238	.008 AND UP	2.23760 - .00040	.050	8
4	7495474		2.239	.001	2.23900 - .00008	.050	4
4	7495475		2.239	.002	2.23892 - .00012	.050	4
4	7495476		2.239	.004	2.23880 - .00016	.050	8
4	7495478		2.239	.008 AND UP	2.23860 - .00040	.050	8
4	7495480		2.240	.001	2.24000 - .00008	.050	4
4	7495481		2.240	.002	2.23992 - .00012	.050	4
4	7495482		2.240	.004	2.23980 - .00016	.050	8
4	7495484		2.240	.008 AND UP	2.23960 - .00040	.050	8
4	7495486		2.241	.001	2.24100 - .00008	.050	4
4	7495487		2.241	.002	2.24092 - .00012	.050	4
4	7495488		2.241	.004	2.24080 - .00016	.050	8
4	7495490		2.241	.008 AND UP	2.24060 - .00040	.050	8
4	7495492		2.242	.001	2.24200 - .00008	.050	4
4	7495493		2.242	.002	2.24192 - .00012	.050	4
4	7495494		2.242	.004	2.24180 - .00016	.050	8
4	7495496		2.242	.008 AND UP	2.24160 - .00040	.050	8
4	7495498		2.243	.001	2.24300 - .00008	.050	4
4	7495499		2.243	.002	2.24292 - .00012	.050	4
4	7495500		2.243	.004	2.24280 - .00016	.050	8
4	7495502		2.243	.008 AND UP	2.24260 - .00040	.050	8
4	7495504		2.244	.001	2.24400 - .00008	.050	4
4	7495505		2.244	.002	2.24392 - .00012	.050	4
4	7495506		2.244	.004	2.24380 - .00016	.050	8
4	7495508		2.244	.008 AND UP	2.24360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495510		2.245	.001	2.24500 - .00008	.050	4
4	7495511		2.245	.002	2.24492 - .00012	.050	4
4	7495512		2.245	.004	2.24480 - .00016	.050	8
4	7495514		2.245	.008 AND UP	2.24460 - .00040	.050	8
4	7495516		2.246	.001	2.24600 - .00008	.050	4
4	7495517		2.246	.002	2.24592 - .00012	.050	4
4	7495518		2.246	.004	2.24580 - .00016	.050	8
4	7495520		2.246	.008 AND UP	2.24560 - .00040	.050	8
4	7495522		2.247	.001	2.24700 - .00008	.050	4
4	7495523		2.247	.002	2.24692 - .00012	.050	4
4	7495524		2.247	.004	2.24680 - .00016	.050	8
4	7495526		2.247	.008 AND UP	2.24660 - .00040	.050	8
4	7495528		2.248	.001	2.24800 - .00008	.050	4
4	7495529		2.248	.002	2.24792 - .00012	.050	4
4	7495530		2.248	.004	2.24780 - .00016	.050	8
4	7495532		2.248	.008 AND UP	2.24760 - .00040	.050	8
4	7495534		2.249	.001	2.24900 - .00008	.050	4
4	7495535		2.249	.002	2.24892 - .00012	.050	4
4	7495536		2.249	.004	2.24880 - .00016	.050	8
4	7495538		2.249	.008 AND UP	2.24860 - .00040	.050	8
4	7495540		2.250	.001	2.25000 - .00008	.050	4
4	7495541		2.250	.002	2.24992 - .00012	.050	4
4	7495542		2.250	.004	2.24980 - .00016	.050	8
4	7495544		2.250	.008 AND UP	2.24960 - .00040	.050	8
4	7495546		2.251	.001	2.25100 - .00008	.050	4
4	7495547		2.251	.002	2.25092 - .00012	.050	4
4	7495548		2.251	.004	2.25080 - .00016	.050	8
4	7495550		2.251	.008 AND UP	2.25060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495552		2.252	.001	2.25200 - .00008	.050	4
4	7495553		2.252	.002	2.25192 - .00012	.050	4
4	7495554		2.252	.004	2.25180 - .00016	.050	8
4	7495556		2.252	.008 AND UP	2.25160 - .00040	.050	8
4	7495558		2.253	.001	2.25300 - .00008	.050	4
4	7495559		2.253	.002	2.25292 - .00012	.050	4
4	7495560		2.253	.004	2.25280 - .00016	.050	8
4	7495562		2.253	.008 AND UP	2.25260 - .00040	.050	8
4	7495564		2.254	.001	2.25400 - .00008	.050	4
4	7495565		2.254	.002	2.25392 - .00012	.050	4
4	7495566		2.254	.004	2.25380 - .00016	.050	8
4	7495568		2.254	.008 AND UP	2.25360 - .00040	.050	8
4	7495570		2.255	.001	2.25500 - .00008	.050	4
4	7495571		2.255	.002	2.25492 - .00012	.050	4
4	7495572		2.255	.004	2.25480 - .00016	.050	8
4	7495574		2.255	.008 AND UP	2.25460 - .00040	.050	8
4	7495576		2.256	.001	2.25600 - .00008	.050	4
4	7495577		2.256	.002	2.25592 - .00012	.050	4
4	7495578		2.256	.004	2.25580 - .00016	.050	8
4	7495580		2.256	.008 AND UP	2.25560 - .00040	.050	8
4	7495582		2.257	.001	2.25700 - .00008	.050	4
4	7495583		2.257	.002	2.25692 - .00012	.050	4
4	7495584		2.257	.004	2.25680 - .00016	.050	8
4	7495586		2.257	.008 AND UP	2.25660 - .00040	.050	8
4	7495588		2.258	.001	2.25800 - .00008	.050	4
4	7495589		2.258	.002	2.25792 - .00012	.050	4
4	7495590		2.258	.004	2.25780 - .00016	.050	8
4	7495592		2.258	.008 AND UP	2.25760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495594		2.259	.001	2.25900 - .00008	.050	4
4	7495595		2.259	.002	2.25892 - .00012	.050	4
4	7495596		2.259	.004	2.25880 - .00016	.050	8
4	7495598		2.259	.008 AND UP	2.25860 - .00040	.050	8
4	7495600		2.260	.001	2.26000 - .00008	.050	4
4	7495601		2.260	.002	2.25992 - .00012	.050	4
4	7495602		2.260	.004	2.25980 - .00016	.050	8
4	7495604		2.260	.008 AND UP	2.25960 - .00040	.050	8
4	7495606		2.261	.001	2.26100 - .00008	.050	4
4	7495607		2.261	.002	2.26092 - .00012	.050	4
4	7495608		2.261	.004	2.26080 - .00016	.050	8
4	7495610		2.261	.008 AND UP	2.26060 - .00040	.050	8
4	7495612		2.262	.001	2.26200 - .00008	.050	4
4	7495613		2.262	.002	2.26192 - .00012	.050	4
4	7495614		2.262	.004	2.26180 - .00016	.050	8
4	7495616		2.262	.008 AND UP	2.26160 - .00040	.050	8
4	7495618		2.263	.001	2.26300 - .00008	.050	4
4	7495619		2.263	.002	2.26292 - .00012	.050	4
4	7495620		2.263	.004	2.26280 - .00016	.050	8
4	7495622		2.263	.008 AND UP	2.26260 - .00040	.050	8
4	7495624		2.264	.001	2.26400 - .00008	.050	4
4	7495625		2.264	.002	2.26392 - .00012	.050	4
4	7495626		2.264	.004	2.26380 - .00016	.050	8
4	7495628		2.264	.008 AND UP	2.26360 - .00040	.050	8
4	7495630		2.265	.001	2.26500 - .00008	.050	4
4	7495631		2.265	.002	2.26492 - .00012	.050	4
4	7495632		2.265	.004	2.26480 - .00016	.050	8
4	7495634		2.265	.008 AND UP	2.26460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495636		2.266	.001	2.26600 - .00008	.050	4
4	7495637		2.266	.002	2.26592 - .00012	.050	4
4	7495638		2.266	.004	2.26580 - .00016	.050	8
4	7495640		2.266	.008 AND UP	2.26560 - .00040	.050	8
4	7495642		2.267	.001	2.26700 - .00008	.050	4
4	7495643		2.267	.002	2.26692 - .00012	.050	4
4	7495644		2.267	.004	2.26680 - .00016	.050	8
4	7495646		2.267	.008 AND UP	2.26660 - .00040	.050	8
4	7495648		2.268	.001	2.26800 - .00008	.050	4
4	7495649		2.268	.002	2.26792 - .00012	.050	4
4	7495650		2.268	.004	2.26780 - .00016	.050	8
4	7495652		2.268	.008 AND UP	2.26760 - .00040	.050	8
4	7495654		2.269	.001	2.26900 - .00008	.050	4
4	7495655		2.269	.002	2.26892 - .00012	.050	4
4	7495656		2.269	.004	2.26880 - .00016	.050	8
4	7495658		2.269	.008 AND UP	2.26860 - .00040	.050	8
4	7495660		2.270	.001	2.27000 - .00008	.050	4
4	7495661		2.270	.002	2.26992 - .00012	.050	4
4	7495662		2.270	.004	2.26980 - .00016	.050	8
4	7495664		2.270	.008 AND UP	2.26960 - .00040	.050	8
4	7495666		2.271	.001	2.27100 - .00008	.050	4
4	7495667		2.271	.002	2.27092 - .00012	.050	4
4	7495668		2.271	.004	2.27080 - .00016	.050	8
4	7495670		2.271	.008 AND UP	2.27060 - .00040	.050	8
4	7495672		2.272	.001	2.27200 - .00008	.050	4
4	7495673		2.272	.002	2.27192 - .00012	.050	4
4	7495674		2.272	.004	2.27180 - .00016	.050	8
4	7495676		2.272	.008 AND UP	2.27160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495678		2.273	.001	2.27300 - .00008	.050	4
4	7495679		2.273	.002	2.27292 - .00012	.050	4
4	7495680		2.273	.004	2.27280 - .00016	.050	8
4	7495682		2.273	.008 AND UP	2.27260 - .00040	.050	8
4	7495684		2.274	.001	2.27400 - .00008	.050	4
4	7495685		2.274	.002	2.27392 - .00012	.050	4
4	7495686		2.274	.004	2.27380 - .00016	.050	8
4	7495688		2.274	.008 AND UP	2.27360 - .00040	.050	8
4	7495690		2.275	.001	2.27500 - .00008	.050	4
4	7495691		2.275	.002	2.27492 - .00012	.050	4
4	7495692		2.275	.004	2.27480 - .00016	.050	8
4	7495694		2.275	.008 AND UP	2.27460 - .00040	.050	8
4	7495696		2.276	.001	2.27600 - .00008	.050	4
4	7495697		2.276	.002	2.27592 - .00012	.050	4
4	7495698		2.276	.004	2.27580 - .00016	.050	8
4	7495700		2.276	.008 AND UP	2.27560 - .00040	.050	8
4	7495702		2.277	.001	2.27700 - .00008	.050	4
4	7495703		2.277	.002	2.27692 - .00012	.050	4
4	7495704		2.277	.004	2.27680 - .00016	.050	8
4	7495706		2.277	.008 AND UP	2.27660 - .00040	.050	8
4	7495708		2.278	.001	2.27800 - .00008	.050	4
4	7495709		2.278	.002	2.27792 - .00012	.050	4
4	7495710		2.278	.004	2.27780 - .00016	.050	8
4	7495712		2.278	.008 AND UP	2.27760 - .00040	.050	8
4	7495714		2.279	.001	2.27900 - .00008	.050	4
4	7495715		2.279	.002	2.27892 - .00012	.050	4
4	7495716		2.279	.004	2.27880 - .00016	.050	8
4	7495718		2.279	.008 AND UP	2.27860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495720		2.280	.001	2.28000 - .00008	.050	4
4	7495721		2.280	.002	2.27992 - .00012	.050	4
4	7495722		2.280	.004	2.27980 - .00016	.050	8
4	7495724		2.280	.008 AND UP	2.27960 - .00040	.050	8
4	7495726		2.281	.001	2.28100 - .00008	.050	4
4	7495727		2.281	.002	2.28092 - .00012	.050	4
4	7495728		2.281	.004	2.28080 - .00016	.050	8
4	7495730		2.281	.008 AND UP	2.28060 - .00040	.050	8
4	7495732		2.28125	.001 AND UP	2.28125 - .00008	.050	4
4	7495733		2.282	.001	2.28200 - .00008	.050	4
4	7495734		2.282	.002	2.28192 - .00012	.050	4
4	7495735		2.282	.004	2.28180 - .00016	.050	8
4	7495737		2.282	.008 AND UP	2.28160 - .00040	.050	8
4	7495739		2.283	.001	2.28300 - .00008	.050	4
4	7495740		2.283	.002	2.28292 - .00012	.050	4
4	7495741		2.283	.004	2.28280 - .00016	.050	8
4	7495743		2.283	.008 AND UP	2.28260 - .00040	.050	8
4	7495745		2.284	.001	2.28400 - .00008	.050	4
4	7495746		2.284	.002	2.28392 - .00012	.050	4
4	7495747		2.284	.004	2.28380 - .00016	.050	8
4	7495749		2.284	.008 AND UP	2.28360 - .00040	.050	8
4	7495751		2.285	.001	2.28500 - .00008	.050	4
4	7495752		2.285	.002	2.28492 - .00012	.050	4
4	7495753		2.285	.004	2.28480 - .00016	.050	8
4	7495755		2.285	.008 AND UP	2.28460 - .00040	.050	8
4	7495757		2.286	.001	2.28600 - .00008	.050	4
4	7495758		2.286	.002	2.28592 - .00012	.050	4
4	7495759		2.286	.004	2.28580 - .00016	.050	8
4	7495761		2.286	.008 AND UP	2.28560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495763		2.287	.001	2.28700 - .00008	.050	4
4	7495764		2.287	.002	2.28692 - .00012	.050	4
4	7495765		2.287	.004	2.28680 - .00016	.050	8
4	7495767		2.287	.008 AND UP	2.28660 - .00040	.050	8
4	7495769		2.288	.001	2.28800 - .00008	.050	4
4	7495770		2.288	.002	2.28792 - .00012	.050	4
4	7495771		2.288	.004	2.28780 - .00016	.050	8
4	7495773		2.288	.008 AND UP	2.28760 - .00040	.050	8
4	7495775		2.289	.001	2.28900 - .00008	.050	4
4	7495776		2.289	.002	2.28892 - .00012	.050	4
4	7495777		2.289	.004	2.28880 - .00016	.050	8
4	7495779		2.289	.008 AND UP	2.28860 - .00040	.050	8
4	7495781		2.290	.001	2.29000 - .00008	.050	4
4	7495782		2.290	.002	2.28992 - .00012	.050	4
4	7495783		2.290	.004	2.28980 - .00016	.050	8
4	7495785		2.290	.008 AND UP	2.28960 - .00040	.050	8
4	7495787		2.291	.001	2.29100 - .00008	.050	4
4	7495788		2.291	.002	2.29092 - .00012	.050	4
4	7495789		2.291	.004	2.29080 - .00016	.050	8
4	7495791		2.291	.008 AND UP	2.29060 - .00040	.050	8
4	7495793		2.292	.001	2.29200 - .00008	.050	4
4	7495794		2.292	.002	2.29192 - .00012	.050	4
4	7495795		2.292	.004	2.29180 - .00016	.050	8
4	7495797		2.292	.008 AND UP	2.29160 - .00040	.050	8
4	7495799		2.293	.001	2.29300 - .00008	.050	4
4	7495800		2.293	.002	2.29292 - .00012	.050	4
4	7495801		2.293	.004	2.29280 - .00016	.050	8
4	7495803		2.293	.008 AND UP	2.29260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495805		2.294	.001	2.29400 - .00008	.050	4
4	7495806		2.294	.002	2.29392 - .00012	.050	4
4	7495807		2.294	.004	2.29380 - .00016	.050	8
4	7495809		2.294	.008 AND UP	2.29360 - .00040	.050	8
4	7495811		2.295	.001	2.29500 - .00008	.050	4
4	7495812		2.295	.002	2.29492 - .00012	.050	4
4	7495813		2.295	.004	2.29480 - .00016	.050	8
4	7495815		2.295	.008 AND UP	2.29460 - .00040	.050	8
4	7495817		2.296	.001	2.29600 - .00008	.050	4
4	7495818		2.296	.002	2.29592 - .00012	.050	4
4	7495819		2.296	.004	2.29580 - .00016	.050	8
4	7495821		2.296	.008 AND UP	2.29560 - .00040	.050	8
4	7495823		2.297	.001	2.29700 - .00008	.050	4
4	7495824		2.297	.002	2.29692 - .00012	.050	4
4	7495825		2.297	.004	2.29680 - .00016	.050	8
4	7495827		2.297	.008 AND UP	2.29660 - .00040	.050	8
4	7495829		2.298	.001	2.29800 - .00008	.050	4
4	7495830		2.298	.002	2.29792 - .00012	.050	4
4	7495831		2.298	.004	2.29780 - .00016	.050	8
4	7495833		2.298	.008 AND UP	2.29760 - .00040	.050	8
4	7495835		2.299	.001	2.29900 - .00008	.050	4
4	7495836		2.299	.002	2.29892 - .00012	.050	4
4	7495837		2.299	.004	2.29880 - .00016	.050	8
4	7495839		2.299	.008 AND UP	2.29860 - .00040	.050	8
4	7495841		2.300	.001	2.30000 - .00008	.050	4
4	7495842		2.300	.002	2.29992 - .00012	.050	4
4	7495843		2.300	.004	2.29980 - .00016	.050	8
4	7495845		2.300	.008 AND UP	2.29960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495847		2.301	.001	2.30100 - .00008	.050	4
4	7495848		2.301	.002	2.30092 - .00012	.050	4
4	7495849		2.301	.004	2.30080 - .00016	.050	8
4	7495851		2.301	.008 AND UP	2.30060 - .00040	.050	8
4	7495853		2.302	.001	2.30200 - .00008	.050	4
4	7495854		2.302	.002	2.30192 - .00012	.050	4
4	7495855		2.302	.004	2.30180 - .00016	.050	8
4	7495857		2.302	.008 AND UP	2.30160 - .00040	.050	8
4	7495859		2.303	.001	2.30300 - .00008	.050	4
4	7495860		2.303	.002	2.30292 - .00012	.050	4
4	7495861		2.303	.004	2.30280 - .00016	.050	8
4	7495863		2.303	.008 AND UP	2.30260 - .00040	.050	8
4	7495865		2.304	.001	2.30400 - .00008	.050	4
4	7495866		2.304	.002	2.30392 - .00012	.050	4
4	7495867		2.304	.004	2.30380 - .00016	.050	8
4	7495869		2.304	.008 AND UP	2.30360 - .00040	.050	8
4	7495871		2.305	.001	2.30500 - .00008	.050	4
4	7495872		2.305	.002	2.30492 - .00012	.050	4
4	7495873		2.305	.004	2.30480 - .00016	.050	8
4	7495875		2.305	.008 AND UP	2.30460 - .00040	.050	8
4	7495877		2.306	.001	2.30600 - .00008	.050	4
4	7495878		2.306	.002	2.30592 - .00012	.050	4
4	7495879		2.306	.004	2.30580 - .00016	.050	8
4	7495881		2.306	.008 AND UP	2.30560 - .00040	.050	8
4	7495883		2.307	.001	2.30700 - .00008	.050	4
4	7495884		2.307	.002	2.30692 - .00012	.050	4
4	7495885		2.307	.004	2.30680 - .00016	.050	8
4	7495887		2.307	.008 AND UP	2.30660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495889		2.308	.001	2.30800 - .00008	.050	4
4	7495890		2.308	.002	2.30792 - .00012	.050	4
4	7495891		2.308	.004	2.30780 - .00016	.050	8
4	7495893		2.308	.008 AND UP	2.30760 - .00040	.050	8
4	7495895		2.309	.001	2.30900 - .00008	.050	4
4	7495896		2.309	.002	2.30892 - .00012	.050	4
4	7495897		2.309	.004	2.30880 - .00016	.050	8
4	7495899		2.309	.008 AND UP	2.30860 - .00040	.050	8
4	7495901		2.310	.001	2.31000 - .00008	.050	4
4	7495902		2.310	.002	2.30992 - .00012	.050	4
4	7495903		2.310	.004	2.30980 - .00016	.050	8
4	7495905		2.310	.008 AND UP	2.30960 - .00040	.050	8
4	7495907		2.311	.001	2.31100 - .00008	.050	4
4	7495908		2.311	.002	2.31092 - .00012	.050	4
4	7495909		2.311	.004	2.31080 - .00016	.050	8
4	7495911		2.311	.008 AND UP	2.31060 - .00040	.050	8
4	7495913		2.312	.001	2.31200 - .00008	.050	4
4	7495914		2.312	.002	2.31192 - .00012	.050	4
4	7495915		2.312	.004	2.31180 - .00016	.050	8
4	7495917		2.312	.008 AND UP	2.31160 - .00040	.050	8
4	7495919		2.3125	.001 AND UP	2.31250 - .00008	.050	4
4	7495920		2.313	.001	2.31300 - .00008	.050	4
4	7495921		2.313	.002	2.31292 - .00012	.050	4
4	7495922		2.313	.004	2.31280 - .00016	.050	8
4	7495924		2.313	.008 AND UP	2.31260 - .00040	.050	8
4	7495926		2.314	.001	2.31400 - .00008	.050	4
4	7495927		2.314	.002	2.31392 - .00012	.050	4
4	7495928		2.314	.004	2.31380 - .00016	.050	8
4	7495930		2.314	.008 AND UP	2.31360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495932		2.315	.001	2.31500 - .00008	.050	4
4	7495933		2.315	.002	2.31492 - .00012	.050	4
4	7495934		2.315	.004	2.31480 - .00016	.050	8
4	7495936		2.315	.008 AND UP	2.31460 - .00040	.050	8
4	7495938		2.316	.001	2.31600 - .00008	.050	4
4	7495939		2.316	.002	2.31592 - .00012	.050	4
4	7495940		2.316	.004	2.31580 - .00016	.050	8
4	7495942		2.316	.008 AND UP	2.31560 - .00040	.050	8
4	7495944		2.317	.001	2.31700 - .00008	.050	4
4	7495945		2.317	.002	2.31692 - .00012	.050	4
4	7495946		2.317	.004	2.31680 - .00016	.050	8
4	7495948		2.317	.008 AND UP	2.31660 - .00040	.050	8
4	7495950		2.318	.001	2.31800 - .00008	.050	4
4	7495951		2.318	.002	2.31792 - .00012	.050	4
4	7495952		2.318	.004	2.31780 - .00016	.050	8
4	7495954		2.318	.008 AND UP	2.31760 - .00040	.050	8
4	7495956		2.319	.001	2.31900 - .00008	.050	4
4	7495957		2.319	.002	2.31892 - .00012	.050	4
4	7495958		2.319	.004	2.31880 - .00016	.050	8
4	7495960		2.319	.008 AND UP	2.31860 - .00040	.050	8
4	7495962		2.320	.001	2.32000 - .00008	.050	4
4	7495963		2.320	.002	2.31992 - .00012	.050	4
4	7495964		2.320	.004	2.31980 - .00016	.050	8
4	7495966		2.320	.008 AND UP	2.31960 - .00040	.050	8
4	7495968		2.321	.001	2.32100 - .00008	.050	4
4	7495969		2.321	.002	2.32092 - .00012	.050	4
4	7495970		2.321	.004	2.32080 - .00016	.050	8
4	7495972		2.321	.008 AND UP	2.32060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7495974		2.322	.001	2.32200 - .00008	.050	4
4	7495975		2.322	.002	2.32192 - .00012	.050	4
4	7495976		2.322	.004	2.32180 - .00016	.050	8
4	7495978		2.322	.008 AND UP	2.32160 - .00040	.050	8
4	7495980		2.323	.001	2.32300 - .00008	.050	4
4	7495981		2.323	.002	2.32292 - .00012	.050	4
4	7495982		2.323	.004	2.32280 - .00016	.050	8
4	7495984		2.323	.008 AND UP	2.32260 - .00040	.050	8
4	7495986		2.324	.001	2.32400 - .00008	.050	4
4	7495987		2.324	.002	2.32392 - .00012	.050	4
4	7495988		2.324	.004	2.32380 - .00016	.050	8
4	7495990		2.324	.008 AND UP	2.32360 - .00040	.050	8
4	7495992		2.325	.001	2.32500 - .00008	.050	4
4	7495993		2.325	.002	2.32492 - .00012	.050	4
4	7495994		2.325	.004	2.32480 - .00016	.050	8
4	7495996		2.325	.008 AND UP	2.32460 - .00040	.050	8
4	7495998		2.326	.001	2.32600 - .00008	.050	4
4	7495999		2.326	.002	2.32592 - .00012	.050	4
4	7496000		2.326	.004	2.32580 - .00016	.050	8
4	7496002		2.326	.008 AND UP	2.32560 - .00040	.050	8
4	7496004		2.327	.001	2.32700 - .00008	.050	4
4	7496005		2.327	.002	2.32692 - .00012	.050	4
4	7496006		2.327	.004	2.32680 - .00016	.050	8
4	7496008		2.327	.008 AND UP	2.32660 - .00040	.050	8
4	7496010		2.328	.001	2.32800 - .00008	.050	4
4	7496011		2.328	.002	2.32792 - .00012	.050	4
4	7496012		2.328	.004	2.32780 - .00016	.050	8
4	7496014		2.328	.008 AND UP	2.32760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20264O-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496016		2.329	.001	2.32900 - .00008	.050	4
4	7496017		2.329	.002	2.32892 - .00012	.050	4
4	7496018		2.329	.004	2.32880 - .00016	.050	8
4	7496020		2.329	.008 AND UP	2.32860 - .00040	.050	8
4	7496022		2.330	.001	2.33000 - .00008	.050	4
4	7496023		2.330	.002	2.32992 - .00012	.050	4
4	7496024		2.330	.004	2.32980 - .00016	.050	8
4	7496026		2.330	.008 AND UP	2.32960 - .00040	.050	8
4	7496028		2.331	.001	2.33100 - .00008	.050	4
4	7496029		2.331	.002	2.33092 - .00012	.050	4
4	7496030		2.331	.004	2.33080 - .00016	.050	8
4	7496032		2.331	.008 AND UP	2.33060 - .00040	.050	8
4	7496034		2.332	.001	2.33200 - .00008	.050	4
4	7496035		2.332	.002	2.33192 - .00012	.050	4
4	7496036		2.332	.004	2.33180 - .00016	.050	8
4	7496038		2.332	.008 AND UP	2.33160 - .00040	.050	8
4	7496040		2.333	.001	2.33300 - .00008	.050	4
4	7496041		2.333	.002	2.33292 - .00012	.050	4
4	7496042		2.333	.004	2.33280 - .00016	.050	8
4	7496044		2.333	.008 AND UP	2.33260 - .00040	.050	8
4	7496046		2.334	.001	2.33400 - .00008	.050	4
4	7496047		2.334	.002	2.33392 - .00012	.050	4
4	7496048		2.334	.004	2.33380 - .00016	.050	8
4	7496050		2.334	.008 AND UP	2.33360 - .00040	.050	8
4	7496052		2.335	.001	2.33500 - .00008	.050	4
4	7496053		2.335	.002	2.33492 - .00012	.050	4
4	7496054		2.335	.004	2.33480 - .00016	.050	8
4	7496056		2.335	.008 AND UP	2.33460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496058		2.336	.001	2.33600 - .00008	.050	4
4	7496059		2.336	.002	2.33592 - .00012	.050	4
4	7496060		2.336	.004	2.33580 - .00016	.050	8
4	7496062		2.336	.008 AND UP	2.33560 - .00040	.050	8
4	7496064		2.337	.001	2.33700 - .00008	.050	4
4	7496065		2.337	.002	2.33692 - .00012	.050	4
4	7496066		2.337	.004	2.33680 - .00016	.050	8
4	7496068		2.337	.008 AND UP	2.33660 - .00040	.050	8
4	7496070		2.338	.001	2.33800 - .00008	.050	4
4	7496071		2.338	.002	2.33792 - .00012	.050	4
4	7496072		2.338	.004	2.33780 - .00016	.050	8
4	7496074		2.338	.008 AND UP	2.33760 - .00040	.050	8
4	7496076		2.339	.001	2.33900 - .00008	.050	4
4	7496077		2.339	.002	2.33892 - .00012	.050	4
4	7496078		2.339	.004	2.33880 - .00016	.050	8
4	7496080		2.339	.008 AND UP	2.33860 - .00040	.050	8
4	7496082		2.340	.001	2.34000 - .00008	.050	4
4	7496083		2.340	.002	2.33992 - .00012	.050	4
4	7496084		2.340	.004	2.33980 - .00016	.050	8
4	7496086		2.340	.008 AND UP	2.33960 - .00040	.050	8
4	7496088		2.341	.001	2.34100 - .00008	.050	4
4	7496089		2.341	.002	2.34092 - .00012	.050	4
4	7496090		2.341	.004	2.34080 - .00016	.050	8
4	7496092		2.341	.008 AND UP	2.34060 - .00040	.050	8
4	7496094		2.342	.001	2.34200 - .00008	.050	4
4	7496095		2.342	.002	2.34192 - .00012	.050	4
4	7496096		2.342	.004	2.34180 - .00016	.050	8
4	7496098		2.342	.008 AND UP	2.34160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
4	7496100		2.343	.001	2.34300 - .00008	.050	4
4	7496101		2.343	.002	2.34292 - .00012	.050	4
4	7496102		2.343	.004	2.34280 - .00016	.050	8
4	7496104		2.343	.008 AND UP	2.34260 - .00040	.050	8
4	7496106		2.34375	.001 AND UP	2.34375 - .00008	.050	4
4	7496107		2.344	.001	2.34400 - .00008	.050	4
4	7496108		2.344	.002	2.34392 - .00012	.050	4
4	7496109		2.344	.004	2.34380 - .00016	.050	8
4	7496111		2.344	.008 AND UP	2.34360 - .00040	.050	8
4	7496113		2.345	.001	2.34500 - .00008	.050	4
4	7496114		2.345	.002	2.34492 - .00012	.050	4
4	7496115		2.345	.004	2.34480 - .00016	.050	8
4	7496117		2.345	.008 AND UP	2.34460 - .00040	.050	8
4	7496119		2.346	.001	2.34600 - .00008	.050	4
4	7496120		2.346	.002	2.34592 - .00012	.050	4
4	7496121		2.346	.004	2.34580 - .00016	.050	8
4	7496123		2.346	.008 AND UP	2.34560 - .00040	.050	8
4	7496125		2.347	.001	2.34700 - .00008	.050	4
4	7496126		2.347	.002	2.34692 - .00012	.050	4
4	7496127		2.347	.004	2.34680 - .00016	.050	8
4	7496129		2.347	.008 AND UP	2.34660 - .00040	.050	8
4	7496131		2.348	.001	2.34800 - .00008	.050	4
4	7496132		2.348	.002	2.34792 - .00012	.050	4
4	7496133		2.348	.004	2.34780 - .00016	.050	8
4	7496135		2.348	.008 AND UP	2.34760 - .00040	.050	8
4	7496137		2.349	.001	2.34900 - .00008	.050	4
4	7496138		2.349	.002	2.34892 - .00012	.050	4
4	7496139		2.349	.004	2.34880 - .00016	.050	8
4	7496141		2.349	.008 AND UP	2.34860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496143		2.350	.001	2.35000 - .00008	.050	4
4	7496144		2.350	.002	2.34992 - .00012	.050	4
4	7496145		2.350	.004	2.34980 - .00016	.050	8
4	7496147		2.350	.008 AND UP	2.34960 - .00040	.050	8
4	7496149		2.351	.001	2.35100 - .00008	.050	4
4	7496150		2.351	.002	2.35092 - .00012	.050	4
4	7496151		2.351	.004	2.35080 - .00016	.050	8
4	7496153		2.351	.008 AND UP	2.35060 - .00040	.050	8
4	7496155		2.352	.001	2.35200 - .00008	.050	4
4	7496156		2.352	.002	2.35192 - .00012	.050	4
4	7496157		2.352	.004	2.35180 - .00016	.050	8
4	7496159		2.352	.008 AND UP	2.35160 - .00040	.050	8
4	7496161		2.353	.001	2.35300 - .00008	.050	4
4	7496162		2.353	.002	2.35292 - .00012	.050	4
4	7496163		2.353	.004	2.35280 - .00016	.050	8
4	7496165		2.353	.008 AND UP	2.35260 - .00040	.050	8
4	7496167		2.354	.001	2.35400 - .00008	.050	4
4	7496168		2.354	.002	2.35392 - .00012	.050	4
4	7496169		2.354	.004	2.35380 - .00016	.050	8
4	7496171		2.354	.008 AND UP	2.35360 - .00040	.050	8
4	7496173		2.355	.001	2.35500 - .00008	.050	4
4	7496174		2.355	.002	2.35492 - .00012	.050	4
4	7496175		2.355	.004	2.35480 - .00016	.050	8
4	7496177		2.355	.008 AND UP	2.35460 - .00040	.050	8
4	7496179		2.356	.001	2.35600 - .00008	.050	4
4	7496180		2.356	.002	2.35592 - .00012	.050	4
4	7496181		2.356	.004	2.35580 - .00016	.050	8
4	7496183		2.356	.008 AND UP	2.35560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIIN—GAGE STOCK NO. RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
4	7496185		2.357	.001	2.35700 - .00008	.050	4
4	7496186		2.357	.002	2.35692 - .00012	.050	4
4	7496187		2.357	.004	2.35680 - .00016	.050	8
4	7496189		2.357	.008 AND UP	2.35660 - .00040	.050	8
4	7496191		2.358	.001	2.35800 - .00008	.050	4
4	7496192		2.358	.002	2.35792 - .00012	.050	4
4	7496193		2.358	.004	2.35780 - .00016	.050	8
4	7496195		2.358	.008 AND UP	2.35760 - .00040	.050	8
4	7496197		2.359	.001	2.35900 - .00008	.050	4
4	7496198		2.359	.002	2.35892 - .00012	.050	4
4	7496199		2.359	.004	2.35880 - .00016	.050	8
4	7496201		2.359	.008 AND UP	2.35860 - .00040	.050	8
4	7496203		2.360	.001	2.36000 - .00008	.050	4
4	7496204		2.360	.002	2.35992 - .00012	.050	4
4	7496205		2.360	.004	2.35980 - .00016	.050	8
4	7496207		2.360	.008 AND UP	2.35960 - .00040	.050	8
4	7496209		2.361	.001	2.36100 - .00008	.050	4
4	7496210		2.361	.002	2.36092 - .00012	.050	4
4	7496211		2.361	.004	2.36080 - .00016	.050	8
4	7496213		2.361	.008 AND UP	2.36060 - .00040	.050	8
4	7496215		2.362	.001	2.36200 - .00008	.050	4
4	7496216		2.362	.002	2.36192 - .00012	.050	4
4	7496217		2.362	.004	2.36180 - .00016	.050	8
4	7496219		2.362	.008 AND UP	2.36160 - .00040	.050	8
4	7496221		2.363	.001	2.36300 - .00008	.050	4
4	7496222		2.363	.002	2.36292 - .00012	.050	4
4	7496223		2.363	.004	2.36280 - .00016	.050	8
4	7496225		2.363	.008 AND UP	2.36260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496227		2.364	.001	2.36400 - .00008	.050	4
4	7496228		2.364	.002	2.36392 - .00012	.050	4
4	7496229		2.364	.004	2.36380 - .00016	.050	8
4	7496231		2.364	.008 AND UP	2.36360 - .00040	.050	8
4	7496233		2.365	.001	2.36500 - .00008	.050	4
4	7496234		2.365	.002	2.36492 - .00012	.050	4
4	7496235		2.365	.004	2.36480 - .00016	.050	8
4	7496237		2.365	.008 AND UP	2.36460 - .00040	.050	8
4	7496239		2.366	.001	2.36600 - .00008	.050	4
4	7496240		2.366	.002	2.36592 - .00012	.050	4
4	7496241		2.366	.004	2.36580 - .00016	.050	8
4	7496243		2.366	.008 AND UP	2.36560 - .00040	.050	8
4	7496245		2.367	.001	2.36700 - .00008	.050	4
4	7496246		2.367	.002	2.36692 - .00012	.050	4
4	7496247		2.367	.004	2.36680 - .00016	.050	8
4	7496249		2.367	.008 AND UP	2.36660 - .00040	.050	8
4	7496251		2.368	.001	2.36800 - .00008	.050	4
4	7496252		2.368	.002	2.36792 - .00012	.050	4
4	7496253		2.368	.004	2.36780 - .00016	.050	8
4	7496255		2.368	.008 AND UP	2.36760 - .00040	.050	8
4	7496257		2.369	.001	2.36900 - .00008	.050	4
4	7496258		2.369	.002	2.36892 - .00012	.050	4
4	7496259		2.369	.004	2.36880 - .00016	.050	8
4	7496261		2.369	.008 AND UP	2.36860 - .00040	.050	8
4	7496263		2.370	.001	2.37000 - .00008	.050	4
4	7496264		2.370	.002	2.36992 - .00012	.050	4
4	7496265		2.370	.004	2.36980 - .00016	.050	8
4	7496267		2.370	.008 AND UP	2.36960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496269		2.371	.001	2.37100 - .00008	.050	4
4	7496270		2.371	.002	2.37092 - .00012	.050	4
4	7496271		2.371	.004	2.37080 - .00016	.050	8
4	7496273		2.371	.008 AND UP	2.37060 - .00040	.050	8
4	7496275		2.372	.001	2.37200 - .00008	.050	4
4	7496276		2.372	.002	2.37192 - .00012	.050	4
4	7496277		2.372	.004	2.37180 - .00016	.050	8
4	7496279		2.372	.008 AND UP	2.37160 - .00040	.050	8
4	7496281		2.373	.001	2.37300 - .00008	.050	4
4	7496282		2.373	.002	2.37292 - .00012	.050	4
4	7496283		2.373	.004	2.37280 - .00016	.050	8
4	7496285		2.373	.008 AND UP	2.37260 - .00040	.050	8
4	7496287		2.374	.001	2.37400 - .00008	.050	4
4	7496288		2.374	.002	2.37392 - .00012	.050	4
4	7496289		2.374	.004	2.37380 - .00016	.050	8
4	7496291		2.374	.008 AND UP	2.37360 - .00040	.050	8
4	7496293		2.375	.001	2.37500 - .00008	.050	4
4	7496294		2.375	.002	2.37492 - .00012	.050	4
4	7496295		2.375	.004	2.37480 - .00016	.050	8
4	7496297		2.375	.008 AND UP	2.37460 - .00040	.050	8
4	7496299		2.376	.001	2.37600 - .00008	.050	4
4	7496300		2.376	.002	2.37592 - .00012	.050	4
4	7496301		2.376	.004	2.37580 - .00016	.050	8
4	7496303		2.376	.008 AND UP	2.37560 - .00040	.050	8
4	7496305		2.377	.001	2.37700 - .00008	.050	4
4	7496306		2.377	.002	2.37692 - .00012	.050	4
4	7496307		2.377	.004	2.37680 - .00016	.050	8
4	7496309		2.377	.008 AND UP	2.37660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496311		2.378	.001	2.37800 - .00008	.050	4
4	7496312		2.378	.002	2.37792 - .00012	.050	4
4	7496313		2.378	.004	2.37780 - .00016	.050	8
4	7496315		2.378	.008 AND UP	2.37760 - .00040	.050	8
4	7496317		2.379	.001	2.37900 - .00008	.050	4
4	7496318		2.379	.002	2.37892 - .00012	.050	4
4	7496319		2.379	.004	2.37880 - .00016	.050	8
4	7496321		2.379	.008 AND UP	2.37860 - .00040	.050	8
4	7496323		2.380	.001	2.38000 - .00008	.050	4
4	7496324		2.380	.002	2.37992 - .00012	.050	4
4	7496325		2.380	.004	2.37980 - .00016	.050	8
4	7496327		2.380	.008 AND UP	2.37960 - .00040	.050	8
4	7496329		2.381	.001	2.38100 - .00008	.050	4
4	7496330		2.381	.002	2.38092 - .00012	.050	4
4	7496331		2.381	.004	2.38080 - .00016	.050	8
4	7496333		2.381	.008 AND UP	2.38060 - .00040	.050	8
4	7496335		2.382	.001	2.38200 - .00008	.050	4
4	7496336		2.382	.002	2.38192 - .00012	.050	4
4	7496337		2.382	.004	2.38180 - .00016	.050	8
4	7496339		2.382	.008 AND UP	2.38160 - .00040	.050	8
4	7496341		2.383	.001	2.38300 - .00008	.050	4
4	7496342		2.383	.002	2.38292 - .00012	.050	4
4	7496343		2.383	.004	2.38280 - .00016	.050	8
4	7496345		2.383	.008 AND UP	2.38260 - .00040	.050	8
4	7496347		2.384	.001	2.38400 - .00008	.050	4
4	7496348		2.384	.002	2.38392 - .00012	.050	4
4	7496349		2.384	.004	2.38380 - .00016	.050	8
4	7496351		2.384	.008 AND UP	2.38360 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496353		2.385	.001	2.38500 - .00008	.050	4
4	7496354		2.385	.002	2.38492 - .00012	.050	4
4	7496355		2.385	.004	2.38480 - .00016	.050	8
4	7496357		2.385	.008 AND UP	2.38460 - .00040	.050	8
4	7496359		2.386	.001	2.38600 - .00008	.050	4
4	7496360		2.386	.002	2.38592 - .00012	.050	4
4	7496361		2.386	.004	2.38580 - .00016	.050	8
4	7496363		2.386	.008 AND UP	2.38560 - .00040	.050	8
4	7496365		2.387	.001	2.38700 - .00008	.050	4
4	7496366		2.387	.002	2.38692 - .00012	.050	4
4	7496367		2.387	.004	2.38680 - .00016	.050	8
4	7496369		2.387	.008 AND UP	2.38660 - .00040	.050	8
4	7496371		2.388	.001	2.38800 - .00008	.050	4
4	7496372		2.388	.002	2.38792 - .00012	.050	4
4	7496373		2.388	.004	2.38780 - .00016	.050	8
4	7496375		2.388	.008 AND UP	2.38760 - .00040	.050	8
4	7496377		2.389	.001	2.38900 - .00008	.050	4
4	7496378		2.389	.002	2.38892 - .00012	.050	4
4	7496379		2.389	.004	2.38880 - .00016	.050	8
4	7496381		2.389	.008 AND UP	2.38860 - .00040	.050	8
4	7496383		2.390	.001	2.39000 - .00008	.050	4
4	7496384		2.390	.002	2.38992 - .00012	.050	4
4	7496385		2.390	.004	2.38980 - .00016	.050	8
4	7496387		2.390	.008 AND UP	2.38960 - .00040	.050	8
4	7496389		2.391	.001	2.39100 - .00008	.050	4
4	7496390		2.391	.002	2.39092 - .00012	.050	4
4	7496391		2.391	.004	2.39080 - .00016	.050	8
4	7496393		2.391	.008 AND UP	2.39060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496395		2.392	.001	2.39200 - .00008	.050	4
4	7496396		2.392	.002	2.39192 - .00012	.050	4
4	7496397		2.392	.004	2.39180 - .00016	.050	8
4	7496399		2.392	.008 AND UP	2.39160 - .00040	.050	8
4	7496401		2.393	.001	2.39300 - .00008	.050	4
4	7496402		2.393	.002	2.39292 - .00012	.050	4
4	7496403		2.393	.004	2.39280 - .00016	.050	8
4	7496405		2.393	.008 AND UP	2.39260 - .00040	.050	8
4	7496407		2.394	.001	2.39400 - .00008	.050	4
4	7496408		2.394	.002	2.39392 - .00012	.050	4
4	7496409		2.394	.004	2.39380 - .00016	.050	8
4	7496411		2.394	.008 AND UP	2.39360 - .00040	.050	8
4	7496413		2.395	.001	2.39500 - .00008	.050	4
4	7496414		2.395	.002	2.39492 - .00012	.050	4
4	7496415		2.395	.004	2.39480 - .00016	.050	8
4	7496417		2.395	.008 AND UP	2.39460 - .00040	.050	8
4	7496419		2.396	.001	2.39600 - .00008	.050	4
4	7496420		2.396	.002	2.39592 - .00012	.050	4
4	7496421		2.396	.004	2.39580 - .00016	.050	8
4	7496423		2.396	.008 AND UP	2.39560 - .00040	.050	8
4	7496425		2.397	.001	2.39700 - .00008	.050	4
4	7496426		2.397	.002	2.39692 - .00012	.050	4
4	7496427		2.397	.004	2.39680 - .00016	.050	8
4	7496429		2.397	.008 AND UP	2.39660 - .00040	.050	8
4	7496431		2.398	.001	2.39800 - .00008	.050	4
4	7496432		2.398	.002	2.39792 - .00012	.050	4
4	7496433		2.398	.004	2.39780 - .00016	.050	8
4	7496435		2.398	.008 AND UP	2.39760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496437		2.399	.001	2.39900 - .00008	.050	4
4	7496438		2.399	.002	2.39892 - .00012	.050	4
4	7496439		2.399	.004	2.39880 - .00016	.050	8
4	7496441		2.399	.008 AND UP	2.39860 - .00040	.050	8
4	7496443		2.400	.001	2.40000 - .00008	.050	4
4	7496444		2.400	.002	2.39992 - .00012	.050	4
4	7496445		2.400	.004	2.39980 - .00016	.050	8
4	7496447		2.400	.008 AND UP	2.39960 - .00040	.050	8
4	7496449		2.401	.001	2.40100 - .00008	.050	4
4	7496450		2.401	.002	2.40092 - .00012	.050	4
4	7496451		2.401	.004	2.40080 - .00016	.050	8
4	7496453		2.401	.008 AND UP	2.40060 - .00040	.050	8
4	7496455		2.402	.001	2.40200 - .00008	.050	4
4	7496456		2.402	.002	2.40192 - .00012	.050	4
4	7496457		2.402	.004	2.40180 - .00016	.050	8
4	7496459		2.402	.008 AND UP	2.40160 - .00040	.050	8
4	7496461		2.403	.001	2.40300 - .00008	.050	4
4	7496462		2.403	.002	2.40292 - .00012	.050	4
4	7496463		2.403	.004	2.40280 - .00016	.050	8
4	7496465		2.403	.008 AND UP	2.40260 - .00040	.050	8
4	7496467		2.404	.001	2.40400 - .00008	.050	4
4	7496468		2.404	.002	2.40392 - .00012	.050	4
4	7496469		2.404	.004	2.40380 - .00016	.050	8
4	7496471		2.404	.008 AND UP	2.40360 - .00040	.050	8
4	7496473		2.405	.001	2.40500 - .00008	.050	4
4	7496474		2.405	.002	2.40492 - .00012	.050	4
4	7496475		2.405	.004	2.40480 - .00016	.050	8
4	7496477		2.405	.008 AND UP	2.40460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496479		2.406	.001	2.40600 - .00008	.050	4
4	7496480		2.406	.002	2.40592 - .00012	.050	4
4	7496481		2.406	.004	2.40580 - .00016	.050	8
4	7496483		2.406	.008 AND UP	2.40560 - .00040	.050	8
4	7496485		2.40625	.001 AND UP	2.40625 - .00008	.050	4
4	7496486		2.407	.001	2.40700 - .00008	.050	4
4	7496487		2.407	.002	2.40692 - .00012	.050	4
4	7496488		2.407	.004	2.40680 - .00016	.050	8
4	7496490		2.407	.008 AND UP	2.40660 - .00040	.050	8
4	7496492		2.408	.001	2.40800 - .00008	.050	4
4	7496493		2.408	.002	2.40792 - .00012	.050	4
4	7496494		2.408	.004	2.40780 - .00016	.050	8
4	7496496		2.408	.008 AND UP	2.40760 - .00040	.050	8
4	7496498		2.409	.001	2.40900 - .00008	.050	4
4	7496499		2.409	.002	2.40892 - .00012	.050	4
4	7496500		2.409	.004	2.40880 - .00016	.050	8
4	7496502		2.409	.008 AND UP	2.40860 - .00040	.050	8
4	7496504		2.410	.001	2.41000 - .00008	.050	4
4	7496505		2.410	.002	2.40992 - .00012	.050	4
4	7496506		2.410	.004	2.40980 - .00016	.050	8
4	7496508		2.410	.008 AND UP	2.40960 - .00040	.050	8
4	7496510		2.411	.001	2.41100 - .00008	.050	4
4	7496511		2.411	.002	2.41092 - .00012	.050	4
4	7496512		2.411	.004	2.41080 - .00016	.050	8
4	7496514		2.411	.008 AND UP	2.41060 - .00040	.050	8
4	7496516		2.412	.001	2.41200 - .00008	.050	4
4	7496517		2.412	.002	2.41192 - .00012	.050	4
4	7496518		2.412	.004	2.41180 - .00016	.050	8
4	7496520		2.412	.008 AND UP	2.41160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496522		2.413	.001	2.41300 - .00008	.050	4
4	7496523		2.413	.002	2.41292 - .00012	.050	4
4	7496524		2.413	.004	2.41280 - .00016	.050	8
4	7496526		2.413	.008 AND UP	2.41260 - .00040	.050	8
4	7496528		2.414	.001	2.41400 - .00008	.050	4
4	7496529		2.414	.002	2.41392 - .00012	.050	4
4	7496530		2.414	.004	2.41380 - .00016	.050	8
4	7496532		2.414	.008 AND UP	2.41360 - .00040	.050	8
4	7496534		2.415	.001	2.41500 - .00008	.050	4
4	7496535		2.415	.002	2.41492 - .00012	.050	4
4	7496536		2.415	.004	2.41480 - .00016	.050	8
4	7496538		2.415	.008 AND UP	2.41460 - .00040	.050	8
4	7496540		2.416	.001	2.41600 - .00008	.050	4
4	7496541		2.416	.002	2.41592 - .00012	.050	4
4	7496542		2.416	.004	2.41580 - .00016	.050	8
4	7496544		2.416	.008 AND UP	2.41560 - .00040	.050	8
4	7496546		2.417	.001	2.41700 - .00008	.050	4
4	7496547		2.417	.002	2.41692 - .00012	.050	4
4	7496548		2.417	.004	2.41680 - .00016	.050	8
4	7496550		2.417	.008 AND UP	2.41660 - .00040	.050	8
4	7496552		2.418	.001	2.41800 - .00008	.050	4
4	7496553		2.418	.002	2.41792 - .00012	.050	4
4	7496554		2.418	.004	2.41780 - .00016	.050	8
4	7496556		2.418	.008 AND UP	2.41760 - .00040	.050	8
4	7496558		2.419	.001	2.41900 - .00008	.050	4
4	7496559		2.419	.002	2.41892 - .00012	.050	4
4	7496560		2.419	.004	2.41880 - .00016	.050	8
4	7496562		2.419	.008 AND UP	2.41860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496564		2.420	.001	2.42000 - .00008	.050	4
4	7496565		2.420	.002	2.41992 - .00012	.050	4
4	7496566		2.420	.004	2.41980 - .00016	.050	8
4	7496568		2.420	.008 AND UP	2.41960 - .00040	.050	8
4	7496570		2.421	.001	2.42100 - .00008	.050	4
4	7496571		2.421	.002	2.42092 - .00012	.050	4
4	7496572		2.421	.004	2.42080 - .00016	.050	8
4	7496574		2.421	.008 AND UP	2.42060 - .00040	.050	8
4	7496576		2.422	.001	2.42200 - .00008	.050	4
4	7496577		2.422	.002	2.42192 - .00012	.050	4
4	7496578		2.422	.004	2.42180 - .00016	.050	8
4	7496580		2.422	.008 AND UP	2.42160 - .00040	.050	8
4	7496582		2.423	.001	2.42300 - .00008	.050	4
4	7496583		2.423	.002	2.42292 - .00012	.050	4
4	7496584		2.423	.004	2.42280 - .00016	.050	8
4	7496586		2.423	.008 AND UP	2.42260 - .00040	.050	8
4	7496588		2.424	.001	2.42400 - .00008	.050	4
4	7496589		2.424	.002	2.42392 - .00012	.050	4
4	7496590		2.424	.004	2.42380 - .00016	.050	8
4	7496592		2.424	.008 AND UP	2.42360 - .00040	.050	8
4	7496594		2.425	.001	2.42500 - .00008	.050	4
4	7496595		2.425	.002	2.42492 - .00012	.050	4
4	7496596		2.425	.004	2.42480 - .00016	.050	8
4	7496598		2.425	.008 AND UP	2.42460 - .00040	.050	8
4	7496600		2.426	.001	2.42600 - .00008	.050	4
4	7496601		2.426	.002	2.42592 - .00012	.050	4
4	7496602		2.426	.004	2.42580 - .00016	.050	8
4	7496604		2.426	.008 AND UP	2.42560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496606		2.427	.001	2.42700 - .00008	.050	4
4	7496607		2.427	.002	2.42692 - .00012	.050	4
4	7496608		2.427	.004	2.42680 - .00016	.050	8
4	7496610		2.427	.008 AND UP	2.42660 - .00040	.050	8
4	7496612		2.428	.001	2.42800 - .00008	.050	4
4	7496613		2.428	.002	2.42792 - .00012	.050	4
4	7496614		2.428	.004	2.42780 - .00016	.050	8
4	7496616		2.428	.008 AND UP	2.42760 - .00040	.050	8
4	7496618		2.429	.001	2.42900 - .00008	.050	4
4	7496619		2.429	.002	2.42892 - .00012	.050	4
4	7496620		2.429	.004	2.42880 - .00016	.050	8
4	7496622		2.429	.008 AND UP	2.42860 - .00040	.050	8
4	7496624		2.430	.001	2.43000 - .00008	.050	4
4	7496625		2.430	.002	2.42992 - .00012	.050	4
4	7496626		2.430	.004	2.42980 - .00016	.050	8
4	7496628		2.430	.008 AND UP	2.42960 - .00040	.050	8
4	7496630		2.431	.001	2.43100 - .00008	.050	4
4	7496631		2.431	.002	2.43092 - .00012	.050	4
4	7496632		2.431	.004	2.43080 - .00016	.050	8
4	7496634		2.431	.008 AND UP	2.43060 - .00040	.050	8
4	7496636		2.432	.001	2.43200 - .00008	.050	4
4	7496637		2.432	.002	2.43192 - .00012	.050	4
4	7496638		2.432	.004	2.43180 - .00016	.050	8
4	7496640		2.432	.008 AND UP	2.43160 - .00040	.050	8
4	7496642		2.433	.001	2.43300 - .00008	.050	4
4	7496643		2.433	.002	2.43292 - .00012	.050	4
4	7496644		2.433	.004	2.43280 - .00016	.050	8
4	7496646		2.433	.008 AND UP	2.43260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496648		2.434	.001	2.43400 - .00008	.050	4
4	7496649		2.434	.002	2.43392 - .00012	.050	4
4	7496650		2.434	.004	2.43380 - .00016	.050	8
4	7496652		2.434	.008 AND UP	2.43360 - .00040	.050	8
4	7496654		2.435	.001	2.43500 - .00008	.050	4
4	7496655		2.435	.002	2.43492 - .00012	.050	4
4	7496656		2.435	.004	2.43480 - .00016	.050	8
4	7496658		2.435	.008 AND UP	2.43460 - .00040	.050	8
4	7496660		2.436	.001	2.43600 - .00008	.050	4
4	7496661		2.436	.002	2.43592 - .00012	.050	4
4	7496662		2.436	.004	2.43580 - .00016	.050	8
4	7496664		2.436	.008 AND UP	2.43560 - .00040	.050	8
4	7496666		2.437	.001	2.43700 - .00008	.050	4
4	7496667		2.437	.002	2.43692 - .00012	.050	4
4	7496668		2.437	.004	2.43680 - .00016	.050	8
4	7496670		2.437	.008 AND UP	2.43660 - .00040	.050	8
4	7496672		2.4375	.001 AND UP	2.43750 - .00008	.050	4
4	7496673		2.438	.001	2.43800 - .00008	.050	4
4	7496674		2.438	.002	2.43792 - .00012	.050	4
4	7496675		2.438	.004	2.43780 - .00016	.050	8
4	7496677		2.438	.008 AND UP	2.43760 - .00040	.050	8
4	7496679		2.439	.001	2.43900 - .00008	.050	4
4	7496680		2.439	.002	2.43892 - .00012	.050	4
4	7496681		2.439	.004	2.43880 - .00016	.050	8
4	7496683		2.439	.008 AND UP	2.43860 - .00040	.050	8
4	7496685		2.440	.001	2.44000 - .00008	.050	4
4	7496686		2.440	.002	2.43992 - .00012	.050	4
4	7496687		2.440	.004	2.43980 - .00016	.050	8
4	7496689		2.440	.008 AND UP	2.43960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496691		2.441	.001	2.44100 - .00008	.050	4
4	7496692		2.441	.002	2.44092 - .00012	.050	4
4	7496693		2.441	.004	2.44080 - .00016	.050	8
4	7496695		2.441	.008 AND UP	2.44060 - .00040	.050	8
4	7496697		2.442	.001	2.44200 - .00008	.050	4
4	7496698		2.442	.002	2.44192 - .00012	.050	4
4	7496699		2.442	.004	2.44180 - .00016	.050	8
4	7496701		2.442	.008 AND UP	2.44160 - .00040	.050	8
4	7496703		2.443	.001	2.44300 - .00008	.050	4
4	7496704		2.443	.002	2.44292 - .00012	.050	4
4	7496705		2.443	.004	2.44280 - .00016	.050	8
4	7496707		2.443	.008 AND UP	2.44260 - .00040	.050	8
4	7496709		2.444	.001	2.44400 - .00008	.050	4
4	7496710		2.444	.002	2.44392 - .00012	.050	4
4	7496711		2.444	.004	2.44380 - .00016	.050	8
4	7496713		2.444	.008 AND UP	2.44360 - .00040	.050	8
4	7496715		2.445	.001	2.44500 - .00008	.050	4
4	7496716		2.445	.002	2.44492 - .00012	.050	4
4	7496717		2.445	.004	2.44480 - .00016	.050	8
4	7496719		2.445	.008 AND UP	2.44460 - .00040	.050	8
4	7496721		2.446	.001	2.44600 - .00008	.050	4
4	7496722		2.446	.002	2.44592 - .00012	.050	4
4	7496723		2.446	.004	2.44580 - .00016	.050	8
4	7496725		2.446	.008 AND UP	2,44560 - .00040	.050	8
4	7496727		2.447	.001	2.44700 - .00008	.050	4
4	7496728		2.447	.002	2.44692 - .00012	.050	4
4	7496729		2.447	.004	2.44680 - .00016	.050	8
4	7496731		2.447	.008 AND UP	2.44660 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496733		2.448	.001	2.44800 - .00008	.050	4
4	7496734		2.448	.002	2.44792 - .00012	.050	4
4	7496735		2.448	.004	2.44780 - .00016	.050	8
4	7496737		2.448	.008 AND UP	2.44760 - .00040	.050	8
4	7496739		2.449	.001	2.44900 - .00008	.050	4
4	7496740		2.449	.002	2.44892 - .00012	.050	4
4	7496741		2.449	.004	2.44880 - .00016	.050	8
4	7496743		2.449	.008 AND UP	2.44860 - .00040	.050	8
4	7496745		2.450	.001	2.45000 - .00008	.050	4
4	7496746		2.450	.002	2.44992 - .00012	.050	4
4	7496747		2.450	.004	2.44980 - .00016	.050	8
4	7496749		2.450	.008 AND UP	2.44960 - .00040	.050	8
4	7496751		2.451	.001	2.45100 - .00008	.050	4
4	7496752		2.451	.002	2.45092 - .00012	.050	4
4	7496753		2.451	.004	2.45080 - .00016	.050	8
4	7496755		2.451	.008 AND UP	2.45060 - .00040	.050	8
4	7496757		2.452	.001	2.45200 - .00008	.050	4
4	7496758		2.452	.002	2.45192 - .00012	.050	4
4	7496759		2.452	.004	2.45180 - .00016	.050	8
4	7496761		2.452	.008 AND UP	2.45160 - .00040	.050	8
4	7496763		2.453	.001	2.45300 - .00008	.050	4
4	7496764		2.453	.002	2.45292 - .00012	.050	4
4	7496765		2.453	.004	2.45280 - .00016	.050	8
4	7496767		2.453	.008 AND UP	2.45260 - .00040	.050	8
4	7496769		2.454	.001	2.45400 - .00008	.050	4
4	7496770		2.454	.002	2.45392 - .00012	.050	4
4	7496771		2.454	.004	2.45380 - .00016	.050	8
4	7496773		2.454	.008 AND UP	2.45360 - .00040	.050	8

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496775		2.455	.001	2.45500 - .00008	.050	4
4	7496776		2.455	.002	2.45492 - .00012	.050	4
4	7496777		2.455	.004	2.45480 - .00016	.050	8
4	7496779		2.455	.008 AND UP	2.45460 - .00040	.050	8
4	7496781		2.456	.001	2.45600 - .00008	.050	4
4	7496782		2.456	.002	2.45592 - .00012	.050	4
4	7496783		2.456	.004	2.45580 - .00016	.050	8
4	7496785		2.456	.008 AND UP	2.45560 - .00040	.050	8
4	7496787		2.457	.001	2.45700 - .00008	.050	4
4	7496788		2.457	.002	2.45692 - .00012	.050	4
4	7496789		2.457	.004	2.45680 - .00016	.050	8
4	7496791		2.457	.008 AND UP	2.45660 - .00040	.050	8
4	7496793		2.458	.001	2.45800 - .00008	.050	4
4	7496794		2.458	.002	2.45792 - .00012	.050	4
4	7496795		2.458	.004	2.45780 - .00016	.050	8
4	7496797		2.458	.008 AND UP	2.45760 - .00040	.050	8
4	7496799		2.459	.001	2.45900 - .00008	.050	4
4	7496800		2.459	.002	2.45892 - .00012	.050	4
4	7496801		2.459	.004	2.45880 - .00016	.050	8
4	7496803		2.459	.008 AND UP	2.45860 - .00040	.050	8
4	7496805		2.460	.001	2.46000 - .00008	.050	4
4	7496806		2.460	.002	2.45992 - .00012	.050	4
4	7496807		2.460	.004	2.45980 - .00016	.050	8
4	7496809		2.460	.008 AND UP	2.45960 - .00040	.050	8
4	7496811		2.461	.001	2.46100 - .00008	.050	4
4	7496812		2.461	.002	2.46092 - .00012	.050	4
4	7496813		2.461	.004	2.46080 - .00016	.050	8
4	7496815		2.461	.008 AND UP	2.46060 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496817		2.462	.001	2.46200 - .00008	.050	4
4	7496818		2.462	.002	2.46192 - .00012	.050	4
4	7496819		2.462	.004	2.46180 - .00016	.050	8
4	7496821		2.462	.008 AND UP	2.46160 - .00040	.050	8
4	7496823		2.463	.001	2.46300 - .00008	.050	4
4	7496824		2.463	.002	2.46292 - .00012	.050	4
4	7496825		2.463	.004	2.46280 - .00016	.050	8
4	7496827		2.463	.008 AND UP	2.46260 - .00040	.050	8
4	7496829		2.464	.001	2.46400 - .00008	.050	4
4	7496830		2.464	.002	2.46392 - .00012	.050	4
4	7496831		2.464	.004	2.46380 - .00016	.050	8
4	7496833		2.464	.008 AND UP	2.46360 - .00040	.050	8
4	7496835		2.465	.001	2.46500 - .00008	.050	4
4	7496836		2.465	.002	2.46492 - .00012	.050	4
4	7496837		2.465	.004	2.46480 - .00016	.050	8
4	7496839		2.465	.008 AND UP	2.46460 - .00040	.050	8
4	7496841		2.466	.001	2.46600 - .00008	.050	4
4	7496842		2.466	.002	2.46592 - .00012	.050	4
4	7496843		2.466	.004	2.46580 - .00016	.050	8
4	7496845		2.466	.008 AND UP	2.46560 - .00040	.050	8
4	7496847		2.467	.001	2.46700 - .00008	.050	4
4	7496848		2.467	.002	2.46692 - .00012	.050	4
4	7496849		2.467	.004	2.46680 - .00016	.050	8
4	7496851		2.467	.008 AND UP	2.46660 - .00040	.050	8
4	7496853		2.468	.001	2.46800 - .00008	.050	4
4	7496854		2.468	.002	2.46792 - .00012	.050	4
4	7496855		2.468	.004	2.46780 - .00016	.050	8
4	7496857		2.468	.008 AND UP	2.46760 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE: FIN—GAGE STOCK NO. / RING GAGE	MARKING ON GO GAGE: ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS: DIAMETER	RING GAGE DIMENSIONS: CHAMFER	FINISH
A	B	C	D	E	F	G	H
4	7496859		2.46875	.001 AND UP	2.46875 - .00008	.050	4
4	7496860		2.469	.001	2.46900 - .00008	.050	4
4	7496861		2.469	.002	2.46892 - .00012	.050	4
4	7496862		2.469	.004	2.46880 - .00016	.050	8
4	7496864		2.469	.008 AND UP	2.46860 - .00040	.050	8
4	7496866		2.470	.001	2.47000 - .00008	.050	4
4	7496867		2.470	.002	2.46992 - .00012	.050	4
4	7496868		2.470	.004	2.46980 - .00016	.050	8
4	7496870		2.470	.008 AND UP	2.46960 - .00040	.050	8
4	7496872		2.471	.001	2.47100 - .00008	.050	4
4	7496873		2.471	.002	2.47092 - .00012	.050	4
4	7496874		2.471	.004	2.47080 - .00016	.050	8
4	7496876		2.471	.008 AND UP	2.47060 - .00040	.050	8
4	7496878		2.472	.001	2.47200 - .00008	.050	4
4	7496879		2.472	.002	2.47192 - .00012	.050	4
4	7496880		2.472	.004	2.47180 - .00016	.050	8
4	7496882		2.472	.008 AND UP	2.47160 - .00040	.050	8
4	7496884		2.473	.001	2.47300 - .00008	.050	4
4	7496885		2.473	.002	2.47292 - .00012	.050	4
4	7496886		2.473	.004	2.47280 - .00016	.050	8
4	7496888		2.473	.008 AND UP	2.47260 - .00040	.050	8
4	7496890		2.474	.001	2.47400 - .00008	.050	4
4	7496891		2.474	.002	2.47392 - .00012	.050	4
4	7496892		2.474	.004	2.47380 - .00016	.050	8
4	7496894		2.474	.008 AND UP	2.47360 - .00040	.050	8
4	7496896		2.475	.001	2.47500 - .00008	.050	4
4	7496897		2.475	.002	2.47492 - .00012	.050	4
4	7496898		2.475	.004	2.47480 - .00016	.050	8
4	7496900		2.475	.008 AND UP	2.47460 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496902		2.476	.001	2.47600 - .00008	.050	4
4	7496903		2.476	.002	2.47592 - .00012	.050	4
4	7496904		2.476	.004	2.47580 - .00016	.050	8
4	7496906		2.476	.008 AND UP	2.47560 - .00040	.050	8
4	7496908		2.477	.001	2.47700 - .00008	.050	4
4	7496909		2.477	.002	2.47692 - .00012	.050	4
4	7496910		2.477	.004	2.47680 - .00016	.050	8
4	7496912		2.477	.008 AND UP	2.47660 - .00040	.050	8
4	7496914		2.478	.001	2.47800 - .00008	.050	4
4	7496915		2.478	.002	2.47792 - .00012	.050	4
4	7496916		2.478	.004	2.47780 - .00016	.050	8
4	7496918		2.478	.008 AND UP	2.47760 - .00040	.050	8
4	7496920		2.479	.001	2.47900 - .00008	.050	4
4	7496921		2.479	.002	2.47892 - .00012	.050	4
4	7496922		2.479	.004	2.47880 - .00016	.050	8
4	7496924		2.479	.008 AND UP	2.47860 - .00040	.050	8
4	7496926		2.480	.001	2.48000 - .00008	.050	4
4	7496927		2.480	.002	2.47992 - .00012	.050	4
4	7496928		2.480	.004	2.47980 - .00016	.050	8
4	7496930		2.480	.008 AND UP	2.47960 - .00040	.050	8
4	7496932		2.481	.001	2.48100 - .00008	.050	4
4	7496933		2.481	.002	2.48092 - .00012	.050	4
4	7496934		2.481	.004	2.48080 - .00016	.050	8
4	7496936		2.481	.008 AND UP	2.48060 - .00040	.050	8
4	7496938		2.482	.001	2.48200 - .00008	.050	4
4	7496939		2.482	.002	2.48192 - .00012	.050	4
4	7496940		2.482	.004	2.48180 - .00016	.050	8
4	7496942		2.482	.008 AND UP	2.48160 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496944		2.483	.001	2.48300 - .00008	.050	4
4	7496945		2.483	.002	2.48292 - .00012	.050	4
4	7496946		2.483	.004	2.48280 - .00016	.050	8
4	7496948		2.483	.008 AND UP	2.48260 - .00040	.050	8
4	7496950		2.484	.001	2.48400 - .00008	.050	4
4	7496951		2.484	.002	2.48392 - .00012	.050	4
4	7496952		2.484	.004	2.48380 - .00016	.050	8
4	7496954		2.484	.008 AND UP	2.48360 - .00040	.050	8
4	7496956		2.485	.001	2.48500 - .00008	.050	4
4	7496957		2.485	.002	2.48492 - .00012	.050	4
4	7496958		2.485	.004	2.48480 - .00016	.050	8
4	7496960		2.485	.008 AND UP	2.48460 - .00040	.050	8
4	7496962		2.486	.001	2.48600 - .00008	.050	4
4	7496963		2.486	.002	2.48592 - .00012	.050	4
4	7496964		2.486	.004	2.48580 - .00016	.050	8
4	7496966		2.486	.008 AND UP	2.48560 - .00040	.050	8
4	7496968		2.487	.001	2.48700 - .00008	.050	4
4	7496969		2.487	.002	2.48692 - .00012	.050	4
4	7496970		2.487	.004	2.48680 - .00016	.050	8
4	7496972		2.487	.008 AND UP	2.48660 - .00040	.050	8
4	7496974		2.488	.001	2.48800 - .00008	.050	4
4	7496975		2.488	.002	2.48792 - .00012	.050	4
4	7496976		2.488	.004	2.48780 - .00016	.050	8
4	7496978		2.488	.008 AND UP	2.48760 - .00040	.050	8
4	7496980		2.489	.001	2.48900 - .00008	.050	4
4	7496981		2.489	.002	2.48892 - .00012	.050	4
4	7496982		2.489	.004	2.48880 - .00016	.050	8
4	7496984		2.489	.008 AND UP	2.48860 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7496986		2.490	.001	2.49000 - .00008	.050	4
4	7496987		2.490	.002	2.48992 - .00012	.050	4
4	7496988		2.490	.004	2.48980 - .00016	.050	8
4	7496990		2.490	.008 AND UP	2.48960 - .00040	.050	8
4	7496992		2.491	.001	2.49100 - .00008	.050	4
4	7496993		2.491	.002	2.49092 - .00012	.050	4
4	7496994		2.491	.004	2.49080 - .00016	.050	8
4	7496996		2.491	.008 AND UP	2.49060 - .00040	.050	8
4	7496998		2.492	.001	2.49200 - .00008	.050	4
4	7496999		2.492	.002	2.49192 - .00012	.050	4
4	7497000		2.492	.004	2.49180 - .00016	.050	8
4	7497002		2.492	.008 AND UP	2.49160 - .00040	.050	8
4	7497004		2.493	.001	2.49300 - .00008	.050	4
4	7497005		2.493	.002	2.49292 - .00012	.050	4
4	7497006		2.493	.004	2.49280 - .00016	.050	8
4	7497008		2.493	.008 AND UP	2.49260 - .00040	.050	8
4	7497010		2.494	.001	2.49400 - .00008	.050	4
4	7497011		2.494	.002	2.49392 - .00012	.050	4
4	7497012		2.494	.004	2.49380 - .00016	.050	8
4	7497014		2.494	.008 AND UP	2.49360 - .00040	.050	8
4	7497016		2.495	.001	2.49500 - .00008	.050	4
4	7497017		2.495	.002	2.49492 - .00012	.050	4
4	7497018		2.495	.004	2.49480 - .00016	.050	8
4	7497020		2.495	.008 AND UP	2.49460 - .00040	.050	8
4	7497022		2.496	.001	2.49600 - .00008	.050	4
4	7497023		2.496	.002	2.49592 - .00012	.050	4
4	7497024		2.496	.004	2.49580 - .00016	.050	8
4	7497026		2.496	.008 AND UP	2.49560 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7497028		2.497	.001	2.49700 - .00008	.050	4
4	7497029		2.497	.002	2.49692 - .00012	.050	4
4	7497030		2.497	.004	2.49680 - .00016	.050	8
4	7497032		2.497	.008 AND UP	2.49660 - .00040	.050	8
4	7497034		2.498	.001	2.49800 - .00008	.050	4
4	7497035		2.498	.002	2.49792 - .00012	.050	4
4	7497036		2.498	.004	2.49780 - .00016	.050	8
4	7497038		2.498	.008 AND UP	2.49760 - .00040	.050	8
4	7497040		2.499	.001	2.49900 - .00008	.050	4
4	7497041		2.499	.002	2.49892 - .00012	.050	4
4	7497042		2.499	.004	2.49880 - .00016	.050	8
4	7497044		2.499	.008 AND UP	2.49860 - .00040	.050	8
4	7497046		2.500	.001	2.50000 - .00008	.050	4
4	7497047		2.500	.002	2.49992 - .00012	.050	4
4	7497048		2.500	.004	2.49980 - .00016	.050	8
4	7497050		2.500	.008 AND UP	2.49960 - .00040	.050	8
4	7497052		2.501	.001	2.50100 - .00008	.050	4
4	7497053		2.501	.002	2.50092 - .00012	.050	4
4	7497054		2.501	.004	2.50080 - .00016	.050	8
4	7497056		2.501	.008 AND UP	2.50060 - .00040	.050	8
4	7497058		2.502	.001	2.50200 - .00008	.050	4
4	7497059		2.502	.002	2.50192 - .00012	.050	4
4	7497060		2.502	.004	2.50180 - .00016	.050	8
4	7497062		2.502	.008 AND UP	2.50160 - .00040	.050	8
4	7497064		2.503	.001	2.50300 - .00008	.050	4
4	7497065		2.503	.002	2.50292 - .00012	.050	4
4	7497066		2.503	.004	2.50280 - .00016	.050	8
4	7497068		2.503	.008 AND UP	2.50260 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIIN—GAGE STOCK NO.				DIAMETER	CHAMFER	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C	D	E	F	G	H
4	7497070		2.504	.001	2.50400 - .00008	.050	4
4	7497071		2.504	.002	2.50392 - .00012	.050	4
4	7497072		2.504	.004	2.50380 - .00016	.050	8
4	7497074		2.504	.008 AND UP	2.50360 - .00040	.050	8
4	7497076		2.505	.001	2.50500 - .00008	.050	4
4	7497077		2.505	.002	2.50492 - .00012	.050	4
4	7497078		2.505	.004	2.50480 - .00016	.050	8
4	7497080		2.505	.008 AND UP	2.50460 - .00040	.050	8
4	7497082		2.506	.001	2.50600 - .00008	.050	4
4	7497083		2.506	.002	2.50592 - .00012	.050	4
4	7497084		2.506	.004	2.50580 - .00016	.050	8
4	7497086		2.506	.008 AND UP	2.50560 - .00040	.050	8
4	7497088		2.507	.001	2.50700 - .00008	.050	4
4	7497089		2.507	.002	2.50692 - .00012	.050	4
4	7497090		2.507	.004	2.50680 - .00016	.050	8
4	7497092		2.507	.008 AND UP	2.50660 - .00040	.050	8
4	7497094		2.508	.001	2.50800 - .00008	.050	4
4	7497095		2.508	.002	2.50792 - .00012	.050	4
4	7497096		2.508	.004	2.50780 - .00016	.050	8
4	7497098		2.508	.008 AND UP	2.50760 - .00040	.050	8
4	7497100		2.509	.001	2.50900 - .00008	.050	4
4	7497101		2.509	.002	2.50892 - .00012	.050	4
4	7497102		2.509	.004	2.50880 - .00016	.050	8
4	7497104		2.509	.008 AND UP	2.50860 - .00040	.050	8
4	7497106		2.510	.001	2.51000 - .00008	.050	4
4	7497107		2.510	.002	2.50992 - .00012	.050	4
4	7497108		2.510	.004	2.50980 - .00016	.050	8
4	7497110		2.510	.008 AND UP	2.50960 - .00040	.050	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

Copies of this standard for military use may be obtained as indicated in the foreword to the Index of Military Specifications and Standards.

Copies of this standard may be obtained for other than official use by individuals, firms, and contractors from the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.

Both the title and the identifying symbol number should be stipulated when requesting copies of military standards.

Custodians:
Army-Ordnance Corps
Navy-Bureau of Ordnance
Air Force

Other interests:
Army-CMEQSig
Navy-ShMdSYMCACG.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.