MIL-STD-116B
15 MARCH 1963
SUPERSEDING
MIL-STD-116A
27 MARCH 1959

MILITARY STANDARD

GAGES, RING, THREAD,

GO (CLASS X)

AND

RELATED THREAD SETTING PLUG GAGES,

GO & NOT GO PLAIN PLUG MINOR DIAMETER

ACCEPTANCE CHECK GAGES

FOR

UNIFIED & AMERICAN NATIONAL STANDARD EXTERNAL THREADS



FED SUP CLASS
5220

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
WASHINGTON 25, D.C.

Gages, Ring, Thread, Go (Class X) and Related Thread Setting Plug Gages, Go & Not Go Plain Plug Minor Diameter Acceptance Check Gages for Unified & American National Standard External Threads

Mil-Std-116B

1. This standard has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force, effective 15 March 1963.

2. Recommended corrections, additions, or deletions should be addressed to Headquarters, DSA, Standardization Division, Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph		Page
1.	Scope	1
2.	Referenced documents	2
3.	Definitions	2
4.	General requirements	3
4.1.1	Table I, II, and III - Tabulation of Design and Identification Data	3
4.1.2	Table IV. Listing of Mil-Std Part Number in Numerical Sequence	4
5.	Procurement	4

FIGURES

Figure		
1.	Go Thread Ring Gage (Thin Blank)	5
2.	Go Thread Ring Gage (Thick Blank)	6
3.	Truncated Thread Setting Plug Gage (Taperlock Type)	7
4.	Truncated Thread Setting Plug Gage (Trilock Type)	8
5.	Go Plain Plug Acceptance Check Gage (Wire Type)	9
6.	Not Go Plain Plug Acceptance Check Gage (Wire Type)	10
7.	Method of Extracting Design and Identification Data for Go Thread Ring Gage	11
8.	Method of Extracting Design and Identification Data for Truncated Thread Setting Plug Gage	12
9.	Method of Extracting Design and Identification Data for Go Plain Plug Acceptance Check Gage for Minor Diameter	13
10.	Method of Extracting Design and Identification Data for Not Go Plain Plug Acceptance Check Gage for Minor Diameter	14

TABLES

Table		
I.	Tabulation of Design and Identification Data - Unified Standard Thread	15
II.	Tabulation of Design and Identification Data - American National Standard Thread	79
III.	Tabulation of Design and Identification Data - Special (UNS) Threads	107
IV.	Listing of Mil-Std Part Numbers in Numerical Sequence	111

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

This page intentionally left blank

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. Scope

1.1 This standard covers pertinent design data and Mil-Std Part Numbers for American Gage Design Standard, go, right-hand thread ring gages for the inspection of the maximum limits of Unified Standard classes 1A, 2A, 3A and American National Standard classes 1, 2, 3 external threads.

1.1.1 This standard also covers pertinent design data and Mil-Std Part Numbers for the applicable American Gage Design Standard truncated thread setting plug gages and go and not go plain plug acceptance check gages. The go and not go plain plug acceptance check gages are only applicable to go thread ring gages having a minor diameter below .375 inch.

1.2 The same go thread ring gage and related truncated thread setting plug gage and go and not go plain plug acceptance check gages are applied to classes 2, 3, and 3A external threads having the same nominal size and threads per inch. These are basic gages and the thread designation omits any reference to class.

Example: .3750-16UNC

1.3 The same go thread ring gage and related truncated thread setting plug gage and go and not go plain plug acceptance check gages are applied to classes 1A and 2A external threads having the same nominal size and threads per inch, since the allowance is identical for both classes.

1.4 The allowance for class 1 external threads is different than for classes 1A and 2A and, accordingly, the applicable go thread ring gage and related truncated thread setting plug gage is not common to any other class.

1.5 The design data for go thread ring gages employs class "X" gage manufacturing tolerances in accordance with the U. S. Department of Commerce Handbook H28 "Screw-Thread Standards for Federal Services".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1.6 The design data for truncated thread setting plug gages employs class "X" gage manufacturing tolerances except that class "W" gage tolerances are specified for "Variation in Lead" and "Half Angle" in accordance with the U. S. Department of Commerce Handbook H28 "Screw-Thread Standards for Federal Services.

2. Referenced Documents

2.1 The issues of the following documents in effect on the date of invitation for bids form a part of the standard.

Standard

Mil-Std-10 Surface Roughness Waviness and Lay

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D. C.)

Specification

Mil-G-45653 - Gages, Cylindrical Plug and Ring, Plain

Mil-G-45654 - Gages, Plug and Ring, Thread

(Copies of specifications should be obtained from the procuring activity or as directed by the contracting officer.)

Other Publications

U.S. Department of Commerce, National Bureau of Standards, Handbook H28 "Screw-Thread Standards for Federal Services".

U.S. Department of Commerce, Commercial Standard CS8, "Gage Blanks".

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.)

3. Definitions

Not applicable

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

4. General Requirements

4.1 This standard contains four tables. Table I provides tabulated design data required for manufacturing and inspection and is arranged in ascending size sequence according to thread designation for Unified Standard gages. Table II provides tabulated design data required for manufacture and inspection and is also arranged in ascending size sequence according to thread designation for American National Standard gages. Table III contains thread designations previously listed in the Standard series of Unified Standard thread (with the exception of 1.0000-14NS-1 and 1.0000-14UNS (see 1.2) which were also listed in the American National Thread Series). They have been redesignated from Standard to special (UNS) threads and are listed herein for reference purposes. Table IV is a listing of Mil-Std Part Numbers in ascending numerical sequence, and is provided as an aid for locating the required design data contained in tables I, II, and III for any given Mil-Std Part Number.

4.1.1 Tables I, II and III. Tabulation of Design and Identification Data.

4.1.1.1 Mil-Std Part Numbers and the corresponding thread designations for each go thread ring gage and related check gages are listed in column B and C respectively.

4.1.1.2 Column A lists the proper reference to the applicable figure (drawing) for each Mil-Std Part Number.

4.1.1.3 Columns B to D inclusive list the identification data for each Mil-Std Part Number and, when applied to the figure (drawing) referenced in column A, provide information for proper marking of the gages. It is not necessary to mark the "5220" indicated in column B on the gage. For example: Mil-Std Part Number 5220-751-4556 may be marked 7514556 on the gage.

4.1.1.4 Columns E to K inclusive list the design data for each Mil-Std Part Number and, when applied to the figure (drawing) referenced in column A, provide data required for manufacture and inspection.

4.1.1.5 The unit of measurement in columns D, E, F, G, H, and K is inches. Column J is ± minutes of a degree.

4.1.1.6 Design data etc., not specifically covered in this standard shall conform to the latest issue of the documents referenced in paragraph 2 above.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

4.1.1.7 The method of extracting design and identification data from tables I, II, and III is illustrated as noted below.

Figure 7.	Go Thread Ring Gage	Page 11
Figure 8.	Truncated Thread Setting Plug Gage	Page 12
Figure 9.	Go Plain Plug Acceptance Check Gage	Page 13
Figure 10.	Not Go Plain Plug Acceptance Check Gage	Page 14

4.1.2 Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence

4.1.2.1 All Mil-Std Part Numbers contained in this standard are listed in ascending numerical sequence in column A.

4.1.2.2 Column B references the page number in tables I, II, and III where the design and identification data for the applicable Mil-Std Part Number may be found.

5. Procurement

5.1 The general requirements and tabulated design data contained in this standard are applicable for procurement purposes, as are the referenced manufacturing and inspection specifications.

5.2 Ordering Data. Procurement documents should specify the following:

(a) Title, number, and date of this standard

(b) Number of gages required and Mil-Std Part Number

(c) Place of delivery for acceptance inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


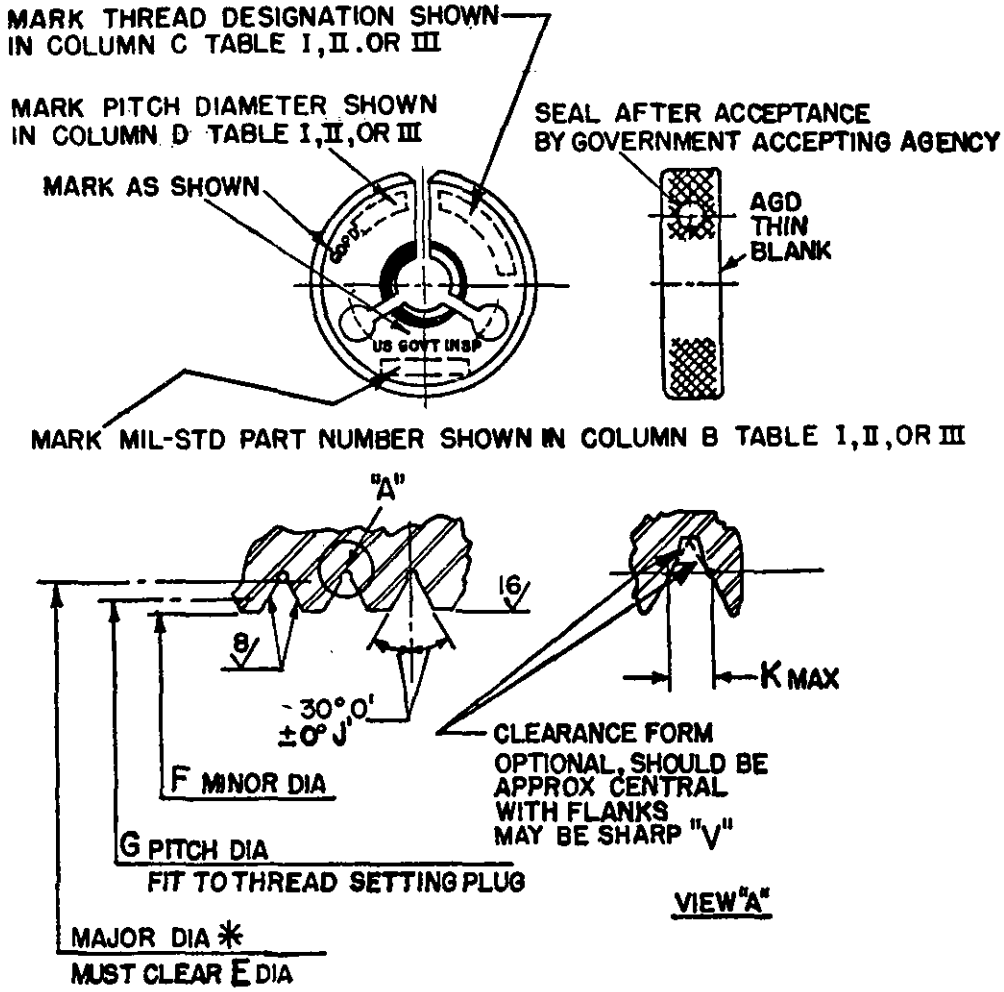


FIGURE 1. *Go thread ring gage (thin blank).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

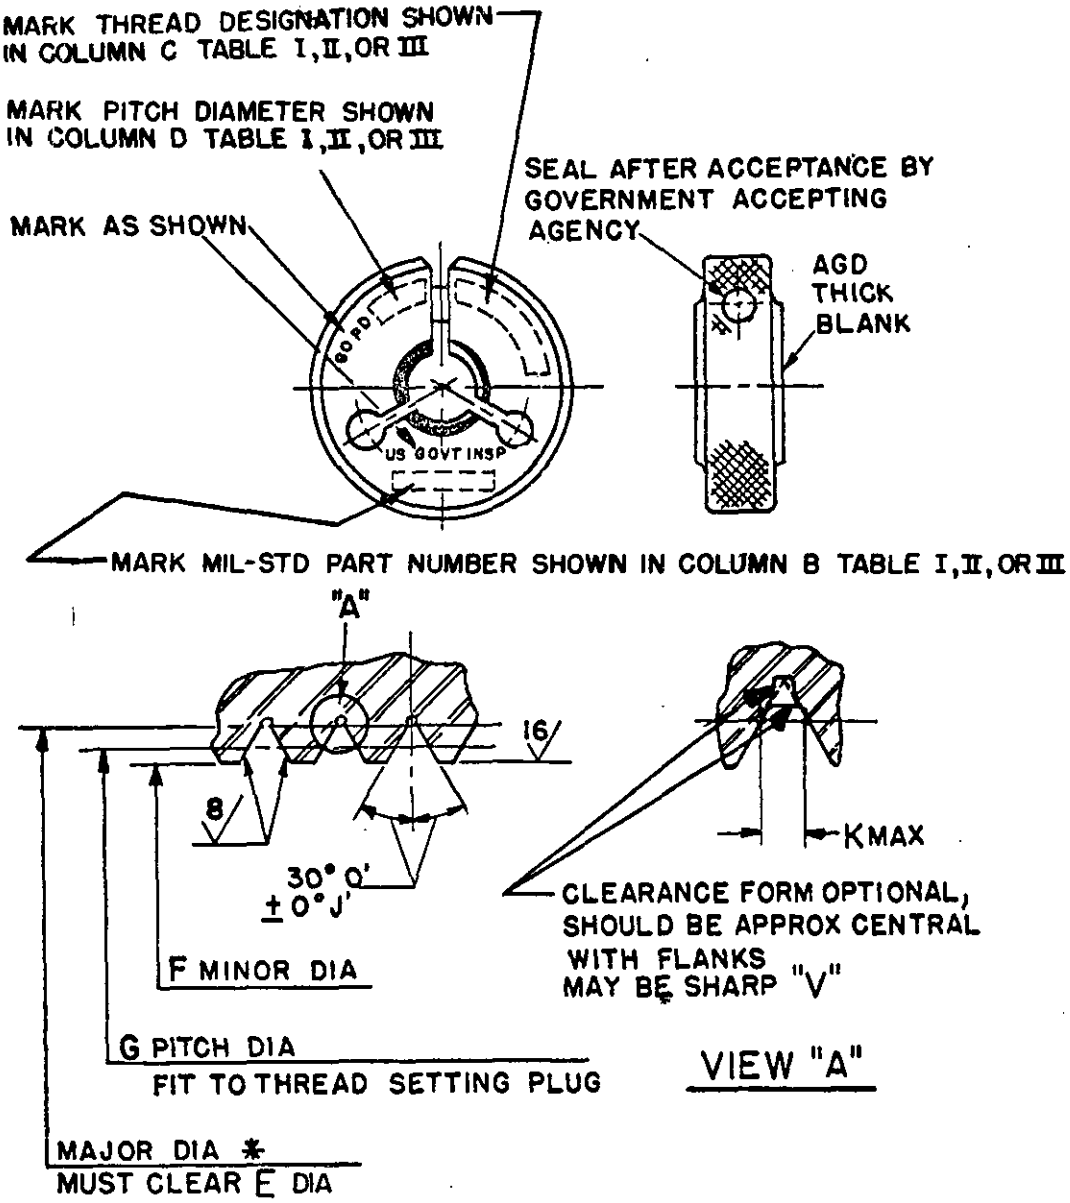


* MAXIMUM MAJOR DIA FULL PORTION THREAD SETTING PLUG GAGE

TOLERANCE ON LEAD H

FIGURE 2. *Go thread ring gage (thick blank).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

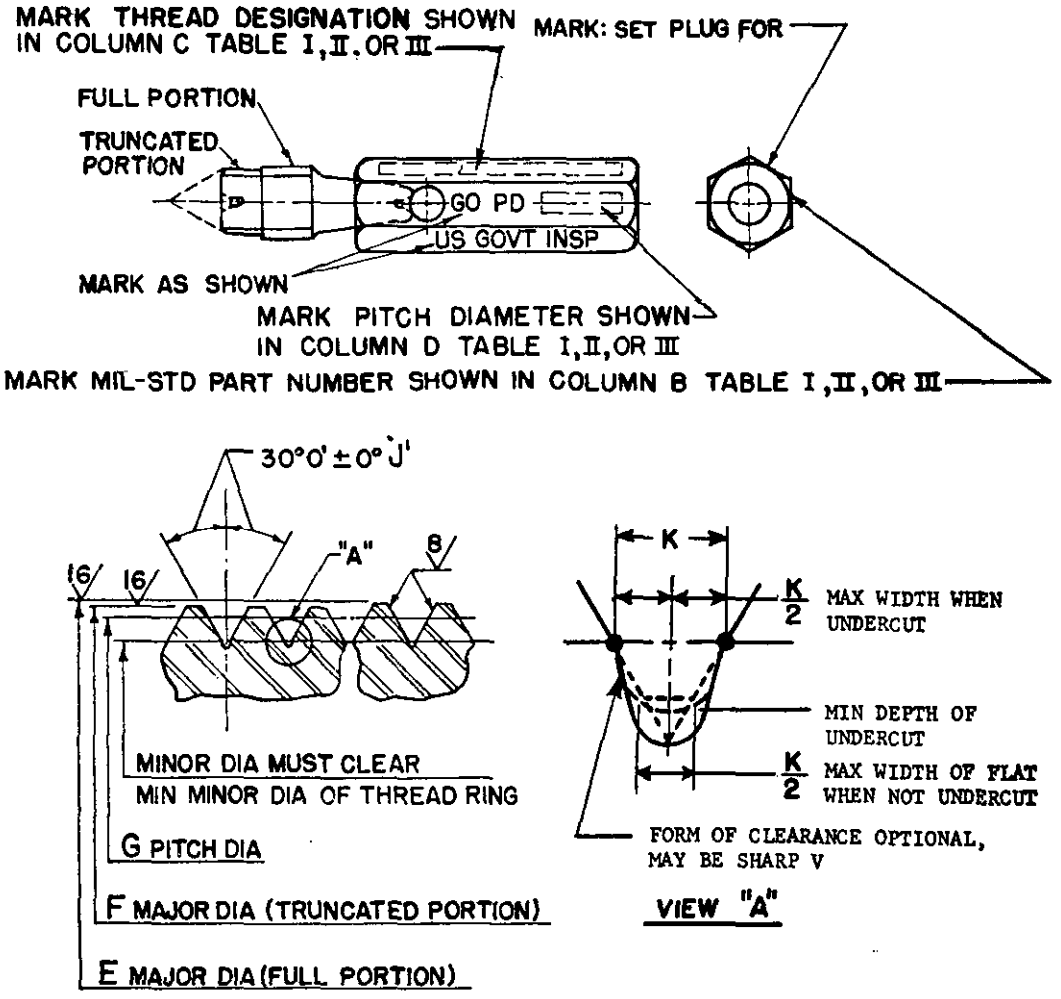

TOLERANCE ON LEAD H

FIGURE 3. *Truncated thread setting plug gage (taperlock type).*

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

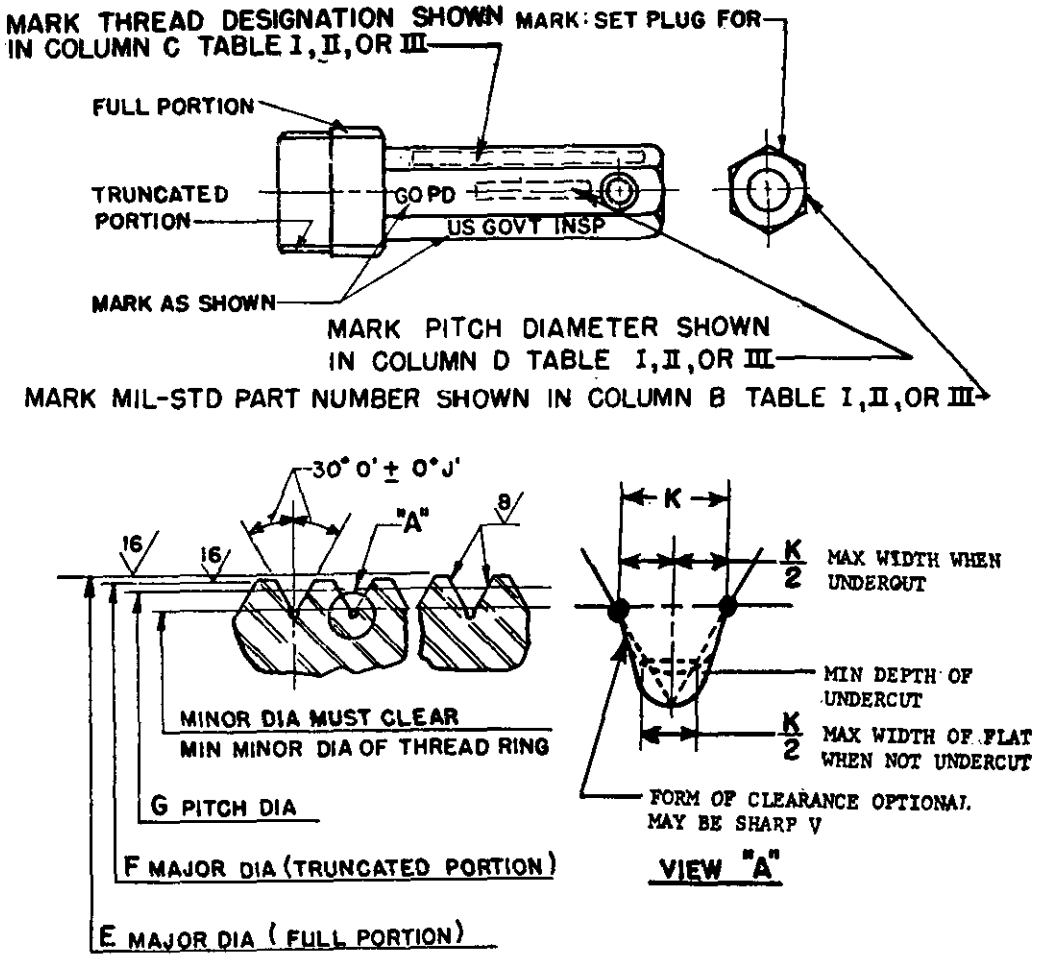


FIGURE 4. *Truncated thread setting plug gage (trilock type).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.



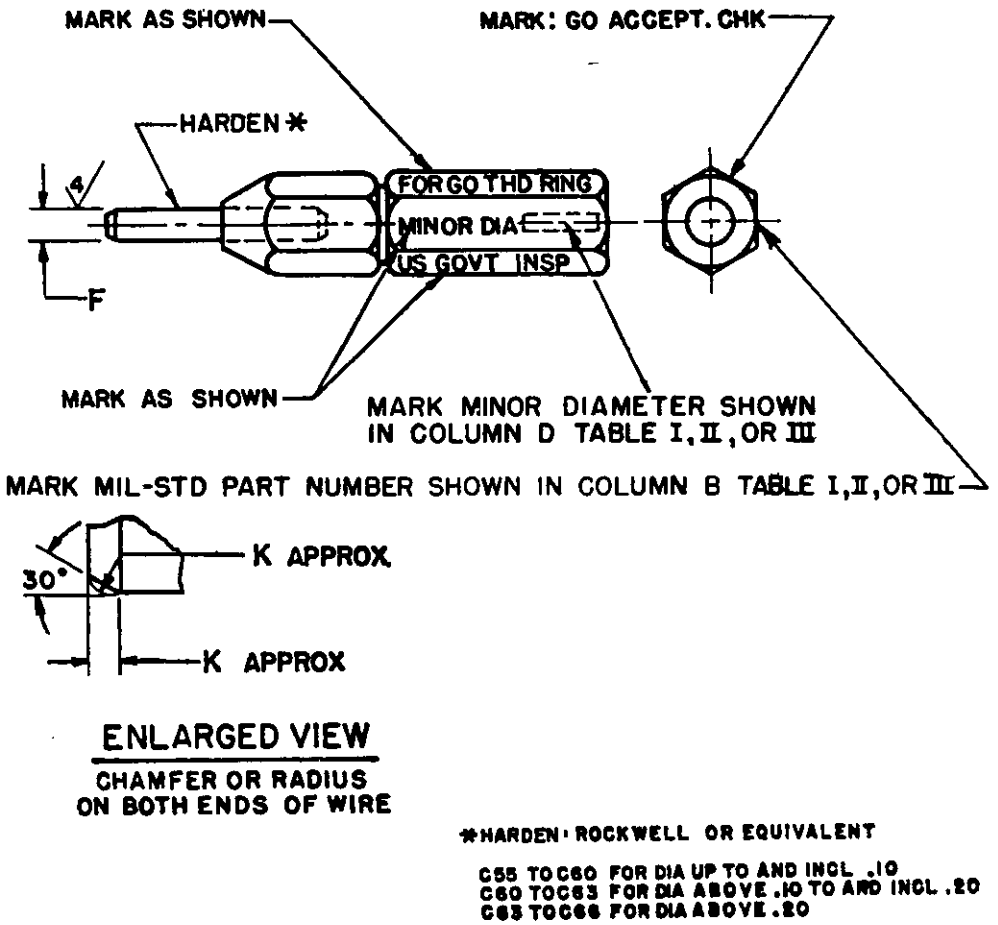


FIGURE 5. *Go plain plug acceptance check gage (wire type).*

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

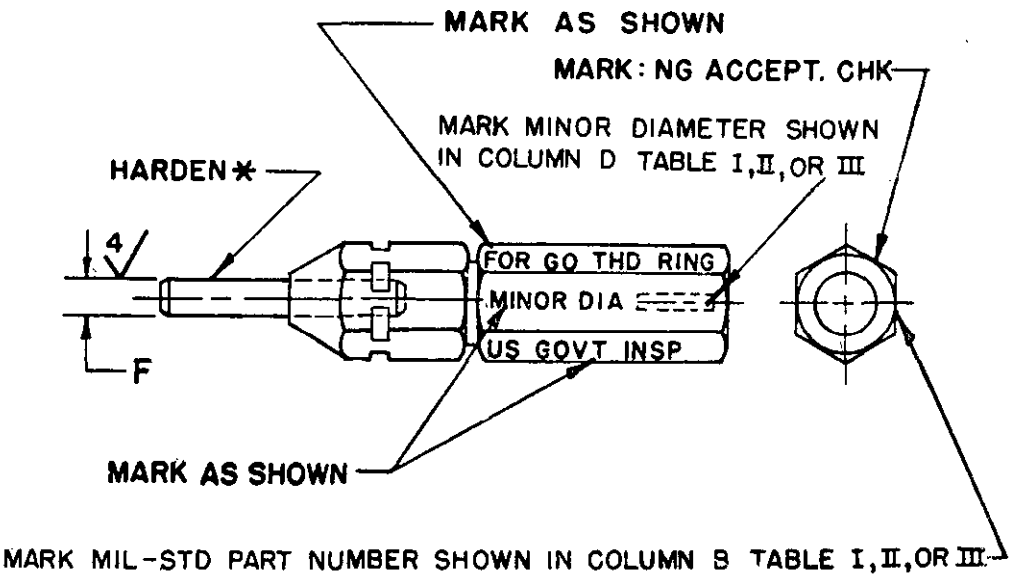

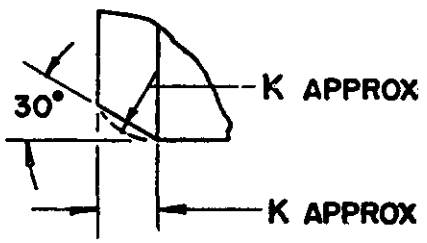

ENLARGED VIEW
CHAMFER OR RADIUS
ON BOTH ENDS OF WIRE

* HARDEN: ROCKWELL OR EQUIVALENT
C55 TO C60 FOR DIA UP TO AND INCL .10
C60 TO C63 FOR DIA ABOVE .10 TO AND INCL .20
C63 TO C66 FOR DIA ABOVE .20

FIGURE 6. *Not go plain plug acceptance check gage (wire type)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1970, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread

MARKING ON GAGE HANDLE					GAGE DIMENSIONS					
FIGURE NO.	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD / GO PD / MINOR DIA / MINOR DIA	*	MAJOR DIA / MAJOR DIA FULL PORTION / —— / ——	MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4556	(0) .060-80UNF-2A	.0514	1	.0598	.0460 - .0003		.0002	30	.0016
3	5220-751-4557	(0) .060-80UNF-2A	.0514	2	.0595 + .0003	.0561 - .0003	.0514 - .0002	.0001	20	.0031
5	5220-751-4558		.0457	3		.04570 - .00004				.008
6	5220-751-4559		.0460	4		.04600 + .00004				.008
1	5220-751-4560	(0) .060-80UNF	.0519	1	.0603	.0465 - .0003		.0002	30	.0016
3	5220-751-4561	(0) .060-80UNF	.0519	2	.0600 + .0003	.0566 - .0003	.0519 - .0002	.0001	20	.0031
5	5220-751-0856		.0462	3		.04620 - .00004				.008
6	5220-751-0857		.0465	4		.04650 + .00004				.008
1	5220-751-4564	(1) .073-64UNC-2A	.0623	1	.0728	.0555 - .0004		.0002	30	.0020
3	5220-751-4565	(1) .073-64UNC-2A	.0623	2	.0724 + .0004	.0684 - .0004	.0623 - .0002	.0001	20	.0039
5	5220-751-4566		.0551	3		.05510 - .00004				.008
6	5220-751-4567		.0555	4		.05550 + .00004				.008
1	5220-751-4568	(1) .073-64UNC	.0629	1	.0734				30	.0020
3	5220-751-4569	(1) .073-64UNC	.0629	2	.0730				20	.0039
5	5220-751-0864		.0557	3						.008
6	5220-751-0865		.0561	4						.008
1	5220-751-4572	(1) .073-72UNF-2A	.0634	1	.0727				30	.0017
3	5220-751-4573	(1) .073-72UNF-2A	.0634	2	.0724				20	.0035
5	5220-751-4574		.0571	3						.008
6	5220-751-4575		.0574	4		.05740 + .00004				.008
1	5220-751-4576	(1) .073-72UNF	.0640	1	.0733	.0580 - .0003		.0002	30	.0017
3	5220-751-4577	(1) .073-72UNF	.0640	2	.0730 + .0003	.0693 - .0003	.0640 - .0002	.0001	20	.0035
5	5220-751-0872		.0577	3		.05770 - .00004				.008
6	5220-751-0873		.0580	4		.05800 + .00004				.008

FIGURE 7: EXTRACTING DATA FOR GO THREAD RING GAGE
NOTE: Numbers '1' listed in the column marked asterisk (*) indicate the applicable lines for "Go Thread Ring Gage" data.

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Figure 7. Method of Extracting Design and Identification Data for Go Thread Ring Gage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA F. # 20-15.6, (OT) 4 Mar. 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread

MARKING ON GAGE HANDLE					GAGE DIMENSIONS					
FIGURE NO.	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD / GO PD / MINOR DIA / MINOR DIA		MAJOR DIA / MAJOR DIA FULL PORTION	MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4556	(0) .060-80UNF-2A	.0514	1	.0598	.0460 - .0003		.0002	30	.0016
(3)	5220-751-4557	(0) .060-80UNF-2A	.0514	2	.0595 + .0003	.0561 - .0003	.0514 - .0002	.0001	20	.0031
5	5220-751-4558		.0457	3		.04570 - .00004				.008
6	5220-751-4559		.0460	4		.04600 + .00004				.008
1	5220-751-4560	(0) .060-80UNF	.0519	1	.0603	.0465 - .0003		.0002	30	.0016
(3)	5220-751-4561	(0) .060-80UNF	.0519	2	.0600 + .0003	.0566 - .0003	.0519 - .0002	.0001	20	.0031
5	5220-751-0856		.0462	3		.04620 - .00004				.008
6	5220-751-0857		.0465	4		.04650 + .00004				.008
1	5220-751-4564	(1) .073-64UNC-2A	.0623	1	.0728	.0555 - .0004		.0002	30	.0020
(3)	5220-751-4565	(1) .073-64UNC-2A	.0623	2	.0724 + .0004	.0684 - .0004	.0623 - .0002	.0001	20	.0039
5	5220-751-4566		.0551	3		.05510 - .00004				.008
6	5220-751-4567		.0555	4		.05550 + .00004				.008
1	5220-751-4568	(1) .073-64UNC	.0629	1	.0734					.0020
(3)	5220-751-4569	(1) .073-64UNC	.0629	2	.0730					.0039
5	5220-751-0864		.0557	3						.008
6	5220-751-0865		.0561	4						.008
1	5220-751-4572	(1) .073-72UNF-2A	.0634	1	.0727					.0017
(3)	5220-751-4573	(1) .073-72UNF-2A	.0634	2	.0724					.0035
5	5220-751-4574		.0571	3						.008
6	5220-751-4575		.0574	4						.008
1	5220-751-4576	(1) .073-72UNF	.0640	1	.0733	.0580 - .0003		.0002	30	.0017
(3)	5220-751-4577	(1) .073-72UNF	.0640	2	.0730 + .0003	.0693 - .0003	.0640 - .0002	.0001	20	.0035
5	5220-751-0872		.0577	3		.05770 - .00004				.008
6	5220-751-0873		.0580	4		.05800 + .00004				.008

FIGURE 8: EXTRACTING DATA FOR TRUNCATED THREAD SETTING PLUG GAGE

NOTE: Numbers '2' listed in the column marked asterisk (*) indicate the applicable lines for 'Truncated Thread Setting Plug Gage' data.

1. Go Thread Ring Gage
* 2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Figure 8. Method of Extracting Design and Identification Data for Truncated Thread Setting Plug Gage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 40-15/6, (OT) 4 Mar, 63

Table I. Tabulation of Design and Identification Data - Unified Standard Thread

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GO PD MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4556	(0) .060-80UNF-2A	.0514	1	.0598	.0460 - .0003		.0002	30	.0016
3	5220-751-4557	(0) .060-80UNF-2A	.0514	2	.0595 + .0003	.0561 - .0003	.0514 - .0002	.0001	20	.0031
5	5220-751-4558		.0457	3		.04570 - .00004				.008
6	5220-751-4559		.0460	4		.04600 + .00004				.008
1	5220-751-4560	(0) .060-80UNF	.0519	1	.0603	.0465 - .0003		.0002	30	.0016
3	5220-751-4561	(0) .060-80UNF	.0519	2	.0600 + .0003	.0566 - .0003	.0519 - .0002	.0001	20	.0031
5	5220-751-0856		.0462	3		.04620 - .00004				.008
6	5220-751-0857		.0465	4		.04650 + .00004				.008
1	5220-751-4564	(1) .073-64UNC-2A	.0623	1	.0728	.0555 - .0004		.0002	30	.0020
3	5220-751-4565	(1) .073-64UNC-2A	.0623	2	.0724 + .0004	.0684 - .0004	.0623 - .0002	.0001	20	.0039
5	5220-751-4566		.0551	3		.05510 - .00004				.008
6	5220-751-4567		.0555	4		.05550 + .00004				.008
1	5220-751-4568	(1) .073-64UNC	.0629	1	.0734					.0020
3	5220-751-4569	(1) .073-64UNC	.0629	2	.0730					.0039
5	5220-751-0864		.0557	3						.008
6	5220-751-0865		.0561	4						.008
1	5220-751-4572	(1) .073-72UNF-2A	.0634	1	.0727					.0017
3	5220-751-4573	(1) .073-72UNF-2A	.0634	2	.0724					.0035
5	5220-751-4574		.0571	3						.008
6	5220-751-4575		.0574	4						.008
1	5220-751-4576	(1) .073-72UNF	.0640	1	.0733					.0017
3	5220-751-4577	(1) .073-72UNF	.0640	2	.0730 + .0003	.0693 - .0003	.0640 - .0002	.0001	20	.0035
5	5220-751-0872		.0577	3		.05770 - .00004				.008
6	5220-751-0873		.0580	4		.05800 + .00004				.008

FIGURE 9: EXTRACTING DATA FOR GO PLAIN PLUG ACCEPTANCE CHECK GAGE FOR MINOR DIAMETER

NOTE: Numbers "3" listed in the column marked asterisk (*) indicate the applicable lines for "Go Plain Plug Acceptance Check Gage for Minor Diameter" data.

1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
* 3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Figure 9. Method of Extracting Design and Identification Data for Go Plain Plug Acceptance Check Gage for Minor Diameter.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 10-1576, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread

FIGURE NO	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GO PD / MINOR DIA / MINOR DIA		GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA		PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4556	(0) .060-80UNF-2A	.0514	1	.0598	.0460 - .0003		.0002	30	.0016
3	5220-751-4557	(0) .060-80UNF-2A	.0514	2	.0595 + .0003	.0561 - .0003	.0514 - .0002	.0001	20	.0031
5	6220-751-4558		.0457	3		.04570 - .00004				.008
6	5220-751-4559		.0460	4		.04600 + .00004				.008
1	5220-751-4560	(0) .060-80UNF	.0519	1	.0603	.0465 - .0003		.0002	30	.0016
3	5220-751-4561	(0) .060-80UNF	.0519	2	.0600 + .0003	.0566 - .0003	.0519 - .0002	.0001	20	.0031
5	5220-751-0856		.0462	3		.04620 - .00004				.008
6	5220-751-0857		.0465	4		.04650 + .00004				.008
1	5220-751-4564	(1) .073-64UNC-2A	.0623	1	.0728	.0555 - .0004		.0002	30	.0020
3	5220-751-4565	(1) .073-64UNC-2A	.0623	2	.0724 + .0004	.0684 - .0004	.0623 - .0002	.0001	20	.0039
5	5220-751-4566		.0551	3		.05510 - .00004				.008
6	5220-751-4567		.0555	4		.05550 + .00004				.008
1	5220-751-4568	(1) .073-64UNC	.0629	1	.0734					.0020
3	5220-751-4569	(1) .073-64UNC	.0629	2	.0730					.0039
5	5220-751-0864		.0557	3						.008
6	5220-751-0865		.0561	4						.008
1	5220-751-4572	(1) .073-72UNF-2A	.0634	1	.0727					.0017
3	5220-751-4573	(1) .073-72UNF-2A	.0634	2	.0724					.0035
5	5220-751-4574		.0571	3						.008
6	5220-751-4575		.0574	4						.008
1	5220-751-4576	(1) .073-72UNF	.0640	1	.0733	.0580 - .0003		.0002	30	.0017
3	5220-751-4577	(1) .073-72UNF	.0640	2	.0730 + .0003	.0693 - .0003	.0640 - .0002	.0001	20	.0035
5	5220-751-0872		.0577	3		.05770 - .00004				.008
6	5220-751-0873		.0580	4		.05800 + .00004				.008

1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
* 4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

FIGURE 10: EXTRACTING DATA FOR NOT GO PLAIN PLUG ACCEPTANCE CHECK GAGE FOR MINOR DIAMETER

NOTE: Numbers "4" listed in the column marked asterisk (*) indicate the applicable lines for "Not Go Plain Plug Acceptance Check Gage for Minor Diameter" data.

Figure 10. Method of Extracting Design and Identification Data for Not Go Plain Plug Acceptance Check Gage for Minor Diameter.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4556	(0) .060-80UNF-2A	.0514	1	.0598	.0460 - .0003		.0002	30	.0016
3	5220-751-4557	(0) .060-80UNF-2A	.0514	2	.0595 + .0003	.0561 - .0003	.0514 - .0002	.0001	20	.0031
5	5220-751-4558		.0457	3		.04570 - .00004				.008
6	5220-751-4559		.0460	4		.04600 + .00004				.008
1	5220-751-4560	(0) .060-80UNF	.0519	1	.0603	.0465 - .0003		.0002	30	.0016
3	5220-751-4561	(0) .060-80UNF	.0519	2	.0600 + .0003	.0566 - .0003	.0519 - .0002	.0001	20	.0031
5	5220-751-0856		.0462	3		.04620 - .00004				.008
6	5220-751-0857		.0465	4		.04650 + .00004				.008
1	5220-751-4564	(1) .073-64UNC-2A	.0623	1	.0728	.0555 - .0004		.0002	30	.0020
3	5220-751-4565	(1) .073-64UNC-2A	.0623	2	.0724 + .0004	.0684 - .0004	.0623 - .0002	.0001	20	.0039
5	5220-751-4566		.0551	3		.05510 - .00004				.008
6	5220-751-4567		.0555	4		.05550 + .00004				.008
1	5220-751-4568	(1) .073-64UNC	.0629	1	.0734	.0561 - .0004		.0002	30	.0020
3	5220-751-4569	(1) .073-64UNC	.0629	2	.0730 + .0004	.0690 - .0004	.0629 - .0002	.0001	20	.0039
5	5220-751-0864		.0557	3		.05570 - .00004				.008
6	5220-751-0865		.0561	4		.05610 + .00004				.008
1	5220-751-4572	(1) .073-72UNF-2A	.0634	1	.0727	.0574 - .0003		.0002	30	.0017
3	5220-751-4573	(1) .073-72UNF-2A	.0634	2	.0724 + .0003	.0687 - .0003	.0634 - .0002	.0001	20	.0035
5	5220-751-4574		.0571	3		.05710 - .00004				.008
6	5220-751-4575		.0574	4		.05740 + .00004				.008
1	5220-751-4576	(1) .073-72UNF	.0640	1	.0733	.0580 - .0003		.0002	30	.0017
3	5220-751-4577	(1) .073-72UNF	.0640	2	.0730 + .0003	.0693 - .0003	.0640 - .0002	.0001	20	.0035
5	5220-751-0872		.0577	3		.05770 - .00004				.008
6	5220-751-0873		.0580	4		.05800 + .00004				.008

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1576, (OT) 4 May 61

Table I. - Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4580	(2) .086-56UNC-2A	.0738	1	.0858	.0661 - .0004		.0002	30	.0022
3	5220-751-4581	(2) .086-56UNC-2A	.0738	2	.0854 + .0004	.0810 - .0004	.0738 - .0002	.0001	20	.0045
5	5220-751-4582		.0657	3		.06570 - .00004				.008
6	5220-751-4583		.0661	4		.06610 + .00004				.008
1	5220-751-4584	(2) .086-56UNC	.0744	1	.0864	.0667 - .0004		.0002	30	.0022
3	5220-751-4585	(2) .086-56UNC	.0744	2	.0860 + .0004	.0816 - .0004	.0744 - .0002	.0001	20	.0045
5	5220-751-0880		.0663	3		.06630 - .00004				.008
6	5220-751-0881		.0667	4		.06670 + .00004				.008
1	5220-751-4588	(2) .086-64UNF-2A	.0753	1	.0858	.0685 - .0004		.0002	30	.0020
3	5220-751-4589	(2) .086-64UNF-2A	.0753	2	.0854 + .0004	.0814 - .0004	.0753 - .0002	.0001	20	.0039
5	5220-751-4590		.0681	3		.06810 - .00004				.008
6	5220-751-4591		.0685	4		.06850 + .00004				.008
1	5220-751-4592	(2) .086-64UNF	.0759	1	.0864	.0691 - .0004		.0002	30	.0020
3	5220-751-4593	(2) .086-64UNF	.0759	2	.0860 + .0004	.0820 - .0004	.0759 - .0002	.0001	20	.0039
5	5220-751-0888		.0687	3		.06870 - .00004				.008
6	5220-751-0889		.0691	4		.06910 + .00004				.008
1	5220-751-4596	(3) .099-48UNC-2A	.0848	1	.0987	.0758 - .0004		.0002	30	.0026
3	5220-751-4597	(3) .099-48UNC-2A	.0848	2	.0983 + .0004	.0934 - .0004	.0848 - .0002	.0001	18	.0052
5	5220-751-6568		.0754	3		.07540 - .00004				.015
6	5220-751-6569		.0758	4		.07580 + .00004				.015
1	5220-751-4600	(3) .099-48UNC	.0855	1	.0994	.0765 - .0004		.0002	30	.0026
3	5220-751-4601	(3) .099-48UNC	.0855	2	.0990 + .0004	.0941 - .0004	.0855 - .0002	.0001	18	.0052
5	5220-751-6570		.0761	3		.07610 - .00004				.015
6	5220-751-6571		.0765	4		.07650 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1570, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GC PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4604	(3) .099-56UNF-2A	.0867	1	.0987	.0790 - .0004		.0002	30	.0022
3	5220-751-4605	(3) .099-56UNF-2A	.0867	2	.0983 + .0004	.0939 - .0004	.0867 - .0002	.0001	20	.0045
5	5220-751-4606		.0786	3		.07860 - .00004				.015
6	5220-751-4607		.0790	4		.07900 + .00004				.015
1	5220-751-4608	(3) .099-56UNF	.0874	1	.0994	.0797 - .0004		.0002	30	.0022
3	5220-751-4609	(3) .099-56UNF	.0874	2	.0990 + .0004	.0946 - .0004	.0874 - .0002	.0001	20	.0045
5	5220-751-0904		.0793	3		.07930 - .00004				.015
6	5220-751-0905		.0797	4		.07970 + .00004				.015
1	5220-751-4612	(4) .112-40UNC-2A	.0950	1	.1116	.0842 - .0004		.0002	20	.0031
3	5220-751-4613	(4) .112-40UNC-2A	.0950	2	.1112 + .0004	.1056 - .0004	.0950 - .0002	.0001	15	.0062
5	5220-751-6576		.0838	3		.08380 - .00004				.015
6	5220-751-6577		.0842	4		.08420 + .00004				.015
1	5220-751-4616	(4) .112-40UNC	.0958	1	.1124	.0850 - .0004		.0002	20	.0031
3	5220-751-4617	(4) .112-40UNC	.0958	2	.1120 + .0004	.1064 - .0004	.0958 - .0002	.0001	15	.0062
5	5220-751-6578		.0846	3		.08460 - .00004				.015
6	5220-751-6579		.0850	4		.08500 + .00004				.015
1	5220-751-4620	(4) .112-48UNF-2A	.0978	1	.1117	.0888 - .0004		.0002	30	.0026
3	5220-751-4621	(4) .112-48UNF-2A	.0978	2	.1113 + .0004	.1064 - .0004	.0978 - .0002	.0001	18	.0052
5	5220-751-6582		.0884	3		.08840 - .00004				.015
6	5220-751-6583		.0888	4		.08880 + .00004				.015
1	5220-751-4624	(4) .112-48UNF	.0985	1	.1124	.0895 - .0004		.0002	30	.0026
3	5220-751-4625	(4) .112-48UNF	.0985	2	.1120 + .0004	.1071 - .0004	.0985 - .0002	.0001	18	.0052
5	5220-751-6584		.0891	3		.08910 - .00004				.015
6	5220-751-6585		.0895	4		.08950 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1576, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	———	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
			MINOR DIA	3	———	PLAIN PLUG DIA	———	———	———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———	———	———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4628	(5) .125-40UNC-2A	.1080	1	.1246	.0972 - .0004		.0002	20	.0031
3	5220-751-4629	(5) .125-40UNC-2A	.1080	2	.1242 + .0004	.1186 - .0004	.1080 - .0002	.0001	15	.0062
5	5220-751-6588		.0968	3		.09680 - .00004				.015
6	5220-751-6589		.0972	4		.09720 + .00004				.015
1	5220-751-4632	(5) .125-40UNC	.1088	1	.1254	.0980 - .0004		.0002	20	.0031
3	5220-751-4633	(5) .125-40UNC	.1088	2	.1250 + .0004	.1194 - .0004	.1088 - .0002	.0001	15	.0062
5	5220-751-6590		.0976	3		.09760 - .00004				.015
6	5220-751-6591		.0980	4		.09800 + .00004				.015
1	5220-751-4636	(5) .125-44UNF-2A	.1095	1	.1247	.0997 - .0004		.0002	20	.0028
3	5220-751-4637	(5) .125-44UNF-2A	.1095	2	.1243 + .0004	.1191 - .0004	.1095 - .0002	.0001	15	.0057
5	5220-751-4638		.0993	3		.09930 - .00004				.015
6	5220-751-4639		.0997	4		.09970 + .00004				.015
1	5220-751-4640	(5) .125-44UNF	.1102	1	.1254	.1004 - .0004		.0002	20	.0028
3	5220-751-4641	(5) .125-44UNF	.1102	2	.1250 + .0004	.1198 - .0004	.1102 - .0002	.0001	15	.0057
5	5220-751-0936		.1000	3		.10000 - .00004				.015
6	5220-751-0937		.1004	4		.10040 + .00004				.015
1	5220-751-4644	(6) .138-32UNC-2A	.1169	1	.1377	.1034 - .0005		.0003	15	.0039
3	5220-751-4645	(6) .138-32UNC-2A	.1169	2	.1372 + .0005	.1307 - .0005	.1169 - .0003	.0001	12	.0078
5	5220-751-4646		.1029	3		.10290 - .00004				.015
6	5220-751-4647		.1034	4		.10340 + .00004				.015
1	5220-751-4648	(6) .138-32UNC	.1177	1	.1385	.1042 - .0005		.0003	15	.0039
3	5220-751-4649	(6) .138-32UNC	.1177	2	.1380 + .0005	.1315 - .0005	.1177 - .0003	.0001	12	.0078
5	5220-751-0944		.1037	3		.10370 - .00004				.015
6	5220-751-0945		.1042	4		.10420 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION			GAGE DIMENSIONS					
			GO PD	1	MAJOR DIA	MINOR DIA	———	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
			MINOR DIA	3	———	PLAIN PLUG DIA	———	———	———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———		———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4652	(6) .138-40UNF-2A	.1210	1	.1376	.1102 - .0004		.0002	20	.0031
3	5220-751-4653	(6) .138-40UNF-2A	.1210	2	.1372 + .0004	.1316 - .0004	.1210 - .0002	.0001	15	.0062
5	5220-751-6598		.1098	3		.10980 - .00004				.015
6	5220-751-6599		.1102	4		.11020 + .00004				.015
1	5220-751-4656	(6) .138-40UNF	.1218	1	.1384	.1110 - .0004		.0002	20	.0031
3	5220-751-4657	(6) .138-40UNF	.1218	2	.1380 + .0004	.1324 - .0004	.1218 - .0002	.0001	15	.0062
5	5220-751-6600		.1106	3		.11060 - .00004				.015
6	5220-751-6601		.1110	4		.11100 + .00004				.015
1	5220-751-4660	(8) .164-32UNC-2A	.1428	1	.1636	.1293 - .0005		.0003	15	.0039
3	5220-751-4661	(8) .164-32UNC-2A	.1428	2	.1631 + .0005	.1566 - .0005	.1428 - .0003	.0001	12	.0078
5	5220-751-4662		.1288	3		.12880 - .00004				.015
6	5220-751-4663		.1293	4		.12930 + .00004				.015
1	5220-751-4664	(8) .164-32UNC	.1437	1	.1645	.1302 - .0005		.0003	15	.0039
3	5220-751-4665	(8) .164-32UNC	.1437	2	.1640 + .0005	.1575 - .0005	.1437 - .0003	.0001	12	.0078
5	5220-751-0960		.1297	3		.12970 - .00004				.015
6	5220-751-0961		.1302	4		.13020 + .00004				.015
1	5220-751-4668	(8) .164-36UNF-2A	.1452	1	.1636	.1332 - .0004		.0002	20	.0035
3	5220-751-4669	(8) .164-36UNF-2A	.1452	2	.1632 + .0004	.1572 - .0004	.1452 - .0002	.0001	12	.0069
5	5220-751-6606		.1328	3		.13280 - .00004				.015
6	5220-751-6607		.1332	4		.13320 + .00004				.015
1	5220-751-4672	(8) .164-36UNF	.1460	1	.1644	.1340 - .0004		.0002	20	.0035
3	5220-751-4673	(8) .164-36UNF	.1460	2	.1640 + .0004	.1580 - .0004	.1460 - .0002	.0001	12	.0069
5	5220-751-6608		.1336	3		.13360 - .00004				.015
6	5220-751-6609		.1340	4		.13400 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION			GAGE DIMENSIONS					
			GO PD	1	MAJOR DIA	MINOR DIA	———	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
			MINOR DIA	3	———	PLAIN PLUG DIA	———	→	———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———		———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4676	(10) .190-24UNC-2A	.1619	1	.1895	.1439 - .0005		.0003	15	.0052
3	5220-751-4677	(10) .190-24UNC-2A	.1619	2	.1890 + .0005	.1811 - .0005	.1619 - .0003	.00015	8	.0104
5	5220-751-4678		.1434	3		.14340 - .00004				.015
6	5220-751-4679		.1439	4		.14390 + .00004				.015
1	5220-751-4680	(10) .190-24UNC	.1629	1	.1905	.1449 - .0005		.0003	15	.0052
3	5220-751-4681	(10) .190-24UNC	.1629	2	.1900 + .0005	.1821 - .0005	.1629 - .0003	.00015	8	.0104
5	5220-751-0976		.1444	3		.14440 - .00004				.015
6	5220-751-0977		.1449	4		.14490 + .00004				.015
1	5220-751-4684	(10) .190-32UNF-2A	.1688	1	.1896	.1553 - .0005		.0003	15	.0039
3	5220-751-4685	(10) .190-32UNF-2A	.1688	2	.1891 + .0005	.1826 - .0005	.1688 - .0003	.0001	12	.0078
5	5220-751-4686		.1548	3		.15480 - .00004				.015
6	5220-751-4687		.1553	4		.15530 + .00004				.015
1	5220-751-4688	(10) .190-32UNF	.1697	1	.1905	.1562 - .0005		.0003	15	.0039
3	5220-751-4689	(10) .190-32UNF	.1697	2	.1900 + .0005	.1835 - .0005	.1697 - .0003	.0001	12	.0078
5	5220-751-0984		.1557	3		.15570 - .00004				.015
6	5220-751-0985		.1562	4		.15620 + .00004				.015
1	5220-751-4692	(12) .216-24UNC-2A	.1879	1	.2155	.1699 - .0005		.0003	15	.0052
3	5220-751-4693	(12) .216-24UNC-2A	.1879	2	.2150 + .0005	.2071 - .0005	.1879 - .0003	.00015	8	.0104
5	5220-751-4694		.1694	3		.16940 - .00004				.015
6	5220-751-4695		.1699	4		.16990 + .00004				.015
1	5220-751-4696	(12) .216-24UNC	.1889	1	.2165	.1709 - .0005		.0003	15	.0052
3	5220-751-4697	(12) .216-24UNC	.1889	2	.2160 + .0005	.2081 - .0005	.1889 - .0003	.00015	8	.0104
5	5220-751-0992		.1704	3		.17040 - .00004				.015
6	5220-751-0993		.1709	4		.17090 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD		GAGE DIMENSIONS: MAJOR DIA / MINOR DIA	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
			MINOR DIA	3	———	PLAIN PLUG DIA	———	———	———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———		———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4700	(12) .216-28UNF-2A	.1918	1	.2155	.1763 - .0005		.0003	15	.0045
3	5220-751-4701	(12) .216-28UNF-2A	.1918	2	.2150 + .0005	.2079 - .0005	.1918 - .0003	.00015	8	.0089
5	5220-751-4702		.1758	3		.17580 - .00004				.015
6	5220-751-4703		.1763	4		.17630 + .00004				.015
1	5220-751-4704	(12) .216-28UNF	.1928	1	.2165	.1773 - .0005		.0003	15	.0045
3	5220-751-4705	(12) .216-28UNF	.1928	2	.2160 + .0005	.2089 - .0005	.1928 - .0003	.00015	8	.0089
5	5220-751-1000		.1768	3		.17680 - .00004				.015
6	5220-751-1001		.1773	4		.17730 + .00004				.015
1	5220-751-6914	(12) .216-32UNEF-2A	.1948	1	.2156	.1813 - .0005		.0003	15	.0039
3	5220-751-6915	(12) .216-32UNEF-2A	.1948	2	.2151 + .0005	.2086 - .0005	.1948 - .0003	.0001	12	.0078
5	5220-751-6916		.1808	3		.18080 - .00004				.015
6	5220-751-6917		.1813	4		.18130 + .00004				.015
1	5220-751-6918	(12) .216-32UNEF	.1957	1	.2165	.1822 - .0005		.0003	15	.0039
3	5220-751-6919	(12) .216-32UNEF	.1957	2	.2160 + .0005	.2095 - .0005	.1957 - .0003	.0001	12	.0078
5	5220-751-6920		.1817	3		.18170 - .00004				.015
6	5220-751-6921		.1822	4		.18220 + .00004				.015
1	5220-751-4708	.2500-20UNC-1A,2A	.2164	1	.2494	.1947 - .0005		.0003	15	.0062
3	5220-751-4709	.2500-20UNC-1A,2A	.2164	2	.2489 + .0005	.2399 - .0005	.2164 - .0003	.00015	8	.0125
5	5220-751-4710		.1943	3		.19430 - .00004				.015
6	5220-751-4711		.1948	4		.19480 + .00004				.015
1	5220-751-4712	.2500-20UNC	.2175	1	.2505	.1958 - .0005		.0003	15	.0062
3	5220-751-4713	.2500-20UNC	.2175	2	.2500 + .0005	.2410 - .0005	.2175 - .0003	.00015	8	.0125
5	5220-751-1008		.1954	3		.19540 - .00004				.015
6	5220-751-1009		.1959	4		.19590 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
			MINOR DIA	3	———	PLAIN PLUG DIA	———		———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———		———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4716	.2500-28UNF-1A,2A	.2258	1	.2495	.2103 - .0005		.0003	15	.0045
3	5220-751-4717	.2500-28UNF-1A,2A	.2258	2	.2490 + .0005	.2419 - .0005	.2258 - .0003	.00015	8	.0089
5	5220-751-4718		.2098	3		.20980 - .00004				.015
6	5220-751-4719		.2103	4		.21030 + .00004				.015
1	5220-751-4720	.2500-28UNF	.2268	1	.2505	.2113 - .0005		.0003	15	.0045
3	5220-751-4721	.2500-28UNF	.2268	2	.2500 + .0005	.2429 - .0005	.2268 - .0003	.00015	8	.0089
5	5220-751-1016		.2108	3		.21080 - .00004				.015
6	5220-751-1017		.2113	4		.21130 + .00004				.015
1	5220-751-4724	.2500-32UNEF-2A	.2287	1	.2495	.2152 - .0005		.0003	15	.0039
3	5220-751-4725	.2500-32UNEF-2A	.2287	2	.2490 + .0005	.2425 - .0005	.2287 - .0003	.0001	12	.0078
5	5220-751-4726		.2147	3		.21470 - .00004				.015
6	5220-751-4727		.2152	4		.21520 + .00004				.015
1	5220-751-4728	.2500-32UNEF	.2297	1	.2505	.2162 - .0005		.0003	15	.0039
3	5220-751-4729	.2500-32UNEF	.2297	2	.2500 + .0005	.2435 - .0005	.2297 - .0003	.0001	12	.0078
5	5220-751-1024		.2157	3		.21570 - .00004				.015
6	5220-751-1025		.2162	4		.21620 + .00004				.015
1	5220-751-4732	.3125-18UNC-1A,2A	.2752	1	.3118	.2511 - .0005		.0003	10	.0069
3	5220-751-4733	.3125-18UNC-1A,2A	.2752	2	.3113 + .0005	.3016 - .0005	.2752 - .0003	.00015	8	.0139
5	5220-751-6624		.2506	3		.25060 - .00004				.015
6	5220-751-6625		.2511	4		.25110 + .00004				.015
1	5220-751-4736	.3125-18UNC	.2764	1	.3130	.2523 - .0005		.0003	10	.0069
3	5220-751-4737	.3125-18UNC	.2764	2	.3125 + .0005	.3028 - .0005	.2764 - .0003	.00015	8	.0139
5	5220-751-6626		.2518	3		.25180 - .00004				.015
6	5220-751-6627		.2523	4		.25230 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OTJ) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION			GAGE DIMENSIONS					
			GO PD	1	MAJOR DIA	MINOR DIA	———	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
			MINOR DIA	3	———	PLAIN PLUG DIA	———	———	———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———		———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	7517554	.3125-20UN-2A	.2788	1	.3118	.2571 - .0005		.0003	15	.0062
3	7517555	.3125-20UN-2A	.2788	2	.3113 + .0005	.3023 - .0005	.2788 - .0003	.00015	8	.0125
5	7517556		.2567	3		.25670 - .00004				.015
6	7517557		.2572	4		.25720 + .00004				.015
1	7517558	.3125-20UN	.2800	1	.3130	.2583 - .0005		.0003	15	.0062
3	7517559	.3125-20UN	.2800	2	.3125 + .0005	.3035 - .0005	.2800 - .0003	.00015	8	.0125
5	7517560		.2579	3		.25790 - .00004				.015
6	7517561		.2584	4		.25840 + .00004				.015
1	5220-751-4740	.3125-24UNF-1A,2A	.2843	1	.3119	.2663 - .0005		.0003	15	.0052
3	5220-751-4741	.3125-24UNF-1A,2A	.2843	2	.3114 + .0005	.3035 - .0005	.2843 - .0003	.00015	8	.0104
5	5220-751-4742		.2658	3		.26580 - .00004				.015
6	5220-751-4743		.2663	4		.26630 + .00004				.015
1	5220-751-4744	.3125-24UNF	.2854	1	.3130	.2674 - .0005		.0003	15	.0052
3	5220-751-4745	.3125-24UNF	.2854	2	.3125 + .0005	.3046 - .0005	.2854 - .0003	.00015	8	.0104
5	5220-751-1038		.2669	3		.26690 - .00004				.015
6	5220-751-1039		.2674	4		.26740 + .00004				.015
1	7517562	.3125-28UN-2A	.2883	1	.3120	.2728 - .0005		.0003	15	.0045
3	7517563	.3125-28UN-2A	.2883	2	.3115 + .0005	.3044 - .0005	.2883 - .0003	.00015	8	.0089
5	7517564		.2723	3		.27230 - .00004				.015
6	7517565		.2728	4		.27280 + .00004				.015
1	7517566	.3125-28UN	.2893	1	.3130	.2738 - .0005		.0003	15	.0045
3	7517567	.3125-28UN	.2893	2	.3125 + .0005	.3054 - .0005	.2893 - .0003	.00015	8	.0089
5	7517568		.2733	3		.27330 - .00004				.015
6	7517569		.2738	4		.27380 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / ——— / ———	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: ——— / PITCH DIA / ——— / ———	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / ——— / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4748	.3125-32UNEF-2A	.2912	1	.3120	.2777 - .0005		.0003	15	.0039
3	5220-751-4749	.3125-32UNEF-2A	.2912	2	.3115 + .0005	.3050 - .0005	.2912 - .0003	.0001	12	.0078
5	5220-751-4750		.2772	3		.27720 - .00004				.015
6	5220-751-4751		.2777	4		.27770 + .00004				.015
1	5220-751-4752	.3125-32UNEF	.2922	1	.3130	.2787 - .0005		.0003	15	.0039
3	5220-751-4753	.3125-32UNEF	.2922	2	.3125 + .0005	.3060 - .0005	.2922 - .0003	.0001	12	.0078
5	5220-751-1046		.2782	3		.27820 - .00004				.015
6	5220-751-1047		.2787	4		.27870 + .00004				.015
1	5220-751-4756	.3750-16UNC-1A,2A	.3331	1	.3743	.3060 - .0006		.0003	10	.0078
3	5220-751-4757	.3750-16UNC-1A,2A	.3331	2	.3737 + .0006	.3632 - .0006	.3331 - .0003	.00015	8	.0156
5	5220-751-4758		.3054	3		.30540 - .00004				.030
6	5220-751-4759		.3060	4		.30600 + .00004				.030
1	5220-751-4760	.3750-16UNC	.3344	1	.3756	.3073 - .0006		.0003	10	.0078
3	5220-751-4761	.3750-16UNC	.3344	2	.3750 + .0006	.3645 - .0006	.3344 - .0003	.00015	8	.0156
5	5220-751-1052		.3067	3		.30670 - .00004				.030
6	5220-751-1053		.3073	4		.30730 + .00004				.030
1	7517570	.3750-20UN-2A	.3413	1	.3743	.3196 - .0005		.0003	15	.0062
3	7517571	.3750-20UN-2A	.3413	2	.3738 + .0005	.3648 - .0005	.3413 - .0003	.00015	8	.0125
5	7517572		.3191	3		.31910 - .00004				.030
6	7517573		.3196	4		.31960 + .00004				.030
1	7517574	.3750-20UN	.3425	1	.3755	.3208 - .0005		.0003	15	.0062
3	7517575	.3750-20UN	.3425	2	.3750 + .0005	.3660 - .0005	.3425 - .0003	.00015	8	.0125
5	7517576		.3203	3		.32030 - .00004				.030
6	7517577		.3208	4		.32080 + .00004				.030

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OTJ) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD / MINOR DIA / MINOR DIA		GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / ——— / ———	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: ——— / PITCH DIA / ——— / ———	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4764	.3750-24UNF-1A,2A	.3468	1	.3744	.3288 - .0005		.0003	15	.0052
3	5220-751-4765	.3750-24UNF-1A,2A	.3468	2	.3739 + .0005	.3660 - .0005	.3468 - .0003	.00015	8	.0104
5	5220-751-4766		.3283	3		.32830 - .00004				.030
6	5220-751-4767		.3288	4		.32880 + .00004				.030
1	5220-751-4768	.3750-24UNF	.3479	1	.3755	.3299 - .0005		.0003	15	.0052
3	5220-751-4769	.3750-24UNF	.3479	2	.3750 + .0005	.3671 - .0005	.3479 - .0003	.00015	8	.0104
5	5220-751-1060		.3294	3		.32940 - .00004				.030
6	5220-751-1061		.3299	4		.32990 + .00004				.030
1	7517578	.3750-28UN-2A	.3507	1	.3744	.3352 - .0005		.0003	15	.0045
3	7517579	.3750-28UN-2A	.3507	2	.3739 + .0005	.3668 - .0005	.3507 - .0003	.00015	8	.0089
5	7517580		.3347	3		.33470 - .00004				.030
6	7517581		.3352	4		.33520 + .00004				.030
1	7517582	.3750-28UN	.3518	1	.3755	.3363 - .0005		.0003	15	.0045
3	7517583	.3750-28UN	.3518	2	.3750 + .0005	.3679 - .0005	.3518 - .0003	.00015	8	.0089
5	7517584		.3358	3		.33580 - .00004				.030
6	7517585		.3363	4		.33630 + .00004				.030
1	5220-751-4772	.3750-32UNEF-2A	.3537	1	.3745	.3402 - .0005		.0003	15	.0039
3	5220-751-4773	.3750-32UNEF-2A	.3537	2	.3740 + .0005	.3675 - .0005	.3537 - .0003	.0001	12	.0078
5	5220-751-4774		.3397	3		.33970 - .00004				.030
6	5220-751-4775		.3402	4		.34020 + .00004				.030
1	5220-751-4776	.3750-32UNEF	.3547	1	.3755	.3412 - .0005		.0003	15	.0039
3	5220-751-4777	.3750-32UNEF	.3547	2	.3750 + .0005	.3685 - .0005	.3547 - .0003	.0001	12	.0078
5	5220-751-1068		.3407	3		.34070 - .00004				.030
6	5220-751-1069		.3412	4		.34120 + .00004				.030

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / ——— / ———	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: ——— / PITCH DIA / ——— / ———	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4780	.4375-14UNC-1A,2A	.3897	1	.4367	.3588 - .0006		.0003	10	.0089
3	5220-751-4781	.4375-14UNC-1A,2A	.3897	2	.4361 + .0006	.4246 - .0006	.3897 - .0003	.0002	6	.0179
5	5220-751-4782		.3582	3		.35820 - .00004				.030
6	5220-751-4783		.3588	4		.35880 + .00004				.030
1	5220-751-4784	.4375-14UNC	.3911	1	.4381	.3602 - .0006		.0003	10	.0089
3	5220-751-4785	.4375-14UNC	.3911	2	.4375 + .0006	.4260 - .0006	.3911 - .0003	.0002	6	.0179
5	5220-751-1074		.3596	3		.35960 - .00004				.030
6	5220-751-1075		.3602	4		.36020 + .00004				.030
1	7517586	.4375-16UN-2A	.3955	1	.4367	.3684 - .0006		.0003	10	.0078
3	7517587	.4375-16UN-2A	.3955	2	.4361 + .0006	.4256 - .0006	.3955 - .0003	.00015	8	.0156
1	7517588	.4375-16UN	.3969	1	.4381	.3698 - .0006		.0003	10	.0078
3	7517589	.4375-16UN	.3969	2	.4375 + .0006	.4270 - .0006	.3969 - .0003	.00015	8	.0156
1	5220-751-4788	.4375-20UNF-1A,2A	.4037	1	.4367	.3820 - .0005		.0003	15	.0062
3	5220-751-4789	.4375-20UNF-1A,2A	.4037	2	.4362 + .0005	.4272 - .0005	.4037 - .0003	.00015	8	.0125
1	5220-751-4790	.4375-20UNF	.4050	1	.4380	.3834 - .0005		.0003	15	.0062
3	5220-751-4791	.4375-20UNF	.4050	2	.4375 + .0005	.4285 - .0005	.4050 - .0003	.00015	8	.0125
1	5220-751-4792	.4375-28UNEF-2A	.4132	1	.4369	.3977 - .0005		.0003	15	.0045
3	5220-751-4793	.4375-28UNEF-2A	.4132	2	.4364 + .0005	.4293 - .0005	.4132 - .0003	.00015	8	.0089
1	5220-751-4794	.4375-28UNEF	.4143	1	.4380	.3988 - .0005		.0003	15	.0045
3	5220-751-4795	.4375-28UNEF	.4143	2	.4375 + .0005	.4304 - .0005	.4143 - .0003	.00015	8	.0089

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	7517590	.4375-32UN-2A	.4162	1	.4370	.4027 - .0005		.0003	15	.0039
3	7517591	.4375-32UN-2A	.4162	2	.4365 + .0005	.4300 - .0005	.4162 - .0003	.0001	12	.0078
1	7517592	.4375-32UN	.4172	1	.4380	.4037 - .0005		.0003	15	.0039
3	7517593	.4375-32UN	.4172	2	.4375 + .0005	.4310 - .0005	.4172 - .0003	.0001	12	.0078
1	5220-751-4796	.5000-13UNC-1A,2A	.4485	1	.4991	.4152 - .0006		.0003	10	.0096
3	5220-751-4797	.5000-13UNC-1A,2A	.4485	2	.4985 + .0006	.4863 - .0006	.4485 - .0003	.0002	6	.0192
1	5220-751-4798	.5000-13UNC	.4500	1	.5006	.4167 - .0006		.0003	10	.0096
3	5220-751-4799	.5000-13UNC	.4500	2	.5000 + .0006	.4878 - .0006	.4500 - .0003	.0002	6	.0192
1	7517594	.5000-16UN-2A	.4580	1	.4992	.4309 - .0006		.0003	10	.0078
3	7517595	.5000-16UN-2A	.4580	2	.4986 + .0006	.4881 - .0006	.4580 - .0003	.00015	8	.0156
1	7517596	.5000-16UN	.4594	1	.5006	.4323 - .0006		.0003	10	.0078
3	7517597	.5000-16UN	.4594	2	.5000 + .0006	.4895 - .0006	.4594 - .0003	.00015	8	.0156
1	5220-751-4800	.5000-20UNF-1A,2A	.4662	1	.4992	.4445 - .0005		.0003	15	.0062
3	5220-751-4801	.5000-20UNF-1A,2A	.4662	2	.4987 + .0006	.4897 - .0005	.4662 - .0003	.00015	8	.0125
1	5220-751-4802	.5000-20UNF	.4675	1	.5005	.4458 - .0005		.0003	15	.0062
3	5220-751-4803	.5000-20UNF	.4675	2	.5000 + .0005	.4910 - .0005	.4675 - .0003	.00015	8	.0125
1	5220-751-4804	.5000-28UNEF-2A	.4757	1	.4994	.4602 - .0005		.0003	15	.0045
3	5220-751-4805	.5000-28UNEF-2A	.4757	2	.4989 + .0005	.4918 - .0005	.4757 - .0003	.00015	8	.0089
1	5220-751-4806	.5000-28UNEF	.4768	1	.5005	.4613 - .0005		.0003	15	.0045
3	5220-751-4807	.5000-28UNEF	.4768	2	.5000 + .0005	.4929 - .0005	.4768 - .0003	.00015	8	.0089
1	7517598	.5000-32UN-2A	.4787	1	.4995	.4652 - .0005		.0003	15	.0039
3	7517599	.5000-32UN-2A	.4787	2	.4990 + .0005	.4925 - .0005	.4787 - .0003	.0001	12	.0078

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	7517600	.5000-32UN	.4797	1	.5005	.4662 - .0005		.0003	15	.0039
3	7517601	.5000-32UN	.4797	2	.5000 + .0005	.4935 - .0005	.4797 - .0003	.0001	12	.0078
2	5220-751-4808	.5625-12UNC-1A,2A	.5068	1	.5615	.4707 - .0006		.0003	10	.0104
3	5220-751-4809	.5625-12UNC-1A,2A	.5068	2	.5609 + .0006	.5480 - .0006	.5068 - .0003	.0002	6	.0208
2	5220-751-4810	.5625-12UNC	.5084	1	.5631	.4723 - .0006		.0003	10	.0104
3	5220-751-4811	.5625-12UNC	.5084	2	.5625 + .0006	.5496 - .0006	.5084 - .0003	.0002	6	.0208
1	7517602	.5625-16UN-2A	.5205	1	.5617	.4934 - .0006		.0003	10	.0078
3	7517603	.5625-16UN-2A	.5205	2	.5611 + .0006	.5506 - .0006	.5205 - .0003	.00015	8	.0156
1	7517604	.5625-16UN	.5219	1	.5631	.4948 - .0006		.0003	10	.0078
3	7517605	.5625-16UN	.5219	2	.5625 + .0006	.5520 - .0006	.5219 - .0003	.00015	8	.0156
1	5220-751-4812	.5625-18UNF-1A,2A	.5250	1	.5616	.5009 - .0005		.0003	10	.0069
3	5220-751-4813	.5625-18UNF-1A,2A	.5250	2	.5611 + .0005	.5514 - .0005	.5250 - .0003	.00015	8	.0139
1	5220-751-4814	.5625-18UNF	.5264	1	.5630	.5023 - .0005		.0003	10	.0069
3	5220-751-4815	.5625-18UNF	.5264	2	.5625 + .0005	.5528 - .0005	.5264 - .0003	.00015	8	.0139
1	7517606	.5625-20UN-2A	.5287	1	.5617	.5070 - .0005		.0003	15	.0062
3	7517607	.5625-20UN-2A	.5287	2	.5612 + .0005	.5522 - .0005	.5287 - .0003	.00015	8	.0125
1	7517608	.5625-20UN	.5300	1	.5630	.5083 - .0005		.0003	15	.0062
3	7517609	.5625-20UN	.5300	2	.5625 + .0005	.5535 - .0005	.5300 - .0003	.00015	8	.0125
1	5220-751-4816	.5625-24UNEF-2A	.5342	1	.5618	.5162 - .0005		.0003	15	.0052
3	5220-751-4817	.5625-24UNEF-2A	.5342	2	.5613 + .0005	.5534 - .0005	.5342 - .0003	.00015	8	.0104
1	5220-751-4818	.5625-24UNEF	.5354	1	.5630	.5174 - .0005		.0003	15	.0052
3	5220-751-4819	.5625-24UNEF	.5354	2	.5625 + .0005	.5546 - .0005	.5354 - .0003	.00015	8	.0104

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	7517610	.5625-28UN-2A	.5382	1	.5619	.5227 - .0005		.0003	15	.0045
3	7517611	.5625-28UN-2A	.5382	2	.5614 + .0005	.5543 - .0005	.5382 - .0003	.00015	8	.0089
1	7517612	.5625-28UN	.5393	1	.5630	.5238 - .0005		.0003	15	.0045
3	7517613	.5625-28UN	.5393	2	.5625 + .0005	.5554 - .0005	.5393 - .0003	.00015	8	.0089
1	7517614	.5625-32UN-2A	.5412	1	.5620	.5277 - .0005		.0003	15	.0039
3	7517615	.5625-32UN-2A	.5412	2	.5615 + .0005	.5550 - .0005	.5412 - .0003	.00015	12	.0078
1	7517616	.5625-32UN	.5422	1	.5630	.5287 - .0005		.0003	15	.0039
3	7517617	.5625-32UN	.5422	2	.5625 + .0005	.5560 - .0005	.5422 - .0003	.00015	12	.0078
2	5220-751-4820	.6250-11UNC-1A,2A	.5644	1	.6240	.5250 - .0006		.0003	10	.0114
3	5220-751-4821	.6250-11UNC-1A,2A	.5644	2	.6234 + .0006	.6097 - .0006	.5644 - .0003	.0002	6	.0227
2	5220-751-4822	.6250-11UNC	.5660	1	.6256	.5266 - .0006		.0003	10	.0114
3	5220-751-4823	.6250-11UNC	.5660	2	.6250 + .0006	.6113 - .0006	.5660 - .0003	.0002	6	.0227
1	5220-751-6924	.6250-12UN-2A	.5693	1	.6240	.5332 - .0006		.0003	10	.0114
3	5220-751-6925	.6250-12UN-2A	.5693	2	.6234 + .0006	.6105 - .0006	.5693 - .0003	.0002	6	.0227
1	5220-751-1134	.6250-12UN	.5709	1	.6256	.5348 - .0006		.0003	10	.0104
3	5220-751-1135	.6250-12UN	.5709	2	.6250 + .0006	.6121 - .0006	.5709 - .0003	.0002	6	.0208
1	7517618	.6250-16UN-2A	.5830	1	.6242	.5559 - .0006		.0003	10	.0078
3	7517619	.6250-16UN-2A	.5830	2	.6236 + .0006	.6131 - .0006	.5830 - .0003	.00015	8	.0156
1	7517620	.6250-16UN	.5844	1	.6256	.5573 - .0006		.0003	10	.0078
3	7517621	.6250-16UN	.5844	2	.6250 + .0006	.6145 - .0006	.5844 - .0003	.00015	8	.0156
1	5220-751-4824	.6250-18UNF-1A,2A	.5875	1	.6241	.5634 - .0005		.0003	10	.0069
3	5220-751-4825	.6250-18UNF-1A,2A	.5875	2	.6236 + .0005	.6139 - .0005	.5875 - .0003	.00015	8	.0139

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	1	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	2	MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4826	.6250-18UNF	.5889	1	.6255	.5648 - .0005		.0003	10	.0069
3	5220-751-4827	.6250-18UNF	.5889	2	.6250 + .0005	.6153 - .0005	.5889 - .0003	.00015	8	.0139
1	7517622	.6250-20UN-2A	.5912	1	.6241	.5695 - .0005		.0003	15	.0062
3	7517623	.6250-20UN-2A	.5912	2	.6237 + .0005	.6147 - .0005	.5912 - .0003	.00015	8	.0125
1	7517624	.6250-20UN	.5925	1	.6255	.5708 - .0005		.0003	15	.0062
3	7517625	.6250-20UN	.5925	2	.6250 + .0005	.6160 - .0005	.5925 - .0003	.00015	8	.0125
1	5220-751-4828	.6250-24UNEF-2A	.5967	1	.6243	.5787 - .0005		.0003	15	.0052
3	5220-751-4829	.6250-24UNEF-2A	.5967	2	.6238 + .0005	.6159 - .0005	.5967 - .0003	.00015	8	.0104
1	5220-751-4830	.6250-24UNEF	.5979	1	.6255	.5799 - .0005		.0003	15	.0052
3	5220-751-4831	.6250-24UNEF	.5979	2	.6250 + .0005	.6171 - .0005	.5979 - .0003	.00015	8	.0104
1	7517626	.6250-28UN-2A	.6007	1	.6244	.5852 - .0005		.0003	15	.0045
3	7517627	.6250-28UN-2A	.6007	2	.6239 + .0005	.6168 - .0005	.6007 - .0003	.00015	8	.0089
1	7517628	.6250-28UN	.6018	1	.6255	.5863 - .0005		.0003	15	.0045
3	7517629	.6250-28UN	.6018	2	.6250 + .0005	.6179 - .0005	.6018 - .0003	.00015	8	.0089
1	7517630	.6250-32UN-2A	.6036	1	.6244	.5901 - .0005		.0003	15	.0039
3	7517631	.6250-32UN-2A	.6036	2	.6239 + .0005	.6174 - .0005	.6036 - .0003	.00015	12	.0078
1	7517632	.6250-32UN	.6047	1	.6255	.5912 - .0005		.0003	15	.0039
3	7517633	.6250-32UN	.6047	2	.6250 + .0005	.6185 - .0005	.6047 - .0003	.00015	12	.0078
1	5220-751-6926	.6875-12UN-2A	.6318	1	.6865	.5957 - .0006		.0003	10	.0104
3	5220-751-6927	.6875-12UN-2A	.6318	2	.6859 + .0006	.6730 - .0006	.6318 - .0003	.0002	6	.0208
1	5220-751-1148	.6875-12UN	.6334	1	.6881	.5973 - .0006		.0003	10	.0104
3	5220-751-1149	.6875-12UN	.6334	2	.6875 + .0006	.6746 - .0006	.6334 - .0003	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	7517634	.6875-16UN-2A	.6455	1	.6867	.6184 - .0006		.0003	10	.0078
3	7517635	.6875-16UN-2A	.6455	2	.6861 + .0006	.6756 - .0006	.6455 - .0003	.00015	8	.0156
1	7517636	.6875-16UN	.6469	1	.6881	.6198 - .0006		.0003	10	.0078
3	7517637	.6875-16UN	.6469	2	.6875 + .0006	.6770 - .0006	.6469 - .0003	.00015	8	.0156
1	7517638	.6875-20UN-2A	.6537	1	.6867	.6320 - .0005		.0003	15	.0062
3	7517639	.6875-20UN-2A	.6537	2	.6862 + .0005	.6772 - .0005	.6537 - .0003	.00015	8	.0125
1	7517640	.6875-20UN	.6550	1	.6880	.6333 - .0005		.0003	15	.0062
3	7517641	.6875-20UN	.6550	2	.6875 + .0005	.6785 - .0005	.6550 - .0003	.00015	8	.0125
1	5220-751-4832	.6875-24UNEF-2A	.6592	1	.6868	.6412 - .0005		.0003	15	.0052
3	5220-751-4833	.6875-24UNEF-2A	.6592	2	.6863 + .0005	.6784 - .0005	.6592 - .0003	.00015	8	.0104
1	5220-751-4834	.6875-24UNEF	.6604	1	.6880	.6424 - .0005		.0003	15	.0052
3	5220-751-4835	.6875-24UNEF	.6604	2	.6875 + .0005	.6796 - .0005	.6604 - .0003	.00015	8	.0104
1	7517642	.6875-28UN-2A	.6632	1	.6869	.6477 - .0005		.0003	15	.0045
3	7517643	.6875-28UN-2A	.6632	2	.6864 + .0005	.6793 - .0005	.6632 - .0003	.00015	8	.0089
1	7517644	.6875-28UN	.6643	1	.6880	.6488 - .0005		.0003	15	.0045
3	7517645	.6875-28UN	.6643	2	.6875 + .0005	.6804 - .0005	.6643 - .0003	.00015	8	.0089
1	7517646	.6875-32UN-2A	.6661	1	.6869	.6526 - .0005		.0003	15	.0039
3	7517647	.6875-32UN-2A	.6661	2	.6864 + .0005	.6799 - .0005	.6661 - .0003	.00015	12	.0078
1	7517648	.6875-32UN	.6672	1	.6880	.6537 - .0005		.0003	15	.0039
3	7517649	.6875-32UN	.6672	2	.6875 + .0005	.6810 - .0005	.6672 - .0003	.00015	12	.0078
2	5220-751-4836	.7500-10UNC-1A,2A	.6832	1	.7488	.6399 - .0006		.0003	10	.0125
3	5220-751-4837	.7500-10UNC-1A,2A	.6832	2	.7482 + .0006	.7336 - .0006	.6832 - .0003	.00025	6	.0250

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-4838	.7500-10UNC	.6850	1	.7506	.6417 - .0006		.0003	10	.0125
3	5220-751-4839	.7500-10UNC	.6850	2	.7500 + .0006	.7354 - .0006	.6850 - .0003	.00025	6	.0250
1	5220-751-6928	.7500-12UN-2A	.6942	1	.7489	.6581 - .0006		.0003	10	.0104
3	5220-751-6929	.7500-12UN-2A	.6942	2	.7483 + .0006	.7354 - .0006	.6942 - .0003	.0002	6	.0208
1	5220-751-1162	.7500-12UN	.6959	1	.7506	.6598 - .0006		.0003	10	.0104
3	5220-751-1163	.7500-12UN	.6959	2	.7500 + .0006	.7371 - .0006	.6959 - .0003	.0002	6	.0208
1	5220-751-4840	.7500-16UNF-1A,2A	.7079	1	.7491	.6808 - .0006		.0003	10	.0078
3	5220-751-4841	.7500-16UNF-1A,2A	.7079	2	.7485 + .0006	.7380 - .0006	.7079 - .0003	.00015	8	.0156
1	5220-751-4842	.7500-16UNF	.7094	1	.7506	.6823 - .0006		.0003	10	.0078
3	5220-751-4843	.7500-16UNF	.7094	2	.7500 + .0006	.7395 - .0006	.7094 - .0003	.00015	8	.0156
1	5220-751-4844	.7500-20UNEF-2A	.7162	1	.7492	.6945 - .0005		.0003	15	.0062
3	5220-751-4845	.7500-20UNEF-2A	.7162	2	.7487 + .0005	.7397 - .0005	.7162 - .0003	.00015	8	.0125
1	5220-751-4846	.7500-20UNEF	.7175	1	.7505	.6958 - .0005		.0003	15	.0062
3	5220-751-4847	.7500-20UNEF	.7175	2	.7500 + .0005	.7410 - .0005	.7175 - .0003	.00015	8	.0125
1	7517650	.7500-28UN-2A	.7256	1	.7493	.7101 - .0005		.0003	15	.0045
3	7517651	.7500-28UN-2A	.7256	2	.7488 + .0005	.7417 - .0005	.7256 - .0003	.00015	8	.0089
1	7517652	.7500-28UN	.7268	1	.7505	.7113 - .0005		.0003	15	.0045
3	7517653	.7500-28UN	.7268	2	.7500 + .0005	.7429 - .0005	.7268 - .0003	.00015	8	.0089
1	7517654	.7500-32UN-2A	.7286	1	.7494	.7151 - .0005		.0003	15	.0039
3	7517655	.7500-32UN-2A	.7286	2	.7489 + .0005	.7424 - .0005	.7286 - .0003	.00015	12	.0078
1	7517656	.7500-32UN	.7297	1	.7505	.7162 - .0005		.0003	15	.0039
3	7517657	.7500-32UN	.7297	2	.7500 + .0005	.7435 - .0005	.7297 - .0003	.00015	12	.0078

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-6930	.8125-12UN-2A	.7567	1	.8114	.7206 - .0006		.0003	10	.0104
3	5220-751-6931	.8125-12UN-2A	.7567	2	.8108 + .0006	.7979 - .0006	.7567 - .0003	.0002	6	.0208
1	5220-751-1176	.8125-12UN	.7584	1	.8131	.7223 - .0006		.0003	10	.0104
3	5220-751-1177	.8125-12UN	.7584	2	.8125 + .0006	.7996 - .0006	.7584 - .0003	.0002	6	.0208
1	5220-751-6932	.8125-16UN-2A	.7704	1	.8116	.7433 - .0006		.0003	10	.0078
3	5220-751-6933	.8125-16UN-2A	.7704	2	.8110 + .0006	.8005 - .0006	.7704 - .0003	.00015	8	.0156
1	5220-751-1180	.8125-16UN	.7719	1	.8131	.7448 - .0006		.0003	10	.0078
3	5220-751-1181	.8125-16UN	.7719	2	.8125 + .0006	.8020 - .0006	.7719 - .0003	.00015	8	.0156
1	5220-751-4848	.8125-20UNEF-2A	.7787	1	.8117	.7570 - .0005		.0003	15	.0062
3	5220-751-4849	.8125-20UNEF-2A	.7787	2	.8112 + .0005	.8022 - .0005	.7787 - .0003	.00015	8	.0125
1	5220-751-4850	.8125-20UNEF	.7800	1	.8130	.7583 - .0005		.0003	15	.0062
3	5220-751-4851	.8125-20UNEF	.7800	2	.8125 + .0005	.8035 - .0005	.7800 - .0003	.00015	8	.0125
1	7517658	.8125-28UN-2A	.7881	1	.8118	.7726 - .0005		.0003	15	.0045
3	7517659	.8125-28UN-2A	.7881	2	.8113 + .0005	.8042 - .0005	.7881 - .0003	.00015	8	.0089
1	7517660	.8125-28UN	.7893	1	.8130	.7738 - .0005		.0003	15	.0045
3	7517661	.8125-28UN	.7893	2	.8125 + .0005	.8054 - .0005	.7893 - .0003	.00015	8	.0089
1	7517662	.8125-32UN-2A	.7911	1	.8119	.7776 - .0005		.0003	15	.0039
3	7517663	.8125-32UN-2A	.7911	2	.8114 + .0005	.8049 - .0005	.7911 - .0003	.00015	12	.0078
1	7517664	.8125-32UN	.7922	1	.8130	.7787 - .0005		.0003	15	.0039
3	7517665	.8125-32UN	.7922	2	.8125 + .0005	.8060 - .0005	.7922 - .0003	.00015	12	.0078
2	5220-751-4852	.8750-9UNC-1A,2A	.8009	1	.8738	.7528 - .0007		.0003	10	.0139
3	5220-751-4853	.8750-9UNC-1A,2A	.8009	2	.8731 + .0007	.8573 - .0007	.8009 - .0003	.00025	6	.0278

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	1 2						
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-4854	.8750-9UNC	.8028	1	.8757	.7547 - .0007		.0003	10	.0139
3	5220-751-4855	.8750-9UNC	.8028	2	.8750 + .0007	.8592 - .0007	.8028 - .0003	.00025	6	.0278
1	5220-751-6934	.8750-12UN-2A	.8192	1	.8739	.7831 - .0006		.0003	10	.0104
3	5220-751-6935	.8750-12UN-2A	.8192	2	.8733 + .0006	.8604 - .0006	.8192 - .0003	.0002	6	.0208
1	5220-751-1194	.8750-12UN	.8209	1	.8756	.7848 - .0006		.0003	10	.0104
3	5220-751-1195	.8750-12UN	.8209	2	.8750 + .0006	.8621 - .0006	.8209 - .0003	.0002	6	.0208
1	5220-751-4856	.8750-14UNF-1A,2A	.8270	1	.8740	.7961 - .0006		.0003	10	.0089
3	5220-751-4857	.8750-14UNF-1A,2A	.8270	2	.8734 + .0006	.8619 - .0006	.8270 - .0003	.0002	6	.0179
1	5220-751-4858	.8750-14UNF	.8286	1	.8756	.7977 - .0006		.0003	10	.0089
3	5220-751-4859	.8750-14UNF	.8286	2	.8750 + .0006	.8635 - .0006	.8286 - .0003	.0002	6	.0179
1	5220-751-6936	.8750-16UN-2A	.8329	1	.8741	.8058 - .0006		.0003	10	.0078
3	5220-751-6937	.8750-16UN-2A	.8329	2	.8735 + .0006	.8630 - .0006	.8329 - .0003	.00015	8	.0156
1	5220-751-1204	.8750-16UN	.8344	1	.8756	.8073 - .0006		.0003	10	.0078
3	5220-751-1205	.8750-16UN	.8344	2	.8750 + .0006	.8645 - .0006	.8344 - .0003	.00015	8	.0156
1	5220-751-4860	.8750-20UNEF-2A	.8412	1	.8742	.8195 - .0005		.0003	15	.0062
3	5220-751-4861	.8750-20UNEF-2A	.8412	2	.3737 + .0005	.8647 - .0005	.8412 - .0003	.00015	8	.0125
1	5220-751-4862	.8750-20UNEF	.8425	1	.8755	.8208 - .0005		.0003	15	.0062
3	5220-751-4863	.8750-20UNEF	.8425	2	.8750 + .0005	.8660 - .0005	.8425 - .0003	.00015	8	.0125
1	7517666	.8750-28UN-2A	.8506	1	.8743	.8351 - .0005		.0003	15	.0045
3	7517667	.8750-28UN-2A	.8506	2	.8738 + .0005	.8667 - .0005	.8506 - .0003	.00015	8	.0089
1	7517668	.8750-28UN	.8518	1	.8755	.8363 - .0005		.0003	15	.0045
3	7517669	.8750-28UN	.8518	2	.8750 + .0005	.8679 - .0005	.8518 - .0003	.00015	8	.0089

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD		GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	2						
A	B	C	D	*	E	F	G	H	J	K
1	7517670	.8750-32UN-2A	.8536	1	.8744	.8401 - .0005		.0003	15	.0039
3	7517671	.8750-32UN-2A	.8536	2	.8739 + .0005	.8674 - .0005	.8536 - .0003	.00015	12	.0078
1	7517672	.8750-32UN	.8547	1	.8755	.8412 - .0005		.0003	15	.0039
3	7517673	.8750-32UN	.8547	2	.8750 + .0005	.8685 - .0005	.8547 - .0003	.00015	12	.0078
1	5220-751-6938	.9375-12UN-2A	.8817	1	.9364	.8456 - .0006		.0003	10	.0104
3	5220-751-6939	.9375-12UN-2A	.8817	2	.9358 + .0006	.9229 - .0006	.8817 - .0003	.0002	6	.0208
1	5220-751-1212	.9375-12UN	.8834	1	.9381	.8473 - .0006		.0003	10	.0104
3	5220-751-1213	.9375-12UN	.8834	2	.9375 + .0006	.9246 - .0006	.8834 - .0003	.0002	6	.0208
1	5220-751-6940	.9375-16UN-2A	.8954	1	.9366	.8683 - .0006		.0003	10	.0078
3	5220-751-6941	.9375-16UN-2A	.8954	2	.9360 + .0006	.9255 - .0006	.8954 - .0003	.00015	8	.0156
1	5220-751-1216	.9375-16UN	.8969	1	.9381	.8698 - .0006		.0003	10	.0078
3	5220-751-1217	.9375-16UN	.8969	2	.9375 + .0006	.9270 - .0006	.8969 - .0003	.00015	8	.0156
1	5220-751-4864	.9375-20UNEF-2A	.9036	1	.9366	.8819 - .0005		.0003	15	.0062
3	5220-751-4865	.9375-20UNEF-2A	.9036	2	.9361 + .0005	.9271 - .0005	.9036 - .0003	.00015	8	.0125
1	5220-751-4866	.9375-20UNEF	.9050	1	.9380	.8833 - .0005		.0003	15	.0062
3	5220-751-4867	.9375-20UNEF	.9050	2	.9375 + .0005	.9285 - .0005	.9050 - .0003	.00015	8	.0125
1	7517674	.9375-28UN-2A	.9131	1	.9368	.8976 - .0005		.0003	15	.0045
3	7517675	.9375-28UN-2A	.9131	2	.9363 + .0005	.9292 - .0005	.9131 - .0003	.00015	8	.0089
1	7517676	.9375-28UN	.9143	1	.9380	.8988 - .0005		.0003	15	.0045
3	7517677	.9375-28UN	.9143	2	.9375 + .0005	.9304 - .0005	.9143 - .0003	.00015	8	.0089
1	7517678	.9375-32UN-2A	.9161	1	.9369	.9026 - .0005		.0003	15	.0039
3	7517679	.9375-32UN-2A	.9161	2	.9364 + .0005	.9299 - .0005	.9161 - .0003	.00015	12	.0078

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	7517680	.9375-32UN	.9172	1	.9380	.9037 - .0005		.0003	15	.0039
3	7517681	.9375-32UN	.9172	2	.9375 + .0005	.9310 - .0005	.9172 - .0003	.00015	12	.0078
2	5220-751-4868	1.0000-8UNC-1A,2A	.9168	1	.9987	.8627 - .0007		.0004	5	.0156
3	5220-751-4869	1.0000-8UNC-1A,2A	.9168	2	.9980 + .0007	.9809 - .0007	.9168 - .0004	.00025	5	.0312
2	5220-751-4870	1.0000-8UNC	.9188	1	1.0007	.8647 - .0007		.0004	5	.0156
3	5220-751-4871	1.0000-8UNC	.9188	2	1.0000 + .0007	.9829 - .0007	.9188 - .0004	.00025	5	.0312
1	5220-751-4872	1.0000-12UNF-1A,2A	.9441	1	.9988	.9080 - .0006		.0003	10	.0104
3	5220-751-4873	1.0000-12UNF-1A,2A	.9441	2	.9982 + .0006	.9853 - .0006	.9441 - .0003	.0002	6	.0208
1	5220-751-4874	1.0000-12UNF,12N	.9459	1	1.0006	.9098 - .0006		.0003	10	.0104
3	5220-751-4875	1.0000-12UNF,12N	.9459	2	1.0000 + .0006	.9871 - .0006	.9459 - .0003	.0002	6	.0208
1	5220-751-6942	1.0000-16UN-2A	.9579	1	.9991	.9308 - .0006		.0003	10	.0078
3	5220-751-6943	1.0000-16UN-2A	.9579	2	.9985 + .0006	.9880 - .0006	.9579 - .0003	.00015	8	.0156
1	5220-751-1240	1.0000-16UN	.9594	1	1.0006	.9323 - .0006		.0003	10	.0078
3	5220-751-1241	1.0000-16UN	.9594	2	1.0000 + .0006	.9895 - .0006	.9594 - .0003	.00015	8	.0156
1	5220-751-4880	1.0000-20UNEF-2A	.9661	1	.9991	.9444 - .0005		.0003	15	.0062
3	5220-751-4881	1.0000-20UNEF-2A	.9661	2	.9986 + .0005	.9896 - .0005	.9661 - .0003	.00015	8	.0125
1	5220-751-4882	1.0000-20UNEF	.9675	1	1.0005	.9458 - .0005		.0003	15	.0062
3	5220-751-4883	1.0000-20UNEF	.9675	2	1.0000 + .0005	.9910 - .0005	.9675 - .0003	.00015	8	.0125
1	7517682	1.0000-28UN-2A	.9756	1	.9993	.9601 - .0005		.0003	15	.0045
3	7517683	1.0000-28UN-2A	.9756	2	.9988 + .0005	.9917 - .0005	.9756 - .0003	.00015	8	.0089
1	7517684	1.0000-28UN	.9768	1	1.0005	.9613 - .0005		.0003	15	.0045
3	7517685	1.0000-28UN	.9768	2	1.0000 + .0005	.9929 - .0005	.9768 - .0003	.00015	8	.0089

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1576, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	7517686	1.0000-32UN-2A	.9786	1	.9994	.9651 - .0005		.0003	15	.0039
3	7517687	1.0000-32UN-2A	.9786	2	.9989 +.0005	.9924 - .0005	.9786 - .0003	.00015	12	.0078
1	7517688	1.0000-32UN	.9797	1	1.0005	.9662 - .0005		.0003	15	.0039
3	7517689	1.0000-32UN	.9797	2	1.0000 +.0005	.9935 - .0005	.9797 - .0003	.00015	12	.0078
2	7517690	1.0625-8UN-2A	.9793	1	1.0612	.9252 - .0007		.0004	5	.0156
3	7517691	1.0625-8UN-2A	.9793	2	1.0605 +.0007	1.0434 - .0007	.9793 - .0004	.00025	5	.0312
2	7517692	1.0625-8UN	.9813	1	1.0632	.9272 - .0007		.0004	5	.0156
3	7517693	1.0625-8UN	.9813	2	1.0625 +.0007	1.0454 - .0007	.9813 - .0004	.00025	5	.0312
1	5220-751-4884	1.0625-12UN-2A	1.0067	1	1.0614	.9706 - .0006		.0003	10	.0104
3	5220-751-4885	1.0625-12UN-2A	1.0067	2	1.0608 +.0006	1.0479 - .0006	1.0067 - .0003	.0002	6	.0208
1	5220-751-4886	1.0625-12UN	1.0084	1	1.0631	.9723 - .0006		.0003	10	.0104
3	5220-751-4887	1.0625-12UN	1.0084	2	1.0625 +.0006	1.0496 - .0006	1.0084 - .0003	.0002	6	.0208
1	5220-751-6944	1.0625-16UN-2A	1.0204	1	1.0616	.9933 - .0006		.0003	10	.0078
3	5220-751-6945	1.0625-16UN-2A	1.0204	2	1.0610 +.0006	1.0505 - .0006	1.0204- .0003	.00015	8	.0156
1	5220-751-1252	1.0625-16UN	1.0219	1	1.0631	.9948 - .0006		.0003	10	.0078
3	5220-751-1253	1.0625-16UN	1.0219	2	1.0625 +.0006	1.0520 - .0006	1.0219- .0003	.00015	8	.0156
1	5220-751-4888	1.0625-18UNEF-2A	1.0250	1	1.0616	1.0009 - .0005		.0003	10	.0069
3	5220-751-4889	1.0625-18UNEF-2A	1.0250	2	1.0611 +.0005	1.0514 - .0005	1.0250- .0003	.00015	8	.0139
1	5220-751-4890	1.0625-18UNEF	1.0264	1	1.0630	1.0023 - .0005		.0003	10	.0069
3	5220-751-4891	1.0625-18UNEF	1.0264	2	1.0625 +.0005	1.0528 - .0005	1.0264- .0003	.00015	8	.0139
1	7517694	1.0625-20UN-2A	1.0286	1	1.0616	1.0069 - .0005		.0003	15	.0062
3	7517695	1.0625-20UN-2A	1.0286	2	1.0611 +.0005	1.0521 - .0005	1.0286- .0003	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	7517696	1.0625-20UN	1.0300	1	1.0630	1.0083 - .0005		.0003	15	.0062
3	7517697	1.0625-20UN	1.0300	2	1.0625 +.0005	1.0535 - .0005	1.0300 -.0003	.00015	8	.0125
1	7517698	1.0625-28UN-2A	1.0381	1	1.0618	1.0226 - .0005		.0003	15	.0045
3	7517699	1.0625-28UN-2A	1.0381	2	1.0613 +.0005	1.0542 - .0005	1.0381 -.0003	.00015	8	.0089
1	7517700	1.0625-28UN	1.0393	1	1.0630	1.0238 - .0005		.0003	15	.0045
3	7517701	1.0625-28UN	1.0393	2	1.0625 +.0005	1.0554 - .0005	1.0393 -.0003	.00015	8	.0089
2	5220-751-4892	1.1250-7UNC-1A,2A	1.0300	1	1.1235	.9681 - .0007		.0004	5	.0179
3	5220-751-4893	1.1250-7UNC-1A,2A	1.0300	2	1.1228 +.0007	1.1040 - .0007	1.0300 -.0004	.0003	5	.0357
2	5220-751-4894	1.1250-7UNC	1.0322	1	1.1257	.9703 - .0007		.0004	5	.0179
3	5220-751-4895	1.1250-7UNC	1.0322	2	1.1250 +.0007	1.1062 - .0007	1.0322 -.0004	.0003	5	.0357
2	5220-751-4896	1.1250-8UN-2A	1.0417	1	1.1236	.9876 - .0007		.0004	5	.0156
3	5220-751-4897	1.1250-8UN-2A	1.0417	2	1.1229 +.0007	1.1058 - .0007	1.0417 -.0004	.00025	5	.0312
2	5220-751-4898	1.1250-8UN	1.0438	1	1.1257	.9897 - .0007		.0004	5	.0156
3	5220-751-4899	1.1250-8UN	1.0438	2	1.1250 +.0007	1.1079 - .0007	1.0438 -.0004	.00025	5	.0312
1	5220-751-4900	1.1250-12UNF-1A,2A	1.0691	1	1.1238	1.0330 - .0006		.0003	10	.0104
3	5220-751-4901	1.1250-12UNF-1A,2A	1.0691	2	1.1232 +.0006	1.1103 - .0006	1.0691 -.0003	.0002	6	.0208
1	5220-751-4902	1.1250-12UNF	1.0709	1	1.1256	1.0348 - .0006		.0003	10	.0104
3	5220-751-4903	1.1250-12UNF	1.0709	2	1.1250 +.0006	1.1121 - .0006	1.0709 -.0003	.0002	6	.0208
1	5220-751-6946	1.1250-16UN-2A	1.0829	1	1.1241	1.0558 - .0006		.0003	10	.0078
3	5220-751-6947	1.1250-16UN-2A	1.0829	2	1.1235 +.0006	1.1130 - .0006	1.0829 -.0003	.00015	8	.0156
1	5220-751-1276	1.1250-16UN	1.0844	1	1.1256	1.0573 - .0006		.0003	10	.0078
3	5220-751-1277	1.1250-16UN	1.0844	2	1.1250 +.0006	1.1145 - .0006	1.0844 -.0003	.00015	8	.0156

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4904	1.1250-18UNEF-2A	1.0875	1	1.1241	1.0634 - .0005		.0003	10	.0069
3	5220-751-4905	1.1250-18UNEF-2A	1.0875	2	1.1236 +.0005	1.1139 - .0005	1.0875 -.0003	.00015	8	.0139
1	5220-751-4906	1.1250-18UNEF	1.0889	1	1.1255	1.0648 - .0005		.0003	10	.0069
3	5220-751-4907	1.1250-18UNEF	1.0899	2	1.1250 +.0005	1.1153 - .0005	1.0889 -.0003	.00015	8	.0139
1	7517702	1.1250-20UN-2A	1.0911	1	1.1241	1.0694 - .0005		.0003	15	.0062
3	7517703	1.1250-20UN-2A	1.0911	2	1.1236 +.0005	1.1146 - .0005	1.0911 -.0003	.00015	8	.0125
1	7517704	1.1250-20UN	1.0925	1	1.1255	1.0708 - .0005		.0003	15	.0062
3	7517705	1.1250-20UN	1.0925	2	1.1250 +.0005	1.1160 - .0005	1.0925 -.0003	.00015	8	.0125
1	7517706	1.1250-28UN-2A	1.1006	1	1.1243	1.0851 - .0005		.0003	15	.0045
3	7517707	1.1250-28UN-2A	1.1006	2	1.1238 +.0005	1.1167 - .0005	1.1006 -.0003	.00015	8	.0089
1	7517708	1.1250-28UN	1.1018	1	1.1255	1.0863 - .0005		.0003	15	.0045
3	7517709	1.1250-28UN	1.1018	2	1.1250 +.0005	1.1179 - .0005	1.1018 -.0003	.00015	8	.0089
2	7517710	1.1875-8UN-2A	1.1042	1	1.1861	1.0501 - .0007		.0004	5	.0156
3	7517711	1.1875-8UN-2A	1.1042	2	1.1854 +.0007	1.1683 - .0007	1.1042 -.0004	.00025	5	.0312
2	7517712	1.1875-8UN	1.1063	1	1.1882	1.0522 - .0007		.0004	5	.0156
3	7517713	1.1875-8UN	1.1063	2	1.1875 +.0007	1.1704 - .0007	1.1063 -.0004	.00025	5	.0312
1	5220-751-4908	1.1875-12UN-2A	1.1317	1	1.1864	1.0956 - .0006		.0003	10	.0104
3	5220-751-4909	1.1875-12UN-2A	1.1317	2	1.1858 +.0006	1.1729 - .0006	1.1317 -.0003	.0002	6	.0208
1	5220-751-4910	1.1875-12UN	1.1334	1	1.1881	1.0973 - .0006		.0003	10	.0104
3	5220-751-4911	1.1875-12UN	1.1334	2	1.1875 +.0006	1.1746 - .0006	1.1334 -.0003	.0002	6	.0208
1	5220-751-6948	1.1875-16UN-2A	1.1454	1	1.1866	1.1183 - .0006		.0003	10	.0078
3	5220-751-6949	1.1875-16UN-2A	1.1454	2	1.1860 +.0006	1.1755 - .0006	1.1454 -.0003	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD		GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	1 / 2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-1288	1.1875-16UN	1.1469	1	1.1881	1.1198 - .0006		.0003	10	.0078
3	5220-751-1289	1.1875-16UN	1.1469	2	1.1875 +.0006	1.1770 - .0006	1.1469 -.0003	.00015	8	.0156
1	5220-751-4912	1.1875-18UNEF-2A	1.1499	1	1.1865	1.1258 - .0005		.0003	10	.0069
3	5220-751-4913	1.1875-18UNEF-2A	1.1499	2	1.1860 +.0005	1.1763 - .0005	1.1499 -.0003	.00015	8	.0139
1	5220-751-4914	1.1875-18UNEF	1.1514	1	1.1880	1.1273 - .0005		.0003	10	.0069
3	5220-751-4915	1.1875-18UNEF	1.1514	2	1.1875 +.0005	1.1778 - .0005	1.1514 -.0003	.00015	8	.0139
1	7517714	1.1875-20UN-2A	1.1536	1	1.1866	1.1319 - .0005		.0003	15	.0062
3	7517715	1.1875-20UN-2A	1.1536	2	1.1861 +.0005	1.1771 - .0005	1.1536 -.0003	.00015	8	.0125
1	7517716	1.1875-20UN	1.1550	1	1.1880	1.1333 - .0005		.0003	15	.0062
3	7517717	1.1875-20UN	1.1550	2	1.1875 +.0005	1.1785 - .0005	1.1550 -.0003	.00015	8	.0125
1	7517718	1.1875-28UN-2A	1.1631	1	1.1868	1.1476 - .0005		.0003	15	.0045
3	7517719	1.1875-28UN-2A	1.1631	2	1.1863 +.0005	1.1792 - .0005	1.1631 -.0003	.00015	8	.0089
1	7517720	1.1875-28UN	1.1643	1	1.1880	1.1488 - .0005		.0003	15	.0045
3	7517721	1.1875-28UN	1.1643	2	1.1875 +.0005	1.1804 - .0005	1.1643 -.0003	.00015	8	.0089
2	5220-751-4916	1.2500-7UNC-1A,2A	1.1550	1	1.2485	1.0931 - .0007		.0004	5	.0179
3	5220-751-4917	1.2500-7UNC-1A,2A	1.1550	2	1.2478 +.0007	1.2290 - .0007	1.1550 -.0004	.0003	5	.0357
2	5220-751-4918	1.2500-7UNC	1.1572	1	1.2507	1.0953 - .0007		.0004	5	.0179
3	5220-751-4919	1.2500-7UNC	1.1572	2	1.2500 +.0007	1.2312 - .0007	1.1572 -.0004	.0003	5	.0357
2	5220-751-4920	1.2500-8UN-2A	1.1667	1	1.2486	1.1126 - .0007		.0004	5	.0156
3	5220-751-4921	1.2500-8UN-2A	1.1667	2	1.2479 +.0007	1.2308 - .0007	1.1667 -.0004	.00025	5	.0312
2	5220-751-4922	1.2500-8UN	1.1688	1	1.2507	1.1147 - .0007		.0004	5	.0156
3	5220-751-4923	1.2500-8UN	1.1688	2	1.2500 +.0007	1.2329 - .0007	1.1688 -.0004	.00025	5	.0312

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4924	1.2500-12UNF-1A,2A	1.1941	1	1.2488	1.1580 - .0006		.0003	10	.0104
3	5220-751-4925	1.2500-12UNF-1A,2A	1.1941	2	1.2482 +.0006	1.2353 - .0006	1.1941 -.0003	.0002	6	.0208
1	5220-751-4926	1.2500-12UNF	1.1959	1	1.2506	1.1598 - .0006		.0003	10	.0104
3	5220-751-4927	1.2500-12UNF	1.1959	2	1.2500 +.0006	1.2371 - .0006	1.1959 -.0003	.0002	6	.0208
1	5220-751-6950	1.2500-16UN-2A	1.2079	1	1.2491	1.1808 - .0006		.0003	10	.0078
3	5220-751-6951	1.2500-16UN-2A	1.2079	2	1.2485 +.0006	1.2380 - .0006	1.2079 -.0003	.00015	8	.0156
1	5220-751-1312	1.2500-16UN	1.2094	1	1.2506	1.1823 - .0006		.0003	10	.0078
3	5220-751-1313	1.2500-16UN	1.2094	2	1.2500 +.0006	1.2395 - .0006	1.2094 -.0003	.00015	8	.0156
1	5220-751-4928	1.2500-18UNEF-2A	1.2124	1	1.2490	1.1883 - .0005		.0003	10	.0069
3	5220-751-4929	1.2500-18UNEF-2A	1.2124	2	1.2485 +.0005	1.2388 - .0005	1.2124 -.0003	.00015	8	.0139
1	5220-751-4930	1.2500-18UNEF	1.2139	1	1.2505	1.1898 - .0005		.0003	10	.0069
3	5220-751-4931	1.2500-18UNEF	1.2139	2	1.2500 +.0005	1.2403 - .0005	1.2139 -.0003	.00015	8	.0139
1	7517722	1.2500-20UN-2A	1.2161	1	1.2491	1.1944 - .0005		.0003	15	.0062
3	7517723	1.2500-20UN-2A	1.2161	2	1.2486 +.0005	1.2396 - .0005	1.2161 -.0003	.00015	8	.0125
1	7517724	1.2500-20UN	1.2175	1	1.2505	1.1958 - .0005		.0003	15	.0062
3	7517725	1.2500-20UN	1.2175	2	1.2500 +.0005	1.2410 - .0005	1.2175 -.0003	.00015	8	.0125
1	7517726	1.2500-28UN-2A	1.2256	1	1.2493	1.2101 - .0005		.0003	15	.0045
3	7517727	1.2500-28UN-2A	1.2256	2	1.2488 +.0005	1.2417 - .0005	1.2256 -.0003	.00015	8	.0089
1	7517728	1.2500-28UN	1.2268	1	1.2505	1.2113 - .0005		.0003	15	.0045
3	7517729	1.2500-28UN	1.2268	2	1.2500 +.0005	1.2429 - .0005	1.2268 -.0003	.00015	8	.0089
2	7517730	1.3125-8UN-2A	1.2292	1	1.3111	1.1751 - .0007		.0004	5	.0156
3	7517731	1.3125-8UN-2A	1.2292	2	1.3104 +.0007	1.2933 - .0007	1.2292 -.0004	.00025	5	.0312

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517732	1.3125-8UN	1.2313	1	1.3132	1.1772 - .0007		.0004	5	.0156
3	7517733	1.3125-8UN	1.2313	2	1.3125 +.0007	1.2954 - .0007	1.2313 -.0004	.00025	5	.0312
1	5220-751-4932	1.3125-12UN-2A	1.2567	1	1.3114	1.2206 - .0006		.0003	10	.0104
3	5220-751-4933	1.3125-12UN-2A	1.2567	2	1.3108 +.0006	1.2979 - .0006	1.2567 -.0003	.0002	6	.0208
1	5220-751-4934	1.3125-12UN	1.2584	1	1.3131	1.2223 - .0006		.0003	10	.0104
3	5220-751-4935	1.3125-12UN	1.2584	2	1.3125 +.0006	1.2996 - .0006	1.2584 -.0003	.0002	6	.0208
1	5220-751-6952	1.3125-16UN-2A	1.2704	1	1.3116	1.2433 - .0006		.0003	10	.0078
3	5220-751-6953	1.3125-16UN-2A	1.2704	2	1.3110 +.0006	1.3005 - .0006	1.2704 -.0003	.00015	8	.0156
1	5220-751-1324	1.3125-16UN	1.2719	1	1.3131	1.2448 - .0006		.0003	10	.0078
3	5220-751-1325	1.3125-16UN	1.2719	2	1.3125 +.0006	1.3020 - .0006	1.2719 -.0003	.00015	8	.0156
1	5220-751-4936	1.3125-18UNEF-2A	1.2749	1	1.3115	1.2508 - .0005		.0003	10	.0069
3	5220-751-4937	1.3125-18UNEF-2A	1.2749	2	1.3110 +.0005	1.3013 - .0005	1.2749 -.0003	.00015	8	.0139
1	5220-751-4938	1.3125-18UNEF	1.2764	1	1.3130	1.2523 - .0005		.0003	10	.0069
3	5220-751-4939	1.3125-18UNEF	1.2764	2	1.3125 +.0005	1.3028 - .0005	1.2764 -.0003	.00015	8	.0139
1	7517734	1.3125-20UN-2A	1.2786	1	1.3116	1.2569 - .0005		.0003	15	.0062
3	7517735	1.3125-20UN-2A	1.2786	2	1.3111 +.0005	1.3021 - .0005	1.2786 -.0003	.00015	8	.0125
1	7517736	1.3125-20UN	1.2800	1	1.3130	1.2583 - .0005		.0003	15	.0062
3	7517737	1.3125-20UN	1.2800	2	1.3125 +.0005	1.3035 - .0005	1.2800 -.0003	.00015	8	.0125
1	7517738	1.3125-28UN-2A	1.2881	1	1.3118	1.2726 - .0005		.0003	15	.0045
3	7517739	1.3125-28UN-2A	1.2881	2	1.3113 +.0005	1.3042 - .0005	1.2881 -.0003	.00015	8	.0089
1	7517740	1.3125-28UN	1.2893	1	1.3130	1.2738 - .0005		.0003	15	.0045
3	7517741	1.3125-28UN	1.2893	2	1.3125 +.0005	1.3054 - .0005	1.2893 -.0003	.00015	8	.0089

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-4940	1.3750-6UNC-1A,2A	1.2643	1	1.3734	1.1921 - .0008		.0004	5	.0208
3	5220-751-4941	1.3750-6UNC-1A,2A	1.2643	2	1.3726 +.0008	1.3516 - .0008	1.2643 -.0004	.0003	5	.0417
2	5220-751-4942	1.3750-6UNC	1.2667	1	1.3758	1.1945 - .0008		.0004	5	.0208
3	5220-751-4943	1.3750-6UNC	1.2667	2	1.3750 +.0008	1.3540 - .0008	1.2667 -.0004	.0003	5	.0417
2	5220-751-4944	1.3750-8UN-2A	1.2916	1	1.3735	1.2375 - .0007		.0004	5	.0156
3	5220-751-4945	1.3750-8UN-2A	1.2916	2	1.3728 +.0007	1.3557 - .0007	1.2916 -.0004	.00025	5	.0312
2	5220-751-4946	1.3750-8UN	1.2938	1	1.3757	1.2397 - .0007		.0004	5	.0156
3	5220-751-4947	1.3750-8UN	1.2938	2	1.3750 +.0007	1.3579 - .0007	1.2938 **-.0004**	.00025	5	.0312
1	5220-751-4948	1.3750-12UNF-1A,2A	1.3190	1	1.3737	1.2829 - .0006		.0003	10	.0104
3	5220-751-4949	1.3750-12UNF-1A,2A	1.3190	2	1.3731 +.0006	1.3602 - .0006	1.3190 -.0003	.0002	6	.0208
1	5220-751-4950	1.3750-12UNF	1.3209	1	1.3756	1.2848 - .0006		.0003	10	.0104
3	5220-751-4951	1.3750-12UNF	1.3209	2	1.3750 +.0006	1.3621 - .0006	1.3209 -.0003	.0002	6	.0208
1	5220-751-6954	1.3750-16UN-2A	1.3329	1	1.3741	1.3058 - .0006		.0003	10	.0078
3	5220-751-6955	1.3750-16UN-2A	1.3329	2	1.3735 +.0006	1.3630 - .0006	1.3329 -.0003	.00015	8	.0156
1	5220-751-1348	1.3750-16UN	1.3344	1	1.3756	1.3073 - .0006		.0003	10	.0078
3	5220-751-1349	1.3750-16UN	1.3344	2	1.3750 +.0006	1.3645 - .0006	1.3344 -.0003	.00015	8	.0156
1	5220-751-4952	1.3750-18UNEF-2A	1.3374	1	1.3740	1.3133 - .0005		.0003	10	.0069
3	5220-751-4953	1.3750-18UNEF-2A	1.3374	2	1.3735 +.0005	1.3638 - .0005	1.3374 -.0003	.00015	8	.0139
1	5220-751-4954	1.3750-18UNEF	1.3389	1	1.3755	1.3148 - .0005		.0003	10	.0069
3	5220-751-4955	1.3750-18UNEF	1.3389	2	1.3750 +.0005	1.3653 - .0005	1.3389 -.0003	.00015	8	.0139
1	7517742	1.3750-20UN-2A	1.3411	1	1.3741	1.3194 - .0005		.0003	15	.0062
3	7517743	1.3750-20UN-2A	1.3411	2	1.3736 +.0005	1.3646 - .0005	1.3411 -.0003	.00015	8	.0125

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	7517744	1.3750-20UN	1.3425	1	1.3755	1.3208 - .0005		.0003	15	.0062
3	7517745	1.3750-20UN	1.3425	2	1.3750 +.0005	1.3660 - .0005	1.3425 -.0003	.00015	8	.0125
1	7517746	1.3750-28UN-2A	1.3506	1	1.3743	1.3351 - .0005		.0003	15	.0045
3	7517747	1.3750-28UN-2A	1.3506	2	1.3738 +.0005	1.3667 - .0005	1.3506 -.0003	.00015	8	.0089
1	7517748	1.3750-28UN	1.3518	1	1.3755	1.3363 - .0005		.0003	15	.0045
3	7517749	1.3750-28UN	1.3518	2	1.3750 +.0005	1.3679 - .0005	1.3518 -.0003	.00015	8	.0089
2	7517750	1.4375-6UN-2A	1.3268	1	1.4359	1.2546 - .0008		.0004	5	.0208
3	7517751	1.4375-6UN-2A	1.3268	2	1.4351 +.0008	1.4141 - .0008	1.3268 -.0004	.0003	5	.0417
2	7517752	1.4375-6UN	1.3292	1	1.4383	1.2570 - .0008		.0004	5	.0208
3	7517753	1.4375-6UN	1.3292	2	1.4375 +.0008	1.4165 - .0008	1.3292 -.0004	.0003	5	.0417
2	7517754	1.4375-8UN-2A	1.3541	1	1.4360	1.3000 - .0007		.0004	5	.0156
3	7517755	1.4375-8UN-2A	1.3541	2	1.4353 +.0007	1.4182 - .0007	1.3541 -.0004	.00025	5	.0312
2	7517756	1.4375-8UN	1.3563	1	1.4382	1.3022 - .0007		.0004	5	.0156
3	7517757	1.4375-8UN	1.3563	2	1.4375 +.0007	1.4204 - .0007	1.3563 -.0004	.00025	5	.0312
1	5220-751-4956	1.4375-12UN-2A	1.3816	1	1.4363	1.3455 - .0006		.0003	10	.0104
3	5220-751-4957	1.4375-12UN-2A	1.3816	2	1.4357 +.0006	1.4228 - .0006	1.3816 -.0003	.0002	6	.0208
1	5220-751-4958	1.4375-12UN	1.3834	1	1.4381	1.3473 - .0006		.0003	10	.0104
3	5220-751-4959	1.4375-12UN	1.3834	2	1.4375 +.0006	1.4246 - .0006	1.3834 -.0003	.0002	6	.0208
1	5220-751-6956	1.4375-16UN-2A	1.3953	1	1.4365	1.3682 - .0006		.0003	10	.0078
3	5220-751-6957	1.4375-16UN-2A	1.3953	2	1.4359 +.0006	1.4254 - .0006	1.3953 -.0003	.00015	8	.0156
1	5220-751-1360	1.4375-16UN	1.3969	1	1.4381	1.3698 - .0006		.0003	10	.0078
3	5220-751-1361	1.4375-16UN	1.3969	2	1.4375 +.0006	1.4270 - .0006	1.3969 -.0003	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4960	1.4375-18UNEF-2A	1.3999	1	1.4365	1.3758 - .0005		.0003	10	.0069
3	5220-751-4961	1.4375-18UNEF-2A	1.3999	2	1.4360 +.0005	1.4263 - .0005	1.3999 -.0003	.00015	8	.0139
1	5220-751-4962	1.4375-18UNEF	1.4014	1	1.4380	1.3773 - .0005		.0003	10	.0069
3	5220-751-4963	1.4375-18UNEF	1.4014	2	1.4375 +.0005	1.4278 - .0005	1.4014 -.0003	.00015	8	.0139
1	7517758	1.4375-20UN-2A	1.4036	1	1.4366	1.3819 - .0005		.0003	15	.0062
3	7517759	1.4375-20UN-2A	1.4036	2	1.4361 +.0005	1.4271 - .0005	1.4036 -.0003	.00015	8	.0125
1	7517760	1.4375-20UN	1.4050	1	1.4380	1.3833 - .0005		.0003	15	.0062
3	7517761	1.4375-20UN	1.4050	2	1.4375 +.0005	1.4285 - .0005	1.4050 -.0003	.00015	8	.0125
1	7517762	1.4375-28UN-2A	1.4130	1	1.4367	1.3975 - .0005		.0003	15	.0045
3	7517763	1.4375-28UN-2A	1.4130	2	1.4362 +.0005	1.4291 - .0005	1.4130 -.0003	.00015	8	.0089
1	7517764	1.4375-28UN	1.4143	1	1.4380	1.3988 - .0005		.0003	15	.0045
3	7517765	1.4375-28UN	1.4143	2	1.4375 +.0005	1.4304 - .0005	1.4143 -.0003	.00015	8	.0089
2	5220-751-4964	1.5000-6UNC-1A,2A	1.3893	1	1.4984	1.3171 - .0008		.0004	5	.0208
3	5220-751-4965	1.5000-6UNC-1A,2A	1.3893	2	1.4976 +.0008	1.4766 - .0008	1.3893 -.0004	.0003	5	.0417
2	5220-751-4966	1.5000-6UNC	1.3917	1	1.5008	1.3195 - .0008		.0004	5	.0208
3	5220-751-4967	1.5000-6UNC	1.3917	2	1.5000 +.0008	1.4790 - .0008	1.3917 -.0004	.0003	5	.0417
2	5220-751-4968	1.5000-8UN-2A	1.4166	1	1.4985	1.3625 - .0007		.0004	5	.0156
3	5220-751-4969	1.5000-8UN-2A	1.4166	2	1.4978 +.0007	1.4807 - .0007	1.4166 -.0004	.00025	5	.0312
2	5220-751-4970	1.5000-8UN	1.4188	1	1.5007	1.3647 - .0007		.0004	5	.0156
3	5220-751-4971	1.5000-8UN	1.4188	2	1.5000 +.0007	1.4829 - .0007	1.4188 -.0004	.00025	5	.0312
1	5220-751-4972	1.5000-12UNF-1A,2A	1.4440	1	1.4987	1.4079 - .0006		.0003	10	.0104
3	5220-751-4973	1.5000-12UNF-1A,2A	1.4440	2	1.4981 +.0006	1.4852 - .0006	1.4440 -.0003	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4974	1.5000-12UNF	1.4459	1	1.5006	1.4098 - .0006		.0003	10	.0104
3	5220-751-4975	1.5000-12UNF	1.4459	2	1.5000 +.0006	1.4871 - .0006	1.4459 -.0003	.0002	6	.0208
1	5220-751-6958	1.5000-16UN-2A	1.4578	1	1.4990	1.4307 - .0006		.0003	10	.0078
3	5220-751-6959	1.5000-16UN-2A	1.4578	2	1.4984 +.0006	1.4879 - .0006	1.4578 -.0003	.00015	8	.0156
1	5220-751-1384	1.5000-16UN	1.4594	1	1.5006	1.4323 - .0006		.0003	10	.0078
3	5220-751-1385	1.5000-16UN	1.4594	2	1.5000 +.0006	1.4895 - .0006	1.4594 -.0003	.00015	8	.0156
1	5220-751-4976	1.5000-18UNEF-2A	1.4624	1	1.4990	1.4383 - .0005		.0003	10	.0069
3	5220-751-4977	1.5000-18UNEF-2A	1.4624	2	1.4985 +.0005	1.4888 - .0005	1.4624 -.0003	.00015	8	.0139
1	5220-751-4978	1.5000-18UNEF	1.4639	1	1.5005	1.4398 - .0005		.0003	10	.0069
3	5220-751-4979	1.5000-18UNEF	1.4639	2	1.5000 +.0005	1.4903 - .0005	1.4639 -.0003	.00015	8	.0139
1	7517766	1.5000-20UN-2A	1.4661	1	1.4991	1.4444 - .0005		.0003	15	.0062
3	7517767	1.5000-20UN-2A	1.4661	2	1.4986 +.0005	1.4896 - .0005	1.4661 -.0003	.00015	8	.0125
1	7517768	1.5000-20UN	1.4675	1	1.5005	1.4458 - .0005		.0003	15	.0062
3	7517769	1.5000-20UN	1.4675	2	1.5000 +.0005	1.4910 - .0005	1.4675 -.0003	.00015	8	.0125
1	7517770	1.5000-28UN-2A	1.4755	1	1.4992	1.4600 - .0005		.0003	15	.0045
3	7517771	1.5000-28UN-2A	1.4755	2	1.4987 +.0005	1.4916 - .0005	1.4755 -.0003	.00015	8	.0089
1	7517772	1.5000-28UN	1.4768	1	1.5005	1.4613 - .0005		.0003	15	.0045
3	7517773	1.5000-28UN	1.4768	2	1.5000 +.0005	1.4929 - .0005	1.4768 -.0003	.00015	8	.0089
2	7517774	1.5625-6UN-2A	1.4518	1	1.5609	1.3796 - .0008		.0004	5	.0208
4	7517775	1.5625-6UN-2A	1.4518	2	1.5601 +.0008	1.5391 - .0008	1.4518 -.0005	.0003	5	.0417
2	7517776	1.5625-6UN	1.4542	1	1.5633	1.3820 - .0008		.0004	5	.0208
4	7517777	1.5625-6UN	1.4542	2	1.5625 +.0008	1.5415 - .0008	1.4542 -.0005	.0003	5	.0417

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD		GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517778	1.5625-8UN-2A	1.4791	1	1.5610	1.4250 - .0007		.0004	5	.0156
4	7517779	1.5625-8UN-2A	1.4791	2	1.5603 +.0007	1.5432 - .0007	1.4791 -.0005	.00025	5	.0312
2	7517780	1.5625-8UN	1.4813	1	1.5632	1.4272 - .0007		.0004	5	.0156
4	7517781	1.5625-8UN	1.4813	2	1.5625 +.0007	1.5454 - .0007	1.4813 -.0005	.00025	5	.0312
1	7517782	1.5625-12UN-2A	1.5066	1	1.5613	1.4705 - .0006		.0003	10	.0104
4	7517783	1.5625-12UN-2A	1.5066	2	1.5607 +.0006	1.5478 - .0006	1.5066 -.0004	.0002	6	.0208
1	7517784	1.5625-12UN	1.5084	1	1.5631	1.4723 - .0006		.0003	10	.0104
4	7517785	1.5625-12UN	1.5084	2	1.5625 +.0006	1.5496 - .0006	1.5084 -.0004	.0002	6	.0208
1	5220-751-6960	1.5625-16UN-2A	1.5203	1	1.5615	1.4932 - .0006		.0003	10	.0078
4	5220-751-6961	1.5625-16UN-2A	1.5203	2	1.5609 +.0006	1.5504 - .0006	1.5203 -.0004	.00015	8	.0156
1	5220-751-1392	1.5625-16UN	1.5219	1	1.5631	1.4948 - .0006		.0003	10	.0078
4	5220-751-1393	1.5625-16UN	1.5219	2	1.5625 +.0006	1.5520 - .0006	1.5219 -.0004	.00015	8	.0156
1	5220-751-4980	1.5625-18UNEF-2A	1.5249	1	1.5615	1.5008 - .0005		.0003	10	.0069
4	5220-751-4981	1.5625-18UNEF-2A	1.5249	2	1.5610 +.0005	1.5513 - .0005	1.5249 -.0004	.00015	8	.0139
1	5220-751-4982	1.5625-18UNEF	1.5264	1	1.5630	1.5023 - .0005		.0003	10	.0069
4	5220-751-4983	1.5625-18UNEF	1.5264	2	1.5625 +.0005	1.5528 - .0005	1.5264 -.0004	.00015	8	.0139
1	7517786	1.5625-20UN-2A	1.5286	1	1.5616	1.5069 - .0005		.0003	15	.0062
4	7517787	1.5625-20UN-2A	1.5286	2	1.5611 +.0005	1.5521 - .0005	1.5286 -.0004	.00015	8	.0125
1	7517788	1.5625-20UN	1.5300	1	1.5630	1.5083 - .0005		.0003	15	.0062
4	7517789	1.5625-20UN	1.5300	2	1.5625 +.0005	1.5535 - .0005	1.5300 -.0004	.00015	8	.0125
2	7517790	1.6250-6UN-2A	1.5142	1	1.6233	1.4420 - .0008		.0004	5	.0208
4	7517791	1.6250-6UN-2A	1.5142	2	1.6225 +.0008	1.6015 - .0008	1.5142 -.0005	.0003	5	.0417

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	*	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA				
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	7517792	1.6250-6UN	1.5167	1	1.6258	1.4445 - .0008		.0004	5	.0208
4	7517793	1.6250-6UN	1.5167	2	1.6250 +.0008	1.6040 - .0008	1.5167 -.0005	.0003	5	.0417
2	5220-751-4984	1.6250-8UN-2A	1.5416	1	1.6235	1.4875 - .0007		.0004	5	.0156
4	5220-751-4985	1.6250-8UN-2A	1.5416	2	1.6228 +.0007	1.6057 - .0007	1.5416 -.0005	.00025	5	.0312
2	5220-751-4986	1.6250-8UN	1.5438	1	1.6257	1.4897 - .0007		.0004	5	.0156
4	5220-751-4987	1.6250-8UN	1.5438	2	1.6250 +.0007	1.6079 - .0007	1.5438 -.0005	.00025	5	.0312
1	5220-751-4988	1.6250-12UN-2A	1.5691	1	1.6238	1.5330 - .0006		.0003	10	.0104
4	5220-751-4989	1.6250-12UN-2A	1.5691	2	1.6232 +.0006	1.6103 - .0006	1.5691 -.0004	.0002	6	.0208
1	5220-751-4990	1.6250-12UN	1.5709	1	1.6256	1.5348 - .0006		.0003	10	.0104
4	5220-751-4991	1.6250-12UN	1.5709	2	1.6250 +.0006	1.6121 - .0006	1.5709 -.0004	.0002	6	.0208
1	5220-751-6962	1.6250-16UN-2A	1.5828	1	1.6240	1.5557 - .0006		.0003	10	.0078
4	5220-751-6963	1.6250-16UN-2A	1.5828	2	1.6234 +.0006	1.6129 - .0006	1.5828 -.0004	.00015	8	.0156
1	5220-751-1408	1.6250-16UN	1.5844	1	1.6256	1.5573 - .0006		.0003	10	.0078
4	5220-751-1409	1.6250-16UN	1.5844	2	1.6250 +.0006	1.6145 - .0006	1.5844 -.0004	.00015	8	.0156
1	5220-751-4992	1.6250-18UNEF-2A	1.5874	1	1.6240	1.5633 - .0005		.0003	10	.0069
4	5220-751-4993	1.6250-18UNEF-2A	1.5874	2	1.6235 +.0005	1.6138 - .0005	1.5874 -.0004	.00015	8	.0139
1	5220-751-4994	1.6250-18UNEF	1.5889	1	1.6255	1.5648 - .0005		.0003	10	.0069
4	5220-751-4995	1.6250-18UNEF	1.5889	2	1.6250 +.0005	1.6153 - .0005	1.5889 -.0004	.00015	8	.0139
1	7517794	1.6250-20UN-2A	1.5911	1	1.6241	1.5694 - .0005		.0003	15	.0062
4	7517795	1.6250-20UN-2A	1.5911	2	1.6236 +.0005	1.6146 - .0005	1.5911 -.0004	.00015	8	.0125
1	7517796	1.6250-20UN	1.5925	1	1.6255	1.5708 - .0005		.0003	15	.0062
4	7517797	1.6250-20UN	1.5925	2	1.6250 +.0005	1.6160 - .0005	1.5925 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517798	1.6875-6UN-2A	1.5767	1	1.6858	1.5045 - .0008		.0004	5	.0208
4	7517799	1.6875-6UN-2A	1.5767	2	1.6850 +.0008	1.6640 - .0008	1.5767 -.0005	.0003	5	.0417
2	7517800	1.6875-6UN	1.5792	1	1.6883	1.5070 - .0008		.0004	5	.0208
4	7517801	1.6875-6UN	1.5792	2	1.6875 +.0008	1.6665 - .0008	1.5792 -.0005	.0003	5	.0417
1	7517802	1.6875-8UN-2A	1.6041	1	1.6860	1.5500 - .0007		.0004	5	.0156
4	7517803	1.6875-8UN-2A	1.6041	2	1.6853 +.0007	1.6682 - .0007	1.6041 -.0005	.00025	5	.0312
1	7517804	1.6875-8UN	1.6063	1	1.6882	1.5522 - .0007		.0004	5	.0156
4	7517805	1.6875-8UN	1.6063	2	1.6875 +.0007	1.6704 - .0007	1.6063 -.0005	.00025	5	.0312
2	7517806	1.6875-12UN-2A	1.6316	1	1.6863	1.5955 - .0006		.0003	10	.0104
4	7517807	1.6875-12UN-2A	1.6316	2	1.6857 +.0006	1.6728 - .0006	1.6316 -.0004	.0002	6	.0208
2	7517808	1.6875-12UN	1.6334	1	1.6881	1.5973 - .0006		.0003	10	.0104
4	7517809	1.6875-12UN	1.6334	2	1.6875 +.0006	1.6746 - .0006	1.6334 -.0004	.0002	6	.0208
1	5220-751-6964	1.6875-16UN-2A	1.6453	1	1.6865	1.6182 - .0006		.0003	10	.0078
4	5220-751-6965	1.6875-16UN-2A	1.6453	2	1.6859 +.0006	1.6754 - .0006	1.6453 -.0004	.00015	8	.0156
1	5220-751-1416	1.6875-16UN	1.6469	1	1.6881	1.6198 - .0006		.0003	10	.0078
4	5220-751-1417	1.6875-16UN	1.6469	2	1.6875 +.0006	1.6770 - .0006	1.6469 -.0004	.00015	8	.0156
1	5220-751-4996	1.6875-18UNEF-2A	1.6499	1	1.6865	1.6258 - .0005		.0003	10	.0069
4	5220-751-4997	1.6875-18UNEF-2A	1.6499	2	1.6860 +.0005	1.6763 - .0005	1.6499 -.0004	.00015	8	.0139
1	5220-751-4998	1.6875-18UNEF	1.6514	1	1.6880	1.6273 - .0005		.0003	10	.0069
4	5220-751-4999	1.6875-18UNEF	1.6514	2	1.6875 +.0005	1.6778 - .0005	1.6514 -.0004	.00015	8	.0139
1	7517810	1.6875-20UN-2A	1.6535	1	1.6865	1.6318 - .0005		.0003	15	.0062
4	7517811	1.6875-20UN-2A	1.6535	2	1.6860 +.0005	1.6770 - .0005	1.6535 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	1	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	2	MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	7517812	1.6875-20UN	1.6550	1	1.6880	1.6333 - .0005		.0003	15	.0062
4	7517813	1.6875-20UN	1.6550	2	1.6875 +.0005	1.6785 - .0005	1.6550 -.0004	.00015	8	.0125
2	5220-751-5000	1.7500-5UNC-1A,2A	1.6174	1	1.7481	1.5308 - .0008		.0004	5	.0250
4	5220-751-5001	1.7500-5UNC-1A,2A	1.6174	2	1.7473 +.0008	1.7234 - .0008	1.6174 -.0005	.0003	4	.0500
2	5220-751-5002	1.7500-5UNC	1.6201	1	1.7508	1.5335 - .0008		.0004	5	.0250
4	5220-751-5003	1.7500-5UNC	1.6201	2	1.7500 +.0008	1.7261 - .0008	1.6201 -.0005	.0003	4	.0500
2	7517814	1.7500-6UN-2A	1.6392	1	1.7483	1.5670 - .0008		.0004	5	.0208
4	7517815	1.7500-6UN-2A	1.6392	2	1.7475 +.0008	1.7265 - .0008	1.6392 -.0005	.0003	5	.0417
2	7517816	1.7500-6UN	1.6417	1	1.7508	1.5695 - .0008		.0004	5	.0208
4	7517817	1.7500-6UN	1.6417	2	1.7500 +.0008	1.7290 - .0008	1.6417 -.0005	.0003	5	.0417
2	5220-751-5004	1.7500-8UN-2A	1.6665	1	1.7484	1.6124 - .0007		.0004	5	.0156
4	5220-751-5005	1.7500-8UN-2A	1.6665	2	1.7477 +.0007	1.7306 - .0007	1.6665 -.0005	.00025	5	.0312
2	5220-751-5006	1.7500-8UN	1.6688	1	1.7507	1.6147 - .0007		.0004	5	.0156
4	5220-751-5007	1.7500-8UN	1.6688	2	1.7500 +.0007	1.7329 - .0007	1.6688 -.0005	.00025	5	.0312
1	5220-751-5008	1.7500-12UN-2A	1.6941	1	1.7488	1.6580 - .0006		.0003	10	.0104
4	5220-751-5009	1.7500-12UN-2A	1.6941	2	1.7482 +.0006	1.7353 - .0006	1.6941 -.0004	.0002	6	.0208
1	5220-751-5010	1.7500-12UN	1.6959	1	1.7506	1.6598 - .0006		.0003	10	.0104
4	5220-751-5011	1.7500-12UN	1.6959	2	1.7500 +.0006	1.7371 - .0006	1.6959 -.0004	.0002	6	.0208
1	5220-751-5012	1.7500-16UN-2A	1.7078	1	1.7490	1.6807 - .0006		.0003	10	.0078
4	5220-751-5013	1.7500-16UN-2A	1.7078	2	1.7484 +.0006	1.7379 - .0006	1.7078 -.0004	.00015	8	.0156
1	5220-751-5014	1.7500-16UN	1.7094	1	1.7506	1.6823 - .0006		.0003	10	.0078
4	5220-751-5015	1.7500-16UN	1.7094	2	1.7500 +.0006	1.7395 - .0006	1.7094 -.0004	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD		GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	7517818	1.7500-20UN-2A	1.7160	1	1.7490	1.6943 - .0005		.0003	15	.0062
4	7517819	1.7500-20UN-2A	1.7160	2	1.7485 +.0005	1.7395 - .0005	1.7160 -.0004	.00015	8	.0125
1	7517820	1.7500-20UN	1.7175	1	1.7505	1.6958 - .0005		.0003	15	.0062
4	7517821	1.7500-20UN	1.7175	2	1.7500 +.0005	1.7410 - .0005	1.7175 -.0004	.00015	8	.0125
2	7517822	1.8125-6UN-2A	1.7017	1	1.8108	1.6295 - .0008		.0004	5	.0208
4	7517823	1.8125-6UN-2A	1.7017	2	1.8100 +.0008	1.7890 - .0008	1.7017 -.0005	.0003	5	.0417
2	7517824	1.8125-6UN	1.7042	1	1.8133	1.6320 - .0008		.0004	5	.0208
4	7517825	1.8125-6UN	1.7042	2	1.8125 +.0008	1.7915 - .0008	1.7042 -.0005	.0003	5	.0417
2	7517826	1.8125-8UN-2A	1.7290	1	1.8109	1.6749 - .0007		.0004	5	.0156
4	7517827	1.8125-8UN-2A	1.7290	2	1.8102 +.0007	1.7931 - .0007	1.7290 -.0005	.00025	5	.0312
2	7517828	1.8125-8UN	1.7313	1	1.8132	1.6772 - .0007		.0004	5	.0156
4	7517829	1.8125-8UN	1.7313	2	1.8125 +.0007	1.7954 - .0007	1.7313 -.0005	.00025	5	.0312
1	7517830	1.8125-12UN-2A	1.7566	1	1.8113	1.7205 - .0006		.0003	10	.0104
4	7517831	1.8125-12UN-2A	1.7566	2	1.8107 +.0006	1.7978 - .0006	1.7566 -.0004	.0002	6	.0208
1	7517832	1.8125-12UN	1.7584	1	1.8131	1.7223 - .0006		.0003	10	.0104
4	7517833	1.8125-12UN	1.7584	2	1.8125 +.0006	1.7996 - .0006	1.7584 -.0004	.0002	6	.0208
1	5220-751-5016	1.8125-16UN-2A	1.7703	1	1.8115	1.7432 - .0006		.0003	10	.0078
4	5220-751-5017	1.8125-16UN-2A	1.7703	2	1.8109 +.0006	1.8004 - .0006	1.7703 -.0004	.00015	8	.0156
1	5220-751-5018	1.8125-16UN	1.7719	1	1.8131	1.7448 - .0006		.0003	10	.0078
4	5220-751-5019	1.8125-16UN	1.7719	2	1.8125 +.0006	1.8020 - .0006	1.7719 -.0004	.00015	8	.0156
1	7517834	1.8125-20UN-2A	1.7785	1	1.8115	1.7568 - .0005		.0003	15	.0062
4	7517835	1.8125-20UN-2A	1.7785	2	1.8110 +.0005	1.8020 - .0005	1.7785 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	7517836	1.8125-20UN	1.7800	1	1.8130	1.7583 - .0005		.0003	15	.0062
4	7517837	1.8125-20UN	1.7800	2	1.8125 +.0005	1.8035 - .0005	1.7800 -.0004	.00015	8	.0125
2	7517838	1.8750-6UN-2A	1.7642	1	1.8733	1.6920 - .0008		.0004	5	.0208
4	7517839	1.8750-6UN-2A	1.7642	2	1.8725 +.0008	1.8515 - .0008	1.7642 -.0005	.0003	5	.0417
2	7517840	1.8750-6UN	1.7667	1	1.8758	1.6945 - .0008		.0004	5	.0208
4	7517841	1.8750-6UN	1.7667	2	1.8750 +.0008	1.8540 - .0008	1.7667 -.0005	.0003	5	.0417
2	5220-751-5020	1.8750-8UN-2A	1.7915	1	1.8734	1.7374 - .0007		.0004	5	.0156
4	5220-751-5021	1.8750-8UN-2A	1.7915	2	1.8727 +.0007	1.8556 - .0007	1.7915 -.0005	.00025	5	.0312
2	5220-751-5022	1.8750-8UN	1.7938	1	1.8757	1.7397 - .0007		.0004	5	.0156
4	5220-751-5023	1.8750-8UN	1.7938	2	1.8750 +.0007	1.8579 - .0007	1.7938 -.0005	.00025	5	.0312
1	5220-751-5024	1.8750-12UN-2A	1.8191	1	1.8738	1.7830 - .0006		.0003	10	.0104
4	5220-751-5025	1.8750-12UN-2A	1.8191	2	1.8732 +.0006	1.8603 - .0006	1.8191 -.0004	.0002	6	.0208
1	5220-751-5026	1.8750-12UN	1.8209	1	1.8756	1.7848 - .0006		.0003	10	.0104
4	5220-751-5027	1.8750-12UN	1.8209	2	1.8750 +.0006	1.8621 - .0006	1.8209 -.0004	.0002	6	.0208
1	5220-751-5028	1.8750-16UN-2A	1.8328	1	1.8740	1.8057 - .0006		.0003	10	.0078
4	5220-751-5029	1.8750-16UN-2A	1.8328	2	1.8734 +.0006	1.8629 - .0006	1.8328 -.0004	.00015	8	.0156
1	5220-751-5030	1.8750-16UN	1.8344	1	1.8756	1.8073 - .0006		.0003	10	.0078
4	5220-751-5031	1.8750-16UN	1.8344	2	1.8750 +.0006	1.8645 - .0006	1.8344 -.0004	.00015	8	.0156
1	7517842	1.8750-20UN-2A	1.8410	1	1.8740	1.8193 - .0005		.0003	15	.0062
4	7517843	1.8750-20UN-2A	1.8410	2	1.8735 +.0005	1.8645 - .0005	1.8410 -.0004	.00015	8	.0125
1	7517844	1.8750-20UN	1.8425	1	1.8755	1.8208 - .0005		.0003	15	.0062
4	7517845	1.8750-20UN	1.8425	2	1.8750 +.0005	1.8660 - .0005	1.8425 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517846	1.9375-6UN-2A	1.8266	1	1.9357	1.7544 - .0008		.0004	5	.0208
4	7517847	1.9375-6UN-2A	1.8266	2	1.9349 +.0008	1.9139 - .0008	1.8266 -.0005	.0003	5	.0417
2	7517848	1.9375-6UN	1.8292	1	1.9383	1.7570 - .0008		.0004	5	.0208
4	7517849	1.9375-6UN	1.8292	2	1.9375 +.0008	1.9165 - .0008	1.8292 -.0005	.0003	5	.0417
2	7517850	1.9375-8UN-2A	1.8540	1	1.9359	1.7999 - .0007		.0004	5	.0156
4	7517851	1.9375-8UN-2A	1.8540	2	1.9352 +.0007	1.9181 - .0007	1.8540 -.0005	.00025	5	.0312
2	7517852	1.9375-8UN	1.8563	1	1.9382	1.8022 - .0007		.0004	5	.0156
4	7517853	1.9375-8UN	1.8563	2	1.9375 +.0007	1.9204 - .0007	1.8563 -.0005	.00025	5	.0312
1	7517854	1.9375-12UN-2A	1.8816	1	1.9363	1.8455 - .0006		.0003	10	.0104
4	7517855	1.9375-12UN-2A	1.8816	2	1.9357 +.0006	1.9228 - .0006	1.8816 -.0004	.0002	6	.0208
1	7517856	1.9375-12UN	1.8834	1	1.9381	1.8473 - .0006		.0003	10	.0104
4	7517857	1.9375-12UN	1.8834	2	1.9375 +.0006	1.9246 - .0006	1.8834 -.0004	.0002	6	.0208
1	5220-751-5032	1.9375-16UN-2A	1.8953	1	1.9365	1.8682 - .0006		.0003	10	.0078
4	5220-751-5033	1.9375-16UN-2A	1.8953	2	1.9359 +.0006	1.9254 - .0006	1.8953 -.0004	.00015	8	.0156
1	5220-751-5034	1.9375-16UN	1.8969	1	1.9381	1.8698 - .0006		.0003	10	.0078
4	5220-751-5035	1.9375-16UN	1.8969	2	1.9375 +.0006	1.9270 - .0006	1.8969 -.0004	.00015	8	.0156
1	7517858	1.9375-20UN-2A	1.9035	1	1.9365	1.8818 - .0005		.0003	15	.0062
4	7517859	1.9375-20UN-2A	1.9035	2	1.9360 +.0005	1.9270 - .0005	1.9035 -.0004	.00015	8	.0125
1	7517860	1.9375-20UN	1.9050	1	1.9380	1.8833 - .0005		.0003	15	.0062
4	7517861	1.9375-20UN	1.9050	2	1.9375 +.0005	1.9285 - .0005	1.9050 -.0004	.00015	8	.0125
2	5220-751-5036	2.0000-4½UNC-1A,2A	1.8528	1	1.9979	1.7566 - .0008		.0004	5	.0278
4	5220-751-5037	2.0000-4½UNC-1A,2A	1.8528	2	1.9971 +.0008	1.9713 - .0008	1.8528 -.0005	.0003	4	.0556

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5038	2.0000-4½UNC	1.8557	1	2.0008	1.7595 - .0008		.0004	5	.0278
4	5220-751-5039	2.0000-4½UNC	1.8557	2	2.0000 +.0008	1.9742 - .0008	1.8557 -.0005	.0003	4	.0556
2	7517862	2.0000-6UN-2A	1.8891	1	1.9982	1.8169 - .0008		.0004	5	.0208
4	7517863	2.0000-6UN-2A	1.8891	2	1.9974 +.0008	1.9764 - .0008	1.8891 -.0005	.0003	5	.0417
2	7517864	2.0000-6UN	1.8917	1	2.0008	1.8195 - .0008		.0004	5	.0208
4	7517865	2.0000-6UN	1.8917	2	2.0000 +.0008	1.9790 - .0008	1.8917 -.0005	.0003	5	.0417
2	5220-751-5040	2.0000-8UN-2A	1.9165	1	1.9984	1.8624 - .0007		.0004	5	.0156
4	5220-751-5041	2.0000-8UN-2A	1.9165	2	1.9977 +.0007	1.9806 - .0007	1.9165 -.0005	.00025	5	.0312
2	5220-751-5042	2.0000-8UN	1.9188	1	2.0007	1.8647 - .0007		.0004	5	.0156
4	5220-751-5043	2.0000-8UN	1.9188	2	2.0000 +.0007	1.9829 - .0007	1.9188 -.0005	.00025	5	.0312
1	5220-751-5044	2.0000-12UN-2A	1.9441	1	1.9988	1.9080 - .0006		.0003	10	.0104
4	5220-751-5045	2.0000-12UN-2A	1.9441	2	1.9982 +.0006	1.9853 - .0006	1.9441 -.0004	.0002	6	.0208
1	5220-751-5046	2.0000-12UN	1.9459	1	2.0006	1.9098 - .0006		.0003	10	.0104
4	5220-751-5047	2.0000-12UN	1.9459	2	2.0000 +.0006	1.9871 - .0006	1.9459 -.0004	.0002	6	.0208
1	5220-751-5048	2.0000-16UN-2A	1.9578	1	1.9990	1.9307 - .0006		.0003	10	.0078
4	5220-751-5049	2.0000-16UN-2A	1.9578	2	1.9984 +.0006	1.9879 - .0006	1.9578 -.0004	.00015	8	.0156
1	5220-751-5050	2.0000-16UN	1.9594	1	2.0006	1.9323 - .0006		.0003	10	.0078
4	5220-751-5051	2.0000-16UN	1.9594	2	2.0000 +.0006	1.9895 - .0006	1.9594 -.0004	.00015	8	.0156
1	7517866	2.0000-20UN-2A	1.9660	1	1.9990	1.9443 - .0005		.0003	15	.0062
4	7517867	2.0000-20UN-2A	1.9660	2	1.9985 +.0005	1.9895 - .0005	1.9660 -.0004	.00015	8	.0125
1	7517868	2.0000-20UN	1.9675	1	2.0005	1.9458 - .0005		.0003	15	.0062
4	7517869	2.0000-20UN	1.9675	2	2.0000 +.0005	1.9910 - .0005	1.9675 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517870	2.1250-6UN-2A	2.0141	1	2.1232	1.9419 - .0008		.0004	5	.0208
4	7517871	2.1250-6UN-2A	2.0141	2	2.1224 +.0008	2.1014 - .0008	2.0141 -.0005	.0003	5	.0417
2	7517872	2.1250-6UN	2.0167	1	2.1258	1.9445 - .0008		.0004	5	.0208
4	7517873	2.1250-6UN	2.0167	2	2.1250 +.0008	2.1040 - .0008	2.0167 -.0005	.0003	5	.0417
2	5220-751-5056	2.1250-8UN-2A	2.0414	1	2.1233	1.9873 - .0007		.0004	5	.0156
4	5220-751-5057	2.1250-8UN-2A	2.0414	2	2.1226 +.0007	2.1055 - .0007	2.0414 -.0005	.00025	5	.0312
2	5220-751-5058	2.1250-8UN	2.0438	1	2.1257	1.9897 - .0007		.0004	5	.0156
4	5220-751-5059	2.1250-8UN	2.0438	2	2.1250 +.0007	2.1079 - .0007	2.0438 -.0005	.00025	5	.0312
1	5220-751-5060	2.1250-12UN-2A	2.0691	1	2.1238	2.0330 - .0006		.0003	10	.0104
4	5220-751-5061	2.1250-12UN-2A	2.0691	2	2.1232 +.0006	2.1103 - .0006	2.0691 -.0004	.0002	6	.0208
1	5220-751-5062	2.1250-12UN	2.0709	1	2.1256	2.0348 - .0006		.0003	10	.0104
4	5220-751-5063	2.1250-12UN	2.0709	2	2.1250 +.0006	2.1121 - .0006	2.0709 -.0004	.0002	6	.0208
1	5220-751-5064	2.1250-16UN-2A	2.0828	1	2.1240	2.0557 - .0006		.0003	10	.0078
4	5220-751-5065	2.1250-16UN-2A	2.0828	2	2.1234 +.0006	2.1129 - .0006	2.0828 -.0004	.00015	8	.0156
1	5220-751-5066	2.1250-16UN	2.0844	1	2.1256	2.0573 - .0006		.0003	10	.0078
4	5220-751-5067	2.1250-16UN	2.0844	2	2.1250 +.0006	2.1145 - .0006	2.0844 -.0004	.00015	8	.0156
1	7517874	2.1250-20UN-2A	2.0910	1	2.1240	2.0693 - .0005		.0003	15	.0062
4	7517875	2.1250-20UN-2A	2.0910	2	2.1235 +.0005	2.1145 - .0005	2.0910 -.0004	.00015	8	.0125
1	7517876	2.1250-20UN	2.0925	1	2.1255	2.0708 - .0005		.0003	15	.0062
4	7517877	2.1250-20UN	2.0925	2	2.1250 +.0005	2.1160 - .0005	2.0925 -.0004	.00015	8	.0125
2	5220-751-5072	2.2500-4½UNC-1A,2A	2.1028	1	2.2479	2.0066 - .0008		.0004	5	.0278
4	5220-751-5073	2.2500-4½UNC-1A,2A	2.1028	2	2.2471 +.0008	2.2213 - .0008	2.1028 -.0005	.0003	4	.0556

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5074	2.2500-4½UNC	2.1057	1	2.2508	2.0095 - .0008		.0004	5	.0278
4	5220-751-5075	2.2500-4½UNC	2.1057	2	2.2500 +.0008	2.2242 - .0008	2.1057 -.0005	.0003	4	.0556
2	7517878	2.2500-6UN-2A	2.1391	1	2.2482	2.0669 - .0008		.0004	5	.0208
4	7517879	2.2500-6UN-2A	2.1391	2	2.2474 +.0008	2.2264 - .0008	2.1391 -.0005	.0003	5	.0417
2	7517880	2.2500-6UN	2.1417	1	2.2508	2.0695 - .0008		.0004	5	.0208
4	7517881	2.2500-6UN	2.1417	2	2.2500 +.0008	2.2290 - .0008	2.1417 -.0005	.0003	5	.0417
2	5220-751-5076	2.2500-8UN-2A	2.1664	1	2.2483	2.1123 - .0007		.0004	5	.0156
4	5220-751-5077	2.2500-8UN-2A	2.1664	2	2.2476 +.0007	2.2305 - .0007	2.1664 -.0005	.00025	5	.0312
2	5220-751-5078	2.2500-8UN	2.1688	1	2.2507	2.1147 - .0007		.0004	5	.0156
4	5220-751-5079	2.2500-8UN	2.1688	2	2.2500 +.0007	2.2329 - .0007	2.1688 -.0005	.00025	5	.0312
1	5220-751-5080	2.2500-12UN-2A	2.1941	1	2.2488	2.1580 - .0006		.0003	10	.0104
4	5220-751-5081	2.2500-12UN-2A	2.1941	2	2.2482 +.0006	2.2353 - .0006	2.1941 -.0004	.0002	6	.0208
1	5220-751-5082	2.2500-12UN	2.1959	1	2.2506	2.1598 - .0006		.0003	10	.0104
4	5220-751-5083	2.2500-12UN	2.1959	2	2.2500 +.0006	2.2371 - .0006	2.1959 -.0004	.0002	6	.0208
1	5220-751-5084	2.2500-16UN-2A	2.2078	1	2.2490	2.1807 - .0006		.0003	10	.0078
4	5220-751-5085	2.2500-16UN-2A	2.2078	2	2.2484 +.0006	2.2379 - .0006	2.2078 -.0004	.00015	8	.0156
1	5220-751-5086	2.2500-16UN	2.2094	1	2.2506	2.1823 - .0006		.0003	10	.0078
4	5220-751-5087	2.2500-16UN	2.2094	2	2.2500 +.0006	2.2395 - .0006	2.2094 -.0004	.00015	8	.0156
1	7517882	2.2500-20UN-2A	2.2160	1	2.2490	2.1943 - .0005		.0003	15	.0062
4	7517883	2.2500-20UN-2A	2.2160	2	2.2485 +.0005	2.2395 - .0005	2.2160 -.0004	.00015	8	.0125
1	7517884	2.2500-20UN	2.2175	1	2.2505	2.1958 - .0005		.0003	15	.0062
4	7517885	2.2500-20UN	2.2175	2	2.2500 +.0005	2.2410 - .0005	2.2175 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517886	2.3750-6UN-2A	2.2640	1	2.3731	2.1918 - .0008		.0004	5	.0208
4	7517887	2.3750-6UN-2A	2.2640	2	2.3723 +.0008	2.3513 - .0008	2.2640 -.0005	.0003	5	.0417
2	7517888	2.3750-6UN	2.2667	1	2.3758	2.1945 - .0008		.0004	5	.0208
4	7517889	2.3750-6UN	2.2667	2	2.3750 +.0008	2.3540 - .0008	2.2667 -.0005	.0003	5	.0417
2	7517890	2.3750-8UN-2A	2.2914	1	2.3733	2.2373 - .0007		.0004	5	.0156
4	7517891	2.3750-8UN-2A	2.2914	2	2.3726 +.0007	2.3555 - .0007	2.2914 -.0005	.00025	5	.0312
2	7517892	2.3750-8UN	2.2938	1	2.3757	2.2397 - .0007		.0004	5	.0156
4	7517893	2.3750-8UN	2.2938	2	2.3750 +.0007	2.3579 - .0007	2.2938 -.0005	.00025	5	.0312
1	5220-751-5092	2.3750-12UN-2A	2.3190	1	2.3737	2.2829 - .0006		.0003	10	.0104
4	5220-751-5093	2.3750-12UN-2A	2.3190	2	2.3731 +.0006	2.3602 - .0006	2.3190 -.0004	.0002	6	.0208
1	5220-751-5094	2.3750-12UN	2.3209	1	2.3756	2.2848 - .0006		.0003	10	.0104
4	5220-751-5095	2.3750-12UN	2.3209	2	2.3750 +.0006	2.3621 - .0006	2.3209 -.0004	.0002	6	.0208
1	5220-751-5096	2.3750-16UN-2A	2.3327	1	2.3739	2.3056 - .0006		.0003	10	.0078
4	5220-751-5097	2.3750-16UN-2A	2.3327	2	2.3733 +.0006	2.3628 - .0006	2.3327 -.0004	.00015	8	.0156
1	5220-751-5098	2.3750-16UN	2.3344	1	2.3756	2.3073 - .0006		.0003	10	.0078
4	5220-751-5099	2.3750-16UN	2.3344	2	2.3750 +.0006	2.3645 - .0006	2.3344 -.0004	.00015	8	.0156
1	7517894	2.3750-20UN-2A	2.3410	1	2.3740	2.3193 - .0005		.0003	15	.0062
4	7517895	2.3750-20UN-2A	2.3410	2	2.3735 +.0005	2.3645 - .0005	2.3410 -.0004	.00015	8	.0125
1	7517896	2.3750-20UN	2.3425	1	2.3755	2.3208 - .0005		.0003	15	.0062
4	7517897	2.3750-20UN	2.3425	2	2.3750 +.0005	2.3660 - .0005	2.3425 -.0004	.00015	8	.0125
2	5220-751-5104	2.5000-4UNC-1A,2A	2.3345	1	2.4978	2.2262 - .0009		.0004	5	.0312
4	5220-751-5105	2.5000-4UNC-1A,2A	2.3345	2	2.4969 +.0009	2.4688 - .0009	2.3345 -.0005	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			*	GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5106	2.5000-4UNC	2.3376	1	2.5009	2.2293 - .0009		.0004	5	.0312
4	5220-751-5107	2.5000-4UNC	2.3376	2	2.5000 +.0009	2.4719 - .0009	2.3376 -.0005	.0003	4	.0625
2	7517898	2.5000-6UN-2A	2.3890	1	2.4981	2.3168 - .0008		.0004	5	.0208
4	7517899	2.5000-6UN-2A	2.3890	2	2.4973 +.0008	2.4763 - .0008	2.3890 -.0005	.0003	5	.0417
2	7517900	2.5000-6UN	2.3917	1	2.5008	2.3195 - .0008		.0004	5	.0208
4	7517901	2.5000-6UN	2.3917	2	2.5000 +.0008	2.4790 - .0008	2.3917 -.0005	.0003	5	.0417
2	5220-751-5108	2.5000-8UN-2A	2.4164	1	2.4983	2.3623 - .0007		.0004	5	.0156
4	5220-751-5109	2.5000-8UN-2A	2.4164	2	2.4976 +.0007	2.4805 - .0007	2.4164 -.0005	.00025	5	.0312
2	5220-751-5110	2.5000-8UN	2.4188	1	2.5007	2.3647 - .0007		.0004	5	.0156
4	5220-751-5111	2.5000-8UN	2.4188	2	2.5000 +.0007	2.4829 - .0007	2.4188 -.0005	.00025	5	.0312
1	5220-751-5112	2.5000-12UN-2A	2.4440	1	2.4987	2.4079 - .0006		.0003	10	.0104
4	5220-751-5113	2.5000-12UN-2A	2.4440	2	2.4981 +.0006	2.4852 - .0006	2.4440 -.0004	.0002	6	.0208
1	5220-751-5114	2.5000-12UN	2.4459	1	2.5006	2.4098 - .0006		.0003	10	.0104
4	5220-751-5115	2.5000-12UN	2.4459	2	2.5000 +.0006	2.4871 - .0006	2.4459 -.0004	.0002	6	.0208
1	5220-751-5116	2.5000-16UN-2A	2.4577	1	2.4989	2.4306 - .0006		.0003	10	.0078
4	5220-751-5117	2.5000-16UN-2A	2.4577	2	2.4983 +.0006	2.4878 - .0006	2.4577 -.0004	.00015	8	.0156
1	5220-751-5118	2.5000-16UN	2.4594	1	2.5006	2.4323 - .0006		.0003	10	.0078
4	5220-751-5119	2.5000-16UN	2.4594	2	2.5000 +.0006	2.4895 - .0006	2.4594 -.0004	.00015	8	.0156
1	7517902	2.5000-20UN-2A	2.4660	1	2.4990	2.4443 - .0005		.0003	15	.0062
4	7517903	2.5000-20UN-2A	2.4660	2	2.4985 +.0005	2.4895 - .0005	2.4660 -.0004	.00015	8	.0125
1	7517904	2.5000-20UN	2.4675	1	2.5005	2.4458 - .0005		.0003	15	.0062
4	7517905	2.5000-20UN	2.4675	2	2.5000 +.0005	2.4910 - .0005	2.4675 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	1	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	7517906	2.6250-6UN-2A	2.5140	1	2.6231	2.4418 - .0008		.0004	5	.0208
4	7517907	2.6250-6UN-2A	2.5140	2	2.6223 +.0008	2.6013 - .0008	2.5140 -.0005	.0003	5	.0417
2	7517908	2.6250-6UN	2.5167	1	2.6258	2.4445 - .0008		.0004	5	.0208
4	7517909	2.6250-6UN	2.5167	2	2.6250 +.0008	2.6040 - .0008	2.5167 -.0005	.0003	5	.0417
2	7517910	2.6250-8UN-2A	2.5413	1	2.6232	2.4872 - .0007		.0004	5	.0156
4	7517911	2.6250-8UN-2A	2.5413	2	2.6225 +.0007	2.6054 - .0007	2.5413 -.0005	.00025	5	.0312
2	7517912	2.6250-8UN	2.5438	1	2.6257	2.4897 - .0007		.0004	5	.0156
4	7517913	2.6250-8UN	2.5438	2	2.6250 +.0007	2.6079 - .0007	2.5438 -.0005	.00025	5	.0312
1	5220-751-5120	2.6250-12UN-2A	2.5690	1	2.6237	2.5329 - .0006		.0003	10	.0104
4	5220-751-5121	2.6250-12UN-2A	2.5690	2	2.6231 +.0006	2.6102 - .0006	2.5690 -.0004	.0002	6	.0208
1	5220-751-5122	2.6250-12UN	2.5709	1	2.6256	2.5348 - .0006		.0003	10	.0104
4	5220-751-5123	2.6250-12UN	2.5709	2	2.6250 +.0006	2.6121 - .0006	2.5709 -.0004	.0002	6	.0208
1	5220-751-5124	2.6250-16UN-2A	2.5827	1	2.6239	2.5556 - .0006		.0003	10	.0078
4	5220-751-5125	2.6250-16UN-2A	2.5827	2	2.6233 +.0006	2.6128 - .0006	2.5827 -.0004	.00015	8	.0156
1	5220-751-5126	2.6250-16UN	2.5844	1	2.6256	2.5573 - .0006		.0003	10	.0078
4	5220-751-5127	2.625Q-16UN	2.5844	2	2.6250 +.0006	2.6145 - .0006	2.5844 -.0004	.00015	8	.0156
1	7517914	2.6250-20UN-2A	2.5910	1	2.6240	2.5693 - .0005		.0003	15	.0062
4	7517915	2.6250-20UN-2A	2.5910	2	2.6235 +.0005	2.6145 - .0005	2.5910 -.0004	.00015	8	.0125
1	7517916	2.6250-20UN	2.5925	1	2.6255	2.5708 - .0005		.0003	15	.0062
4	7517917	2.6250-20UN	2.5925	2	2.6250 +.0005	2.6160 - .0005	2.5925 -.0004	.00015	8	.0125
2	5220-751-5128	2.7500-4UNC-1A,2A	2.5844	1	2.7477	2.4761 - .0009		.0004	5	.0312
4	5220-751-5129	2.7500-4UNC-1A,2A	2.5844	2	2.7468 +.0009	2.7187 - .0009	2.5844 -.0005	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5130	2.7500-4UNC	2.5876	1	2.7509	2.4793 - .0009		.0004	5	.0312
4	5220-751-5131	2.7500-4UNC	2.5876	2	2.7500 +.0009	2.7219 - .0009	2.5876 -.0005	.0003	4	.0625
2	7517918	2.7500-6UN-2A	2.6390	1	2.7481	2.5668 - .0008		.0004	5	.0208
4	7517919	2.7500-6UN-2A	2.6390	2	2.7473 +.0008	2.7263 - .0008	2.6390 -.0005	.0003	5	.0417
2	7517920	2.7500-6UN	2.6417	1	2.7508	2.5695 - .0008		.0004	5	.0208
4	7517921	2.7500-6UN	2.6417	2	2.7500 +.0008	2.7290 - .0008	2.6417 -.0005	.0003	5	.0417
2	5220-751-5132	2.7500-8UN-2A	2.6663	1	2.7482	2.6122 - .0007		.0004	5	.0156
4	5220-751-5133	2.7500-8UN-2A	2.6663	2	2.7475 +.0007	2.7304 - .0007	2.6663 -.0005	.00025	5	.0312
2	5220-751-5134	2.7500-8UN	2.6688	1	2.7507	2.6147 - .0007		.0004	5	.0156
4	5220-751-5135	2.7500-8UN	2.6688	2	2.7500 +.0007	2.7329 - .0007	2.6688 -.0005	.00025	5	.0312
1	5220-751-5136	2.7500-12UN-2A	2.6940	1	2.7487	2.6579 - .0006		.0003	10	.0104
4	5220-751-5137	2.7500-12UN-2A	2.6940	2	2.7481 +.0006	2.7352 - .0006	2.6940 -.0004	.0002	6	.0208
1	5220-751-5138	2.7500-12UN	2.6959	1	2.7506	2.6598 - .0006		.0003	10	.0104
4	5220-751-5139	2.7500-12UN	2.6959	2	2.7500 +.0006	2.7371 - .0006	2.6959 -.0004	.0002	6	.0208
1	5220-751-5140	2.7500-16UN-2A	2.7077	1	2.7489	2.6806 - .0006		.0003	10	.0078
4	5220-751-5141	2.7500-16UN-2A	2.7077	2	2.7483 +.0006	2.7378 - .0006	2.7077 -.0004	.00015	8	.0156
1	5220-751-5142	2.7500-16UN	2.7094	1	2.7506	2.6823 - .0006		.0003	10	.0078
4	5220-751-5143	2.7500-16UN	2.7094	2	2.7500 +.0006	2.7395 - .0006	2.7094 -.0004	.00015	8	.0156
1	7517922	2.7500-20UN-2A	2.7160	1	2.7490	2.6943 - .0005		.0003	15	.0062
4	7517923	2.7500-20UN-2A	2.7160	2	2.7485 +.0005	2.7395 - .0005	2.7160 -.0004	.00015	8	.0125
1	7517924	2.7500-20UN	2.7175	1	2.7505	2.6958 - .0005		.0003	15	.0062
4	7517925	2.7500-20UN	2.7175	2	2.7500 +.0005	2.7410 - .0005	2.7175 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD	GAGE DIMENSIONS: 1 / 2	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517926	2.8750-6UN-2A	2.7639	1	2.8730	2.6917 - .0008		.0004	5	.0208
4	7517927	2.8750-6UN-2A	2.7639	2	2.8722 +.0008	2.8512 - .0008	2.7639 -.0005	.0003	5	.0417
2	7517928	2.8750-6UN	2.7667	1	2.8758	2.6945 - .0008		.0004	5	.0208
4	7517929	2.8750-6UN	2.7667	2	2.8750 +.0008	2.8540 - .0008	2.7667 -.0005	.0003	5	.0417
2	7517930	2.8750-8UN-2A	2.7913	1	2.8732	2.7372 - .0007		.0004	5	.0156
4	7517931	2.8750-8UN-2A	2.7913	2	2.8725 +.0007	2.8554 - .0007	2.7913 -.0005	.00025	5	.0312
2	7517932	2.8750-8UN	2.7938	1	2.8757	2.7397 - .0007		.0004	5	.0156
4	7517933	2.8750-8UN	2.7938	2	2.8750 +.0007	2.8579 - .0007	2.7938 -.0005	.00025	5	.0312
1	5220-751-5144	2.8750-12UN-2A	2.8190	1	2.8737	2.7829 - .0006		.0003	10	.0104
4	5220-751-5145	2.8750-12UN-2A	2.8190	2	2.8731 +.0006	2.8602 - .0006	2.8190 -.0004	.0002	6	.0208
1	5220-751-5146	2.8750-12UN	2.8209	1	2.8756	2.7848 - .0006		.0003	10	.0104
4	5220-751-5147	2.8750-12UN	2.8209	2	2.8750 +.0006	2.8621 - .0006	2.8209 -.0004	.0002	6	.0208
1	5220-751-5148	2.8750-16UN-2A	2.8327	1	2.8739	2.8056 - .0006		.0003	10	.0078
4	5220-751-5149	2.8750-16UN-2A	2.8327	2	2.8733 +.0006	2.8628 - .0006	2.8327 -.0004	.00015	8	.0156
1	5220-751-5150	2.8750-16UN	2.8344	1	2.8756	2.8073 - .0006		.0003	10	.0078
4	5220-751-5151	2.8750-16UN	2.8344	2	2.8750 +.0006	2.8645 - .0006	2.8344 -.0004	.00015	8	.0156
1	7517934	2.8750-20UN-2A	2.8409	1	2.8739	2.8192 - .0005		.0003	15	.0062
4	7517935	2.8750-20UN-2A	2.8409	2	2.8734 +.0005	2.8644 - .0005	2.8409 -.0004	.00015	8	.0125
1	7517936	2.8750-20UN	2.8425	1	2.8755	2.8208 - .0005		.0003	15	.0062
4	7517937	2.8750-20UN	2.8425	2	2.8750 +.0005	2.8660 - .0005	2.8425 -.0004	.00015	8	.0125
2	5220-751-5152	3.0000-4UNC-1A,2A	2.8344	1	2.9977	2.7261 - .0009		.0004	5	.0312
4	5220-751-5153	3.0000-4UNC-1A,2A	2.8344	2	2.9968 +.0009	2.9687 - .0009	2.8344 -.0005	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 20240-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	1	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	2	MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5154	3.0000-4UNC	2.8376	1	3.0009	2.7293 - .0009		.0004	5	.0312
4	5220-751-5155	3.0000-4UNC	2.8376	2	3.0000 +.0009	2.9719 - .0009	2.8376 -.0005	.0003	4	.0625
2	7517938	3.0000-6UN-2A	2.8889	1	2.9980	2.8167 - .0008		.0004	5	.0208
4	7517939	3.0000-6UN-2A	2.8889	2	2.9972 +.0008	2.9762 - .0008	2.8889 -.0005	.0003	5	.0417
2	7517940	3.0000-6UN	2.8917	1	3.0008	2.8195 - .0008		.0004	5	.0208
4	7517941	3.0000-6UN	2.8917	2	3.0000 +.0008	2.9790 - .0008	2.8917 -.0005	.0003	5	.0417
2	5220-751-5156	3.0000-8UN-2A	2.9162	1	2.9981	2.8621 - .0007		.0004	5	.0156
4	5220-751-5157	3.0000-8UN-2A	2.9162	2	2.9974 +.0007	2.9803 - .0007	2.9162 -.0005	.00025	5	.0312
2	5220-751-5158	3.0000-8UN	2.9188	1	3.0007	2.8647 - .0007		.0004	5	.0156
4	5220-751-5159	3.0000-8UN	2.9188	2	3.0000 +.0007	2.9829 - .0007	2.9188 -.0005	.00025	5	.0312
1	5220-751-5160	3.0000-12UN-2A	2.9440	1	2.9987	2.9079 - .0006		.0003	10	.0104
4	5220-751-5161	3.0000-12UN-2A	2.9440	2	2.9981 +.0006	2.9852 - .0006	2.9440 -.0004	.0002	6	.0208
1	5220-751-5162	3.0000-12UN	2.9459	1	3.0006	2.9098 - .0006		.0003	10	.0104
4	5220-751-5163	3.0000-12UN	2.9459	2	3.0000 +.0006	2.9871 - .0006	2.9459 -.0004	.0002	6	.0208
1	5220-751-5164	3.0000-16UN-2A	2.9577	1	2.9989	2.9306 - .0006		.0003	10	.0078
4	5220-751-5165	3.0000-16UN-2A	2.9577	2	2.9983 +.0006	2.9878 - .0006	2.9577 -.0004	.00015	8	.0156
1	5220-751-5166	3.0000-16UN	2.9594	1	3.0006	2.9323 - .0006		.0003	10	.0078
4	5220-751-5167	3.0000-16UN	2.9594	2	3.0000 +.0006	2.9895 - .0006	2.9594 -.0004	.00015	8	.0156
1	7517942	3.0000-20UN-2A	2.9659	1	2.9989	2.9442 - .0005		.0003	15	.0062
4	7517943	3.0000-20UN-2A	2.9659	2	2.9984 +.0005	2.9894 - .0005	2.9659 -.0004	.00015	8	.0125
1	7517944	3.0000-20UN	2.9675	1	3.0005	2.9458 - .0005		.0003	15	.0062
4	7517945	3.0000-20UN	2.9675	2	3.0000 +.0005	2.9910 - .0005	2.9675 -.0004	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1576, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	7517946	3.1250-6UN-2A	3.0139	1	3.1230	2.9417 - .0008		.0004	5	.0208
4	7517947	3.1250-6UN-2A	3.0139	2	3.1222 +.0008	3.1012 - .0008	3.0139 -.0005	.0003	5	.0417
2	7517948	3.1250-6UN	3.0167	1	3.1258	2.9445 - .0008		.0004	5	.0208
4	7517949	3.1250-6UN	3.0167	2	3.1250 +.0008	3.1040 - .0008	3.0167 -.0005	.0003	5	.0417
2	7517950	3.1250-8UN-2A	3.0412	1	3.1231	2.9871 - .0007		.0004	5	.0156
4	7517951	3.1250-8UN-2A	3.0412	2	3.1224 +.0007	3.1053 - .0007	3.0412 -.0005	.00025	5	.0312
2	7517952	3.1250-8UN	3.0438	1	3.1257	2.9897 - .0007		.0004	5	.0156
4	7517953	3.1250-8UN	3.0438	2	3.1250 +.0007	3.1079 - .0007	3.0438 -.0005	.00025	5	.0312
1	5220-751-5168	3.1250-12UN-2A	3.0690	1	3.1237	3.0329 - .0006		.0003	10	.0104
4	5220-751-5169	3.1250-12UN-2A	3.0690	2	3.1231 +.0006	3.1102 - .0006	3.0690 -.0004	.0002	6	.0208
1	5220-751-5170	3.1250-12UN	3.0709	1	3.1256	3.0348 - .0006		.0003	10	.0104
4	5220-751-5171	3.1250-12UN	3.0709	2	3.1250 +.0006	3.1121 - .0006	3.0709 -.0004	.0002	6	.0208
1	5220-751-5172	3.1250-16UN-2A	3.0827	1	3.1239	3.0556 - .0006		.0003	10	.0078
4	5220-751-5173	3.1250-16UN-2A	3.0827	2	3.1233 +.0006	3.1128 - .0006	3.0827 -.0004	.00015	8	.0156
1	5220-751-5174	3.1250-16UN	3.0844	1	3.1256	3.0573 - .0006		.0003	10	.0078
4	5220-751-5175	3.1250-16UN	3.0844	2	3.1250 +.0006	3.1145 - .0006	3.0844 -.0004	.00015	8	.0156
2	5220-751-5176	3.2500-4UNC-1A,2A	3.0843	1	3.2476	2.9760 - .0009		.0004	5	.0312
4	5220-751-5177	3.2500-4UNC-1A,2A	3.0843	2	3.2467 +.0009	3.2186 - .0009	3.0843 -.0005	.0003	4	.0625
2	5220-751-5178	3.2500-4UNC	3.0876	1	3.2509	2.9793 - .0009		.0004	5	.0312
4	5220-751-5179	3.2500-4UNC	3.0876	2	3.2500 +.0009	3.2219 - .0009	3.0876 -.0005	.0003	4	.0625
2	7517954	3.2500-6UN-2A	3.1389	1	3.2480	3.0667 - .0008		.0004	5	.0208
4	7517955	3.2500-6UN-2A	3.1389	2	3.2472 +.0008	3.2262 - .0008	3.1389 -.0005	.0003	5	.0417

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
2	7517956	3.2500-6UN	3.1417	1	3.2508	3.0695 - .0008		.0004	5	.0208
4	7517957	3.2500-6UN	3.1417	2	3.2500 +.0008	3.2290 - .0008	3.1417 -.0005	.0003	5	.0417
2	5220-751-5180	3.2500-8UN-2A	3.1662	1	3.2481	3.1121 - .0007		.0004	5	.0156
4	5220-751-5181	3.2500-8UN-2A	3.1662	2	3.2474 +.0007	3.2303 - .0007	3.1662 -.0005	.00025	5	.0312
2	5220-751-5182	3.2500-8UN	3.1688	1	3.2507	3.1147 - .0007		.0004	5	.0156
4	5220-751-5183	3.2500-8UN	3.1688	2	3.2500 +.0007	3.2329 - .0007	3.1688 -.0005	.00025	5	.0312
1	5220-751-5184	3.2500-12UN-2A	3.1940	1	3.2487	3.1579 - .0006		.0003	10	.0104
4	5220-751-5185	3.2500-12UN-2A	3.1940	2	3.2481 +.0006	3.2352 - .0006	3.1940 -.0004	.0002	6	.0208
1	5220-751-5186	3.2500-12UN	3.1959	1	3.2506	3.1598 - .0006		.0003	10	.0104
4	5220-751-5187	3.2500-12UN	3.1959	2	3.2500 +.0006	3.2371 - .0006	3.1959 -.0004	.0002	6	.0208
1	5220-751-5188	3.2500-16UN-2A	3.2077	1	3.2489	3.1806 - .0006		.0003	10	.0078
4	5220-751-5189	3.2500-16UN-2A	3.2077	2	3.2483 +.0006	3.2378 - .0006	3.2077 -.0004	.00015	8	.0156
1	5220-751-5190	3.2500-16UN	3.2094	1	3.2506	3.1823 - .0006		.0003	10	.0078
4	5220-751-5191	3.2500-16UN	3.2094	2	3.2500 +.0006	3.2395 - .0006	3.2094 -.0004	.00015	8	.0156
2	7517958	3.3750-6UN-2A	3.2638	1	3.3729	3.1916 - .0008		.0004	5	.0208
4	7517959	3.3750-6UN-2A	3.2638	2	3.3721 +.0008	3.3511 - .0008	3.2638 -.0005	.0003	5	.0417
2	7517960	3.3750-6UN	3.2667	1	3.3758	3.1945 - .0008		.0004	5	.0208
4	7517961	3.3750-6UN	3.2667	2	3.3750 +.0008	3.3540 - .0008	3.2667 -.0005	.0003	5	.0417
2	7517962	3.3750-8UN-2A	3.2912	1	3.3731	3.2371 - .0007		.0004	5	.0156
4	7517963	3.3750-8UN-2A	3.2912	2	3.3724 +.0007	3.3553 - .0007	3.2912 -.0005	.00025	5	.0312
2	7517964	3.3750-8UN	3.2938	1	3.3757	3.2397 - .0007		.0004	5	.0156
4	7517965	3.3750-8UN	3.2938	2	3.3750 +.0007	3.3579 - .0007	3.2938 -.0005	.00025	5	.0312

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	1	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	2	MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5192	3.3750-12UN-2A	3.3190	1	3.3737	3.2829 - .0006		.0003	10	.0104
4	5220-751-5193	3.3750-12UN-2A	3.3190	2	3.3731 +.0006	3.3602 - .0006	3.3190 -.0004	.0002	6	.0208
1	5220-751-5194	3.3750-12UN	3.3209	1	3.3756	3.2848 - .0006		.0003	10	.0104
4	5220-751-5195	3.3750-12UN	3.3209	2	3.3750 +.0006	3.3621 - .0006	3.3209 -.0004	.0002	6	.0208
1	5220-751-5196	3.3750-16UN-2A	3.3327	1	3.3739	3.3056 - .0006		.0003	10	.0078
4	5220-751-5197	3.3750-16UN-2A	3.3327	2	3.3733 +.0006	3.3628 - .0006	3.3327 -.0004	.00015	8	.0156
1	5220-751-5198	3.3750-16UN	3.3344	1	3.3756	3.3073 - .0006		.0003	10	.0078
4	5220-751-5199	3.3750-16UN	3.3344	2	3.3750 +.0006	3.3645 - .0006	3.3344 -.0004	.00015	8	.0156
2	5220-751-5200	3.5000-4UNC-1A,2A	3.3343	1	3.4976	3.2260 - .0009		.0004	5	.0312
4	5220-751-5201	3.5000-4UNC-1A,2A	3.3343	2	3.4967 +.0009	3.4686 - .0009	3.3343 -.0005	.0003	4	.0625
2	5220-751-5202	3.5000-4UNC	3.3376	1	3.5009	3.2293 - .0009		.0004	5	.0312
4	5220-751-5203	3.5000-4UNC	3.3376	2	3.5000 +.0009	3.4719 - .0009	3.3376 -.0005	.0003	4	.0625
2	7517966	3.5000-6UN-2A	3.3888	1	3.4979	2.3166 - .0008		.0004	5	.0208
4	7517967	3.5000-6UN-2A	3.3888	2	3.4971 +.0008	3.4761 - .0008	3.3888 -.0005	.0003	5	.0417
2	7517968	3.5000-6UN	3.3917	1	3.5008	2.3195 - .0008		.0004	5	.0208
4	7517969	3.5000-6UN	3.3917	2	3.5000 +.0008	3.4790 - .0008	3.3917 -.0005	.0003	5	.0417
2	5220-751-5204	3.5000-8UN-2A	3.4162	1	3.4981	3.3621 - .0007		.0004	5	.0156
4	5220-751-5205	3.5000-8UN-2A	3.4162	2	3.4974 +.0007	3.4803 - .0007	3.4162 -.0005	.00025	5	.0312
2	5220-751-5206	3.5000-8UN	3.4188	1	3.5007	3.3647 - .0007		.0004	5	.0156
4	5220-751-5207	3.5000-8UN	3.4188	2	3.5000 +.0007	3.4829 - .0007	3.4188 -.0005	.00025	5	.0312
1	5220-751-5208	3.5000-12UN-2A	3.4440	1	3.4987	3.4079 - .0006		.0003	10	.0104
4	5220-751-5209	3.5000-12UN-2A	3.4440	2	3.4981 +.0006	3.4852 - .0006	3.4440 -.0004	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/6, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5210	3.5000-12UN	3.4459	1	3.5006	3.4098 - .0006		.0003	10	.0104
4	5220-751-5211	3.5000-12UN	3.4459	2	3.5000 +.0006	3.4871 - .0006	3.4459 -.0004	.0002	6	.0208
1	5220-751-5212	3.5000-16UN-2A	3.4577	1	3.4989	3.4306 - .0006		.0003	10	.0078
4	5220-751-5213	3.5000-16UN-2A	3.4577	2	3.4983 +.0006	3.4878 - .0006	3.4577 -.0004	.00015	8	.0156
1	5220-751-5214	3.5000-16UN	3.4594	1	3.5006	3.4323 - .0006		.0003	10	.0078
4	5220-751-5215	3.5000-16UN	3.4594	2	3.5000 +.0006	3.4895 - .0006	3.4594 -.0004	.00015	8	.0156
2	7517970	3.6250-6UN-2A	3.5138	1	3.6229	3.4416 - .0008		.0004	5	.0208
4	7517971	3.6250-6UN-2A	3.5138	2	3.6221 +.0008	3.6011 - .0008	3.5138 -.0005	.0003	5	.0417
2	7517972	3.6250-6UN	3.5167	1	3.6258	3.4445 - .0008		.0004	5	.0208
4	7517973	3.6250-6UN	3.5167	2	3.6250 +.0008	3.6040 - .0008	3.5167 -.0005	.0003	5	.0417
2	7517974	3.6250-8UN-2A	3.5411	1	3.6230	3.4870 - .0007		.0004	5	.0156
4	7517975	3.6250-8UN-2A	3.5411	2	3.6223 +.0007	3.6052 - .0007	3.5411 -.0005	.00025	5	.0312
2	7517976	3.6250-8UN	3.5438	1	3.6257	3.4897 - .0007		.0004	5	.0156
4	7517977	3.6250-8UN	3.5438	2	3.6250 +.0007	3.6079 - .0007	3.5438 -.0005	.00025	5	.0312
1	5220-751-5216	3.6250-12UN-2A	3.5690	1	3.6237	3.5329 - .0006		.0003	10	.0104
4	5220-751-5217	3.6250-12UN-2A	3.5690	2	3.6231 +.0006	3.6102 - .0006	3.5690 -.0004	.0002	6	.0208
1	5220-751-5218	3.6250-12UN	3.5709	1	3.6256	3.5348 - .0006		.0003	10	.0104
4	5220-751-5219	3.6250-12UN	3.5709	2	3.6250 +.0006	3.6121 - .0006	3.5709 -.0004	.0002	6	.0208
1	5220-751-5220	3.6250-16UN-2A	3.5827	1	3.6239	3.5556 - .0006		.0003	10	.0078
4	5220-751-5221	3.6250-16UN-2A	3.5827	2	3.6233 +.0006	3.6128 - .0006	3.5827 -.0004	.00015	8	.0156
1	5220-751-5222	3.6250-16UN	3.5844	1	3.6256	3.5573 - .0006		.0003	10	.0078
4	5220-751-5223	3.6250-16UN	3.5844	2	3.6250 +.0006	3.6145 - .0006	3.5844 -.0004	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5224	3.7500-4UNC-1A,2A	3.5842	1	3.7475	3.4759 - .0009		.0004	5	.0312
4	5220-751-5225	3.7500-4UNC-1A,2A	3.5842	2	3.7466 +.0009	3.7185 - .0009	3.5842 -.0005	.0003	4	.0625
2	5220-751-5226	3.7500-4UNC	3.5876	1	3.7509	3.4793 - .0009		.0004	5	.0312
4	5220-751-5227	3.7500-4UNC	3.5876	2	3.7500 +.0009	3.7219 - .0009	3.5876 -.0005	.0003	4	.0625
2	7517978	3.7500-6UN-2A	3.6388	1	3.7479	3.5666 - .0008		.0004	5	.0208
4	7517979	3.7500-6UN-2A	3.6388	2	3.7471 +.0008	3.7261 - .0008	3.6388 -.0005	.0003	5	.0417
2	7517980	3.7500-6UN	3.6417	1	3.7508	3.5695 - .0008		.0004	5	.0208
4	7517981	3.7500-6UN	3.6417	2	3.7500 +.0008	3.7290 - .0008	3.6417 -.0005	.0003	5	.0417
2	5220-751-5228	3.7500-8UN-2A	3.6661	1	3.7480	3.6120 - .0007		.0004	5	.0156
4	5220-751-5229	3.7500-8UN-2A	3.6661	2	3.7473 +.0007	3.7302 - .0007	3.6661 -.0005	.00025	5	.0312
2	5220-751-5230	3.7500-8UN	3.6688	1	3.7507	3.6147 - .0007		.0004	5	.0156
4	5220-751-5231	3.7500-8UN	3.6688	2	3.7500 +.0007	3.7329 - .0007	3.6688 -.0005	.00025	5	.0312
1	5220-751-5232	3.7500-12UN-2A	3.6940	1	3.7487	3.6579 - .0006		.0003	10	.0104
4	5220-751-5233	3.7500-12UN-2A	3.6940	2	3.7481 +.0006	3.7352 - .0006	3.6940 -.0004	.0002	6	.0208
1	5220-751-5234	3.7500-12UN	3.6959	1	3.7506	3.6598 - .0006		.0003	10	.0104
4	5220-751-5235	3.7500-12UN	3.6959	2	3.7500 +.0006	3.7371 - .0006	3.6959 -.0004	.0002	6	.0208
1	5220-751-5236	3.7500-16UN-2A	3.7077	1	3.7489	3.6806 - .0006		.0003	10	.0078
4	5220-751-5237	3.7500-16UN-2A	3.7077	2	3.7483 +.0006	3.7378 - .0006	3.7077 -.0004	.00015	8	.0156
1	5220-751-5238	3.7500-16UN	3.7094	1	3.7506	3.6823 - .0006		.0003	10	.0078
4	5220-751-5239	3.7500-16UN	3.7094	2	3.7500 +.0006	3.7395 - .0006	3.7094 -.0004	.00015	8	.0156
2	7517982	3.8750-6UN-2A	3.7637	1	3.8728	3.6915 - .0008		.0004	5	.0208
4	7517983	3.8750-6UN-2A	3.7637	2	3.8720 +.0008	3.8510 - .0008	3.7637 -.0005	.0003	5	.0417

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	7517984	3.8750-6UN	3.7667	1	3.8758	3.6945 - .0008		.0004	5	.0208
4	7517985	3.8750-6UN	3.7667	2	3.8750 +.0008	3.8540 - .0008	3.7667 -.0005	.0003	5	.0417
2	7517986	3.8750-8UN-2A	3.7911	1	3.8730	3.7370 - .0007		.0004	5	.0156
4	7517987	3.8750-8UN-2A	3.7911	2	3.8723 +.0007	3.8552 - .0007	3.7911 -.0005	.00025	5	.0312
2	7517988	3.8750-8UN	3.7938	1	3.8757	3.7397 - .0007		.0004	5	.0156
4	7517989	3.8750-8UN	3.7938	2	3.8750 +.0007	3.8579 - .0007	3.7938 -.0005	.00025	5	.0312
1	5220-751-5240	3.8750-12UN-2A	3.8189	1	3.8736	3.7828 - .0006		.0003	10	.0104
4	5220-751-5241	3.8750-12UN-2A	3.8189	2	3.8730 +.0006	3.8601 - .0006	3.8189 -.0004	.0002	6	.0208
1	5220-751-5242	3.8750-12UN	3.8209	1	3.8756	3.7848 - .0006		.0003	10	.0104
4	5220-751-5243	3.8750-12UN	3.8209	2	3.8750 +.0006	3.8621 - .0006	3.8209 -.0004	.0002	6	.0208
1	5220-751-5244	3.8750-16UN-2A	3.8326	1	3.8738	3.8055 - .0006		.0003	10	.0078
4	5220-751-5245	3.8750-16UN-2A	3.8326	2	3.8732 +.0006	3.8627 - .0006	3.8326 -.0004	.00015	8	.0156
1	5220-751-5246	3.8750-16UN	3.8344	1	3.8756	3.8073 - .0006		.0003	10	.0078
4	5220-751-5247	3.8750-16UN	3.8344	2	3.8750 +.0006	3.8645 - .0006	3.8344 -.0004	.00015	8	.0156
2	5220-751-5248	4.0000-4UNC-1A,2A	3.8342	1	3.9975	3.7259 - .0009		.0004	5	.0312
4	5220-751-5249	4.0000-4UNC-1A,2A	3.8342	2	3.9966 +.0009	3.9685 - .0009	3.8342 -.0005	.0003	4	.0625
2	5220-751-5250	4.0000-4UNC	3.8376	1	4.0009	3.7293 - .0009		.0004	5	.0312
4	5220-751-5251	4.0000-4UNC	3.8376	2	4.0000 +.0009	3.9719 - .0009	3.8376 -.0005	.0003	4	.0625
2	7517990	4.0000-6UN-2A	3.8887	1	3.9978	3.8165 - .0008		.0004	5	.0208
4	7517991	4.0000-6UN-2A	3.8887	2	3.9970 +.0008	3.9760 - .0008	3.8887 -.0005	.0003	5	.0417
2	7517992	4.0000-6UN	3.8917	1	4.0008	3.8195 - .0008		.0004	5	.0208
4	7517993	4.0000-6UN	3.8917	2	4.0000 +.0008	3.9790 - .0008	3.8917 -.0005	.0003	5	.0417

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1577, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5252	4.0000-8UN-2A	3.9161	1	3.9980	3.8620 - .0007		.0004	5	.0156
4	5220-751-5253	4.0000-8UN-2A	3.9161	2	3.9973 +.0007	3.9802 - .0007	3.9161 -.0005	.00025	5	.0312
2	5220-751-5254	4.0000-8UN	3.9188	1	4.0007	3.8647 - .0007		.0004	5	.0156
4	5220-751-5255	4.0000-8UN	3.9188	2	4.0000 +.0007	3.9829 - .0007	3.9188 -.0005	.00025	5	.0312
1	5220-751-5256	4.0000-12UN-2A	3.9439	1	3.9986	3.9078 - .0006		.0003	10	.0104
4	5220-751-5257	4.0000-12UN-2A	3.9439	2	3.9980 +.0006	3.9851 - .0006	3.9439 -.0004	.0002	6	.0208
1	5220-751-5258	4.0000-12UN	3.9459	1	4.0006	3.9098 - .0006		.0003	10	.0104
4	5220-751-5259	4.0000-12UN	3.9459	2	4.0000 +.0006	3.9871 - .0006	3.9459 -.0004	.0002	6	.0208
1	5220-751-5260	4.0000-16UN-2A	3.9576	1	3.9988	3.9305 - .0006		.0003	10	.0078
4	5220-751-5261	4.0000-16UN-2A	3.9576	2	3.9982 +.0006	3.9877 - .0006	3.9576 -.0004	.00015	8	.0156
1	5220-751-5262	4.0000-16UN	3.9594	1	4.0006	3.9323 - .0006		.0003	10	.0078
4	5220-751-5263	4.0000-16UN	3.9594	2	4.0000 +.0006	3.9895 - .0006	3.9594 -.0004	.00015	8	.0156
2	7517994	4.1250-6UN-2A	4.0137	1	4.1233	3.9415 - .0013		.0004	5	.0208
4	7517995	4.1250-6UN-2A	4.0137	2	4.1220 +.0013	4.1010 - .0013	4.0137 -.0006	.0003	5	.0417
2	7517996	4.1250-6UN	4.0167	1	4.1263	3.9445 - .0013		.0004	5	.0208
4	7517997	4.1250-6UN	4.0167	2	4.1250 +.0013	4.1040 - .0013	4.0167 -.0006	.0003	5	.0417
1	7517998	4.1250-12UN-2A	4.0689	1	4.1239	4.0328 - .0009		.0003	10	.0104
4	7517999	4.1250-12UN-2A	4.0689	2	4.1230 +.0009	4.1101 - .0009	4.0689 -.0006	.0002	6	.0208
1	7518000	4.1250-12UN	4.0709	1	4.1259	4.0348 - .0009		.0003	10	.0104
4	7518001	4.1250-12UN	4.0709	2	4.1250 +.0009	4.1121 - .0009	4.0709 -.0006	.0002	6	.0208
1	7518002	4.1250-16UN-2A	4.0826	1	4.1241	4.0555 - .0009		.0003	10	.0078
4	7518003	4.1250-16UN-2A	4.0826	2	4.1232 +.0009	4.1127 - .0009	4.0826 -.0006	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	7518004	4.1250-16UN	4.0844	1	4.1259	4.0573 - .0009		.0003	10	.0078
4	7518005	4.1250-16UN	4.0844	2	4.1250 +.0009	4.1145 - .0009	4.0844 -.0006	.00015	8	.0156
2	7518006	4.2500-4UN-2A	4.0842	1	4.2481	3.9759 - .0015		.0004	5	.0312
4	7518007	4.2500-4UN-2A	4.0842	2	4.2466 +.0015	4.2185 - .0015	4.0842 -.0006	.0003	4	.0625
2	7518008	4.2500-4UN	4.0876	1	4.2515	3.9793 - .0015		.0004	5	.0312
4	7518009	4.2500-4UN	4.0876	2	4.2500 +.0015	4.2219 - .0015	4.0876 -.0006	.0003	4	.0625
2	7518010	4.2500-6UN-2A	4.1387	1	4.2483	4.0665 - .0013		.0004	5	.0208
4	7518011	4.2500-6UN-2A	4.1387	2	4.2470 +.0013	4.2260 - .0013	4.1387 -.0006	.0003	5	.0417
2	7518012	4.2500-6UN	4.1417	1	4.2513	4.0695 - .0013		.0004	5	.0208
4	7518013	4.2500-6UN	4.1417	2	4.2500 +.0013	4.2290 - .0013	4.1417 -.0006	.0003	5	.0417
1	5220-751-5268	4.2500-12UN-2A	4.1939	1	4.2489	4.1578 - .0009		.0003	10	.0104
4	5220-751-5269	4.2500-12UN-2A	4.1939	2	4.2480 +.0009	4.2351 - .0009	4.1939 -.0006	.0002	6	.0208
1	5220-751-5270	4.2500-12UN	4.1959	1	4.2509	4.1598 - .0009		.0003	10	.0104
4	5220-751-5271	4.2500-12UN	4.1959	2	4.2500 +.0009	4.2371 - .0009	4.1959 -.0006	.0002	6	.0208
1	5220-751-5272	4.2500-16UN-2A	4.2076	1	4.2491	4.1805 - .0009		.0003	10	.0078
4	5220-751-5273	4.2500-16UN-2A	4.2076	2	4.2482 +.0009	4.2377 - .0009	4.2076 -.0006	.00015	8	.0156
1	5220-751-5274	4.2500-16UN	4.2094	1	4.2509	4.1823 - .0009		.0003	10	.0078
4	5220-751-5275	4.2500-16UN	4.2094	2	4.2500 +.0009	4.2395 - .0009	4.2094 -.0006	.00015	8	.0156
2	7518014	4.3750-6UN-2A	4.2637	1	4.3733	4.1915 - .0013		.0004	5	.0208
4	7518015	4.3750-6UN-2A	4.2637	2	4.3720 +.0013	4.3510 - .0013	4.2637 -.0006	.0003	5	.0417
2	7518016	4.3750-6UN	4.2667	1	4.3763	4.1945 - .0013		.0004	5	.0208
4	7518017	4.3750-6UN	4.2667	2	4.3750 +.0013	4.3540 - .0013	4.2667 -.0006	.0003	5	.0417

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	*	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA			
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	7518018	4.3750-12UN-2A	4.3189	1	4.3739	4.2828 - .0009		.0003	10	.0104
4	7518019	4.3750-12UN-2A	4.3189	2	4.3730 +.0009	4.3601 - .0009	4.3189 -.0006	.0002	6	.0208
1	7518020	4.3750-12UN	4.3209	1	4.3759	4.2848 - .0009		.0003	10	.0104
4	7518021	4.3750-12UN	4.3209	2	4.3750 +.0009	4.3621 - .0009	4.3209 -.0006	.0002	6	.0208
1	7518022	4.3750-16UN-2A	4.3326	1	4.3741	4.3055 - .0009		.0003	10	.0078
4	7518023	4.3750-16UN-2A	4.3326	2	4.3732 +.0009	4.3627 - .0009	4.3326 -.0006	.00015	8	.0156
1	7518024	4.3750-16UN	4.3344	1	4.3759	4.3073 - .0009		.0003	10	.0078
4	7518025	4.3750-16UN	4.3344	2	4.3750 +.0009	4.3645 - .0009	4.3344 -.0006	.00015	8	.0156
2	7518026	4.5000-4UN-2A	4.3341	1	4.4980	4.2258 - .0015		.0004	5	.0312
4	7518027	4.5000-4UN-2A	4.3341	2	4.4965 +.0015	4.4684 - .0015	4.3341 -.0006	.0003	4	.0625
2	7518028	4.5000-4UN	4.3376	1	4.5015	4.2293 - .0015		.0004	5	.0312
4	7518029	4.5000-4UN	4.3376	2	4.5000 +.0015	4.4719 - .0015	4.3376 -.0006	.0003	4	.0625
2	7518030	4.5000-6UN-2A	4.3886	1	4.4982	4.3164 - .0013		.0004	5	.0208
4	7518031	4.5000-6UN-2A	4.3886	2	4.4969 +.0013	4.4759 - .0013	4.3886 -.0006	.0003	5	.0417
2	7518032	4.5000-6UN	4.3917	1	4.5013	4.3195 - .0013		.0004	5	.0208
4	7518033	4.5000-6UN	4.3917	2	4.5000 +.0013	4.4790 - .0013	4.3917 -.0006	.0003	5	.0417
1	5220-751-5280	4.5000-12UN-2A	4.4439	1	4.4989	4.4078 - .0009		.0003	10	.0104
4	5220-751-5281	4.5000-12UN-2A	4.4439	2	4.4980 +.0009	4.4851 - .0009	4.4439 -.0006	.0002	6	.0208
1	5220-751-5282	4.5000-12UN	4.4459	1	4.5009	4.4098 - .0009		.0003	10	.0104
4	5220-751-5283	4.5000-12UN	4.4459	2	4.5000 +.0009	4.4871 - .0009	4.4459 -.0006	.0002	6	.0208
1	5220-751-5284	4.5000-16UN-2A	4.4576	1	4.4991	4.4305 - .0009		.0003	10	.0078
4	5220-751-5285	4.5000-16UN-2A	4.4576	2	4.4982 +.0009	4.4877 - .0009	4.4576 -.0006	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5286	4.5000-16UN	4.4594	1	4.5009	4.4323 - .0009		.0003	10	.0078
4	5220-751-5287	4.5000-16UN	4.4594	2	4.5000 +.0009	4.4895 - .0009	4.4594 -.0006	.00015	8	.0156
2	7518034	4.6250-6UN-2A	4.5136	1	4.6232	4.4414 - .0013		.0004	5	.0208
4	7518035	4.6250-6UN-2A	4.5136	2	4.6219 +.0013	4.6009 - .0013	4.5136 -.0006	.0003	5	.0417
2	7518036	4.6250-6UN	4.5167	1	4.6263	4.4445 - .0013		.0004	5	.0208
4	7518037	4.6250-6UN	4.5167	2	4.6250 +.0013	4.6040 - .0013	4.5167 -.0006	.0003	5	.0417
1	7518038	4.6250-12UN-2A	4.5689	1	4.6239	4.5328 - .0009		.0003	10	.0104
4	7518039	4.6250-12UN-2A	4.5689	2	4.6230 +.0009	4.6101 - .0009	4.5689 -.0006	.0002	6	.0208
1	7518040	4.6250-12UN	4.5709	1	4.6259	4.5348 - .0009		.0003	10	.0104
4	7518041	4.6250-12UN	4.5709	2	4.6250 +.0009	4.6121 - .0009	4.5709 -.0006	.0002	6	.0208
1	7518042	4.6250-16UN-2A	4.5826	1	4.6241	4.5555 - .0009		.0003	10	.0078
4	7518043	4.6250-16UN-2A	4.5826	2	4.6232 +.0009	4.6127 - .0009	4.5826 -.0006	.00015	8	.0156
1	7518044	4.6250-16UN	4.5844	1	4.6259	4.5573 - .0009		.0003	10	.0078
4	7518045	4.6250-16UN	4.5844	2	4.6250 +.0009	4.6145 - .0009	4.5844 -.0006	.00015	8	.0156
2	7518046	4.7500-4UN-2A	4.5841	1	4.7480	4.4758 - .0015		.0004	5	.0312
4	7518047	4.7500-4UN-2A	4.5841	2	4.7465 +.0015	4.7184 - .0015	4.5841 -.0006	.0003	4	.0625
2	7518048	4.7500-4UN	4.5876	1	4.7515	4.4793 - .0015		.0004	5	.0312
4	7518049	4.7500-4UN	4.5876	2	4.7500 +.0015	4.7219 - .0015	4.5876 -.0006	.0003	4	.0625
2	7518050	4.7500-6UN-2A	4.6386	1	4.7482	4.5664 - .0013		.0004	5	.0208
4	7518051	4.7500-6UN-2A	4.6386	2	4.7469 +.0013	4.7259 - .0013	4.6386 -.0006	.0003	5	.0417
2	7518052	4.7500-6UN	4.6417	1	4.7513	4.5695 - .0013		.0004	5	.0208
4	7518053	4.7500-6UN	4.6417	2	4.7500 +.0013	4.7290 - .0013	4.6417 -.0006	.0003	5	.0417

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLRAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5292	4.7500-12UN-2A	4.6939	1	4.7489	4.6578 - .0009		.0003	10	.0104
4	5220-751-5293	4.7500-12UN-2A	4.6939	2	4.7480 +.0009	4.7351 - .0009	4.6939 -.0006	.0002	6	.0208
1	5220-751-5294	4.7500-12UN	4.6959	1	4.7509	4.6598 - .0009		.0003	10	.0104
4	5220-751-5295	4.7500-12UN	4.6959	2	4.7500 +.0009	4.7371 - .0009	4.6959 -.0006	.0002	6	.0208
1	5220-751-5296	4.7500-16UN-2A	4.7076	1	4.7491	4.6805 - .0009		.0003	10	.0078
4	5220-751-5297	4.7500-16UN-2A	4.7076	2	4.7482 +.0009	4.7377 - .0009	4.7076 -.0006	.00015	8	.0156
1	5220-751-5298	4.7500-16UN	4.7094	1	4.7509	4.6823 - .0009		.0003	10	.0078
4	5220-751-5299	4.7500-16UN	4.7094	2	4.7500 +.0009	4.7395 - .0009	4.7094 -.0006	.00015	8	.0156
2	7518054	4.8750-6UN-2A	4.7636	1	4.8732	4.6914 - .0013		.0004	5	.0208
4	7518055	4.8750-6UN-2A	4.7636	2	4.8719 +.0013	4.8509 - .0013	4.7636 -.0006	.0003	5	.0417
2	7518056	4.8750-6UN	4.7667	1	4.8763	4.6945 - .0013		.0004	5	.0208
4	7518057	4.8750-6UN	4.7667	2	4.8750 +.0013	4.8540 - .0013	4.7667 -.0006	.0003	5	.0417
1	7518058	4.8750-12UN-2A	4.8189	1	4.8739	4.7828 - .0009		.0003	10	.0104
4	7518059	4.8750-12UN-2A	4.8189	2	4.8730 +.0009	4.8601 - .0009	4.8189 -.0006	.0002	6	.0208
1	7518060	4.8750-12UN	4.8209	1	4.8759	4.7848 - .0009		.0003	10	.0104
4	7518061	4.8750-12UN	4.8209	2	4.8750 +.0009	4.8621 - .0009	4.8209 -.0006	.0002	6	.0208
1	7518062	4.8750-16UN-2A	4.8326	1	4.8741	4.8055 - .0009		.0003	10	.0078
4	7518063	4.8750-16UN-2A	4.8326	2	4.8732 +.0009	4.8627 - .0009	4.8326 -.0006	.00015	8	.0156
1	7518064	4.8750-16UN	4.8344	1	4.8759	4.8073 - .0009		.0003	10	.0078
4	7518065	4.8750-16UN	4.8344	2	4.8750 +.0009	4.8645 - .0009	4.8344 -.0006	.00015	8	.0156
2	7518066	5.0000-4UN-2A	4.8340	1	4.9979	4.7257 - .0015		.0004	5	.0312
4	7518067	5.0000-4UN-2A	4.8340	2	4.9964 +.0015	4.9683 - .0015	4.8340 -.0006	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	*	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	7518068	5.0000-4UN	4.8376	1	5.0015	4.7293 - .0015		.0004	5	.0312
4	7518069	5.0000-4UN	4.8376	2	5.0000 +.0015	4.9719 - .0015	4.8376 -.0006	.0003	4	.0625
2	7518070	5.0000-6UN-2A	4.8886	1	4.9982	4.8164 - .0013		.0004	5	.0208
4	7518071	5.0000-6UN-2A	4.8886	2	4.9969 +.0013	4.9759 - .0013	4.8886 -.0006	.0003	5	.0417
2	7518072	5.0000-6UN	4.8917	1	5.0013	4.8195 - .0013		.0004	5	.0208
4	7518073	5.0000-6UN	4.8917	2	5.0000 +.0013	4.9790 - .0013	4.8917 -.0006	.0003	5	.0417
1	5220-751-5304	5.0000-12UN-2A	4.9439	1	4.9989	4.9078 - .0009		.0003	10	.0104
4	5220-751-5305	5.0000-12UN-2A	4.9439	2	4.9980 +.0009	4.9851 - .0009	4.9439 -.0006	.0002	6	.0208
1	5220-751-5306	5.0000-12UN	4.9459	1	5.0009	4.9098 - .0009		.0003	10	.0104
4	5220-751-5307	5.0000-12UN	4.9459	2	5.0000 +.0009	4.9871 - .0009	4.9459 -.0006	.0002	6	.0208
1	5220-751-5308	5.0000-16UN-2A	4.9576	1	4.9991	4.9305 - .0009		.0003	10	.0078
4	5220-751-5309	5.0000-16UN-2A	4.9576	2	4.9982 +.0009	4.9877 - .0009	4.9576 -.0006	.00015	8	.0156
1	5220-751-5310	5.0000-16UN	4.9594	1	5.0009	4.9323 - .0009		.0003	10	.0078
4	5220-751-5311	5.0000-16UN	4.9594	2	5.0000 +.0009	4.9895 - .0009	4.9594 -.0006	.00015	8	.0156
1	7518074	5.1250-12UN-2A	5.0689	1	5.1239	5.0328 - .0009		.0003	10	.0104
4	7518075	5.1250-12UN-2A	5.0689	2	5.1230 +.0009	5.1101 - .0009	5.0689 -.0006	.0002	6	.0208
1	7518076	5.1250-12UN	5.0709	1	5.1259	5.0348 - .0009		.0003	10	.0104
4	7518077	5.1250-12UN	5.0709	2	5.1250 +.0009	5.1121 - .0009	5.0709 -.0006	.0002	6	.0208
1	7518078	5.1250-16UN-2A	5.0826	1	5.1241	5.0555 - .0009		.0003	10	.0078
4	7518079	5.1250-16UN-2A	5.0826	2	5.1232 +.0009	5.1127 - .0009	5.0826 -.0006	.00015	8	.0156
1	7518080	5.1250-16UN	5.0844	1	5.1259	5.0573 - .0009		.0003	10	.0078
4	7518081	5.1250-16UN	5.0844	2	5.1250 +.0009	5.1145 - .0009	5.0844 -.0006	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	7518082	5.2500-4UN-2A	5.0840	1	5.2479	4.9757 - .0015		.0004	5	.0312
4	7518083	5.2500-4UN-2A	5.0840	2	5.2464 +.0015	5.2183 - .0015	5.0840 -.0006	.0003	4	.0625
2	7518084	5.2500-4UN	5.0876	1	5.2515	4.9793 - .0015		.0004	5	.0312
4	7518085	5.2500-4UN	5.0876	2	5.2500 +.0015	5.2219 - .0015	5.0876 -.0006	.0003	4	.0625
1	5220-751-5316	5.2500-12UN-2A	5.1939	1	5.2489	5.1578 - .0009		.0003	10	.0104
4	5220-751-5317	5.2500-12UN-2A	5.1939	2	5.2480 +.0009	5.2351 - .0009	5.1939 -.0006	.0002	6	.0208
1	5220-751-5318	5.2500-12UN	5.1959	1	5.2509	5.1598 - .0009		.0003	10	.0104
4	5220-751-5319	5.2500-12UN	5.1959	2	5.2500 +.0009	5.2371 - .0009	5.1959 -.0006	.0002	6	.0208
1	5220-751-5320	5.2500-16UN-2A	5.2076	1	5.2491	5.1805 - .0009		.0003	10	.0078
4	5220-751-5321	5.2500-16UN-2A	5.2076	2	5.2482 +.0009	5.2377 - .0009	5.2076 -.0006	.00015	8	.0156
1	5220-751-5322	5.2500-16UN	5.2094	1	5.2509	5.1823 - .0009		.0003	10	.0078
4	5220-751-5323	5.2500-16UN	5.2094	2	5.2500 +.0009	5.2395 - .0009	5.2094 -.0006	.00015	8	.0156
1	7518086	5.3750-12UN-2A	5.3189	1	5.3739	5.2828 - .0009		.0003	10	.0104
4	7518087	5.3750-12UN-2A	5.3189	2	5.3730 +.0009	5.3601 - .0009	5.3189 -.0006	.0002	6	.0208
1	7518088	5.3750-12UN	5.3209	1	5.3759	5.2848 - .0009		.0003	10	.0104
4	7518089	5.3750-12UN	5.3209	2	5.3750 +.0009	5.3621 - .0009	5.3209 -.0006	.0002	6	.0208
1	7518090	5.3750-16UN-2A	5.3326	1	5.3741	5.3055 - .0009		.0003	10	.0078
4	7518091	5.3750-16UN-2A	5.3326	2	5.3732 +.0009	5.3627 - .0009	5.3326 -.0006	.00015	8	.0156
1	7518092	5.3750-16UN	5.3344	1	5.3759	5.3073 - .0009		.0003	10	.0078
4	7518093	5.3750-16UN	5.3344	2	5.3750 +.0009	5.3645 - .0009	5.3344 -.0006	.00015	8	.0156
2	7518094	5.5000-4UN-2A	5.3340	1	5.4979	5.2257 - .0015		.0004	5	.0312
4	7518095	5.5000-4UN-2A	5.3340	2	5.4964 +.0015	5.4683 - .0015	5.3340 -.0006	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	7518096	5.5000-4UN	5.3376	1	5.5015	5.2293 - .0015		.0004	5	.0312
4	7518097	5.5000-4UN	5.3376	2	5.5000 +.0015	5.4719 - .0015	5.3376 -.0006	.0003	4	.0625
1	5220-751-5328	5.5000-12UN-2A	5.4439	1	5.4989	5.4078 - .0009		.0003	10	.0104
4	5220-751-5329	5.5000-12UN-2A	5.4439	2	5.4980 +.0009	5.4851 - .0009	5.4439 -.0006	.0002	6	.0208
1	5220-751-5330	5.5000-12UN	5.4459	1	5.5009	5.4098 - .0009		.0003	10	.0104
4	5220-751-5331	5.5000-12UN	5.4459	2	5.5000 +.0009	5.4871 - .0009	5.4459 -.0006	.0002	6	.0208
1	5220-751-5332	5.5000-16UN-2A	5.4576	1	5.4991	5.4305 - .0009		.0003	10	.0078
4	5220-751-5333	5.5000-16UN-2A	5.4576	2	5.4982 +.0009	5.4877 - .0009	5.4576 -.0006	.00015	8	.0156
1	5220-751-5334	5.5000-16UN	5.4594	1	5.5009	5.4323 - .0009		.0003	10	.0078
4	5220-751-5335	5.5000-16UN	5.4594	2	5.5000 +.0009	5.4895 - .0009	5.4594 -.0006	.00015	8	.0156
1	7518098	5.6250-12UN-2A	5.5688	1	5.6238	5.5327 - .0009		.0003	10	.0104
4	7518099	5.6250-12UN-2A	5.5688	2	5.6229 +.0009	5.6100 - .0009	5.5688 -.0006	.0002	6	.0208
1	7518100	5.6250-12UN	5.5709	1	5.6259	5.5348 - .0009		.0003	10	.0104
4	7518101	5.6250-12UN	5.5709	2	5.6250 +.0009	5.6121 - .0009	5.5709 -.0006	.0002	6	.0208
1	7518102	5.6250-16UN-2A	5.5825	1	5.6240	5.5554 - .0009		.0003	10	.0078
4	7518103	5.6250-16UN-2A	5.5825	2	5.6231 +.0009	5.6126 - .0009	5.5825 -.0006	.00015	8	.0156
1	7518104	5.6250-16UN	5.5844	1	5.6259	5.5573 - .0009		.0003	10	.0078
4	7518105	5.6250-16UN	5.5844	2	5.6250 +.0009	5.6145 - .0009	5.5844 -.0006	.00015	8	.0156
2	7518106	5.7500-4UN-2A	5.5839	1	5.7478	5.4756 - .0015		.0004	5	.0312
4	7518107	5.7500-4UN-2A	5.5839	2	5.7463 +.0015	5.7182 - .0015	5.5839 -.0006	.0003	4	.0625
2	7518108	5.7500-4UN	5.5876	1	5.7515	5.4793 - .0015		.0004	5	.0312
4	7518109	5.7500-4UN	5.5876	2	5.7500 +.0015	5.7219 - .0015	5.5876 -.0006	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-15/7, (OT) 4 May 61

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	*	GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5340	5.7500-12UN-2A	5.6938	1	5.7488	5.6577 - .0009		.0003	10	.0104
4	5220-751-5341	5.7500-12UN-2A	5.6938	2	5.7479 +.0009	5.7350 - .0009	5.6938 -.0006	.0002	6	.0208
1	5220-751-5342	5.7500-12UN	5.6959	1	5.7509	5.6598 - .0009		.0003	10	.0104
4	5220-751-5343	5.7500-12UN	5.6959	2	5.7500 +.0009	5.7371 - .0009	5.6959 -.0006	.0002	6	.0208
1	5220-751-5344	5.7500-16UN-2A	5.7075	1	5.7490	5.6804 - .0009		.0003	10	.0078
4	5220-751-5345	5.7500-16UN-2A	5.7075	2	5.7481 +.0009	5.7376 - .0009	5.7075 -.0006	.00015	8	.0156
1	5220-751-5346	5.7500-16UN	5.7094	1	5.7509	5.6823 - .0009		.0003	10	.0078
4	5220-751-5347	5.7500-16UN	5.7094	2	5.7500 +.0009	5.7395 - .0009	5.7094 -.0006	.00015	8	.0156
1	7518110	5.8750-12UN-2A	5.8188	1	5.8738	5.7827 - .0009		.0003	10	.0104
4	7518111	5.8750-12UN-2A	5.8188	2	5.8729 +.0009	5.8600 - .0009	5.8188 -.0006	.0002	6	.0208
1	7518112	5.8750-12UN	5.8209	1	5.8759	5.7848 - .0009		.0003	10	.0104
4	7518113	5.8750-12UN	5.8209	2	5.8750 +.0009	5.8621 - .0009	5.8209 -.0006	.0002	6	.0208
1	7518114	5.8750-16UN-2A	5.8325	1	5.8740	5.8054 - .0009		.0003	10	.0078
4	7518115	5.8750-16UN-2A	5.8325	2	5.8731 +.0009	5.8626 - .0009	5.8325 -.0006	.00015	8	.0156
1	7518116	5.8750-16UN	5.8344	1	5.8759	5.8073 - .0009		.0003	10	.0078
4	7518117	5.8750-16UN	5.8344	2	5.8750 +.0009	5.8645 - .0009	5.8344 -.0006	.00015	8	.0156
2	7518118	6.0000-4UN-2A	5.8339	1	5.9978	5.7256 - .0015		.0004	5	.0312
4	7518119	6.0000-4UN-2A	5.8339	2	5.9963 +.0015	5.9682 - .0015	5.8339 -.0006	.0003	4	.0625
2	7518120	6.0000-4UN	5.8376	1	6.0015	5.7293 - .0015		.0004	5	.0312
4	7518121	6.0000-4UN	5.8376	2	6.0000 +.0015	5.9719 - .0015	5.8376 -.0006	.0003	4	.0625
1	5220-751-5352	6.0000-12UN-2A	5.9438	1	5.9988	5.9077 - .0009		.0003	10	.0104
4	5220-751-5353	6.0000-12UN-2A	5.9438	2	5.9979 +.0009	5.9850 - .0009	5.9438 -.0006	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5354	6.0000-12UN	5.9459	1	6.0009	5.9098 - .0009		.0003	10	.0104
4	5220-751-5355	6.0000-12UN	5.9459	2	6.0000 +.0009	5.9871 - .0009	5.9459 -.0006	.0002	6	.0208
1	5220-751-5356	6.0000-16UN-2A	5.9575	1	5.9990	5.9304 - .0009		.0003	10	.0078
4	5220-751-5357	6.0000-16UN-2A	5.9575	2	5.9981 +.0009	5.9876 - .0009	5.9575 -.0006	.00015	8	.0156
1	5220-751-5358	6.0000-16UN	5.9594	1	6.0009	5.9323 - .0009		.0003	10	.0078
4	5220-751-5359	6.0000-16UN	5.9594	2	6.0000 +.0009	5.9895 - .0009	5.9594 -.0006	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-0854	(0) .060-80NF-1	.0512	1	.0596	.0458 - .0003		.0002	30	.0016
3	5220-751-0855	(0) .060-80NF-1	.0512	2	.0593 +.0003	.0559 - .0003	.0512 -.0002	.0001	20	.0031
5	5220-751-6556		.0455	3		.04550 - .00004				.008
6	5220-751-6557		.0458	4		.04580 + .00004				.008
1	5220-751-4560	(0) .060-80UNF	.0519	1	.0603	.0465 - .0003		.0002	30	.0016
3	5220-751-4561	(0) .060-80UNF	.0519	2	.0600 +.0003	.0566 - .0003	.0519 -.0002	.0001	20	.0031
5	5220-751-0856		.0462	3		.04620 - .00004				.008
6	5220-751-0857		.0465	4		.04650 + .00004				.008
1	5220-751-0862	(1) .073-64NC-1	.0622	1	.0727	.0554 - .0004		.0002	30	.0020
3	5220-751-0863	(1) .073-64NC-1	.0622	2	.0723 +.0004	.0683 - .0004	.0622 -.0002	.0001	20	.0039
5	5220-751-6558		.0550	3		.05500 - .00004				.008
6	5220-751-6559		.0554	4		.05540 + .00004				.008
1	5220-751-4568	(1) .073-64UNC	.0629	1	.0734	.0561 - .0004		.0002	30	.0020
3	5220-751-4569	(1) .073-64UNC	.0629	2	.0730 +.0004	.0690 - .0004	.0629 -.0002	.0001	20	.0039
5	5220-751-0864		.0557	3		.05570 - .00004				.008
6	5220-751-0865		.0561	4		.05610 + .00004				.008
1	5220-751-0870	(1) .073-72NF-1	.0633	1	.0726	.0573 - .0003		.0002	30	.001
3	5220-751-0871	(1) .073-72NF-1	.0633	2	.0723 +.0003	.0686 - .0003	.0633 -.0002	.0001	20	.0035
5	5220-751-6560		.0570	3		.05700 - .00004				.008
6	5220-751-6561		.0573	4		.05730 + .00004				.008
1	5220-751-4576	(1) .073-72UNF	.0640	1	.0733	.0580 - .0003		.0002	30	.0017
3	5220-751-4577	(1) .073-72UNF	.0640	2	.0730 +.0003	.0693 - .0003	.0640 -.0002	.0001	20	.0035
5	5220-751-0872		.0577	3		.05770 - .00004				.008
6	5220-751-0873		.0580	4		.05800 + .00004				.008

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / ——— / ———	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: ——— / PITCH DIA / ——— / ———	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / ——— / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-0878	(2) .086-56NC-1	.0736	1	.0856	.0659 - .0004		.0002	30	.0022
3	5220-751-0879	(2) .086-56NC-1	.0736	2	.0852 +.0004	.0808 - .0004	.0736 -.0002	.0001	20	.0045
5	5220-751-6562		.0655	3		.06550 - .00004				.008
6	5220-751-6563		.0659	4		.06590 + .00004				.008
1	5220-751-4584	(2) .086-56UNC	.0744	1	.0864	.0667 - .0004		.0002	30	.0022
3	5220-751-4585	(2) .086-56UNC	.0744	2	.0860 +.0004	.0816 - .0004	.0744 -.0002	.0001	20	.0045
5	5220-751-0880		.0663	3		.06630 - .00004				.008
6	5220-751-0881		.0667	4		.06670 + .00004				.008
1	5220-751-0886	(2) .086-64NF-1	.0752	1	.0857	.0684 - .0004		.0002	30	.0020
3	5220-751-0887	(2) .086-64NF-1	.0752	2	.0853 +.0004	.0813 - .0004	.0752 -.0002	.0001	20	.0039
5	5220-751-6564		.0680	3		.06800 - .00004				.008
6	5220-751-6565		.0684	4		.06840 + .00004				.008
1	5220-751-4592	(2) .086-64UNF	.0759	1	.0864	.0691 - .0004		.0002	30	.0020
3	5220-751-4593	(2) .086-64UNF	.0759	2	.0860 +.0004	.0820 - .0004	.0759 -.0002	.0001	20	.0039
5	5220-751-0888		.0687	3		.06870 - .00004				.008
6	5220-751-0889		.0691	4		.06910 + .00004				.008
1	5220-751-0894	(3) .099-48NC-1	.0846	1	.0985	.0756 - .0004		.0002	30	.0026
3	5220-751-0895	(3) .099-48NC-1	.0846	2	.0981 +.0004	.0932 - .0004	.0846 -.0002	.0001	18	.0052
5	5220-751-6566		.0752	3		.07520 - .00004				.015
6	5220-751-6567		.0756	4		.07560 + .00004				.015
1	5220-751-4600	(3) .099-48UNC	.0855	1	.0994	.0765 - .0004		.0002	30	.0026
3	5220-751-4601	(3) .099-48UNC	.0855	2	.0990 +.0004	.0941 - .0004	.0855 -.0002	.0001	18	.0052
5	5220-751-6570		.0761	3		.07610 - .00004				.015
6	5220-751-6571		.0765	4		.07650 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	———	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
			MINOR DIA	3	———	PLAIN PLUG DIA	———	———	———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———		———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-0902	(3) .099-56NF-1	.0866	1	.0986	.0789 - .0004		.0002	30	.0022
3	5220-751-0903	(3) .099-56NF-1	.0866	2	.0982 +.0004	.0938 - .0004	.0866 -.0002	.0001	20	.0045
5	5220-751-6572		.0785	3		.07850 - .00004				.015
6	5220-751-6573		.0789	4		.07890 + .00004				.015
1	5220-751-4608	(3) .099-56UNF	.0874	1	.0994	.0797 - .0004		.0002	30	.0022
3	5220-751-4609	(3) .099-56UNF	.0874	2	.0990 +.0004	.0946 - .0004	.0874 -.0002	.0001	20	.0045
5	5220-751-0904		.0793	3		.07930 - .00004				.015
6	5220-751-0905		.0797	4		.07970 + .00004				.015
1	5220-751-0910	(4) .112-40NC-1	.0948	1	.1114	.0840 - .0004		.0002	20	.0031
3	5220-751-0911	(4) .112-40NC-1	.0948	2	.1110 +.0004	.1054 - .0004	.0948 -.0002	.0001	15	.0062
5	5220-751-6574		.0836	3		.08360 - .00004				.015
6	5220-751-6575		.0840	4		.08400 + .00004				.015
1	5220-751-4616	(4) .112-40UNC	.0958	1	.1124	.0850 - .0004		.0002	20	.0031
3	5220-751-4617	(4) .112-40UNC	.0958	2	.1120 +.0004	.1064 - .0004	.0958 -.0002	.0001	15	.0062
5	5220-751-6578		.0846	3		.08460 - .00004				.015
6	5220-751-6579		.0850	4		.08500 + .00004				.015
1	5220-751-0918	(4) .112-48NF-1	.0976	1	.1115	.0886 - .0004		.0002	30	.0026
3	5220-751-0919	(4) .112-48NF-1	.0976	2	.1111 +.0004	.1062 - .0004	.0976 -.0002	.0001	18	.0052
5	5220-751-6580		.0882	3		.08820 - .00004				.015
6	5220-751-6581		.0886	4		.08860 + .00004				.015
1	5220-751-4624	(4) .112-48UNF	.0985	1	.1124	.0895 - .0004		.0002	30	.0026
3	5220-751-4625	(4) .112-48UNF	.0985	2	.1120 +.0004	.1071 - .0004	.0985 -.0002	.0001	18	.0052
5	5220-751-6584		.0891	3		.08910 - .00004				.015
6	5220-751-6585		.0895	4		.08950 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / ——— / ———	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: ——— / PITCH DIA / ——— / ———	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / ——— / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-0926	(5) .125-40NC-1	.1078	1	.1244	.0970 - .0004		.0002	20	.0031
3	5220-751-0927	(5) .125-40NC-1	.1078	2	.1240 +.0004	.1184 - .0004	.1078 -.0002	.0001	15	.0062
5	5220-751-6586		.0966	3		.09660 - .00004				.015
6	5220-751-6587		.0970	4		.09700 + .00004				.015
1	5220-751-4632	(5) .125-40UNC	.1088	1	.1254	.0980 - .0004		.0002	20	.0031
3	5220-751-4633	(5) .125-40UNC	.1088	2	.1250 +.0004	.1194 - .0004	.1088 -.0002	.0001	15	.0062
5	5220-751-6590		.0976	3		.09760 - .00004				.015
6	5220-751-6591		.0980	4		.09800 + .00004				.015
1	5220-751-0934	(5) .125-44NF-1	.1093	1	.1245	.0995 - .0004		.0002	20	.0028
3	5220-751-0935	(5) .125-44NF-1	.1093	2	.1241 +.0004	.1189 - .0004	.1093 -.0002	.0001	15	.0057
5	5220-751-6592		.0991	3		.09910 - .00004				.015
6	5220-751-6593		.0995	4		.09950 + .00004				.015
1	5220-751-4640	(5) .125-44UNF	.1102	1	.1254	.1004 - .0004		.0002	20	.0028
3	5220-751-4641	(5) .125-44UNF	.1102	2	.1250 +.0004	.1198 - .0004	.1102 -.0002	.0001	15	.0057
5	5220-751-0936		.1000	3		.10000 - .00004				.015
6	5220-751-0937		.1004	4		.10040 + .00004				.015
1	5220-751-0942	(6) .138-32NC-1	.1166	1	.1374	.1031 - .0005		.0003	15	.0039
3	5220-751-0943	(6) .138-32NC-1	.1166	2	.1369 +.0005	.1304 - .0005	.1166 -.0003	.0001	12	.0078
5	5220-751-6594		.1026	3		.10260 - .00004				.015
6	5220-751-6595		.1031	4		.10310 + .00004				.015
1	5220-751-4648	(6) .138-32UNC	.1177	1	.1385	.1042 - .0005		.0003	15	.0039
3	5220-751-4649	(6) .138-32UNC	.1177	2	.1380 +.0005	.1315 - .0005	.1177 -.0003	.0001	12	.0078
5	5220-751-0944		.1037	3		.10370 - .00004				.015
6	5220-751-0945		.1042	4		.10420 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	———	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
			MINOR DIA	3	———	PLAIN PLUG DIA	———	——→	———	CHAM
			MINOR DIA	4	———	PLAIN PLUG DIA	———		———	CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-0950	(6) .138-40NF-1	.1208	1	.1374	.1100 - .0004		.0002	20	.0031
3	5220-751-0951	(6) .138-40NF-1	.1208	2	.1370 +.0004	.1314 - .0004	.1208 -.0002	.0001	15	.0062
5	5220-751-6596		.1096	3		.10960 - .00004				.015
6	5220-751-6597		.1100	4		.11000 + .00004				.015
1	5220-751-4656	(6) .138-40UNF	.1218	1	.1384	.1110 - .0004		.0002	20	.0031
3	5220-751-4657	(6) .138-40UNF	.1218	2	.1380 +.0004	.1324 - .0004	.1218 -.0002	.0001	15	.0062
5	5220-751-6600		.1106	3		.11060 - .00004				.015
6	5220-751-6601		.1110	4		.11100 + .00004				.015
1	5220-751-0958	(8) .164-32NC-1	.1426	1	.1634	.1291 - .0005		.0003	15	.0039
3	5220-751-0959	(8) .164-32NC-1	.1426	2	.1629 +.0005	.1564 - .0005	.1426 -.0003	.0001	12	.0078
5	5220-751-6602		.1286	3		.12860 - .00004				.015
6	5220-751-6603		.1291	4		.12910 + .00004				.015
1	5220-751-4664	(8) .164-32UNC	.1437	1	.1645	.1302 - .0005		.0003	15	.0039
3	5220-751-4665	(8) .164-32UNC	.1437	2	.1640 +.0005	.1575 - .0005	.1437 -.0003	.0001	12	.0078
5	5220-751-0960		.1297	3		.12970 - .00004				.015
6	5220-751-0961		.1302	4		.13020 + .00004				.015
1	5220-751-0966	(8) .164-36NF-1	.1449	1	.1633	.1329 - .0004		.0002	20	.0035
3	5220-751-0967	(8) .164-36NF-1	.1449	2	.1629 +.0004	.1569 - .0004	.1449 -.0002	.0001	12	.0069
5	5220-751-6604		.1325	3		.13250 - .00004				.015
6	5220-751-6605		.1329	4		.13290 + .00004				.015
1	5220-751-4672	(8) .164-36UNF	.1460	1	.1644	.1340 - .0004		.0002	20	.0035
3	5220-751-4673	(8) .164-36UNF	.1460	2	.1640 +.0004	.1580 - .0004	.1460 -.0002	.0001	12	.0069
5	5220-751-6608		.1336	3		.13360 - .00004				.015
6	5220-751-6609		.1340	4		.13400 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-0974	(10) .190-24NC-1	.1616	1	.1892	.1436 - .0005		.0003	15	.0052
3	5220-751-0975	(10) .190-24NC-1	.1616	2	.1887 +.0005	.1808 - .0005	.1616 -.0003	.00015	8	.0104
5	5220-751-6610		.1431	3		.14310 - .00004				.015
6	5220-751-6611		.1436	4		.14360 + .00004				.015
1	5220-751-4680	(10) .190-24UNC	.1629	1	.1905	.1449 - .0005		.0003	15	.0052
3	5220-751-4681	(10) .190-24UNC	.1629	2	.1900 +.0005	.1821 - .0005	.1629 -.0003	.00015	8	.0104
5	5220-751-0976		.1444	3		.14440 - .00004				.015
6	5220-751-0977		.1449	4		.14490 + .00004				.015
1	5220-751-0982	(10) .190-32NF-1	.1686	1	.1894	.1551 - .0005		.0003	15	.0039
3	5220-751-0983	(10) .190-32NF-1	.1686	2	.1889 +.0005	.1824 - .0005	.1686 -.0003	.0001	12	.0078
5	5220-751-6612		.1546	3		.15460 - .00004				.015
6	5220-751-6613		.1551	4		.15510 + .00004				.015
1	5220-751-4688	(10) .190-32UNF	.1697	1	.1905	.1562 - .0005		.0003	15	.0039
3	5220-751-4689	(10) .190-32UNF	.1697	2	.1900 +.0005	.1835 - .0005	.1697 -.0003	.0001	12	.0078
5	5220-751-0984		.1557	3		.15570 - .00004				.015
6	5220-751-0985		.1562	4		.15620 + .00004				.015
1	5220-751-0990	(12) .216-24NC-1	.1876	1	.2152	.1696 - .0005		.0003	15	.0052
3	5220-751-0991	(12) .216-24NC-1	.1876	2	.2147 +.0005	.2068 - .0005	.1876 -.0003	.00015	8	.0104
5	5220-751-6614		.1691	3		.16910 - .00004				.015
6	5220-751-6615		.1696	4		.16960 + .00004				.015
1	5220-751-4696	(12) .216-24UNC	.1889	1	.2165	.1709 - .0005		.0003	15	.0052
3	5220-751-4697	(12) .216-24UNC	.1889	2	.2160 +.0005	.2081 - .0005	.1889 -.0003	.00015	8	.0104
5	5220-751-0992		.1704	3		.17040 - .00004				.015
6	5220-751-0993		.1709	4		.17090 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD / MINOR DIA / MINOR DIA		GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / ——— / ———	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: ——— / PITCH DIA / ——— / ———	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / ——— / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-0998	(12) .216-28NF-1	.1916	1	.2153	.1761 - .0005		.0003	15	.0045
3	5220-751-0999	(12) .216-28NF-1	.1916	2	.2148 +.0005	.2077 - .0005	.1916 -.0003	.00015	8	.0089
5	5220-751-6616		.1756	3		.17560 - .00004				.015
6	5220-751-6617		.1761	4		.17610 + .00004				.015
1	5220-751-4704	(12) .216-28UNF	.1928	1	.2165	.1773 - .0005		.0003	15	.0045
3	5220-751-4705	(12) .216-28UNF	.1928	2	.2160 +.0005	.2089 - .0005	.1928 -.0003	.00015	8	.0089
5	5220-751-1000		.1768	3		.17680 - .00004				.015
6	5220-751-1001		.1773	4		.17730 + .00004				.015
1	5220-751-6918	(12) .216-32UNEF	.1957	1	.2165	.1822 - .0005		.0003	15	.0039
3	5220-751-6919	(12) .216-32UNEF	.1957	2	.2160 +.0005	.2095 - .0005	.1957 -.0003	.0001	12	.0078
5	5220-751-6920		.1817	3		.18170 - .00004				.015
6	5220-751-6921		.1822	4		.18220 + .00004				.015
1	5220-751-6428	.2500-20NC-1	.2160	1	.2490	.1944 - .0005		.0003	15	.0062
3	5220-751-6429	.2500-20NC-1	.2160	2	.2485 +.0005	.2395 - .0005	.2160 -.0003	.00015	8	.0125
5	5220-751-6618		.1939	3		.19390 - .00004				.015
6	5220-751-6619		.1944	4		.19440 + .00004				.015
1	5220-751-4712	.2500-20UNC	.2175	1	.2505	.1959 - .0005		.0003	15	.0062
3	5220-751-4713	.2500-20UNC	.2175	2	.2500 +.0005	.2410 - .0005	.2175 -.0003	.00015	8	.0125
5	5220-751-1008		.1954	3		.19540 - .00004				.015
6	5220-751-1009		.1959	4		.19590 + .00004				.015
1	5220-751-6430	.2500-28NF-1	.2256	1	.2493	.2101 - .0005		.0003	15	.0045
3	5220-751-6431	.2500-28NF-1	.2256	2	.2488 +.0005	.2417 - .0005	.2256 -.0003	.00015	8	.0089
5	5220-751-6620		.2096	3		.20960 - .00004				.015
6	5220-751-6621		.2101	4		.21010 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4720	.2500-28UNF	.2268	1	.2505	.2113 - .0005		.0003	15	.0045
3	5220-751-4721	.2500-28UNF	.2268	2	.2500 +.0005	.2429 - .0005	.2268 -.0003	.00015	8	.0089
5	5220-751-1016		.2108	3		.21080 - .00004				.015
6	5220-751-1017		.2113	4		.21130 + .00004				.015
1	5220-751-4728	.2500-32UNEF	.2297	1	.2505	.2162 - .0005		.0003	15	.0039
3	5220-751-4729	.2500-32UNEF	.2297	2	.2500 +.0005	.2435 - .0005	.2297 -.0003	.0001	12	.0078
5	5220-751-1024		.2157	3		.21570 - .00004				.015
6	5220-751-1025		.2162	4		.21620 + .00004				.015
1	5220-751-6432	.3125-18NC-1	.2748	1	.3114	.2507 - .0005		.0003	10	.0069
3	5220-751-6433	.3125-18NC-1	.2748	2	.3109 +.0005	.3012 - .0005	.2748 -.0003	.00015	8	.0139
5	5220-751-6622		.2502	3		.25020 - .00004				.015
6	5220-751-6623		.2507	4		.25070 + .00004				.015
1	5220-751-4736	.3125-18UNC	.2764	1	.3130	.2523 - .0005		.0003	10	.0069
3	5220-751-4737	.3125-18UNC	.2764	2	.3125 +.0005	.3028 - .0005	.2764 -.0003	.00015	8	.0139
5	5220-751-6626		.2518	3		.25180 - .00004				.015
6	5220-751-6627		.2523	4		.25230 + .00004				.015
1	5220-751-6434	.3125-24NF-1	.2841	1	.3117	.2661 - .0005		.0003	15	.0052
3	5220-751-6435	.3125-24NF-1	.2841	2	.3112 +.0005	.3033 - .0005	.2841 -.0003	.00015	8	.0104
5	5220-751-6628		.2656	3		.26560 - .00004				.015
6	5220-751-6629		.2661	4		.26610 + .00004				.015
1	5220-751-4744	.3125-24UNF	.2854	1	.3130	.2674 - .0005		.0003	15	.0052
3	5220-751-4745	.3125-24UNF	.2854	2	.3125 +.0005	.3046 - .0005	.2854 -.0003	.00015	8	.0104
5	5220-751-1038		.2669	3		.26690 - .00004				.015
6	5220-751-1039		.2674	4		.26740 + .00004				.015

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION / — / —	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: — / PITCH DIA / — / —	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL / — / —	GAGE DIMENSIONS: ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4752	.3125-32UNEF	.2922	1	.3130	.2787 - .0005		.0003	15	.0039
3	5220-751-4753	.3125-32UNEF	.2922	2	.3125 +.0005	.3060 - .0005	.2922 -.0003	.0001	12	.0078
5	5220-751-1046		.2782	3		.27820 - .00004				.015
6	5220-751-1047		.2787	4		.27870 + .00004				.015
1	5220-751-6436	.3750-16NC-1	.3326	1	.3738	.3055 - .0006		.0003	10	.0078
3	5220-751-6437	.3750-16NC-1	.3326	2	.3732 +.0006	.3627 - .0006	.3326 -.0003	.00015	8	.0156
5	5220-751-6630		.3049	3		.30490 - .00004				.030
6	5220-751-6631		.3055	4		.30550 + .00004				.030
1	5220-751-4760	.3750-16UNC	.3344	1	.3756	.3073 - .0006		.0003	10	.0078
3	5220-751-4761	.3750-16UNC	.3344	2	.3750 +.0006	.3645 - .0006	.3344 -.0003	.00015	8	.0156
5	5220-751-1052		.3067	3		.30670 - .00004				.030
6	5220-751-1053		.3073	4		.30730 + .00004				.030
1	5220-751-6438	.3750-24NF-1	.3466	1	.3742	.3286 - .0005		.0003	15	.0052
3	5220-751-6439	.3750-24NF-1	.3466	2	.3737 +.0005	.3658 - .0005	.3466 -.0003	.00015	8	.0104
5	5220-751-6632		.3281	3		.32810 - .00004				.030
6	5220-751-6633		.3286	4		.32860 + .00004				.030
1	5220-751-4768	.3750-24UNF	.3479	1	.3755	.3299 - .0005		.0003	15	.0052
3	5220-751-4769	.3750-24UNF	.3479	2	.3750 +.0005	.3671 - .0005	.3479 -.0003	.00015	8	.0104
5	5220-751-1060		.3294	3		.32940 - .00004				.030
6	5220-751-1061		.3299	4		.32990 + .00004				.030
1	5220-751-4776	.3750-32UNEF	.3547	1	.3755	.3412 - .0005		.0003	15	.0039
3	5220-751-4777	.3750-32UNEF	.3547	2	.3750 +.0005	.3685 - .0005	.3547 -.0003	.0001	12	.0078
5	5220-751-1068		.3407	3		.34070 - .00004				.030
6	5220-751-1069		.3412	4		.34120 + .00004				.030

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIGURE NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD / MINOR DIA / MINOR DIA	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION / PLAIN PLUG DIA / PLAIN PLUG DIA	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR / CHAM / CHAM
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-6440	.4375-14NC-1	.3890	1	.4360	.3581 - .0006		.0003	10	.0089
3	5220-751-6441	.4375-14NC-1	.3890	2	.4354 +.0006	.4239 - .0006	.3890 -.0003	.0002	6	.0179
5	5220-751-6634		.3575	3		.35750 - .00004				.030
6	5220-751-6635		.3581	4		.35810 + .00004				.030
1	5220-751-4784	.4375-14UNC	.3911	1	.4381	.3602 - .0006		.0003	10	.0089
3	5220-751-4785	.4375-14UNC	.3911	2	.4375 +.0006	.4260 - .0006	.3911 -.0003	.0002	6	.0179
5	5220-751-1074		.3596	3		.35960 - .00004				.030
6	5220-751-1075		.3602	4		.36020 + .00004				.030
1	5220-751-6442	.4375-20NF-1	.4035	1	.4365	.3818 - .0005		.0003	15	.0062
3	5220-751-6443	.4375-20NF-1	.4035	2	.4360 +.0005	.4270 - .0005	.4035 -.0003	.00015	8	.0125
1	5220-751-4790	.4375-20UNF	.4050	1	.4380	.3834 - .0005		.0003	15	.0062
3	5220-751-4791	.4375-20UNF	.4050	2	.4375 +.0005	.4285 - .0005	.4050 -.0003	.00015	8	.0125
1	5220-751-4794	.4375-28UNEF	.4143	1	.4380	.3988 - .0005		.0003	15	.0045
3	5220-751-4795	.4375-28UNEF	.4143	2	.4375 +.0005	.4304 - .0005	.4143 -.0003	.00015	8	.0089
1	5220-751-1092	.5000-12N	.4459	1	.5006	.4098 - .0006		.0003	10	.0104
3	5220-751-1093	.5000-12N	.4459	2	.5000 +.0006	.4871 - .0006	.4459 -.0003	.0002	6	.0208
1	5220-751-6444	.5000-13NC-1	.4478	1	.4984	.4145 - .0006		.0003	10	.0096
3	5220-751-6445	.5000-13NC-1	.4478	2	.4978 +.0006	.4856 - .0006	.4478 -.0003	.0002	6	.0192
1	5220-751-4798	.5000-13UNC	.4500	1	.5006	.4167 - .0006		.0003	10	.0096
3	5220-751-4799	.5000-13UNC	.4500	2	.5000 +.0006	.4878 - .0006	.4500 -.0003	.0002	6	.0192

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage
3. Go Plain Plug Acceptance Check Gage for Minor Diameter
4. Not Go Plain Plug Acceptance Check Gage for Minor Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1379, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-6446	.5000-20NF-1	.4660	1	.4990	.4444 - .0005		.0003	15	.0062
3	5220-751-6447	.5000-20NF-1	.4660	2	.4985 +.0005	.4895 - .0005	.4660 - .0003	.00015	8	.0125
1	5220-751-4802	.5000-20UNF	.4675	1	.5005	.4459 - .0005		.0003	15	.0062
3	5220-751-4803	.5000-20UNF	.4675	2	.5000 +.0005	.4910 - .0005	.4675 - .0003	.00015	8	.0125
1	5220-751-4806	.5000-28UNEF	.4768	1	.5005	.4613 - .0005		.0003	15	.0045
3	5220-751-4807	.5000-28UNEF	.4768	2	.5000 +.0005	.4929 - .0005	.4768 - .0003	.00015	8	.0089
2	5220-751-6448	.5625-12NC-1	.5060	1	.5607	.4699 - .0006		.0003	10	.0104
3	5220-751-6449	.5625-12NC-1	.5060	2	.5601 +.0006	.5472 - .0006	.5060 - .0003	.0002	6	.0208
2	5220-751-4810	.5625-12UNC	.5084	1	.5631	.4723 - .0006		.0003	10	.0104
3	5220-751-4811	.5625-12UNC	.5084	2	.5625 +.0006	.5496 - .0006	.5084 - .0003	.0002	6	.0208
1	5220-751-6450	.5625-18NF-1	.5248	1	.5614	.5007 - .0005		.0003	10	.0069
3	5220-751-6451	.5625-18NF-1	.5248	2	.5609 +.0005	.5512 - .0005	.5248 - .0003	.00015	8	.0139
1	5220-751-4814	.5625-18UNF	.5264	1	.5630	.5023 - .0005		.0003	10	.0069
3	5220-751-4815	.5625-18UNF	.5264	2	.5625 +.0005	.5528 - .0005	.5264 - .0003	.00015	8	.0139
1	5220-751-4818	.5625-24UNEF	.5354	1	.5630	.5174 - .0005		.0003	15	.0052
3	5220-751-4819	.5625-24UNEF	.5354	2	.5625 +.0005	.5546 - .0005	.5354 - .0003	.00015	8	.0104
2	5220-751-6452	.6250-11NC-1	.5634	1	.6230	.5240 - .0006		.0003	10	.0104
3	5220-751-6453	.6250-11NC-1	.5634	2	.6224 +.0006	.6087 - .0006	.5634 - .0003	.0002	6	.0208
2	5220-751-4822	.6250-11UNC	.5660	1	.6256	.5266 - .0006		.0003	10	.0114
3	5220-751-4823	.6250-11UNC	.5660	2	.6250 +.0006	.6113 - .0006	.5660 - .0003	.0002	6	.0227
1	5220-751-1134	.6250-12UN	.5709	1	.6256	.5348 - .0006		.0003	10	.0104
3	5220-751-1135	.6250-12UN	.5709	2	.6250 +.0006	.6121 - .0006	.5709 - .0003	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-6454	.6250-18NF-1	.5873	1	.6239	.5632 - .0005		.0003	10	.0069
3	5220-751-6455	.6250-18NF-1	.5873	2	.6234 +.0005	.6137 - .0005	.5873 -.0003	.00015	8	.0139
1	5220-751-4826	.6250-18UNF	.5889	1	.6255	.5648 - .0005		.0003	10	.0069
3	5220-751-4827	.6250-18UNF	.5889	2	.6250 +.0005	.6153 - .0005	.5889 -.0003	.00015	8	.0139
1	5220-751-4830	.6250-24UNEF	.5979	1	.6255	.5799 - .0005		.0003	15	.0052
3	5220-751-4831	.6250-24UNEF	.5979	2	.6250 +.0005	.6171 - .0005	.5979 -.0003	.00015	8	.0104
1	5220-751-1148	.6875-12UN	.6334	1	.6881	.5973 - .0006		.0003	10	.0104
3	5220-751-1149	.6875-12UN	.6334	2	.6875 +.0006	.6746 - .0006	.6334 -.0003	.0002	6	.0208
1	5220-751-4834	.6875-24UNEF	.6604	1	.6880	.6424 - .0005		.0003	15	.0052
3	5220-751-4835	.6875-24UNEF	.6604	2	.6875 +.0005	.6796 - .0005	.6604 -.0003	.00015	8	.0104
2	5220-751-6456	.7500-10NC-1	.6822	1	.7478	.6389 - .0006		.0003	10	.0125
3	5220-751-6457	.7500-10NC-1	.6822	2	.7472 +.0006	.7326 - .0006	.6822 -.0003	.00025	6	.0250
2	5220-751-4838	.7500-10UNC	.6850	1	.7506	.6417 - .0006		.0003	10	.0125
3	5220-751-4839	.7500-10UNC	.6850	2	.7500 +.0006	.7354 - .0006	.6850 -.0003	.00025	6	.0250
1	5220-751-1162	.7500-12UN	.6959	1	.7506	.6598 - .0006		.0003	10	.0104
3	5220-751-1163	.7500-12UN	.6959	2	.7500 +.0006	.7371 - .0006	.6959 -.0003	.0002	6	.0208
1	5220-751-6458	.7500-16NF-1	.7076	1	.7488	.6805 - .0006		.0003	10	.0078
3	5220-751-6459	.7500-16NF-1	.7076	2	.7482 +.0006	.7377 - .0006	.7076 -.0003	.00015	8	.0156
1	5220-751-4842	.7500-16UNF	.7094	1	.7506	.6823 - .0006		.0003	10	.0078
3	5220-751-4843	.7500-16UNF	.7094	2	.7500 +.0006	.7395 - .0006	.7094 -.0003	.00015	8	.0156
1	5220-751-4846	.7500-20UNEF	.7175	1	.7505	.6959 - .0005		.0003	15	.0062
3	5220-751-4847	.7500-20UNEF	.7175	2	.7500 +.0005	.7410 - .0005	.7175 -.0003	.00015	8	.0125

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-1176	.8125-12UN	.7584	1	.8131	.7223 - .0006		.0003	10	.0104
3	5220-751-1177	.8125-12UN	.7584	2	.8125 +.0006	.7996 - .0006	.7584 -.0003	.0002	6	.0208
1	5220-751-1180	.8125-16UN	.7719	1	.8131	.7448 - .0006		.0003	10	.0078
3	5220-751-1181	.8125-16UN	.7719	2	.8125 +.0006	.8020 - .0006	.7719 -.0003	.00015	8	.0156
1	5220-751-4850	.8125-20UNEF	.7800	1	.8130	.7584 - .0005		.0003	15	.0062
3	5220-751-4851	.8125-20UNEF	.7800	2	.8125 +.0005	.8035 - .0005	.7800 -.0003	.00015	8	.0125
2	5220-751-6460	.8750-9NC-1	.7997	1	.8726	.7516 - .0007		.0003	10	.0139
3	5220-751-6461	.8750-9NC-1	.7997	2	.8719 +.0007	.8561 - .0007	.7997 -.0003	.00025	6	.0278
2	5220-751-4854	.8750-9UNC	.8028	1	.8757	.7547 - .0007		.0003	10	.0139
3	5220-751-4855	.8750-9UNC	.8028	2	.8750 +.0007	.8592 - .0007	.8028 -.0003	.00025	6	.0278
1	5220-751-1194	.8750-12UN	.8209	1	.8756	.7848 - .0006		.0003	10	.0104
3	5220-751-1195	.8750-12UN	.8209	2	.8750 +.0006	.8621 - .0006	.8209 -.0003	.0002	6	.0208
1	5220-751-6462	.8750-14NF-1	.8265	1	.8735	.7956 - .0006		.0003	10	.0089
3	5220-751-6463	.8750-14NF-1	.8265	2	.8729 +.0006	.8614 - .0006	.8265 -.0003	.0002	6	.0179
1	5220-751-4858	.8750-14UNF	.8286	1	.8756	.7977 - .0006		.0003	10	.0089
3	5220-751-4859	.8750-14UNF	.8286	2	.8750 +.0006	.8635 - .0006	.8286 -.0003	.0002	6	.0179
1	5220-751-1204	.8750-16UN	.8344	1	.8756	.8073 - .0006		.0003	10	.0078
3	5220-751-1205	.8750-16UN	.8344	2	.8750 +.0006	.8645 - .0006	.8344 -.0003	.00015	8	.0156
1	5220-751-4862	.8750-20UNEF	.8425	1	.8755	.8209 - .0005		.0003	15	.0062
3	5220-751-4863	.8750-20UNEF	.8425	2	.8750 +.0005	.8660 - .0005	.8425 -.0003	.00015	8	.0125
1	5220-751-1212	.9375-12UN	.8834	1	.9381	.8473 - .0006		.0003	10	.0104
3	5220-751-1213	.9375-12UN	.8834	2	.9375 +.0006	.9246 - .0006	.8834 -.0003	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD	1	GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-1216	.9375-16UN	.8969	1	.9381	.8698 - .0006		.0003	10	.0078
3	5220-751-1217	.9375-16UN	.8969	2	.9375 +.0006	.9270 - .0006	.8969 -.0003	.00015	8	.0156
1	5220-751-4866	.9375-20UNEF	.9050	1	.9380	.8834 - .0005		.0003	15	.0062
3	5220-751-4867	.9375-20UNEF	.9050	2	.9375 +.0005	.9285 - .0005	.9050 -.0003	.00015	8	.0125
2	5220-751-6464	1.0000-8NC-1	.9154	1	.9973	.8613 - .0007		.0004	5	.0156
3	5220-751-6465	1.0000-8NC-1	.9154	2	.9966 +.0007	.9795 - .0007	.9154 -.0004	.00025	5	.0312
2	5220-751-4870	1.0000-8UNC	.9188	1	1.0007	.8647 - .0007		.0004	5	.0156
3	5220-751-4871	1.0000-8UNC	.9188	2	1.0000 +.0007	.9829 - .0007	.9188 -.0004	.00025	5	.0312
1	5220-751-4874	1.0000-12UNF,12N	.9459	1	1.0006	.9098 - .0006		.0003	10	.0104
3	5220-751-4875	1.0000-12UNF,12N	.9459	2	1.0000 +.0006	.9871 - .0006	.9459 -.0003	.0002	6	.0208
1	5220-751-1240	1.0000-16UN	.9594	1	1.0006	.9323 - .0006		.0003	10	.0078
3	5220-751-1241	1.0000-16UN	.9594	2	1.0000 +.0006	.9895 - .0006	.9594 -.0003	.00015	8	.0156
1	5220-751-4882	1.0000-20UNEF	.9675	1	1.0005	.9459 - .0005		.0003	15	.0062
3	5220-751-4883	1.0000-20UNEF	.9675	2	1.0000 +.0005	.9910 - .0005	.9675 -.0003	.00015	8	.0125
1	5220-751-4886	1.0625-12UN	1.0084	1	1.0631	.9723 - .0006		.0003	10	.0104
3	5220-751-4887	1.0625-12UN	1.0084	2	1.0625 +.0006	1.0496 - .0006	1.0084 -.0003	.0002	6	.0208
1	5220-751-1252	1.0625-16UN	1.0219	1	1.0631	.9948 - .0006		.0003	10	.0078
3	5220-751-1253	1.0625-16UN	1.0219	2	1.0625 +.0006	1.0520 - .0006	1.0219 -.0003	.00015	8	.0156
1	5220-751-4890	1.0625-18UNEF	1.0264	1	1.0630	1.0023 - .0005		.0003	10	.0069
3	5220-751-4891	1.0625-18UNEF	1.0264	2	1.0625 +.0005	1.0528 - .0005	1.0264 -.0003	.00015	8	.0139
2	5220-751-6468	1.1250-7NC-1	1.0283	1	1.1218	.9664 - .0007		.0004	5	.0179
3	5220-751-6469	1.1250-7NC-1	1.0283	2	1.1211 +.0007	1.1023 - .0007	1.0283 -.0004	.0003	5	.0357

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-4894	1.1250-7UNC	1.0322	1	1.1257	.9703 - .0007		.0004	5	.0179
3	5220-751-4895	1.1250-7UNC	1.0322	2	1.1250 +.0007	1.1062 - .0007	1.0322 -.0004	.0003	5	.0357
2	5220-751-4898	1.1250-8UN	1.0438	1	1.1257	.9897 - .0007		.0004	5	.0156
3	5220-751-4899	1.1250-8UN	1.0438	2	1.1250 +.0007	1.1079 - .0007	1.0438 -.0004	.00025	5	.0312
1	5220-751-6470	1.1250-12NF-1	1.0685	1	1.1232	1.0324 - .0006		.0003	10	.0104
3	5220-751-6471	1.1250-12NF-1	1.0685	2	1.1226 +.0006	1.1097 - .0006	1.0685 -.0003	.0002	6	.0208
1	5220-751-4902	1.1250-12UNF	1.0709	1	1.1256	1.0348 - .0006		.0003	10	.0104
3	5220-751-4903	1.1250-12UNF	1.0709	2	1.1250 +.0006	1.1121 - .0006	1.0709 -.0003	.0002	6	.0208
1	5220-751-1276	1.1250-16UN	1.0844	1	1.1256	1.0573 - .0006		.0003	10	.0078
3	5220-751-1277	1.1250-16UN	1.0844	2	1.1250 +.0006	1.1145 - .0006	1.0844 -.0003	.00015	8	.0156
1	5220-751-4906	1.1250-18UNEF	1.0889	1	1.1255	1.0648 - .0005		.0003	10	.0069
3	5220-751-4907	1.1250-18UNEF	1.0889	2	1.1250 +.0005	1.1153 - .0005	1.0889 -.0003	.00015	8	.0139
1	5220-751-4910	1.1875-12UN	1.1334	1	1.1881	1.0973 - .0006		.0003	10	.0104
3	5220-751-4911	1.1875-12UN	1.1334	2	1.1875 +.0006	1.1746 - .0006	1.1334 -.0003	.0002	6	.0208
1	5220-751-1288	1.1875-16UN	1.1469	1	1.1881	1.1198 - .0006		.0003	10	.0078
3	5220-751-1289	1.1875-16UN	1.1469	2	1.1875 +.0006	1.1770 - .0006	1.1469 -.0003	.00015	8	.0156
1	5220-751-4914	1.1875-18UNEF	1.1514	1	1.1880	1.1273 - .0005		.0003	10	.0069
3	5220-751-4915	1.1875-18UNEF	1.1514	2	1.1875 +.0005	1.1778 - .0005	1.1514 -.0003	.00015	8	.0139
2	5220-751-6472	1.2500-7NC-1	1.1533	1	1.2468	1.0914 - .0007		.0004	5	.0179
3	5220-751-6473	1.2500-7NC-1	1.1533	2	1.2461 +.0007	1.2273 - .0007	1.1533 -.0004	.0003	5	.0357
2	5220-751-4918	1.2500-7UNC	1.1572	1	1.2507	1.0953 - .0007		.0004	5	.0179
3	5220-751-4919	1.2500-7UNC	1.1572	2	1.2500 +.0007	1.2312 - .0007	1.1572 -.0004	.0003	5	.0357

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-4922	1.2500-8UN	1.1688	1	1.2507	1.1147 - .0007		.0004	5	.0156
3	5220-751-4923	1.2500-8UN	1.1688	2	1.2500 +.0007	1.2329 - .0007	1.1688 -.0004	.00025	5	.0312
1	5220-751-6474	1.2500-12NF-1	1.1935	1	1.2482	1.1574 - .0006		.0003	10	.0104
3	5220-751-6475	1.2500-12NF-1	1.1935	2	1.2476 +.0006	1.2347 - .0006	1.1935 -.0003	.0002	6	.0208
1	5220-751-4926	1.2500-12UNF	1.1959	1	1.2506	1.1598 - .0006		.0003	10	.0104
3	5220-751-4927	1.2500-12UNF	1.1959	2	1.2500 +.0006	1.2371 - .0006	1.1959 -.0003	.0002	6	.0208
1	5220-751-1312	1.2500-16UN	1.2094	1	1.2506	1.1823 - .0006		.0003	10	.0078
3	5220-751-1313	1.2500-16UN	1.2094	2	1.2500 +.0006	1.2395 - .0006	1.2094 -.0003	.00015	8	.0156
1	5220-751-4930	1.2500-18UNEF	1.2139	1	1.2505	1.1898 - .0005		.0003	10	.0069
3	5220-751-4931	1.2500-18UNEF	1.2139	2	1.2500 +.0005	1.2403 - .0005	1.2139 -.0003	.00015	8	.0139
1	5220-751-4934	1.3125-12UN	1.2584	1	1.3131	1.2223 - .0006		.0003	10	.0104
3	5220-751-4935	1.3125-12UN	1.2584	2	1.3125 +.0006	1.2996 - .0006	1.2584 -.0003	.0002	6	.0208
1	5220-751-1324	1.3125-16UN	1.2719	1	1.3131	1.2448 - .0006		.0003	10	.0078
3	5220-751-1325	1.3125-16UN	1.2719	2	1.3125 +.0006	1.3020 - .0006	1.2719 -.0003	.00015	8	.0156
1	5220-751-4938	1.3125-18UNEF	1.2764	1	1.3130	1.2523 - .0005		.0003	10	.0069
3	5220-751-4939	1.3125-18UNEF	1.2764	2	1.3125 +.0005	1.3028 - .0005	1.2764 -.0003	.00015	8	.0139
2	5220-751-6476	1.3750-6NC-1	1.2623	1	1.3714	1.1901 - .0008		.0004	5	.0208
3	5220-751-6477	1.3750-6NC-1	1.2623	2	1.3706 +.0008	1.3496 - .0008	1.2623 -.0004	.0003	5	.0417
2	5220-751-4942	1.3750-6UNC	1.2667	1	1.3758	1.1945 - .0008		.0004	5	.0208
3	5220-751-4943	1.3750-6UNC	1.2667	2	1.3750 +.0008	1.3540 - .0008	1.2667 -.0004	.0003	5	.0417
2	5220-751-4946	1.3750-8UN	1.2938	1	1.3757	1.2397 - .0007		.0004	5	.0156
3	5220-751-4947	1.3750-8UN	1.2938	2	1.3750 +.0007	1.3579 - .0007	1.2938 -.0004	.00025	5	.0312

* 1. Go Thread Ring Gage

2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-6478	1.3750-12NF-1	1.3185	1	1.3732	1.2824 - .0006		.0003	10	.0104
3	5220-751-6479	1.3750-12NF-1	1.3185	2	1.3726 +.0006	1.3597 - .0006	1.3185 -.0003	.0002	6	.0208
1	5220-751-4950	1.3750-12UNF	1.3209	1	1.3756	1.2848 - .0006		.0003	10	.0104
3	5220-751-4951	1.3750-12UNF	1.3209	2	1.3750 +.0006	1.3621 - .0006	1.3209 -.0003	.0002	6	.0208
1	5220-751-1348	1.3750-16UN	1.3344	1	1.3756	1.3073 - .0006		.0003	10	.0078
3	5220-751-1349	1.3750-16UN	1.3344	2	1.3750 +.0006	1.3645 - .0006	1.3344 -.0003	.00015	8	.0156
1	5220-751-4954	1.3750-18UNEF	1.3389	1	1.3755	1.3148 - .0005		.0003	10	.0069
3	5220-751-4955	1.3750-18UNEF	1.3389	2	1.3750 +.0005	1.3653 - .0005	1.3389 -.0003	.00015	8	.0139
1	5220-751-4958	1.4375-12UN	1.3834	1	1.4381	1.3473 - .0006		.0003	10	.0104
3	5220-751-4959	1.4375-12UN	1.3834	2	1.4375 +.0006	1.4246 - .0006	1.3834 -.0003	.0002	6	.0208
1	5220-751-1360	1.4375-16UN	1.3969	1	1.4381	1.3698 - .0006		.0003	10	.0078
3	5220-751-1361	1.4375-16UN	1.3969	2	1.4375 +.0006	1.4270 - .0006	1.3969 -.0003	.00015	8	.0156
1	5220-751-4962	1.4375-18UNEF	1.4014	1	1.4380	1.3773 - .0005		.0003	10	.0069
3	5220-751-4963	1.4375-18UNEF	1.4014	2	1.4375 +.0005	1.4278 - .0005	1.4014 -.0003	.00015	8	.0139
2	5220-751-6480	1.5000-6NC-1	1.3873	1	1.4964	1.3151 - .0008		.0004	5	.0208
3	5220-751-6481	1.5000-6NC-1	1.3873	2	1.4956 +.0008	1.4746 - .0008	1.3873 -.0004	.0003	5	.0417
2	5220-751-4966	1.5000-6UNC	1.3917	1	1.5008	1.3195 - .0008		.0004	5	.0208
3	5220-751-4967	1.5000-6UNC	1.3917	2	1.5000 +.0008	1.4790 - .0008	1.3917 -.0004	.0003	5	.0417
2	5220-751-4970	1.5000-8UN	1.4188	1	1.5007	1.3647 - .0007		.0004	5	.0156
3	5220-751-4971	1.5000-8UN	1.4188	2	1.5000 +.0007	1.4829 - .0007	1.4188 -.0004	.00025	5	.0312
1	5220-751-6482	1.5000-12NF-1	1.4435	1	1.4982	1.4074 - .0006		.0003	10	.0104
3	5220-751-6483	1.5000-12NF-1	1.4435	2	1.4976 +.0006	1.4847 - .0006	1.4435 -.0003	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-4974	1.5000-12UNF	1.4459	1	1.5006	1.4098 - .0006		.0003	10	.0104
3	5220-751-4975	1.5000-12UNF	1.4459	2	1.5000 +.0006	1.4871 - .0006	1.4459 -.0003	.0002	6	.0208
1	5220-751-1384	1.5000-16UN	1.4594	1	1.5006	1.4323 - .0006		.0003	10	.0078
3	5220-751-1385	1.5000-16UN	1.4594	2	1.5000 +.0006	1.4895 - .0006	1.4594 -.0003	.00015	8	.0156
1	5220-751-4978	1.5000-18UNEF	1.4639	1	1.5005	1.4398 - .0005		.0003	10	.0069
3	5220-751-4979	1.5000-18UNEF	1.4639	2	1.5000 +.0005	1.4903 - .0005	1.4639 -.0003	.00015	8	.0139
1	5220-751-1392	1.5625-16UN	1.5219	1	1.5631	1.4948 - .0006		.0003	10	.0078
4	5220-751-1393	1.5625-16UN	1.5219	2	1.5625 +.0006	1.5520 - .0006	1.5219 -.0004	.00015	8	.0156
1	5220-751-4982	1.5625-18UNEF	1.5264	1	1.5630	1.5023 - .0005		.0003	10	.0069
4	5220-751-4983	1.5625-18UNEF	1.5264	2	1.5625 +.0005	1.5528 - .0005	1.5264 -.0004	.00015	8	.0139
2	5220-751-4986	1.6250-8UN	1.5438	1	1.6257	1.4897 - .0007		.0004	5	.0156
4	5220-751-4987	1.6250-8UN	1.5438	2	1.6250 +.0007	1.6079 - .0007	1.5438 -.0005	.00025	5	.0312
1	5220-751-4990	1.6250-12UN	1.5709	1	1.625	1.5348 - .0006		.0003	10	.0104
4	5220-751-4991	1.6250-12UN	1.5709	2	1.6250 +.0006	1.6121 - .0006	1.5709 -.0004	.0002	6	.0208
1	5220-751-1408	1.6250-16UN	1.5844	1	1.6256	1.5573 - .0006		.0003	10	.0078
4	5220-751-1409	1.6250-16UN	1.5844	2	1.6250 +.0006	1.6145 - .0006	1.5844 -.0004	.00015	8	.0156
1	5220-751-4994	1.6250-18UNEF	1.5889	1	1.6255	1.5648 - .0005		.0003	10	.0069
4	5220-751-4995	1.6250-18UNEF	1.5889	2	1.6250 +.0005	1.6153 - .0005	1.5889 -.0004	.00015	8	.0139
1	5220-751-1416	1.6875-16UN	1.6469	1	1.6881	1.6198 - .0006		.0003	10	.0078
4	5220-751-1417	1.6875-16UN	1.6469	2	1.6875 +.0006	1.6770 - .0006	1.6469 -.0004	.00015	8	.0156
1	5220-751-4998	1.6875-18UNEF	1.6514	1	1.6880	1.6273 - .0005		.0003	10	.0069
4	5220-751-4999	1.6875-18UNEF	1.6514	2	1.6875 +.0005	1.6778 - .0005	1.6514 -.0004	.00015	8	.0139

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-6484	1.7500-5NC-1	1.6149	1	1.7456	1.5283 - .0008		.0004	5	.0250
4	5220-751-6485	1.7500-5NC-1	1.6149	2	1.7448 +.0008	1.7209 - .0008	1.6149 -.0005	.0003	4	.0500
2	5220-751-5002	1.7500-5UNC	1.6201	1	1.7508	1.5335 - .0008		.0004	5	.0250
4	5220-751-5003	1.7500-5UNC	1.6201	2	1.7500 +.0008	1.7261 - .0008	1.6201 -.0005	.0003	4	.0500
2	5220-751-5006	1.7500-8UN	1.6688	1	1.7507	1.6147 - .0007		.0004	5	.0156
4	5220-751-5007	1.7500-8UN	1.6688	2	1.7500 +.0007	1.7329 - .0007	1.6688 -.0005	.00025	5	.0312
1	5220-751-5010	1.7500-12UN	1.6959	1	1.7506	1.6598 - .0006		.0003	10	.0104
4	5220-751-5011	1.7500-12UN	1.6959	2	1.7500 +.0006	1.7371 - .0006	1.6959 -.0004	.0002	6	.0208
1	5220-751-5014	1.7500-16UNEF	1.7094	1	1.7506	1.6823 - .0006		.0003	10	.0078
4	5220-751-5015	1.7500-16UNEF	1.7094	2	1.7500 +.0006	1.7395 - .0006	1.7094 -.0004	.00015	8	.0156
1	5220-751-5018	1.8125-16UN	1.7719	1	1.8131	1.7448 - .0006		.0003	10	.0078
4	5220-751-5019	1.8125-16UN	1.7719	2	1.8125 +.0006	1.8020 - .0006	1.7719 -.0004	.00015	8	.0156
2	5220-751-5022	1.8750-8UN	1.7938	1	1.8757	1.7397 - .0007		.0004	5	.0156
4	5220-751-5023	1.8750-8UN	1.7938	2	1.8750 +.0007	1.8579 - .0007	1.7938 -.0005	.00025	5	.0312
1	5220-751-5026	1.8750-12UN	1.8209	1	1.8756	1.7848 - .0006		.0003	10	.0104
4	5220-751-5027	1.8750-12UN	1.8209	2	1.8750 +.0006	1.8621 - .0006	1.8209 -.0004	.0002	6	.0208
1	5220-751-5030	1.8750-16UN	1.8344	1	1.8756	1.8073 - .0006		.0003	10	.0078
4	5220-751-5031	1.8750-16UN	1.8344	2	1.8750 +.0006	1.8645 - .0006	1.8344 -.0004	.00015	8	.0156
1	5220-751-5034	1.9375-16UN	1.8969	1	1.9381	1.8698 - .0006		.0003	10	.0078
4	5220-751-5035	1.9375-16UN	1.8969	2	1.9375 +.0006	1.9270 - .0006	1.8969 -.0004	.00015	8	.0156
2	5220-751-6486	2.0000-4½NC-1	1.8500	1	1.9951	1.7538 - .0008		.0004	5	.0278
4	5220-751-6487	2.0000-4½NC-1	1.8500	2	1.9943 +.0008	1.9685 - .0008	1.8500 -.0005	.0003	4	.0556

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5038	2.0000-4½UNC	1.8557	1	2.0008	1.7595 - .0008		.0004	5	.0278
4	5220-751-5039	2.0000-4½UNC	1.8557	2	2.0000 +.0008	1.9742 - .0008	1.8557 -.0005	.0003	4	.0556
2	5220-751-5042	2.0000-8UN	1.9188	1	2.0007	1.8647 - .0007		.0004	5	.0156
4	5220-751-5043	2.0000-8UN	1.9188	2	2.0000 +.0007	1.9829 - .0007	1.9188 -.0005	.00025	5	.0312
1	5220-751-5046	2.0000-12UN	1.9459	1	2.0006	1.9098 - .0006		.0003	10	.0104
4	5220-751-5047	2.0000-12UN	1.9459	2	2.0000 +.0006	1.9871 - .0006	1.9459 -.0004	.0002	6	.0208
1	5220-751-5050	2.0000-16UNEF	1.9594	1	2.0006	1.9323 - .0006		.0003	10	.0078
4	5220-751-5051	2.0000-16UNEF	1.9594	2	2.0000 +.0006	1.9895 - .0006	1.9594 -.0004	.00015	8	.0156
1	5220-751-5054	2.0625-16UN	2.0219	1	2.0631	1.9948 - .0006		.0003	10	.0078
4	5220-751-5055	2.0625-16UN	2.0219	2	2.0625 +.0006	2.0520 - .0006	2.0219 -.0004	.00015	8	.0156
2	5220-751-5058	2.1250-8UN	2.0438	1	2.1257	1.9897 - .0007		.0004	5	.0156
4	5220-751-5059	2.1250-8UN	2.0438	2	2.1250 +.0007	2.1079 - .0007	2.0438 -.0005	.00025	5	.0312
1	5220-751-5062	2.1250-12UN	2.0709	1	2.1256	2.0348 - .0006		.0003	10	.0104
4	5220-751-5063	2.1250-12UN	2.0709	2	2.1250 +.0006	2.1121 - .0006	2.0709 -.0004	.0002	6	.0208
1	5220-751-5066	2.1250-16UN	2.0844	1	2.1256	2.0573 - .0006		.0003	10	.0078
4	5220-751-5067	2.1250-16UN	2.0844	2	2.1250 +.0006	2.1145 - .0006	2.0844 -.0004	.00015	8	.0156
1	5220-751-5070	2.1875-16UN	2.1469	1	2.1881	2.1198 - .0006		.0003	10	.0078
4	5220-751-5071	2.1875-16UN	2.1469	2	2.1875 +.0006	2.1770 - .0006	2.1469 -.0004	.00015	8	.0156
2	5220-751-6488	2.2500-4½NC-1	2.1000	1	2.2451	2.0038 - .0008		.0004	5	.0278
4	5220-751-6489	2.2500-4½NC-1	2.1000	2	2.2443 +.0008	2.2185 - .0008	2.1000 -.0005	.0003	4	.0556
2	5220-751-5074	2.2500-4½NC	2.1057	1	2.2508	2.0095 - .0008		.0004	5	.0278
4	5220-751-5075	2.2500-4½NC	2.1057	2	2.2500 +.0008	2.2242 - .0008	2.1057 -.0005	.0003	4	.0556

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD / GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5078	2.2500-8UN	2.1688	1	2.2507	2.1147 - .0007		.0004	5	.0156
4	5220-751-5079	2.2500-8UN	2.1688	2	2.2500 +.0007	2.2329 - .0007	2.1688 -.0005	.00025	5	.0312
1	5220-751-5082	2.2500-12UN	2.1959	1	2.2506	2.1598 - .0006		.0003	10	.0104
4	5220-751-5083	2.2500-12UN	2.1959	2	2.2500 +.0006	2.2371 - .0006	2.1959 -.0004	.0002	6	.0208
1	5220-751-5086	2.2500-16UN	2.2094	1	2.2506	2.1823 - .0006		.0003	10	.0078
4	5220-751-5087	2.2500-16UN	2.2094	2	2.2500 +.0006	2.2395 - .0006	2.2094 -.0004	.00015	8	.0156
1	5220-751-5090	2.3125-16UN	2.2719	1	2.3131	2.2448 - .0006		.0003	10	.0078
4	5220-751-5091	2.3125-16UN	2.2719	2	2.3125 +.0006	2.3020 - .0006	2.2719 -.0004	.00015	8	.0156
1	5220-751-5094	2.3750-12UN	2.3209	1	2.3756	2.2848 - .0006		.0003	10	.0104
4	5220-751-5095	2.3750-12UN	2.3209	2	2.3750 +.0006	2.3621 - .0006	2.3209 -.0004	.0002	6	.0208
1	5220-751-5098	2.3750-16UN	2.3344	1	2.3756	2.3073 - .0006		.0003	10	.0078
4	5220-751-5099	2.3750-16UN	2.3344	2	2.3750 +.0006	2.3645 - .0006	2.3344 -.0004	.00015	8	.0156
1	5220-751-5102	2.4375-16UN	2.3969	1	2.4381	2.3698 - .0006		.0003	10	.0078
4	5220-751-5103	2.4375-16UN	2.3969	2	2.4375 +.0006	2.4270 - .0006	2.3969 -.0004	.00015	8	.0156
2	5220-751-6490	2.5000-4NC-1	2.3312	1	2.4945	2.2230 - .0009		.0004	5	.0312
4	5220-751-6491	2.5000-4NC-1	2.3312	2	2.4936 +.0009	2.4655 - .0009	2.3312 -.0005	.0003	4	.0625
2	5220-751-5106	2.5000-4UNC	2.3376	1	2.5009	2.2294 - .0009		.0004	5	.0312
4	5220-751-5107	2.5000-4UNC	2.3376	2	2.5000 +.0009	2.4719 - .0009	2.3376 -.0005	.0003	4	.0625
2	5220-751-5110	2.5000-8UN	2.4188	1	2.5007	2.3647 - .0007		.0004	5	.0156
4	5220-751-5111	2.5000-8UN	2.4188	2	2.5000 +.0007	2.4829 - .0007	2.4188 -.0005	.00025	5	.0312
1	5220-751-5114	2.5000-12UN	2.4459	1	2.5006	2.4098 - .0006		.0003	10	.0104
4	5220-751-5115	2.5000-12UN	2.4459	2	2.5000 +.0006	2.4871 - .0006	2.4459 -.0004	.0002	6	.0208

* 1. Go Thread Ring-Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA		TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5118	2.5000-16UN	2.4594	1	2.5006	2.4323 - .0006		.0003	10	.0078
4	5220-751-5119	2.5000-16UN	2.4594	2	2.5000 +.0006	2.4895 - .0006	2.4594 -.0004	.00015	8	.0156
1	5220-751-5122	2.6250-12UN	2.5709	1	2.6256	2.5348 - .0006		.0003	10	.0104
4	5220-751-5123	2.6250-12UN	2.5709	2	2.6250 +.0006	2.6121 - .0006	2.5709 -.0004	.0002	6	.0208
1	5220-751-5126	2.6250-16UN	2.5844	1	2.6256	2.5573 - .0006		.0003	10	.0078
4	5220-751-5127	2.6250-16UN	2.5844	2	2.6250 +.0006	2.6145 - .0006	2.5844 -.0004	.00015	8	.0156
2	5220-751-6492	2.7500-4NC-1	2.5812	1	2.7445	2.4730 - .0009		.0004	5	.0312
4	5220-751-6493	2.7500-4NC-1	2.5812	2	2.7436 +.0009	2.7155 - .0009	2.5812 -.0005	.0003	4	.0625
2	5220-751-5130	2.7500-4UNC	2.5876	1	2.7509	2.4794 - .0009		.0004	5	.0312
4	5220-751-5131	2.7500-4UNC	2.5876	2	2.7500 +.0009	2.7219 - .0009	2.5876 -.0005	.0003	4	.0625
2	5220-751-5134	2.7500-8UN	2.6688	1	2.7507	2.6147 - .0007		.0004	5	.0156
4	5220-751-5135	2.7500-8UN	2.6688	2	2.7500 +.0007	2.7329 - .0007	2.6688 -.0005	.00025	5	.0312
1	5220-751-5138	2.7500-12UN	2.6959	1	2.7506	2.6598 - .0006		.0003	10	.0104
4	5220-751-5139	2.7500-12UN	2.6959	2	2.7500 +.0006	2.7371 - .0006	2.6959 -.0004	.0002	6	.0208
1	5220-751-5142	2.7500-16UN	2.7094	1	2.7506	2.6823 - .0006		.0003	10	.0078
4	5220-751-5143	2.7500-16UN	2.7094	2	2.7500 +.0006	2.7395 - .0006	2.7094 -.0004	.00015	8	.0156
1	5220-751-5146	2.8750-12UN	2.8209	1	2.8756	2.7848 - .0006		.0003	10	.0104
4	5220-751-5147	2.8750-12UN	2.8209	2	2.8750 +.0006	2.8621 - .0006	2.8209 -.0004	.0002	6	.0208
1	5220-751-5150	2.8750-16UN	2.8344	1	2.8756	2.8073 - .0006		.0003	10	.0078
4	5220-751-5151	2.8750-16UN	2.8344	2	2.8750 +.0006	2.8645 - .0006	2.8344 -.0004	.00015	8	.0156
2	5220-751-6494	3.0000-4NC-1	2.8312	1	2.9945	2.7230 - .0009		.0004	5	.0312
4	5220-751-6495	3.0000-4NC-1	2.8312	2	2.9936 +.0009	2.9655 - .0009	2.8312 -.0005	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD / GO PD	*	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5154	3.0000-4UNC	2.8376	1	3.0009	2.7294 - .0009		.0004	5	.0312
4	5220-751-5155	3.0000-4UNC	2.8376	2	3.0000 +.0009	2.9719 - .0009	2.8376 -.0005	.0003	4	.0625
2	5220-751-5158	3.0000-8UN	2.9188	1	3.0007	2.8647 - .0007		.0004	5	.0156
4	5220-751-5159	3.0000-8UN	2.9188	2	3.0000 +.0007	2.9829 - .0007	2.9188 -.0005	.00025	5	.0312
1	5220-751-5162	3.0000-12UN	2.9459	1	3.0006	2.9098 - .0006		.0003	10	.0104
4	5220-751-5163	3.0000-12UN	2.9459	2	3.0000 +.0006	2.9871 - .0006	2.9459 -.0004	.0002	6	.0208
1	5220-751-5166	3.0000-16UN	2.9594	1	3.0006	2.9323 - .0006		.0003	10	.0078
4	5220-751-5167	3.0000-16UN	2.9594	2	3.0000 +.0006	2.9895 - .0006	2.9594 -.0004	.00015	8	.0156
1	5220-751-5170	3.1250-12UN	3.0709	1	3.1256	3.0348 - .0006		.0003	10	.0104
4	5220-751-5171	3.1250-12UN	3.0709	2	3.1250 +.0006	3.1121 - .0006	3.0709 -.0004	.0002	6	.0208
1	5220-751-5174	3.1250-16UN	3.0844	1	3.1256	3.0573 - .0006		.0003	10	.0078
4	5220-751-5175	3.1250-16UN	3.0844	2	3.1250 +.0006	3.1145 - .0006	3.0844 -.0004	.00015	8	.0156
2	5220-751-6496	3.2500-4NC-1	3.0812	1	3.2445	2.9730 - .0009		.0004	5	.0312
4	5220-751-6497	3.2500-4NC-1	3.0812	2	3.2436 +.0009	3.2155 - .0009	3.0812 -.0005	.0003	4	.0625
2	5220-751-5178	3.2500-4UNC	3.0876	1	3.2509	2.9794 - .0009		.0004	5	.0312
4	5220-751-5179	3.2500-4UNC	3.0876	2	3.2500 +.0009	3.2219 - .0009	3.0876 -.0005	.0003	4	.0625
2	5220-751-5182	3.2500-8UN	3.1688	1	3.2507	3.1147 - .0007		.0004	5	.0156
4	5220-751-5183	3.2500-8UN	3.1688	2	3.2500 +.0007	3.2329 - .0007	3.1688 -.0005	.00025	5	.0312
1	5220-751-5186	3.2500-12UN	3.1959	1	3.2506	3.1598 - .0006		.0003	10	.0104
4	5220-751-5187	3.2500-12UN	3.1959	2	3.2500 +.0006	3.2371 - .0006	3.1959 -.0004	.0002	6	.0208
1	5220-751-5190	3.2500-16UN	3.2094	1	3.2506	3.1823 - .0006		.0003	10	.0078
4	5220-751-5191	3.2500-16UN	3.2094	2	3.2500 +.0006	3.2395 - .0006	3.2094 -.0004	.00015	8	.0156

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II.- Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD GO PD–	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5194	3.3750-12UN	3.3209	1	3.3756	3.2848 - .0006		.0003	10	.0104
4	5220-751-5195	3.3750-12UN	3.3209	2	3.3750 +.0006	3.3621 - .0006	3.3209 -.0004	.0002	6	.0208
1	5220-751-5198	3.3750-16UN	3.3344	1	3.3756	3.3073 - .0006		.0003	10	.0078
4	5220-751-5199	3.3750-16UN	3.3344	2	3.3750 +.0006	3.3645 - .0006	3.3344 -.0004	.00015	8	.0156
2	5220-751-6498	3.5000-4NC-1	3.3312	1	3.4945	3.2230 - .0009		.0004	5	.0312
4	5220-751-6499	3.5000-4NC-1	3.3312	2	3.4936 +.0009	3.4655 - .0009	3.3312 -.0005	.0003	4	.0625
2	5220-751-5202	3.5000-4UNC	3.3376	1	3.5009	3.2294 - .0009		.0004	5	.0312
4	5220-751-5203	3.5000-4UNC	3.3376	2	3.5000 +.0009	3.4719 - .0009	3.3376 -.0005	.0003	4	.0625
2	5220-751-5206	3.5000-8UN	3.4188	1	3.5007	3.3647 - .0007		.0004	5	.0156
4	5220-751-5207	3.5000-8UN	3.4188	2	3.5000 +.0007	3.4829 - .0007	3.4188 -.0005	.00025	5	.0312
1	5220-751-5210	3.5000-12UN	3.4459	1	3.5006	3.4098 - .0006		.0003	10	.0104
4	5220-751-5211	3.5000-12UN	3.4459	2	3.5000 +.0006	3.4871 - .0006	3.4459 -.0004	.0002	6	.0208
1	5220-751-5214	3.5000-16UN	3.4594	1	3.5006	3.4323 - .0006		.0003	10	.0078
4	5220-751-5215	3.5000-16UN	3.4594	2	3.5000 +.0006	3.4895 - .0006	3.4594 -.0004	.00015	8	.0156
1	5220-751-5218	3.6250-12UN	3.5709	1	3.6256	3.5348 - .0006		.0003	10	.0104
4	5220-751-5219	3.6250-12UN	3.5709	2	3.6250 +.0006	3.6121 - .0006	3.5709 -.0004	.0002	6	.0208
1	5220-751-5222	3.6250-16UN	3.5844	1	3.6256	3.5573 - .0006		.0003	10	.0078
4	5220-751-5223	3.6250-16UN	3.5844	2	3.6250 +.0006	3.6145 - .0006	3.5844 -.0004	.00015	8	.0156
2	5220-751-6500	3.7500-4NC-1	3.5812	1	3.7445	3.4730 - .0009		.0004	5	.0312
4	5220-751-6501	3.7500-4NC-1	3.5812	2	3.7436 +.0009	3.7155 - .0009	3.5812 -.0005	.0003	4	.0625
2	5220-751-5226	3.7500-4UNC	3.5876	1	3.7509	3.4794 - .0009		.0004	5	.0312
4	5220-751-5227	3.7500-4UNC	3.5876	2	3.7500 +.0009	3.7219 - .0009	3.5876 -.0005	.0003	4	.0625

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5229	3.7500-8UN	3.6688	1	3.7507	3.6147 - .0007		.0004	5	.0156
4	5220-751-5231	3.7500-8UN	3.6688	2	3.7500 +.0007	3.7329 - .0007	3.6688 -.0005	.00025	5	.0312
1	5220-751-5234	3.7500-12UN	3.6959	1	3.7506	3.6598 - .0006		.0003	10	.0104
4	5220-751-5235	3.7500-12UN	3.6959	2	3.7500 +.0006	3.7371 - .0006	3.6959 -.0004	.0002	6	.0208
1	5220-751-5238	3.7500-16UN	3.7094	1	3.7506	3.6823 - .0006		.0003	10	.0078
4	5220-751-5239	3.7500-16UN	3.7094	2	3.7500 +.0006	3.7395 - .0006	3.7094 -.0004	.00015	8	.0156
1	5220-751-5242	3.8750-12UN	3.8209	1	3.8756	3.7848 - .0006		.0003	10	.0104
4	5220-751-5243	3.8750-12UN	3.8209	2	3.8750 +.0006	3.8621 - .0006	3.8209 -.0004	.0002	6	.0208
1	5220-751-5246	3.8750-16UN	3.8344	1	3.8756	3.8073 - .0006		.0003	10	.0078
4	5220-751-5247	3.8750-16UN	3.8344	2	3.8750 +.0006	3.8645 - .0006	3.8344 -.0004	.00015	8	.0156
2	5220-751-6502	4.0000-4NC-1	3.8312	1	3.9945	3.7230 - .0009		.0004	5	.0312
4	5220-751-6503	4.0000-4NC-1	3.8312	2	3.9936 +.0009	3.9655 - .0009	3.8312 -.0005	.0003	4	.0625
2	5220-751-5250	4.0000-4UNC	3.8376	1	4.0009	3.7294 - .0009		.0004	5	.0312
4	5220-751-5251	4.0000-4UNC	3.8376	2	4.0000 +.0009	3.9719 - .0009	3.8376 -.0005	.0003	4	.0625
2	5220-751-5254	4.0000-8UN	3.9188	1	4.0007	3.8647 - .0007		.0004	5	.0156
4	5220-751-5255	4.0000-8UN	3.9188	2	4.0000 +.0007	3.9829 - .0007	3.9188 -.0005	.00025	5	.0312
1	5220-751-5258	4.0000-12UN	3.9459	1	4.0006	3.9098 - .0006		.0003	10	.0104
4	5220-751-5259	4.0000-12UN	3.9459	2	4.0000 +.0006	3.9871 - .0006	3.9459 -.0004	.0002	6	.0208
1	5220-751-5262	4.0000-16UN	3.9594	1	4.0006	3.9323 - .0006		.0003	10	.0078
4	5220-751-5263	4.0000-16UN	3.9594	2	4.0000 +.0006	3.9895 - .0006	3.9594 -.0004	.00015	8	.0156
2	5220-751-5266	4.2500-8UN	4.1688	1	4.2511	4.1147 - .0011		.0004	5	.0156
4	5220-751-5267	4.2500-8UN	4.1688	2	4.2500 +.0011	4.2329 - .0011	4.1688 -.0006	.00025	5	.0312

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE				GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD	2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5270	4.2500-12UN	4.1959	1	4.2509	4.1598 - .0009		.0003	10	.0104
4	5220-751-5271	4.2500-12UN	4.1959	2	4.2500 +.0009	4.2371 - .0009	4.1959 -.0006	.0002	6	.0208
1	5220-751-5274	4.2500-16UN	4.2094	1	4.2509	4.1823 - .0009		.0003	10	.0078
4	5220-751-5275	4.2500-16UN	4.2094	2	4.2500 +.0009	4.2395 - .0009	4.2094 -.0006	.00015	8	.0156
2	5220-751-5278	4.5000-8UN	4.4188	1	4.5011	4.3647 - .0011		.0004	5	.0156
4	5220-751-5279	4.5000-8UN	4.4188	2	4.5000 +.0011	4.4829 - .0011	4.4188 -.0006	.00025	5	.0312
1	5220-751-5282	4.5000-12UN	4.4459	1	4.5009	4.4098 - .0009		.0003	10	.0104
4	5220-751-5283	4.5000-12UN	4.4459	2	4.5000 +.0009	4.4871 - .0009	4.4459 -.0006	.0002	6	.0208
1	5220-751-5286	4.5000-16UN	4.4594	1	4.5009	4.4323 - .0009		.0003	10	.0078
4	5220-751-5287	4.5000-16UN	4.4594	2	4.5000 +.0009	4.4895 - .0009	4.4594 -.0006	.00015	8	.0156
2	5220-751-5290	4.7500-8UN	4.6688	1	4.7511	4.6147 - .0011		.0004	5	.0156
4	5220-751-5291	4.7500-8UN	4.6688	2	4.7500 +.0011	4.7329 - .0011	4.6688 -.0006	.00025	5	.0312
1	5220-751-5294	4.7500-12UN	4.6959	1	4.7509	4.6598 - .0009		.0003	10	.0104
4	5220-751-5295	4.7500-12UN	4.6959	2	4.7500 +.0009	4.7371 - .0009	4.6959 -.0006	.0002	6	.0208
1	5220-751-5298	4.7500-16UN	4.7094	1	4.7509	4.6823 - .0009		.0003	10	.0078
4	5220-751-5299	4.7500-16UN	4.7094	2	4.7500 +.0009	4.7395 - .0009	4.7094 -.0006	.00015	8	.0156
2	5220-751-5302	5.0000-8UN	4.9188	1	5.0011	4.8647 - .0011		.0004	5	.0156
4	5220-751-5303	5.0000-8UN	4.9188	2	5.0000 +.0011	4.9829 - .0011	4.9188 -.0006	.00025	5	.0312
1	5220-751-5306	5.0000-12UN	4.9459	1	5.0009	4.9098 - .0009		.0003	10	.0104
4	5220-751-5307	5.0000-12UN	4.9459	2	5.0000 +.0009	4.9871 - .0009	4.9459 -.0006	.0002	6	.0208
1	5220-751-5310	5.0000-16UN	4.9594	1	5.0009	4.9323 - .0009		.0003	10	.0078
4	5220-751-5311	5.0000-16UN	4.9594	2	5.0000 +.0009	4.9895 - .0009	4.9594 -.0006	.00015	8	.0156

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS			TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1	MAJOR DIA	MINOR DIA	PITCH DIA			
				2	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION				
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5314	5.2500-8UN	5.1688	1	5.2511	5.1147 - .0011		.0004	5	.0156
4	5220-751-5315	5.2500-8UN	5.1688	2	5.2500 +.0011	5.2329 - .0011	5.1688 -.0006	.00025	5	.0312
1	5220-751-5318	5.2500-12UN	5.1959	1	5.2509	5.1598 - .0009		.0003	10	.0104
4	5220-751-5319	5.2500-12UN	5.1959	2	5.2500 +.0009	5.2371 - .0009	5.1959 -.0006	.0002	6	.0208
1	5220-751-5322	5.2500-16UN	5.2094	1	5.2509	5.1823 - .0009		.0003	10	.0078
4	5220-751-5323	5.2500-16UN	5.2094	2	5.2500 +.0009	5.2395 - .0009	5.2094 -.0006	.00015	8	.0156
2	5220-751-5326	5.5000-8UN	5.4188	1	5.5011	5.3647 - .0011		.0004	5	.0156
4	5220-751-5327	5.5000-8UN	5.4188	2	5.5000 +.0011	5.4829 - .0011	5.4188 -.0006	.00025	5	.0312
1	5220-751-5330	5.5000-12UN	5.4459	1	5.5009	5.4098 - .0009		.0003	10	.0104
4	5220-751-5331	5.5000-12UN	5.4459	2	5.5000 +.0009	5.4871 - .0009	5.4459 -.0006	.0002	6	.0208
1	5220-751-5334	5.5000-16UN	5.4594	1	5.5009	5.4323 - .0009		.0003	10	.0078
4	5220-751-5335	5.5000-16UN	5.4594	2	5.5000 +.0009	5.4895 - .0009	5.4594 -.0006	.00015	8	.0156
2	5220-751-5338	5.7500-8UN	5.6688	1	5.7511	5.6147 - .0011		.0004	5	.0156
4	5220-751-5339	5.7500-8UN	5.6688	2	5.7500 +.0011	5.7329 - .0011	5.6688 -.0006	.00025	5	.0312
1	5220-751-5342	5.7500-12UN	5.6959	1	5.7509	5.6598 - .0009		.0003	10	.0104
4	5220-751-5343	5.7500-12UN	5.6959	2	5.7500 +.0009	5.7371 - .0009	5.6959 -.0006	.0002	6	.0208
1	5220-751-5346	5.7500-16UN	5.7094	1	5.7509	5.6823 - .0009		.0003	10	.0078
4	5220-751-5347	5.7500-16UN	5.7094	2	5.7500 +.0009	5.7395 - .0009	5.7094 -.0006	.00015	8	.0156
2	5220-751-5350	6.0000-8UN	5.9188	1	6.0011	5.8647 - .0011		.0004	5	.0156
4	5220-751-5351	6.0000-8UN	5.9188	2	6.0000 +.0011	5.9829 - .0011	5.9188 -.0006	.00025	5	.0312
1	5220-751-5354	6.0000-12UN	5.9459	1	6.0009	5.9098 - .0009		.0003	10	.0104
4	5220-751-5355	6.0000-12UN	5.9459	2	6.0000 +.0009	5.9871 - .0009	5.9459 -.0006	.0002	6	.0208

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1579, (OT) 4 May 61

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		GO PD		GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	GO PD	1 2	MAJOR DIA MAJOR DIA FULL PORTION	MINOR DIA MAJOR DIA TRUNCATED PORTION	PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5358	6.0000-16UN	5.9594	1	6.0009	5.9323 - .0009		.0003	10	.0078
4	5220-751-5359	6.0000-16UN	5.9594	2	6.0000 +.0009	5.9895 - .0009	5.9594 -.0006	.00015	8	.0156

* 1. Go Thread Ring Gage
2. Truncated Thread Setting Plug Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table III. Tabulation of Design and Identification Data - Special (UNS) Threads

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	1	GAGE DIMENSIONS: MAJOR DIA / MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA / MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	GAGE DIMENSIONS: TOL ON LEAD	GAGE DIMENSIONS: HALF ANGLE TOL	GAGE DIMENSIONS: ROOT CLEAR
			GO PD	2						
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-6922	.5000-12UNS-2A	.4443	1	.4990	.4082 - .0006		.0003	10	.0104
3	5220-751-6923	.5000-12UNS-2A	.4443	2	.4984 + .0006	.4855 - .0006	.4443 - .0003	.0002	6	.0208
		(.5000-12UN-2A)**								
		(.5000-12UN-2A)**								
1	5220-751-1092	.5000-12UNS	.4459	1	.5006	.4098 - .0006		.0003	10	.0104
3	5220-751-1093	.5000-12UNS	.4459	2	.5000 + .0006	.4871 - .0006	.4459 - .0003	.0002	6	.0208
		(.5000-12UN)**								
		(.5000-12UN)**								
1	5220-751-6466	1.0000-14NS-1	.9515	1	.9985	.9206 - .0006		.0003	10	.0089
3	5220-751-6467	1.0000-14NS-1	.9515	2	.9979 + .0006	.9864 - .0006	.9515 - .0003	.0002	6	.0179
		(1.0000-14NF-1)**								
		(1.0000-14NF-1)**								
1	5220-751-4876	1.0000-14UNS-1A,2A	.9519	1	.9989	.9210 - .0006		.0003	10	.0089
3	5220-751-4877	1.0000-14UNS-1A,2A	.9519	2	.9983 + .0006	.9868 - .0006	.9519 - .0003	.0002	6	.0179
		(1.0000-14NF-1A,2A)**								
		(1.0000-14NF-1A,2A)**								
1	5220-751-4878	1.0000-14UNS	.9536	1	1.0006	.9227 - .0006		.0003	10	.0089
3	5220-751-4879	1.0000-14UNS	.9536	2	1.0000 + .0006	.9885 - .0006	.9536 - .0003	.0002	6	.0179
		(1.0000-14NF)**								
		(1.0000-14NF)**								
1	5220-751-5052	2.0625-16UNS-2A	2.0203	1	2.0615	1.9932 - .0006		.0003	10	.0078
4	5220-751-5053	2.0625-16UNS-2A	2.0203	2	2.0609 + .0006	2.0504 - .0006	2.0203 - .0004	.00015	8	.0156
		(2.0625-16UN-2A)**								
		(2.0625-16UN-2A)**								
1	5220-751-5054	2.0625-16UNS	2.0219	1	2.0631	1.9948 - .0006		.0003	10	.0078
4	5220-751-5055	2.0625-16UNS	2.0219	2	2.0625 + .0006	2.0520 - .0006	2.0219 - .0004	.00015	8	.0156
		(2.0625-16UN)**								
		(2.0625-16UN)**								
1	5220-751-5068	2.1875-16UNS-2A	2.1453	1	2.1865	2.1182 - .0006		.0003	10	.0078
4	5220-751-5069	2.1875-16UNS-2A	2.1453	2	2.1859 + .0006	2.1754 - .0006	2.1453 - .0004	.00015	8	.0156
		(2.1875-16UN-2A)**								
		(2.1875-16UN-2A)**								

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

** Thread designation as previously listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table III. Tabulation of Design and Identification Data - Special (UNS) Threads (Continued)

FIG. No.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	GO PD	*	GAGE DIMENSIONS: MAJOR DIA: MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA: MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	*	E	F	G	H	J	K
1	5220-751-5070	2.1875-16UNS	2.1469	1	2.1881	2.1198 - .0006		.0003	10	.0078
4	5220-751-5071	2.1875-16UNS (2.1875-16UN)** (2.1875-16UN)**	2.1469	2	2.1875 + .0006	2.1770 - .0006	2.1469 - .0004	.00015	8	.0156
1	5220-751-5088	2.3125-16UNS-2A	2.2702	1	2.3114	2.2431 - .0006		.0003	10	.0078
4	5220-751-5089	2.3125-16UNS-2A (2.3125-16UN-2A)** (2.3125-16UN-2A)**	2.2702	2	2.3108 + .0006	2.3003 - .0006	2.2702 - .0004	.00015	8	.0156
1	5220-751-5090	2.3125-16UNS	2.2719	1	2.3131	2.2448 - .0006		.0003	10	.0078
4	5220-751-5091	2.3125-16UNS (2.3125-16UN)** (2.3125-16UN)**	2.2719	2	2.3125 + .0006	2.3020 - .0006	2.2719 - .0004	.00015	8	.0156
1	5220-751-5100	2.4375-16UNS-2A	2.3952	1	2.4364	2.3681 - .0006		.0003	10	.0078
4	5220-751-5101	2.4375-16UNS-2A (2.4375-16UN-2A)** (2.4375-16UN-2A)**	2.3952	2	2.4358 + .0006	2.4253 - .0006	2.3952 - .0004	.00015	8	.0156
1	5220-751-5102	2.4375-16UNS	2.3969	1	2.4381	2.3698 - .0006		.0003	10	.0078
4	5220-751-5103	2.4375-16UNS (2.4375-16UN)** (2.4375-16UN)**	2.3969	2	2.4375 + .0006	2.4270 - .0006	2.3969 - .0004	.00015	8	.0156
2	5220-751-5264	4.2500-8UN-2A	4.1660	1	4.2483	4.1119 - .0011		.0004	5	.0156
4	5220-751-5265	4.2500-8UN-2A	4.1660	2	4.2472 + .0011	4.2301 - .0011	4.1660 - .0006	.00025	5	.0312
2	5220-751-5266	4.2500-8UN	4.1688	1	4.2511	4.1147 - .0011		.0004	5	.0156
4	5220-751-5267	4.2500-8UN	4.1688	2	4.2500 + .0011	4.2329 - .0011	4.1688 - .0006	.00025	5	.0312
2	5220-751-5276	4.5000-8UN-2A	4.4160	1	4.4983	4.3619 - .0011		.0004	5	.0156
4	5220-751-5277	4.5000-8UN-2A	4.4160	2	4.4972 + .0011	4.4801 - .0011	4.4160 - .0006	.00025	5	.0312
2	5220-751-5278	4.5000-8UN	4.4188	1	4.5011	4.3647 - .0011		.0004	5	.0156
4	5220-751-5279	4.5000-8UN	4.4188	2	4.5000 + .0011	4.4829 - .0011	4.4188 - .0006	.00025	5	.0312

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

** Thread designation as previously listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table III. Tabulation of Design and Identification Data - Special (UNS) Threads (Continued)

FIG. NO.	MARKING ON GAGE HANDLE: MIL-STD PART NUMBER	MARKING ON GAGE HANDLE: THREAD DESIGNATION	MARKING ON GAGE HANDLE: GO PD		GAGE DIMENSIONS: MAJOR DIA: MAJOR DIA FULL PORTION	GAGE DIMENSIONS: MINOR DIA: MAJOR DIA TRUNCATED PORTION	GAGE DIMENSIONS: PITCH DIA	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
			GO PD		MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIA			
A	B	C	D	*	E	F	G	H	J	K
2	5220-751-5288	4.7500-8UN-2A	4.6659	1	4.7482	4.6118 - .0011		.0004	5	.0156
4	5220-751-5289	4.7500-8UN-2A	4.6659	2	4.7471 + .0011	4.7300 - .0011	4.6659 - .0006	.00025	5	.0312
2	5220-751-5290	4.7500-8UN	4.6688	1	4.7511	4.6147 - .0011		.0004	5	.0156
4	5220-751-5291	4.7500-8UN	4.6688	2	4.7500 + .0011	4.7329 - .0011	4.6688 - .0006	.00025	5	.0312
2	5220-751-5300	5.0000-8UN-2A	4.9159	1	4.9982	4.8618 - .0011		.0004	5	.0156
4	5220-751-5301	5.0000-8UN-2A	4.9159	2	4.9971 + .0011	4.9800 - .0011	4.9159 - .0006	.00025	5	.0312
2	5220-751-5302	5.0000-8UN	4.9188	1	5.0011	4.8647 - .0011		.0004	5	.0156
4	5220-751-5303	5.0000-8UN	4.9188	2	5.0000 + .0011	4.9829 - .0011	4.9188 - .0006	.00025	5	.0312
2	5220-751-5312	5.2500-8UN-2A	5.1659	1	5.2482	5.1118 - .0011		.0004	5	.0156
4	5220-751-5313	5.2500-8UN-2A	5.1659	2	5.2471 + .0011	5.2300 - .0011	5.9159 - .0006	.00025	5	.0312
2	5220-751-5314	5.2500-8UN	5.1688	1	5.2511	5.1147 - .0011		.0004	5	.0156
4	5220-751-5315	5.2500-8UN	5.1688	2	5.2500 + .0011	5.2329 - .0011	5.1688 - .0006	.00025	5	.0312
2	5220-751-5324	5.5000-8UN-2A	5.4158	1	5.4981	5.3617 - .0011		.0004	5	.0156
4	5220-751-5325	5.5000-8UN-2A	5.4158	2	5.4970 + .0011	5.4799 - .0011	5.4158 - .0006	.00025	5	.0312
2	5220-751-5326	5.5000-8UN	5.4188	1	5.5011	5.3647 - .0011		.0004	5	.0156
4	5220-751-5327	5.5000-8UN	5.4188	2	5.5000 + .0011	5.4829 - .0011	5.4188 - .0006	.00025	5	.0312
2	5220-751-5336	5.7500-8UN-2A	5.6658	1	5.7481	5.6117 - .0011		.0004	5	.0156
4	5220-751-5337	5.7500-8UN-2A	5.6658	2	5.7470 + .0011	5.7299 - .0011	5.6658 - .0006	.00025	5	.0312
2	5220-751-5338	5.7500-8UN	5.6688	1	5.7511	5.6147 - .0011		.0004	5	.0156
4	5220-751-4339	5.7500-8UN	5.6688	2	5.7500 + .0011	5.7329 - .0011	5.6688 - .0006	.00025	5	.0312
2	5220-751-5348	6.0000-8UN-2A	5.9158	1	5.9981	5.8617 - .0011		.0004	5	.0156
4	5220-751-5349	6.0000-8UN-2A	5.9158	2	5.9970 + .0011	5.9799 - .0011	5.9158 - .0006	.00025	5	.0312
2	5220-751-5350	6.0000-8UN	5.9188	1	6.0011	5.8647 - .0011		.0004	5	.0156
4	5220-751-5351	6.0000-8UN	5.9188	2	6.0000 + .0011	5.9829 - .0011	5.9188 - .0006	.00025	5	.0312

* 1. Go Thread Ring Gage 2. Truncated Thread Setting Plug Gage

Note: The length of engagement for 8UN thread series is equal to the nominal diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 Mar 67

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-0854	79	5220-751-0904	17,81	5220-751-0974	84	5220-751-1046	24,87	5220-751-1204	34,91
5220-751-0855	79	5220-751-0905	17,81	5220-751-0975	84	5220-751-1047	24,87	5220-751-1205	34,91
5220-751-0856	15,79	5220-751-0910	81	5220-751-0976	20,84	5220-751-1052	24,87	5220-751-1212	35,91
5220-751-0857	15,79	5220-751-0911	81	5220-751-0977	20,84	5220-751-1053	24,87	5220-751-1213	35,91
5220-751-0862	79	5220-751-0918	81	5220-751-0982	84	5220-751-1060	25,87	5220-751-1216	35,92
5220-751-0863	79	5220-751-0919	81	5220-751-0983	84	5220-751-1061	25,87	5220-751-1217	35,92
5220-751-0864	15,79	5220-751-0926	82	5220-751-0984	20,84	5220-751-1068	25,87	5220-751-1240	36,92
5220-751-0865	15,79	5220-751-0927	82	5220-751-0985	20,84	5220-751-1069	25,87	5220-751-1241	36,92
5220-751-0870	79	5220-751-0934	82	5220-751-0990	84	5220-751-1074	26,88	5220-751-1252	37,92
5220-751-0871	79	5220-751-0935	82	5220-751-0991	84	5220-751-1075	26,88	5220-751-1253	37,92
5220-751-0872	15,79	5220-751-0936	18,82	5220-751-0992	20,84	5220-751-1092	88,107	5220-751-1276	38,93
5220-751-0873	15,79	5220-751-0937	18,82	5220-751-0993	20,84	5220-751-1093	88,107	5220-751-1277	38,93
5220-751-0878	80	5220-751-0942	82	5220-751-0998	85	5220-751-1134	29,89	5220-751-1288	40,93
5220-751-0879	80	5220-751-0943	82	5220-751-0999	85	5220-751-1135	29,89	5220-751-1289	40,93
5220-751-0880	16,80	5220-751-0944	18,82	5220-751-1000	21,85	5220-751-1148	30,90	5220-751-1312	41,94
5220-751-0881	16,80	5220-751-0945	18,82	5220-751-1001	21,85	5220-751-1149	30,90	5220-751-1313	41,94
5220-751-0886	80	5220-751-0950	83	5220-751-1008	21,85	5220-751-1162	32,90	5220-751-1324	42,94
5220-751-0887	80	5220-751-0951	83	5220-751-1009	21,85	5220-751-1163	32,90	5220-751-1325	42,94
5220-751-0888	16,80	5220-751-0958	83	5220-751-1016	22,86	5220-751-1176	33,91	5220-751-1348	43,95
5220-751-0889	16,80	5220-751-0959	83	5220-751-1017	22,86	5220-751-1177	33,91	5220-751-1349	43,95
5220-751-0894	80	5220-751-0960	19,83	5220-751-1024	22,86	5220-751-1180	33,91	5220-751-1360	44,95
5220-751-0895	80	5220-751-0961	19,83	5220-751-1025	22,86	5220-751-1181	33,91	5220-751-1361	44,95
5220-751-0902	81	5220-751-0966	83	5220-751-1038	23,86	5220-751-1194	34,91	5220-751-1384	46,96
5220-751-0903	81	$220-751-0967	83	5220-751-1039	23,86	5220-751-1195	34,91	5220-751-1385	46,96

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 Mar 61

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-1392	47,96	5220-751-4580	16	5220-751-4616	17,81	5220-751-4656	19,83	5220-751-4692	20
5220-751-1393	47,96	5220-751-4581	16	5220-751-4617	17,81	5220-751-4657	19,83	5220-751-4693	20
5220-751-1408	48,96	5220-751-4582	16	5220-751-4620	17	5220-751-4660	19	5220-751-4694	20
5220-751-1409	48,96	5220-751-4583	16	5220-751-4621	17	5220-751-4661	19	5220-751-4695	20
5220-751-1416	49,96	5220-751-4584	16,80	5220-751-4624	17,81	5220-751-4662	19	5220-751-4696	20,84
5220-751-1417	49,96	5220-751-4585	16,80	5220-751-4625	17,81	5220-751-4663	19	5220-751-4697	20,84
5220-751-4556	15	5220-751-4588	16	5220-751-4628	18	5220-751-4664	19,83	5220-751-4700	21
5220-751-4557	15	5220-751-4589	16	5220-751-4629	18	5220-751-4665	19,83	5220-751-4701	21
5220-751-4558	15	5220-751-4590	16	5220-751-4632	18,82	5220-751-4668	19	5220-751-4702	21
5220-751-4559	15	5220-751-4591	16	5220-751-4633	18,82	5220-751-4669	19	5220-751-4703	21
5220-751-4560	15,79	5220-751-4592	16,80	5220-751-4636	18	5220-751-4672	19,83	5220-751-4704	21,85
5220-751-4561	15,79	5220-751-4593	16,80	5220-751-4637	18	5220-751-4673	19,83	5220-751-4705	21,85
5220-751-4564	15	5220-751-4596	16	5220-751-4638	18	5220-751-4676	20	5220-751-4708	21
5220-751-4565	15	5220-751-4597	16	5220-751-4639	18	5220-751-4677	20	5220-751-4709	21
5220-751-4566	15	5220-751-4600	16,80	5220-751-4640	18,82	5220-751-4678	20	5220-751-4710	21
5220-751-4567	15	5220-751-4601	16,80	5220-751-4641	18,82	5220-751-4679	20	5220-751-4711	21
5220-751-4568	15,79	5220-751-4604	17	5220-751-4644	18	5220-751-4680	20,84	5220-751-4712	21,85
5220-751-4569	15,79	5220-751-4605	17	5220-751-4645	18	5220-751-4681	20,84	5220-751-4713	21,85
5220-751-4572	15	5220-751-4606	17	5220-751-4646	18	5220-751-4684	20	5220-751-4716	22
5220-751-4573	15	5220-751-4607	17	5220-751-4647	18	5220-751-4685	20	5220-751-4717	22
5220-751-4574	15	5220-751-4608	17,81	5220-751-4648	18,82	5220-751-4686	20	5220-751-4718	22
5220-751-4575	15	5220-751-4609	17,81	5220-751-4649	18,82	5220-751-4687	20	5220-751-4719	22
5220-751-4576	15,79	5220-751-4612	17	5220-751-4652	19	5220-751-4688	20,84	5220-751-4720	22,86
5220-751-4577	15,79	5220-751-4613	17	5220-751-4653	19	5220-751-4689	20,84	5220-751-4721	22,86

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 Mar

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-4724	22	5220-751-4758	24	5220-751-4790	26,88	5220-751-4814	28,89	5220-751-4838	32,90
5220-751-4725	22	5220-751-4759	24	5220-751-4791	26,88	5220-751-4815	28,89	5220-751-4839	32,90
5220-751-4726	22	5220-751-4760	24,87	5220-751-4792	26	5220-751-4816	28	5220-751-4840	32
5220-751-4727	22	5220-751-4761	24,87	5220-751-4793	26	5220-751-4817	28	5220-751-4841	32
5220-751-4728	22,86	5220-751-4764	25	5220-751-4794	26,88	5220-751-4818	28,89	5220-751-4842	32,90
5220-751-4729	22,86	5220-751-4765	25	5220-751-4795	26,88	5220-751-4819	28,89	5220-751-4843	32,90
5220-751-4732	22	5220-751-4766	25	5220-751-4796	27	5220-751-4820	29	5220-751-4844	32
5220-751-4733	22	5220-751-4767	25	5220-751-4797	27	5220-751-4821	29	5220-751-4845	32
5220-751-4736	22,86	5220-751-4768	25,87	5220-751-4798	27,88	5220-751-4822	29,89	5220-751-4846	32,90
5220-751-4737	22,86	5220-751-4769	25,87	5220-751-4799	27,88	5220-751-4823	29,89	5220-751-4847	32,90
5220-751-4740	23	5220-751-4772	25	5220-751-4800	27	5220-751-4824	29	5220-751-4848	33
5220-751-4741	23	5220-751-4773	25	5220-751-4801	27	5220-751-4825	29	5220-751-4849	33
5220-751-4742	23	5220-751-4774	25	5220-751-4802	27,89	5220-751-4826	30,90	5220-751-4850	33,91
5220-751-4743	23	5220-751-4775	25	5220-751-4803	27,89	5220-751-4827	30,90	5220-751-4851	33,91
5220-751-4744	23,86	5220-751-4776	25,87	5220-751-4804	27	5220-751-4828	30	5220-751-4852	33
5220-751-4745	23,86	5220-751-4777	25,87	5220-751-4805	27	5220-751-4829	30	5220-751-4853	33
5220-751-4748	24	5220-751-4780	26	5220-751-4806	27,89	5220-751-4830	30,90	5220-751-4854	34,91
5220-751-4749	24	5220-751-4781	26	5220-751-4807	27,89	5220-751-4831	30,90	5220-751-4855	34,91
5220-751-4750	24	5220-751-4782	26	5220-751-4808	28	5220-751-4832	31	5220-751-4856	34
5220-751-4751	24	5220-751-4783	26	5220-751-4809	28	5220-751-4833	31	5220-751-4857	34
5220-751-4752	24,87	5220-751-4784	26,88	5220-751-4810	28,89	5220-751-4834	31,90	5220-751-4858	34,91
5220-751-4753	24,87	5220-751-4785	26,88	5220-751-4811	28,89	5220-751-4835	31,90	5220-751-4859	34,91
5220-751-4756	24	5220-751-4788	26	5220-751-4812	28	5220-751-4836	31	5220-751-4860	34
5220-751-4757	24	5220-751-4789	26	5220-751-4813	28	5220-751-4837	31	5220-751-4861	34

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev. 15 Ma. 61

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-4862	34,91	5220-751-4886	37,92	5220-751-4911	39,93	5220-751-4935	42,94	5220-751-4959	44,95
5220-751-4863	34,91	5220-751-4887	37,92	5220-751-4912	40	5220-751-4936	42	5220-751-4960	45
5220-751-4864	35	5220-751-4888	37	5220-751-4913	40	5220-751-4937	42	5220-751-4961	45
5220-751-4865	35	5220-751-4889	37	5220-751-4914	40,93	5220-751-4938	42,94	5220-751-4962	45,95
		5220-751-4890	37,92						
5220-751-4866	35,92	5220-751-4891	37,92	5220-751-4915	40,93	5220-751-4939	42,94	5220-751-4963	45,95
5220-751-4867	35,92	5220-751-4892	38	5220-751-4916	40	5220-751-4940	43	5220-751-4964	45
5220-751-4868	36	5220-751-4893	38	5220-751-4917	40	5220-751-4941	43	5220-751-4965	45
5220-751-4869	36	5220-751-4894	38,93	5220-751-4918	40,93	5220-751-4942	43,94	5220-751-4966	45,95
5220-751-4870	36,92	5220-751-4895	38,93	5220-751-4919	40,93	5220-751-4943	43,94	5220-751-4967	45,95
5220-751-4871	36,92	5220-751-4896	38	5220-751-4920	40	5220-751-4944	43	5220-751-4968	45
5220-751-4872	36	5220-751-4897	38	5220-751-4921	40	5220-751-4945	43	5220-751-4969	45
5220-751-4873	36	5220-751-4898	38,93	5220-751-4922	40,94	5220-751-4946	43,94	5220-751-4970	45,95
5220-751-4874	36,92	5220-751-4899	38,93	5220-751-4923	40,94	5220-751-4947	43,94	5220-751-4971	45,95
5220-751-4875	36,92	5220-751-4900	38	5220-751-4924	41	5220-751-4948	43	5220-751-4972	45
5220-751-4876	107	5220-751-4901	38	5220-751-4925	41	5220-751-4949	43	5220-751-4973	45
5220-751-4877	107	5220-751-4902	38,93	5220-751-4926	41,94	5220-751-4950	43,95	5220-751-4974	46,96
5220-751-4878	107	5220-751-4903	38,93	5220-751-4927	41,94	5220-751-4951	43,95	5220-751-4975	46,96
5220-751-4879	107	5220-751-4904	39	5220-751-4928	41	5220-751-4952	43	5220-751-4976	46
5220-751-4880	36	5220-751-4905	39	5220-751-4929	41	5220-751-4953	43	5220-751-4977	46
5220-751-4881	36	5220-751-4906	39,93	5220-751-4930	41,94	5220-751-4954	43,95	5220-751-4978	46,96
5220-751-4882	36,92	5220-751-4907	39,93	5220-751-4931	41,94	5220-751-4955	43,95	5220-751-4979	46,96
5220-751-4883	36,92	5220-751-4908	39	5220-751-4932	42	5220-751-4956	44	5220-751-4980	47
5220-751-4884	37	5220-751-4909	39	5220-751-4933	42	5220-751-4957	44	5220-751-4981	47
5220-751-4885	37	5220-751-4910	39,93	5220-751-4934	42,94	5220-751-4958	44,95	5220-751-4982	47,96

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 Mar 61

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-4983	47,96	5220-751-5007	50,97	5220-751-5031	52,97	5220-751-5055	98,107	5220-751-5079	56,99
5220-751-4984	48	5220-751-5008	50	5220-751-5032	53	5220-751-5056	55	5220-751-5080	56
5220-751-4985	48	5220-751-5009	50	5220-751-5033	53	5220-751-5057	55	5220-751-5081	56
5220-751-4986	48,96	5220-751-5010	50,97	5220-751-5034	53,97	5220-751-5058	55,98	5220-751-5082	56,99
5220-751-4987	48,96	5220-751-5011	50,97	5220-751-5035	53,97	5220-751-5059	55,98	5220-751-5083	56,99
5220-751-4988	48	5220-751-5012	50	5220-751-5036	53	5220-751-5060	55	5220-751-5084	56
5220-751-4989	48	5220-751-5013	50	5220-751-5037	53	5220-751-5061	55	5220-751-5085	56
5220-751-4990	48,96	5220-751-5014	50,97	5220-751-5038	54,98	5220-751-5062	55,98	5220-751-5086	56,99
5220-751-4991	48,96	5220-751-5015	50,97	5220-751-5039	54,98	5220-751-5063	55,98	5220-751-5087	56,99
5220-751-4992	48	5220-751-5016	51	5220-751-5040	54	5220-751-5064	55	5220-751-5088	107
5220-751-4993	48	5220-751-5017	51	5220-751-5041	54	5220-751-5065	55	5220-751-5089	107
5220-751-4994	48,96	5220-751-5018	51,97	5220-751-5042	54,98	5220-751-5066	55,98	5220-751-5090	99,107
5220-751-4995	48,96	5220-751-5019	51,97	5220-751-5043	54,98	5220-751-5067	55,98	5220-751-5091	99,107
5220-751-4996	49	5220-751-5020	52	5220-751-5044	54	5220-751-5068	107	5220-751-5092	57
5220-751-4997	49	5220-751-5021	52	5220-751-5045	54	5220-751-5069	107	5220-751-5093	57
5220-751-4998	49,96	5220-751-5022	52,97	5220-751-5046	54,98	5220-751-5070	98,107	5220-751-5094	57,99
5220-751-4999	49,96	5220-751-5023	52,97	5220-751-5047	54,98	5220-751-5071	98,107	5220-751-5095	57,99
5220-751-5000	50	5220-751-5024	52	5220-751-5048	54	5220-751-5072	55	5220-751-5096	57
5220-751-5001	50	5220-751-5025	52	5220-751-5049	54	5220-751-5073	55	5220-751-5097	57
5220-751-5002	50,97	5220-751-5026	52,97	5220-751-5050	54,98	5220-751-5074	56,98	5220-751-5098	57,99
5220-751-5003	50,97	5220-751-5027	52,97	5220-751-5051	54,98	5220-751-5075	56,98	5220-751-5099	57,99
5220-751-5004	50	5220-751-5028	52	5220-751-5052	107	5220-751-5076	56	5220-751-5100	108
5220-751-5005	50	5220-751-5029	52	5220-751-5053	107	5220-751-5077	56	5220-751-5101	108
5220-751-5006	50,97	5220-751-5030	52,97	5220-751-5054	98,107	5220-751-5078	56,99	5220-751-5102	99,108

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 Mar 61

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-5103	99,108	5220-751-5127	59,100	5220-751-5151	61,100	5220-751-5175	63,101	5220-751-5199	65,102
5220-751-5104	57	5220-751-5128	59	5220-751-5152	61	5220-751-5176	63	5220-751-5200	65
5220-751-5105	57	5220-751-5129	59	5220-751-5153	61	5220-751-5177	63	5220-751-5201	65
5220-751-5106	58,99	5220-751-5130	60,100	5220-751-5154	62,101	5220-751-5178	63,101	5220-751-5202	65,102
5220-751-5107	58,99	5220-751-5131	60,100	5220-751-5155	62,101	5220-751-5179	63,101	5220-751-5203	65,102
5220-751-5108	58	5220-751-5132	60	5220-751-5156	62	5220-751-5180	64	5220-751-5204	65
5220-751-5109	58	5220-751-5133	60	5220-751-5157	62	5220-751-5181	64	5220-751-5205	65
5220-751-5110	58,99	5220-751-5134	60,100	5220-751-5158	62,101	5220-751-5182	64,101	5220-751-5206	65,102
5220-751-5111	58,99	5220-751-5135	60,100	5220-751-5159	62,101	5220-751-5183	64,101	5220-751-5207	65,102
5220-751-5112	58	5220-751-5136	60	5220-751-5160	62	5220-751-5184	64	5220-751-5208	65
5220-751-5113	58	5220-751-5137	60	5220-751-5161	62	5220-751-5185	64	5220-751-5209	65
5220-751-5114	58,99	5220-751-5138	60,100	5220-751-5162	62,101	5220-751-5186	64,101	5220-751-5210	66,102
5220-751-5115	58,99	5220-751-5139	60,100	5220-751-5163	62,101	5220-751-5187	64,101	5220-751-5211	66,102
5220-751-5116	58	5220-751-5140	60	5220-751-5164	62	5220-751-5188	64	5220-751-5212	66
5220-751-5117	58	5220-751-5141	60	5220-751-5165	62	5220-751-5189	64	5220-751-5213	66
5220-751-5118	58,100	5220-751-5142	60,100	5220-751-5166	62,101	5220-751-5190	64,101	5220-751-5214	66,102
5220-751-5119	58,100	5220-751-5143	60,100	5220-751-5167	62,101	5220-751-5191	64,101	5220-751-5215	66,102
5220-751-5120	59	5220-751-5144	61	5220-751-5168	63	5220-751-5192	65	5220-751-5216	66
5220-751-5121	59	5220-751-5145	61	5220-751-5169	63	5220-751-5193	65	5220-751-5217	66
5220-751-5122	59,100	5220-751-5146	61,100	5220-751-5170	63,101	5220-751-5194	65,102	5220-751-5218	66,102
5220-751-5123	59,100	5220-751-5147	61,100	5220-751-5171	63,101	5220-751-5195	65,102	5220-751-5219	66,102
5220-751-5124	59	5220-751-5148	61	5220-751-5172	63	5220-751-5196	65	5220-751-5220	66
5220-751-5125	59	5220-751-5149	61	5220-751-5173	63	5220-751-5197	65	5220-751-5221	66
5220-751-5126	59,100	5220-751-5150	61,100	5220-751-5174	63,101	5220-751-5198	65,102	5220-751-5222	66,102

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 1

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-5223	66,102	5220-751-5247	68,103	5220-751-5271	70,104	5220-751-5295	73,104	5220-751-5319	75,105
5220-751-5224	67	5220-751-5248	68	5220-751-5272	70	5220-751-5296	73	5220-751-5320	75
5220-751-5225	67	5220-751-5249	68	5220-751-5273	70	5220-751-5297	73	5220-751-5321	75
5220-751-5226	67,102	5220-751-5250	68,103	5220-751-5274	70,104	5220-751-5298	73,104	5220-751-5322	75,105
5220-751-5227	67,102	5220-751-5251	68,103	5220-751-5275	70,104	5220-751-5299	73,104	5220-751-5323	75,105
5220-751-5228	67	5220-751-5252	69	5220-751-5276	108	5220-751-5300	108	5220-751-5324	109
5220-751-5229	67	5220-751-5253	69	5220-751-5277	108	5220-751-5301	108	5220-751-5325	109
5220-751-5230	67,103	5220-751-5254	69,103	5220-751-5278	104,108	5220-751-5302	104,108	5220-751-5326	105,109
5220-751-5231	67,103	5220-751-5255	69,103	5220-751-5279	104,108	5220-751-5303	104,108	5220-751-5327	105,109
5220-751-5232	67	5220-751-5256	69	5220-751-5280	71	5220-751-5304	74	5220-751-5328	76
5220-751-5233	67	5220-751-5257	69	5220-751-5281	71	5220-751-5305	74	5220-751-5329	76
5220-751-5234	67,103	5220-751-5258	69,103	5220-751-5282	71,104	5220-751-5306	74,104	5220-751-5330	76,105
5220-751-5235	67,103	5220-751-5259	69,103	5220-751-5283	71,104	5220-751-5307	74,104	5220-751-5331	76,105
5220-751-5236	67	5220-751-5260	69	5220-751-5284	71	5220-751-5308	74	5220-751-5332	76
5220-751-5237	67	5220-751-5261	69	5220-751-5285	71	5220-751-5309	74	5220-751-5333	76
5220-751-5238	67,103	5220-751-5262	69,103	5220-751-5286	72,104	5220-751-5310	74,104	5220-751-5334	76,105
5220-751-5239	67,103	5220-751-5263	69,103	5220-751-5287	72,104	5220-751-5311	74,104	5220-751-5335	76,105
5220-751-5240	68	5220-751-5264	108	5220-751-5288	108	5220-751-5312	108	5220-751-5336	109
5220-751-5241	68	5220-751-5265	108	5220-751-5289	108	5220-751-5313	108	5220-751-5337	109
5220-751-5242	68,103	5220-751-5266	103,108	5220-751-5290	104,108	5220-751-5314	105,109	5220-751-5338	105,109
5220-751-5243	68,103	5220-751-5267	103,108	5220-751-5291	104,108	5220-751-5315	105,109	5220-751-5339	105,109
5220-751-5244	68	5220-751-5268	70	5220-751-5292	73	5220-751-5316	75	5220-751-5340	77
5220-751-5245	68	5220-751-5269	70	5220-751-5293	73	5220-751-5317	75	5220-751-5341	77
5220-751-5246	68,103	5220-751-5270	70,104	5220-751-5294	73,104	5220-751-5318	75,105	5220-751-5342	77,105

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 May 61

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-5343	77,105	5220-751-6435	86	5220-751-6459	90	5220-751-6483	95	5220-751-6559	79
5220-751-5344	77	5220-751-6436	87	5220-751-6460	91	5220-751-6484	97	5220-751-6560	79
5220-751-5345	77	5220-751-6437	87	5220-751-6461	91	5220-751-6485	97	5220-751-6561	79
5220-751-5346	77,105	5220-751-6438	87	5220-751-6462	91	5220-751-6486	97	5220-751-6562	80
5220-751-5347	77,105	5220-751-6439	87	5220-751-6463	91	5220-751-6487	97	5220-751-6563	80
5220-751-5348	109	5220-751-6440	88	5220-751-6464	92	5220-751-6488	98	5220-751-6564	80
5220-751-5349	109	5220-751-6441	88	5220-751-6465	92	5220-751-6489	98	5220-751-6565	80
5220-751-5350	105,109	5220-751-6442	88	5220-751-6466	107	5220-751-6490	99	5220-751-6566	80
5220-751-5351	105,109	5220-751-6443	88	5220-751-6467	107	5220-751-6491	99	5220-751-6567	80
5220-751-5352	77	5220-751-6444	88	5220-751-6468	92	5220-751-6492	100	5220-751-6568	16
5220-751-5353	77	5220-751-6445	88	5220-751-6469	92	5220-751-6493	100	5220-751-6569	16
5220-751-5354	78,105	5220-751-6446	89	5220-751-6470	93	5220-751-6494	100	5220-751-6570	16,80
5220-751-5355	78,105	5220-751-6447	89	5220-751-6471	93	5220-751-6495	100	5220-751-6571	16,80
5220-751-5356	78	5220-751-6448	89	5220-751-6472	93	5220-751-6496	101	5220-751-6572	81
5220-751-5357	78	5220-751-6449	89	5220-751-6473	93	5220-751-6497	101	5220-751-6573	81
5220-751-5358	78,105	5220-751-6450	89	5220-751-6474	94	5220-751-6498	102	5220-751-6574	81
5220-751-5359	78,105	5220-751-6451	89	5220-751-6475	94	5220-751-6499	102	5220-751-6575	81
5220-751-6428	85	5220-751-6452	89	5220-751-6476	94	5220-751-6500	102	5220-751-6576	17
5220-751-6429	85	5220-751-6453	89	5220-751-6477	94	5220-751-6501	102	5220-751-6577	17
5220-751-6430	85	5220-751-6454	90	5220-751-6478	95	5220-751-6502	103	5220-751-6578	17,81
5220-751-6431	85	5220-751-6455	90	5220-751-6479	95	5220-751-6503	103	5220-751-6579	17,81
5220-751-6432	86	5220-751-6456	90	5220-751-6480	95	5220-751-6556	79	5220-751-6580	81
5220-751-6433	86	5220-751-6457	90	5220-751-6481	95	5220-751-6557	79	5220-751-6581	81
5220-751-6434	86	5220-751-6458	90	5220-751-6482	95	5220-751-6558	79	5220-751-6582	17

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ORDBA Form 20-1415
(OT) Rev 15 M[illegible]

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-6583	17	5220-751-6607	19	5220-751-6631	87	5220-751-6933	33	5220-751-6957	44
5220-751-6584	17,81	5220-751-6608	19,83	5220-751-6632	87	5220-751-6934	34	5220-751-6958	46
5220-751-6585	17,81	5220-751-6609	19,83	5220-751-6633	87	5220-751-6935	34	5220-751-6959	46
5220-751-6586	82	5220-751-6610	84	5220-751-6634	88	5220-751-6936	34	5220-751-6960	47
5220-751-6587	82	5220-751-6611	84	5220-751-6635	88	5220-751-6937	34	5220-751-6961	47
5220-751-6588	18	5220-751-6612	84	5220-751-6914	21	5220-751-6938	35	5220-751-6962	48
5220-751-6589	18	5220-751-6613	84	5220-751-6915	21	5220-751-6939	35	5220-751-6963	48
5220-751-6590	18,82	5220-751-6614	84	5220-751-6916	21	5220-751-6940	35	5220-751-6964	49
5220-751-6591	18,82	5220-751-6615	84	5220-751-6917	21	5220-751-6941	35	5220-751-6965	49
5220-751-6592	82	5220-751-6616	85	5220-751-6918	21,85	5220-751-6942	36	7517554	23
5220-751-6593	82	5220-751-6617	85	5220-751-6919	21,85	5220-751-6943	36	7517555	23
5220-751-6594	82	5220-751-6618	85	5220-751-6920	21,85	5220-751-6944	37	7517556	23
5220-751-6595	82	5220-751-6619	85	5220-751-6921	21,85	5220-751-6945	37	7517557	23
5220-751-6596	83	5220-751-6620	85	5220-751-6922	107	5220-751-6946	38	7517558	23
5220-751-6597	83	5220-751-6621	85	5220-751-6923	107	5220-751-6947	38	7517559	23
5220-751-6598	19	5220-751-6622	86	5220-751-6924	29	5220-751-6948	39	7517560	23
5220-751-6599	19	5220-751-6623	86	5220-751-6925	29	5220-751-6949	39	7517561	23
5220-751-6600	19,83	5220-751-6624	22	5220-751-6926	30	5220-751-6950	41	7517562	23
5220-751-6601	19,83	5220-751-6625	22	5220-751-6927	30	5220-751-6951	41	7517563	23
5220-751-6602	83	5220-751-6626	22,86	5220-751-6928	32	5220-751-6952	42	7517564	23
5220-751-6603	83	5220-751-6627	22,86	5220-751-6929	32	5220-751-6953	42	7517565	23
5220-751-6604	83	5220-751-6628	86	5220-751-6930	33	5220-751-6954	43	7517566	23
5220-751-6605	83	5220-751-6629	86	5220-751-6931	33	5220-751-6955	43	7517567	23
5220-751-6606	19	5220-751-6630	87	5220-751-6932	33	5220-751-6956	44	7517568	23

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
7517569	23	7517593	27	7517617	29	7517641	31	7517665	33
7517570	24	7517594	27	7517618	29	7517642	31	7517666	34
7517571	24	7517595	27	7517619	29	7517643	31	7517667	34
7517572	24	7517596	27	7517620	29	7517644	31	7517668	34
7517573	24	7517597	27	7517621	29	7517645	31	7517669	34
7517574	24	7517598	27	7517622	30	7517646	31	7517670	35
7517575	24	7517599	27	7517623	30	7517647	31	7517671	35
7517576	24	7517600	28	7517624	30	7517648	31	7517672	35
7517577	24	7517601	28	7517625	30	7517649	31	7517673	35
7517578	25	7517602	28	7517626	30	7517650	32	7517674	35
7517579	25	7517603	28	7517627	30	7517651	32	7517675	35
7517580	25	7517604	28	7517628	30	7517652	32	7517676	35
7517581	25	7517605	28	7517629	30	7517653	32	7517677	35
7517582	25	7517606	28	7517630	30	7517654	32	7517678	35
7517583	25	7517607	28	7517631	30	7517655	32	7517679	35
7517584	25	7517608	28	7517632	30	7517656	32	7517680	36
7517585	25	7517609	28	7517633	30	7517657	32	7517681	36
7517586	26	7517610	29	7517634	31	7517658	33	7517682	36
7517587	26	7517611	29	7517635	31	7517659	33	7517683	36
7517588	26	7517612	29	7517636	31	7517660	33	7517684	36
7517589	26	7517613	29	7517637	31	7517661	33	7517685	36
7517590	27	7517614	29	7517638	31	7517662	33	7517686	37
7517591	27	7517615	29	7517639	31	7517663	33	7517687	37
7517592	27	7517616	29	7517640	31	7517664	33	7517688	37

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
7517689	37	7517713	39	7517737	42	7517761	45	7517785	47
7517690	37	7517714	40	7517738	42	7517762	45	7517786	47
7517691	37	7517715	40	7517739	42	7517763	45	7517787	47
7517692	37	7517716	40	7517740	42	7517764	45	7517788	47
7517693	37	7517717	40	7517741	42	7517765	45	7517789	47
7517694	37	7517718	40	7517742	43	7517766	46	7517790	47
7517695	37	7517719	40	7517743	43	7517767	46	7517791	47
7517696	38	7517720	40	7517744	44	7517768	46	7517792	48
7517697	38	7517721	40	7517745	44	7517769	46	7517793	48
7517698	38	7517722	41	7517746	44	7517770	46	7517794	48
7517699	38	7517723	41	7517747	44	7517771	46	7517795	48
7517700	38	7517724	41	7517748	44	7517772	46	7517796	48
7517701	38	7517725	41	7517749	44	7517773	46	7517797	48
7517702	39	7517726	41	7517750	44	7517774	46	7517798	49
7517703	39	7517727	41	7517751	44	7517775	46	7517799	49
7517704	39	7517728	41	7517752	44	7517776	46	7517800	49
7517705	39	7517729	41	7517753	44	7517777	46	7517801	49
7517706	39	7517730	41	7517754	44	7517778	47	7517802	49
7517707	39	7517731	41	7517755	44	7517779	47	7517803	49
7517708	39	7517732	42	7517756	44	7517780	47	7517804	49
7517709	39	7517733	42	7517757	44	7517781	47	7517805	49
7517710	39	7517734	42	7517758	45	7517782	47	7517806	49
7517711	39	7517735	42	7517759	45	7517783	47	7517807	49
7517712	39	7517736	42	7517760	45	7517784	47	7517808	49

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
7517809	49	7517833	51	7517857	53	7517881	56	7517905	58
7517810	49	7517834	51	7517858	53	7517882	56	7517906	59
7517811	49	7517835	51	7517859	53	7517883	56	7517907	59
7517812	50	7517836	52	7517860	53	7517884	56	7517908	59
7517813	50	7517837	52	7517861	53	7517885	56	7517909	59
7517814	50	7517838	52	7517862	54	7517886	57	7517910	59
7517815	50	7517839	52	7517863	54	7517887	57	7517911	59
7517816	50	7517840	52	7517864	54	7517888	57	7517912	59
7517817	50	7517841	52	7517865	54	7517889	57	7517913	59
7517818	51	7517842	52	7517866	54	7517890	57	7517914	59
7517819	51	7517843	52	7517867	54	7517891	57	7517915	59
7517820	51	7517844	52	7517868	54	7517892	57	7517916	59
7517821	51	7517845	52	7517869	54	7517893	57	7517917	59
7517822	51	7517846	53	7517870	55	7517894	57	7517918	60
7517823	51	7517847	53	7517871	55	7517895	57	7517919	60
7517824	51	7517848	53	7517872	55	7517896	57	7517920	60
7517825	51	7517849	53	7517873	55	7517897	57	7517921	60
7517826	51	7517850	53	7517874	55	7517898	58	7517922	60
7517827	51	7517851	53	7517875	55	7517899	58	7517923	60
7517828	51	7517852	53	7517876	55	7517900	58	7517924	60
7517829	51	7517853	53	7517877	55	7517901	58	7517925	60
7517830	51	7517854	53	7517878	56	7517902	58	7517926	61
7517831	51	7517855	53	7517879	56	7517903	58	7517927	61
7517832	51	7517856	53	7517880	56	7517904	58	7517928	61

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
7517929	61	7517953	63	7517977	66	7518001	69	7518025	71
7517930	61	7517954	63	7517978	67	7518002	69	7518026	71
7517931	61	7517955	63	7517979	67	7518003	69	7518027	71
7517932	61	7517956	64	7517980	67	7518004	70	7518028	71
7517933	61	7517957	64	7517981	67	7518005	70	7518029	71
7517934	61	7517958	64	7517982	67	7518006	70	7518030	71
7517935	61	7517959	64	7517983	67	7518007	70	7518031	71
7517936	61	7517960	64	7517984	68	7518008	70	7518032	71
7517937	61	7517961	64	7517985	68	7518009	70	7518033	71
7517938	62	7517962	64	7517986	68	7518010	70	7518034	72
7517939	62	7517963	64	7517987	68	7518011	70	7518035	72
7517940	62	7517964	64	7517988	68	7518012	70	7518036	72
7517941	62	7517965	64	7517989	68	7518013	70	7518037	72
7517942	62	7517966	65	7517990	68	7518014	70	7518038	72
7517943	62	7517967	65	7517991	68	7518015	70	7518039	72
7517944	62	7517968	65	7517992	68	7518016	70	7518040	72
7517945	62	7517969	65	7517993	68	7518017	70	7518041	72
7517946	63	7517970	66	7517994	69	7518018	71	7518042	72
7517947	63	7517971	66	7517995	69	7518019	71	7518043	72
7517948	63	7517972	66	7517996	69	7518020	71	7518044	72
7517949	63	7517973	66	7517997	69	7518021	71	7518045	72
7517950	63	7517974	66	7517998	69	7518022	71	7518046	72
7517951	63	7517975	66	7517999	69	7518023	71	7518047	72
7517952	63	7517976	66	7518000	69	7518024	71	7518048	72

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
7518049	72	7518073	74	7518097	76	7518121	77		
7518050	72	7518074	74	7518098	76				
7518051	72	7518075	74	7518099	76				
7518052	72	7518076	74	7518100	76				
7518053	72	7518077	74	7518101	76				
7518054	73	7518078	74	7518102	76				
7518055	73	7518079	74	7518103	76				
7518056	73	7518080	74	7518104	76				
7518057	73	7518081	74	7518105	76				
7518058	73	7518082	75	7518106	76				
7518059	73	7518083	75	7518107	76				
7518060	73	7518084	75	7518108	76				
7518061	73	7518085	75	7518109	76				
7518062	73	7518086	75	7518110	77				
7518063	73	7518087	75	7518111	77				
7518064	73	7518088	75	7518112	77				
7518065	73	7518089	75	7518113	77				
7518066	73	7518090	75	7518114	77				
7518067	73	7518091	75	7518115	77				
7518068	74	7518092	75	7518116	77				
7518069	74	7518093	75	7518117	77				
7518070	74	7518094	75	7518118	77				
7518071	74	7518095	75	7518119	77				
7518072	74	7518096	76	7518120	77				

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Notice: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

Copies of this standard for military use may be obtained as indicated in the foreword to the *DOD Index of Military Specifications* and Standards.

Copies of this standard may be obtained from other than official use by individuals, firms, and contractors from the Superientendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

Both the title and the identifying symbol number should be stipulated when requesting copies of military standards.

Custodians:
Army - MU
Navy - WEPS
Air Force - MAA

Preparing Activity
Army - MU

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research & Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.