MIL-STD-35-105(MI)
2 MARCH 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

THERMOCOUPLES

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
WASHINGTON, D.C. 20315

Automated Engineering
Document Preparation System,
Thermocouples

MIL-STD-35-105(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is approved for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-35-105(MI)

FOREWORD

1. The purpose of MIL-STD-35-105(MI)is to facilitate the preparation of Military Specification, Exceptions for Thermocouples.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE
SECTION 1	INTRODUCTION	1-1
1.1	Scope	1-1
1.2	Purpose	1-1
1.3	Format	1-1
1.4	Military Specification, Exception Title Index	1-2
1.4.1	Title	1-2
1.4.2	Index	1-3
SECTION 2	APPLICABLE DOCUMENTS	2-1
SECTION 3	DEFINITIONS	3-1
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1
5.1	Introduction	5-1
5.2	Specification Requirement Sheet (SRS)	5-1
5.3	Specification Requirements	5-1
5.3.1	Mandatory Specification Requirements	5-1
5.4	Code 1006 Requirements and Test Methods	5-1
5.5	Approved Item Name Code	5-2
5.6	Dimensions and Figures	5-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.7	Applicable Documents	5-2	
5.8	Tabulation	5-3	
5.9	Assembly Resistance	5-4	5-29
5.10	Drawing Requirements	5-4	5-29
5.11	Electromotive Force Output	5-4	5-29
5.12	Measuring Junction	5-5	5-29
5.13	Temperature Rating	5-5	5-29
5.14	Weight, Maximum	5-6	5-30
5.15	Bending	5-6	5-30
5.16	Calibration	5-7	5-31
5.17	Fungus	5-8	5-32
5.18	Humidity	5-9	5-33
5.19	Insulation Resistance	5-9	5-34
5.20	Moisture Resistance	5-11	5-35
5.21	Radiographic	5-12	5-36
5.22	Salt Spray	5-13	5-38
5.23	Seal	5-14	5-38
5.24	Shock, High Impact	5-16	5-41
5.25	Shock, Specified Pulse	5-16	5-42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.26	Solderability	5-17	5-43
5.27	Spring Life	5-18	5-45
5.28	Spring Tension	5-19	5-46
5.29	Temperature, High	5-20	5-47
5.30	Temperature, Low	5-21	5-48
5.31	Thermal Response	5-22	5-50
5.32	Thermal Shock	5-24	5-51
5.33	Vibration, High Frequency	5-24	5-52
5.34	Vibration, Low Frequency	5-25	5-53
5.35	Vibration, Random	5-27	5-54
SECTION 6	USE OF AEDPS	6-1	
SECTION 7	FIGURES	7-1	
SECTION 8	TABLES	8-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT
PREPARATION SYSTEM (AEDPS)

THERMOCOUPLES

SECTION 1

INTRODUCTION

1.1 Scope

This dash-numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Thermocouples.

1.2 Purpose

The purpose of this dash-numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Thermocouple Military Specification Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash-numbered part of MIL-STD-35. Specification Requirements which are standard for all generic names have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash-numbered part. The following list contains subjects from MIL-STD-35 which are pertinent to every dash-number part unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Inspections
Single and Multi-item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables

1.4 Military Specification, Exception Title Index

1.4.1 Title

The title of a generated MSE must be selected from one of the titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable title is not found in the Military Specification Exception Title Index, a request should be forwarded to USAMICOM, ATTN: AMSMI-RCS, along with the desired title, and the related document. A code will be assigned and the code, title, and related document will be made a part of the Military Specification Exceptions Title Index. The requester will be notified of the code assigned.

One of the six-digit characteristic value codes, listed in the MSE TITLE CODE column of the Military Specification Exception Title Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the index. Each MSE title listed in the index is compatible with the document(s) listed with that title in the RELATED DOCUMENT column. The list may or may not be a complete listing.

The information contained in the RELATED DOCUMENT COVERAGE column is intended for the requester's reference; when more than one document is listed for a title, this information will be found useful in determining which of the documents is most suitable for use as the applicable General Specification.

The MSE title uses the basic federal item name listed in Cataloging Handbook H6. Titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. To allow the designer flexibility, the title is generally not as restrictive as the basic specification to which the exception is taken. The reverse AEDPS Title comprises the words that will appear in the Scope paragraph (1.1) of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. The title written on the MSE or in DODISS or FIIG will not be entered in paragraph 2.1.

1.4.2 Index

The Military Specification Exception Title Index is as follows:

RELATED DOCUMENT	RELATED DOCUMENT COVERAGE	MSE TITLE	MSE TITLE CODE
MIL-T-5494 MIL-T-24388 AN5540	Gasket-Type Thermocouples	Thermocouple, Contact	330001
MIL-T-5494 MIL-T-24388 AN5540	Sensing Element-Type Thermocouples	Thermocouple, Heating Element	330002
MIL-T-81272 MS90324	Bayonet-Type Thermocouples	Thermocouple, Immersion	330003

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-T-5494	Thermocouples, Contact, Aircraft Engine, Spark Plug Gasket-Type
MIL-T-81272	Thermocouple, Engine, Cylinder, Bayonet-Type

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-735	Test Methods and Test Equipment For Thermometers Used in Machinery and Piping Systems
MIL-STD-810	Environmental Test Methods

OTHER PUBLICATIONS

ASTM E380	Metric Practice Guide
ANSI C96.1	Temperature Measurement Thermocouples

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Thermocouples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Thermocouples.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Thermocouples consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Specification Requirement Sheet (SRS) requirements described in MIL-STD-35 are applicable to Thermocouples.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Thermocouples.

Refer to ASTM E380 for guidance in using the Internation System of Units (SI).

5.3.1 Mandatory Specification Requirements

The mandatory specification requirements of MIL-STD-35 are applicable and shall be entered on the SRS of each request for a MSE. If one or more of these mandatory characteristics are omitted from a request, one or more important details will not be included in the MSE.

5.4 Code 1006 Requirements and Test Methods

Instructions for utilizing Codes 1006 and 1006 except requirements and test methods are explained in MIL-STD-35.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for a Thermocouple is selected from the following list:

APPROVED ITEM NAME	ITEM NAME CODE
Thermocouple, Contact	07118
Thermocouple, Heating Element	00365
Thermocouple, Immersion	07117
Unapproved Name	77777

Only the Item Name Code number is entered on the SRS with Code 1007.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Thermocouples are contained in Section 7. It is mandatory to enter on the SRS Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and the applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirement. A document designation, with a code from Table B, is entered on the SRS only once.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS	CODES
MIL-T-5494	1634 (Bending)
MIL-T-81272	1724 (Spring Life)
MIL-STD-202	4853 (Humidity) 1511 (Insulation Resistance) 1397 (Moisture Resistance) 4843 (Radiographic) 4771 (Salt Spray) 4732 (Seal) 1482 (Shock, High Impact) 1500 (Shock, Specified Pulse) 4683 (Solderability) 4714 (Thermal Shock) 1447 (Vibration, High Frequency) 1467 (Vibration, Low Frequency) 1427 (Vibration, Random)
MIL-STD-735	1654 (Calibration) 1844 (Thermal Response)
MIL-STD-810	4755 (Fungus) 6218 (Temperature, High) 6232 (Temperature, Low)
ANSI C96.1	1684 (Calibration)
Document to which exception is taken	1006

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Characteristics in this dash-numbered part that are candidates for tabulation are contained in the following list. The table headings are shown as they will print in the MSE. Only characteristic codes from this list shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

When different units of measure are shown for a specified parameter, only one may be tabulated. For example, where there are several codes which may be used to specify weight each of which specifies a different unit of measure, only one code may be tabulated. However, equivalent U.S. or SI units of measure may be used for a specified parameter.

TABULATION CANDIDATES FOR THERMOCOUPLES

TOP LINE	SECOND LINE	BOTTOM LINE	CODE
ASSEMBLY	RESISTANCE	OHMS	1562
ASSEMBLY	RES PLUS	TOL PCT	1564
ASSEMBLY	RES MINUS	TOL PCT	1566
MEASURING	TEMP	DEGREES C	1568
MAXIMUM	WEIGHT	OUNCES	1610
MAXIMUM	WEIGHT	GRAMS	1612
MAXIMUM	WEIGHT	POUNDS	1614
MAXIMUM	WEIGHT	KILOGRAMS	1616

5.9 Assembly Resistance

Code 1562 and a value, entered on the SRS, will specify the resistance of the thermocouple assembly in ohms.

Codes 1564 and 1566 with values, entered on the SRS, will specify plus and minus resistance tolerances in percent, respectively.

Code 1568 and a value, entered on the SRS, will specify the temperature for measuring resistance of the assembly in degrees Celsius.

5.10 Drawing Requirements

Code 1570 and an "X", entered on the SRS, will specify that the drawing requirements of MIL-T-24388 do not apply.

5.11 Electromotive Force Output

The electromotive force that the thermocouple shall generate at a specified temperature(s), may be specified by entering on the SRS applicable codes from the ELECTROMOTIVE FORCE OUTPUT TABLE (Section 8, Table I) with the required values. Code 1580 may be used to specify Electromotive Force tolerance. Information concerning Code 1580 and codes from the table is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1580 and a value, entered on the SRS, will specify electromotive force tolerance in plus or minus millivolts.

Code 2100 and a value, entered on the SRS, will specify nominal electromotive force in millivolts.

Code 2101 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 2102 and a value, entered on the SRS, will specify the reference junction temperature in degrees Celsius.

The remaining lines of the table may be entered on the SRS in a similar manner to specify additional electromotive force output.

5.12 Measuring Junction

There are three codes to specify the measuring junction. None of the codes are mandatory. Information concerning them is as follows:

Code 1590 and an "X", entered on the SRS, will specify the measuring junction of the thermocouple shall be exposed.

Code 1592 and an "X", entered on the SRS, will specify the measuring junction of the thermocouple shall be grounded.

Code 1594 and an "X", entered on the SRS, will specify the measuring junction of the thermocouple shall be ungrounded.

5.13 Temperature Rating

Temperature ratings are specified by the use of the TEMPERATURE RATING TABLE (Section 8, Table II). Codes selected from the table and a value, entered on the SRS, will cause the computer to generate the table and enter values in degrees Celsius in respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE. Temperature less than zero (0) degrees Celsius shall be entered with a "-" sign, not the work minus. Only numbers are entered for positive temperatures; no "+" sign is required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.14 Weight, Maximum

There are four codes to specify maximum weight. None of the codes are mandatory. Information concerning them is as follows:

Code 1610 and a value, entered on the SRS, will specify the maximum weight in ounces.

Code 1612 and a value, entered on the SRS, will specify the maximum weight in grams.

Code 1614 and a value, entered on the SRS, will specify the maximum weight in pounds.

Code 1616 and a value, entered on the SRS, will specify the maximum weight in kilograms.

5.15 Bending

Code 1630 is the 1006 test code (5.4).

Code 1632 is the 1006 except test code (5.4).

To detail a bending test, Code 1634 is mandatory. Code 1636 is optional. Information concerning these codes is as follows:

Code 1634 and an "X", entered on the SRS, will specify to test in accordance with MIL-T-5494.

Code 1636 and a value, entered on the SRS, will specify the number of bends to be performed.

Code 1640 is the 1006 requirement code (5.4).

Code 1642 is the 1006 except requirement code (5.4).

To detail bending requirements, it is mandatory to use Code 1644. Other code is optional.

Code 1644 and an "X", entered on the SRS, will specify no evidence of physical damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1646 and a value, entered on the SRS, will specify maximum resistance change in ohms.

5.16 Calibration

Code 1650 is the 1006 test code (5.4).

Code 1652 is the 1006 except test code (5.4).

To detail a calibration test, codes 1654 and 1656 are mandatory. The other codes are optional. Information concerning them is as follows:

Code 1654 and an "X", entered on the SRS, will specify to test in accordance with MIL-STD-735.

Code 1656 and a value, entered on the SRS, will specify the first temperature for calibration in degrees Celsius.

Code 1658 and a value, entered on the SRS, will specify the second temperature for calibration in degrees Celsius.

Code 1660 and a value, entered on the SRS, will specify the third temperature for calibration in degrees Celisus.

Code 1662 and a value, entered on the SRS, will specify the fourth temperature for calibration in degrees Celsius.

Code 1664 and a value, entered on the SRS, will specify the fifth temperature for calibration in degrees Celsius.

Code 1666 and a value, entered on the SRS, will specify the sixth temperature for calibration in degrees Celsius.

Code 1668 and a value, entered on the SRS, will specify the seventh temperature for calibration in degrees Celsius.

Code 1670 and a value, entered on the SRS, will specify the eighth temperature for calibration in degrees Celsius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1672 and a value, entered on the SRS, will specify temperature tolerance in plus or minus degrees Celsius.

Code 1680 is the 1006 requirement code (5.4).

Code 1682 is the 1006 except requirement code (5.4).

Code 1684 and an "X", entered on the SRS, will specify standard limits of error in accordance with ANSI C96.1.

5.17 Fungus

Code 4753 is the 1006 test code (5.4).

Code 4754 is the 1006 except test code (5.4).

Code 4755 and an "X", entered on the SRS, will specify to test in accordance with Method 508 of MIL-STD-810.

Code 4756 and a value, entered on the SRS, will specify the duration in days of test (if other than 28 days).

Code 4759 is the 1006 requirement code (5.4).

Code 4760 is the 1006 except requirement code (5.4).

Code 4761 and an "X", entered on the SRS, will specify that all materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. The manufacturer shall verify by certification that all external materials are fungus resistant or shall perform the fungus test as specified. When the fungus test is performed, there shall be no evidence of fungus growth on the external surfaces.

Code 4762 and an "X", entered on the SRS, will specify that all materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. When the fungus test specified is performed, there shall be no evidence of fungus growth on the external surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.18 Humidity

Code 4787 is the 1006 test code (5.4).

Code 4788 is the 1006 except test code (5.4).

To detail a humidity test, Codes 4853 and 4890 are mandatory. Other codes are optional. Information concerning them is as follows:

Code 4853 and an "X", entered on the SRS, will specify to test in accordance with Method 103 of MIL-STD-202.

Code 4890 and a test condition letter, entered on the SRS, will specify the test letter entered shall apply to specify test duration.

Code 4797 is the 1006 requirement code (5.4).

Code 4798 is the 1006 except requirement code (5.4).

To detail humidity requirements, it is mandatory to use Code 4799. Other codes are optional.

Code 4799 and an "X", entered on the SRS, will specify there shall be no evidence of corrosion or physical damage.

Code 4795 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 4805 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

5.19 Insulation Resistance

Code 1370 is the 1006 test code (5.4).

Code 1371 is the 1006 except test code (5.4).

To detail an insulation resistance test, it is mandatory that Codes 1511 and 1378 or 1373 be entered on the SRS. Other codes are optional. Information concerning these codes is as follows:

Code 1511 and an "X", entered on the SRS, will specify the insulation resistance test method shall be as specified in Method 302 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1378 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 302 of MIL-STD-202.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc shall be the value entered.

Code 1376 and a value, entered on the SRS, will specify the electrification time in seconds if other than two minutes.

Code 1498 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between terminations tied together and case.

Code 1372 and a value, entered on the SRS, will specify the test temperature in degrees Celsius if other than as specified in MIL-STD-202 standard test conditions, or the first test temperature if the insulation resistance test is to be performed at two temperatures.

Code 1381 and a value, entered on the SRS, will specify the second test temperature in degrees Celsius when the insulation resistance test is to be performed at two temperatures.

Code 1383 and a value, entered on the SRS, will specify plus or minus test temperature tolerance in degrees Celsius.

Code 1379 is the 1006 requirement code (5.4).

Code 1380 is the 1006 except requirement code (5.4).

To detail requirements, Code 1407 is mandatory. Other codes are optional.

Code 1407 and an "X", entered on the SRS, will specify that there shall be no evidence of physical damage.

Code 1384 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the first test temperature specified with Code 1372.

Code 1387 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the second test temperature specified with Code 1381.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1386 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when no temperature is specified with Codes 1372 or 1381.

5.20 Moisture Resistance

Code 1390 is the 1006 test code (5.4).

Code 1391 is the 1006 except test code (5.4).

To detail a moisture resistance test, Code 1397 is mandatory. Other codes are optional. These codes and information concerning them is as follows:

Code 1397 and an "X", entered on the SRS, will specify to test in accordance with Method 106 of MIL-STD-202.

Code 4985 and an "X", entered on the SRS, will specify Step 7a of Method 106 of MIL-STD-202 is not applicable.

Code 4986 and an "X", entered on the SRS, will specify Step 7b of Method 106 of MIL-STD-202 is not applicable.

Code 1399 is the 1006 requirement code (5.4).

Code 1400 is the 1006 except requirement code (5.4).

To detail requirements, Code 1396 is mandatory. Other codes are optional. Information concerning them is as follows:

Code 1396 and an "X", entered on the SRS, will specify no evidence of corrosion or physical damage.

Code 1432 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 1406 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.21 Radiographic

Code 6281 is the 1006 test code (5.4).

Code 6282 is the 1006 except test code (5.4).

Code 4843 and an "X", entered on the SRS, will specify to test in accordance with Method 209 of MIL-STD-202. This code specifies a complete test using a 48 awg penetrameter, 36-inch source-object distance, marking of radiographed units by any suitable method, and radiograph in one longitudinal plane, except if lot rejected, the failed lot sample and the next three lots shall be examined in two planes, 90 degrees apart. This code is mandatory to detail radiographic testing. Specific changes, such as source-object distance and penetrameter size, or further details may be specified by entering the following codes with approximate values:

Code 6286 and a value, entered on the SRS, will specify the source-object distance in metres.

Code 6285 and a value, entered on the SRS, will specify the source-object distance in inches. Use only if a source-object distance other than 36 inches is required.

Code 6287 and a description of required viewing equipment, entered on the SRS, will specify the viewing equipment to be used.

Code 6288 and a value, entered on the SRS, will specify the X-power magnification at which the image may be viewed.

Code 6289 and the words to complete the following sentence, "Defects to be sought shall be", entered on the SRS, will specify reject criteria in addition to the reject criterion with Codes 4857 or 4858 below.

Code 6284 and an "X", entered on the SRS, will specify nonfilm techniques may be used.

Code 6283 and a value, entered on the SRS, will specify the penetrameter awg wire size when size other than 48 awg is required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6290 is the 1006 requirement code (5.4).

Code 6291 is the 1006 except requirement code (5.4).

Code 4857 or 4858 and an "X", entered on the SRS, will specify negatives or nonfilm technique records shall be delivered (Code 4857) or only be available for examination upon request (Code 4858). These codes also specify that examination of the radiographs shall show: no inhomogeneities, no foreign particles within the enclosure, all parts correctly aligned with each other, no defective workmanship details, or any other defects specified herein.

5.22 Salt Spray

Code 4769 is the 1006 test code (5.4).

Code 4770 is the 1006 except test code (5.4).

To detail a salt spray test, Codes 4771 and 4772 are mandatory.

Code 4771 and an "X", entered on the SRS, will specify to test in accordance with Method 101 of MIL-STD-202.

Code 4772 and a test condition letter, entered on the SRS, will specify the test condition letter entered shall apply.

Code 4765 and an "X", entered on the SRS, will specify that mounting shall be by normal mounting means.

Code 4766 and an "X", entered on the SRS, will specify that any suitable means of mounting may be used.

Code 4877 is the 1006 requirement code (5.4).

Code 4878 is the 1006 except requirement code (5.4).

Code 4782 and an "X", entered on the SRS, will specify no evidence of corrosion, physical damage or degradation of performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.23 Seal

Code 4733 is the 1006 test code (5.4).

Code 4734 is the 1006 except test code (5.4).

To detail a seal test, Codes 4732 and 4737 are mandatory. Other codes are optional unless test condition letter C is used. If test condition letter C is used, Codes 4740 and 4741 are mandatory.

Code 4732 and an "X", entered on the SRS, will specify to test in accordance with Method 112 of MIL-STD-202.

Code 4737 and a test condition letter, entered on the SRS, will specify the test condition letter entered shall apply.

If test condition letter A or B is specified, Codes 4738 and/or 4739 may be used if exception to the parameters in the specified test condition letter are required. These codes and information concerning them are as follows:

Code 4738 and a media description, entered on the SRS, will specify the media to be used for the immersion bath.

Code 4739 and a value, entered on the SRS, will specify the minimum bath temperature in degrees Celsius.

If test condition letter C is specified, Codes 4740 and 4741 are mandatory. Information concerning them is as follows:

Code 4740 and a number, entered on the SRS, will specify the applicable procedure as specified in test condition letter C, Method 112 of MIL-STD-202.

Code 4741 and a value, entered on the SRS, will specify the leak rate sensitivity setting in atm cc/sec for the applicable leak detector in accordance with the procedure specified.

Code 4742 or 4736 or both and a value(s), entered on the SRS, will specify the backfill pressure in procedure I or II of test condition letter C in pounds per square inch or kilopascals, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4749 and a number, entered on the SRS, will specify the number of pressure cycles applicable to procedure II of test condition letter C when pressure cycling is required.

Code 4750 and a letter, entered on the SRS, will specify the gross leak test condition letter applicable after completion of procedure III or IV, test condition C, Method 112 of MIL-STD-202.

Code 4751 and a value, entered on the SRS, will specify the pressure in torr to which the chamber is to be evacuated for procedure IV of test condition C, Method 112 of MIL-STD-202.

Code 4735 and a value, entered on the SRS, will specify the pressure in kilopascals to which the chamber is to be evacuated for procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 4752 and a value, entered on the SRS, will specify the duration in minutes of reduced pressure for procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 4743 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for test condition letters D or E, Method 112 of MIL-STD-202.

Code 4744 is the 1006 requirement code (5.4).

Code 4745 is the 1006 except requirement code (5.4).

Code 4746 and an "X", entered on the SRS, will specify the leak rate measured shall be not greater than the leak rate sensitivity specified. This code is intended for use when test condition letter C is specified, but may be used with any test condition letter, Method 112 of MIL-STD-202.

Code 4748 and an "X", entered on the SRS, will specify there shall be no bubbles indicative of leakage. This code is applicable to all test condition letters.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.24 Shock, High Impact

Code 1485 is the 1006 test code (5.4).

Code 1486 is the 1006 except test code (5.4).

To detail a high impact shock test, Codes 1482 and 1488 or 1478 are mandatory. Codes 1488 and 1478 shall be not used together. Information concerning them is as follows:

Code 1482 and an "X", entered on the SRS, will specify to test in accordance with Method 207 of MIL-STD-202.

Code 1488 and a figure number, entered on the SRS, will specify the applicable mounting fixture for the high impact shock test. Only the number is entered on the SRS. The number is selected from 207-4A, 207-4B, 207-5, or 207-6 as shown in Method 207 of MIL-STD-202.

Code 1478 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for the high impact shock test.

Code 1493 is the 1006 requirement code (5.4).

Code 1494 is the 1006 except requirement code (5.4).

Code 1495 and an "X", entered on the SRS, will specify no evidence of physical damage.

5.25 Shock, Specified Pulse

Code 1501 is the 1006 test code (5.4).

Code 1502 is the 1006 except test code (5.4).

To detail a specified pulse shock test, it is mandatory to use Codes 1500 and 1504. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1500 and an "X", entered on the SRS, will specify to test in accordance with Method 213 of MIL-STD-202.

Code 1504 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 213 of MIL-STD-202.

There are two codes to specify mounting. Only one of these codes may be used. Information concerning them is as follows:

Code 4686 and an "X", entered on the SRS, will specify mounting shall be by any suitable method.

Code 4685 and an "X", entered on the SRS, will specify mounting shall be by normal mounting means.

Code 1507 is the 1006 requirement code (5.4).

Code 1508 is the 1006 except requirement code (5.4).

Code 1509 and an "X", entered on the SRS, will specify no evidence of physical damage.

5.26 Solderability

Code 4661 is the 1006 test code (5.4).

Code 4662 is the 1006 except test code (5.4).

To detail a solderability test, it is mandatory to use Code 4683. Other codes are optional.

Code 4683 and an "X", entered on the SRS, will specify to test in accordance with Method 208 of MIL-STD-202.

Code 4666 and a value (quantity), entered on the SRS, will specify the quantity of terminations on each device to be tested. This code is only used when all terminations are not tested.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 4667 and a value, entered on the SRS, will specify the depth in inches of immersion in flux and solder. This code and value are entered when the required depth of immersion is to be other than within 0.05 inch of the body.

Code 4663 and a value, entered on the SRS, will specify the depth in millimetres of immersion in flux and solder.

Code 4664 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of inches from the body of the device.

Code 4665 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of millimetres from the body of the device.

Code 4673 is the 1006 requirement code (5.4).

Code 4674 is the 1006 except requirement code (5.4).

To detail solderability requirements, it is mandatory to use Code 4675. Other code is optional

Code 4675 and and "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 4672 and an "X", entered on the SRS, will specify the device shall meet the evaluation criteria specified in Method 208 of MIL-STD-202.

5.27 Spring Life

Code 1720 is the 1006 test code (5.4).

Code 1722 is the 1006 except test code (5.4).

To detail a spring life test, Code 1724 is mandatory. Other codes are optional. Information concerning them is as follows:

Code 1724 and an "X", entered on the SRS, will specify to test in accordance with MIL-T-81272.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1726 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 1728 and a value, entered on the SRS, will specify the test duration in hours.

Code 1738 is the 1006 requirement code (5.4).

Code 1740 is the 1006 except requirement code (5.4).

To detail spring life requirements, it is mandatory to use Code 1742. Other codes are optional.

Code 1742 and an "X", entered on the SRS, will specify no evidence of physical damage.

Code 1744 and a value, entered on the SRS, will specify the minimum spring tension in pounds.

Code 1746 and a value, entered on the SRS, will specify the minimum spring tension in kilograms.

5.28 Spring Tension

Code 1780 is the 1006 test code (5.4).

Code 1782 is the 1006 except test code (5.4).

To detail a spring tension test, Code 1784 or 1786 is mandatory. Other codes are optional. Information concerning them is as follows:

Code 1784 and a value, entered on the SRS, will specify the distance the spring is compressed in inches.

Code 1786 and a value, entered on the SRS, will specify the distance the spring is compressed in millimetres.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1788 and a value, entered on the SRS, will specify the number of compression cycles.

Code 1790 and an "X", entered on the SRS, will specify any suitable test fixture may be used.

Code 1800 is the 1006 requirement code (5.4).

Code 1802 is the 1006 except requirement code (5.4).

To detail spring tension requirements, it is mandatory to use Code 1803. Other codes are optional.

Code 1803 and an "X", entered on the SRS, will specify no evidence of physical damage.

Code 1804 and a value, entered on the SRS, will specify the minimum force exerted in pounds.

Code 1806 and a value, entered on the SRS, will specify the minimum force exerted in kilograms.

5.29 Temperature, High

Code 6216 is the 1006 test code (5.4).

Code 6217 is the 1006 except test code (5.4).

To detail a high temperature test, it is mandatory to use codes 6218 and 6219. Other codes are optional.

Code 6218 and an "X", entered on the SRS, will specify to test in accordance with Method 501 of MIL-STD-810.

Code 6219 and a Roman numeral, entered on the SRS, will specify the applicable procedure number.

Code 6220 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperature other than 71 degrees Celsius is required.

Code 6221 and a value, entered on the SRS, will specify the duration in hours of the high temperature storage. This code is only used when a storage other than 48 hours is required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6222 and a value, entered on the SRS, will specify the highest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6224 and a value, entered on the SRS, will specify the operating time in minutes at the temperature specified with Code 6222. Do not use Code 6224 with Code 6225.

Code 6225 and a value, entered on the SRS, will specify the operating time in hours at the temperature specified with Code 6222. Do not use Code 6225 with Code 6224.

Code 6227 is the 1006 requirement code (5.4).

Code 6228 is the 1006 except requirement code (5.4).

To detail high temperature requirements, it is mandatory to use Code 6229. Code 1816 is optional.

Code 6229 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage after exposure to high temperature.

Code 1816 and an "X", entered on the SRS, will specify the maximum resistance change in ohms.

5.30 Temperature, Low

Code 6230 is the 1006 test code (5.4).

Code 6231 is the 1006 except test code (5.4).

To detail a low temperature test, it is mandatory to use Code 6232. Other codes are optional.

Code 6232 and an "X", entered on the SRS, will specify to test in accordance with Method 501 of MIL-STD-810.

Code 6234 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperature other than -57 degrees Celsius is required.

Code 6235 and a value, entered on the SRS, will specify the duration in hours of the low temperature storage. This code is only used when a storage other than 24 hours is required.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 6236 and a value, entered on the SRS, will specify the lowest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6237 and a value, entered on the SRS, will specify the chamber air velocity in feet per second where the heat transfer rate from the surface of the test item is important.

Code 6238 and a value, entered on the SRS, will specify the chamber air velocity in metres per second where the heat transfer rate from the surface of the test item is important.

Code 6315 or 6316 and a value, entered on the SRS, will specify the operation time at low temprature in minutes and hours, respectively. Do not use these codes together.

Code 6317 is the 1006 requirement code (5.4).

Code 6318 is the 1006 except requirement code (5.4).

To detail low temperature requirements, it is mandatory to use Code 6319. Code 1826 is optional.

Code 6319 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 1826 and a value, entered on the SRS, will specify the maximum resistance change in ohms.

5.31 Thermal Response

Code 1840 is the 1006 test code (5.4).

Code 1842 is the 1006 except test code (5.4).

To detail a thermal response test, Codes 1844, 1846, 1848 and 1850 are mandatory. Other codes are optional. Information concerning them is as follows:

Code 1844 and an "X", entered on the SRS, will specify to test in accordance with the thermal response type A test of MIL-STD-735.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1846 and a value, entered on the SRS, will specify the initial test temperature in degrees Celsius.

Code 1848 and a value, entered on the SRS, will specify the temperature at which timing begins in degrees Celsius.

Code 1850 and a value, entered on the SRS, will specify the temperature at which timing ends in degrees Celsius.

Code 1852 and a value, entered on the SRS, will specify the plus or minus temperature tolerance in degrees Celsius.

Code 1853 and a value, entered on the SRS, will specify the duration of exposure in the test media in seconds.

Code 1854 and an "X", entered on the SRS, will specify still air as the exposure media.

Code 1856 and a value, entered on the SRS, will specify air as the exposure media and air velocity in feet per second.

Code 1858 and a value, entered on the SRS, will specify air as the exposure media and the air velocity in metres per second.

Code 1860 and an "X", entered on the SRS, will specify still water as the exposure media.

Code 1862 and an "X", entered on the SRS, will specify 50 percent glycol/50 percent water as the exposure media.

Code 1864 and an "X", entered on the SRS, will specify liquefied salt as the exposure media.

Code 1866 and an "X", entered on the SRS, will specify oil as the exposure media.

Code 1868 and a value, entered on the SRS, will specify the exposure media temperature in degrees Celsius.

Code 1870 and a value, entered on the SRS, will specify a bare bulb well shall be used for the test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1880 is the 1006 requirement code (5.4).

Code 1882 is the 1006 except requirement code (5.4).

Code 1884 and a value, entered on the SRS, will specify maximum thermal response time in seconds.

5.32 Thermal Shock

Code 4712 is the 1006 test code (5.4).

Code 4713 is the 1006 except test code (5.4).

To detail a thermal shock test, it is mandatory to use Codes 4714 and 4715.

Code 4714 and an "X", entered on the SRS, will specify to test in accordance with Method 107 of MIL-STD-202.

Code 4715 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4720 is the 1006 requirement code (5.4).

Code 4722 is the 1006 except requirement code (5.4).

Code 4723 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the thermal shock test. Code 1898 is optional.

Code 1898 and a value, entered on the SRS, will specify the maximum resistance change in ohms.

5.33 Vibration, High Frequency

Code 1445 is the 1006 test code (5.4).

Code 1446 is the 1006 except test code (5.4).

To detail the high frequency vibration test, Code 1447 and Code 1448 are mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1447 and an "X", entered on the SRS, will specify to test in accordance with Method 204 of MIL-STD-202.

Code 1448 and a letter, entered on the SRS, will specify the applicable test condition letter as selected from Method 204 of MIL-STD-202.

There are two codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4709 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4708 and an "X", entered on the SRS, will specify normal usage mounting means shall be used.

There are two codes available to specify the method of determining mechanical resonance. Only one of the codes may be entered. Information concerning them is as follows:

Code 1533 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored visually by means of a strobotac.

Code 1534 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored by electrical output indicators.

Code 1454 is the 1006 requirement code (5.4).

Code 1455 is the 1006 except requirement code (5.4).

Code 1456 and an "X", entered on the SRS, will specify no evidence of physical damage.

5.34 Vibration, Low Frequency

Code 1465 is the 1006 test code (5.4).

Code 1466 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail the low frequency vibration test, Code 1467 is mandatory. Other codes are optional.

Code 1467 and an "X", entered on the SRS, will specify to test in accordance with Method 201 of MIL-STD-202.

Code 1470 and a value, entered on the SRS, will specify the duration in hours of vibration per axis. This code should only be used when the required vibration per axis is other than 2 hours as specified in Method 201 of MIL-STD-202.

There are two codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4731 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4730 and an "X", entered on the SRS, will specify normal mounting means shall be used.

There are several codes available to specify the direction of motion. These may be used as required.

Code 1535 and an "X", entered on the SRS, will specify motion shall be parallel to the longitudinal axis.

Code 1536 and an "X", entered on the SRS, will specify motion shall be perpendicular to the longitudinal axis.

Code 1537 and an "X", entered on the SRS, will specify motion shall be in each of three mutually perpendicular axes.

Code 1474 is the 1006 requirement code (5.4).

Code 1475 is the 1006 except requirement code (5.4).

Code 1476 and an "X", entered on the SRS, will specify no evidence of physical damage.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.35 Vibration, Random

Code 1425 is the 1006 test code (5.4).

Code 1426 is the 1006 except test code (5.4).

To detail the random vibration test, Codes 1427, 1428, and 1431 or 1438 are mandatory. Other codes are optional.

Code 1427 and an "X", entered on the SRS, will specify to test in accordance with Method 214 of MIL-STD-202.

Code 1428 and a Roman numeral and a letter, entered on the SRS, will specify the applicable test condition number and letter as selected from Method 214 of MIL-STD-202. Enter the number (I or II) and follow with the letter, for example, IB or IIK.

It is mandatory that one duration of application per axis be specified. Information concerning codes is as follows:

Code 1438 and a value, entered on the SRS, will specify the duration in minutes of the random excitation per axis. The options are 3 or 15 minutes. Do not use Code 1438 with Code 1431.

Code 1431 and a value, entered on the SRS, will specify the duration in hours of the random excitation per axis. The options are 1.5 and 8 hours. Do not use Code 1431 with 1438.

There are three codes to specify the monitoring instrumentation of the excitation. Only one may be selected.

Code 1452 and an "X", entered on the SRS, will specify any suitable system may be used to monitor excitation.

Code 1453 and an "X", entered on the SRS, will specify the use of a calibrated ac to dc converter and a strip chart recorder to monitor excitation.

Code 1459 and an "X", entered on the SRS, will specify the use of a calibrated oscilloscope to monitor excitation.

Code 1430 and a value, entered on the SRS, will specify the quantity of vibration monitoring test points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1439 or 1462 may be used to specify the location of the test point(s).

Code 1439 and an "X", entered on the SRS, will specify any suitable location(s) is permitted to mount the monitoring test points.

Code 1462 and an "X", entered on the SRS, will specify the monitoring test points shall be mounted as close as practical to the test specimen.

There are two codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4977 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4976 and an "X", entered on the SRS, will specify normal mounting means shall be used.

Code 1434 is the 1006 requirement code (5.4).

Code 1435 is the 1006 except requirement code (5.4).

Code 1436 and an "X", entered on the SRS, will specify no evidence of physical damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.3	Enter on the SRS, requirements from MIL-STD-35	
5.9	Assembly Resistance	
	(ohm)	1562
	Plus tolerance (pct)	1564
	Minus tolerance (pct)	1566
	Measuring temperature (deg C)	1568
5.10	Drawing Requirements	
	Drawing requirements of MIL-T-24388 do not apply.	1570
5.11	Electromotive Force Output	Table I
	Tolerance (mV)	1580
5.12	Measuring Junction (Select one)	
	Exposed.	1590
	Grounded.	1592
	Ungrounded.	1594
5.13	Temperature Rating	Table II

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.14	Weight, Maximum	
	(oz)	1610
	(g)	1612
	(lb)	1614
	(kg)	1616
5.15	Bending	
	(Select one test method)	
	Test per 1006 document.	1630
	Test per 1006 document except ____	1632
	Test per MIL-T-5494.	1634
	Bends (no.)	1636
	(Select one requirement)	
	Requirement(s) per 1006 document.	1640
	Requirement(s) per 1006 document except ____	1642
	Requirement(s) as follows:	
	*No evidence of physical damage.	1644
	Maximum resistance change (ohm)	1646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.16	Calibration	
	(Select one test method)	
	Test per 1006 document.	1650
	Test per 1006 document except ____	1652
	Test per MIL-STD-735.	1654
	Calibration temperatures.	
	*First (deg C)	1656
	Second (deg C)	1658
	Third (deg C)	1660
	Fourth (deg C)	1662
	Fifth (deg C)	1664
	Sixth (deg C)	1666
	Seventh (deg C)	1668
	Eighth (deg C)	1670
	Tolerance (deg C)	1672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.16 (Cont)	Calibration (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1680
	Requirement(s) per 1006 document except ____	1682
	Requirement(s) as follows:	
	*Standard limits of error per ANSI C96.1.	1684
5.17	Fungus	
	(Select one test method)	
	Test per 1006 document.	4753
	Test per 1006 document except ____	4754
	Test per MIL-STD-810, Method 508.	4755
	Test period (days)	4756
	(Select one requirement)	
	Requirement(s) per 1006 document.	4759
	Requirement(s) per 1006 document except ____	4760
	Requirement(s) as follows (select one):	
	Fungus resistant by certification or by test.	4761
	No evidence of fungus growth when tested.	4762

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.18	Humidity	
	(Select one test method)	
	Test per 1006 document.	4787
	Test per 1006 document except _____	4788
	Test per MIL-STD-202, Method 103.	4853
	*Test condition (letter)	4890
	(Select one requirement)	
	Requirement(s) per 1006 document.	4797
	Requirement(s) per 1006 document except ___	4798
	Requirement(s) as follows:	
	*No evidence of corrosion or physical damage.	4799
	Minimum insulation resistance at high humidity (megohm)	4795
	Minimum insulation resistance after drying (megohm)	4805

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19	Insulation Resistance	
	(Select one test method)	
	Test per 1006 document.	1370
	Test per 1006 document except ____	1371
	Test per MIL-STD-202, Method 302.	1511
	*Condition (Select one)	
	Test condition (letter)	1378
	Test voltage (Vdc)	1373
	Electrification time, if other than 2 minutes (s)	1376
	Points of application of test voltage.	
	Between terminations tied together and case.	1498
	First test temperature (deg C)	1372
	Second test temperature (deg C)	1381
	Temperature tolerance (deg C)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19 (Cont)	Insulation Resistance (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1379
	Requirement(s) per 1006 document except ____	1380
	Requirement(s) as follows:	
	*No evidence of physical damage.	1407
	Minimum insulation resistance (select one)	
	Single test	
	(megohms)	1386
	Multiple test	
	First test (megohms)	1384
	Second test (megohms)	1387
5.20	Moisture Resistance	
	(Select one test method)	
	Test per 1006 document.	1390
	Test per 1006 document except ____	1391
	Test per MIL-STD-202, Method 106.	1397
	Step 7a not applicable.	4985
	Step 7b not applicable.	4986

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	Moisture Resistance (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1399
	Requirement(s) per 1006 document except ____	1400
	Requirement(s) as follows:	
	*No evidence of corrosion or physical damage.	1396
	Minimum insulation resistance at high humidity (megohms)	1432
	Minimum insulation resistance after drying (megohms)	1406
5.21	Radiographic	
	(Select one test method)	
	Test per 1006 document.	6281
	Test per 1006 document except ____	6282
	Test per MIL-STD-202, Method 209.	4843

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.21 (Cont)	Radiographic (Cont)	
	Source-object distance (m)	6286
	Source-object distance (in.)	6285
	Viewing equipment (identify)	6287
	Magnification (X-power)	6288
	Defects sought (identify)	6289
	Nonfilm techniques allowed.	6284
	Penetrameter wire size (awg)	6283
	(Select one requirement)	
	Requirement(s) per 1006 document.	6290
	Requirement(s) per 1006 document except ____	6291
	Requirement(s) as follows:	
	Disposition of negatives or records	
	Delivered.	4857
	Not delivered.	4858

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22	Salt Spray	
	(Select one test method)	
	Test per 1006 document.	4769
	Test per 1006 document except ____	4770
	Test per MIL-STD-202, Method 101.	4771
	*Test condition (letter)	4772
	Mounting shall be by normal method.	4765
	Mounting shall be by any suitable method.	4766
	(Select one requirement)	
	Requirement(s) per 1006 document.	4877
	Requirement(s) per 1006 document except ___	4878
	Requirement(s) as follows:	
	*No evidence of corrosion, physical damage or degradation of performance.	4782
5.23	Seal	
	(Select one test method)	
	Test per 1006 document.	4733
	Test per 1006 document except ____	4734
	Test per MIL-STD-202, Method 112.	4732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23 (Cont)	Seal (Cont)	
	*Test condition (letter)	4737
	Test condition letter A or B	
	Media for test (if exception desired)	4738
	Minimum media temperature (deg C)	4739
	Test condition letter C	
	*Test procedure (no.)	4740
	*Leak rate sensitivity (atm cc/sec)	4741
	Procedure I or II in condition C	
	Backfill pressure	
	(psi)	4742
	(kPa)	4736
	Number of pressure cycles (quantity)	4749

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.23 (Cont)	Seal (Cont)	
	Procedure III in condition C.	
	Gross leak test condition (letter)	4750
	Procedure IV in condition C.	
	Chamber pressure.	
	(torr)	4751
	(kPa)	4735
	Duration of reduced pressure (min.)	4752
	Gross leak test condition (letter)	4750
	Test condition letter D or E.	
	Any suitable mounting fixture.	4743
	(Select one requirement)	
	Requirement(s) per 1006 document.	4744
	Requirement(s) per 1006 document except ____	4745

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.23 (Cont)	Seal (Cont)	
	Requirement(s) as follows:	
	Requirements in accordance with specified test method sensitivity.	4746
	No bubbles indicative of leakage.	4748
5.24	Shock, High Impact	
	(Select one test method)	
	Test per 1006 document.	1485
	Test per 1006 document except ____	1486
	Test per MIL-STD-202, Method 207.	1482
	*Mounting fixture (Select one)	
	Figure number from Method 207 of MIL-STD-202 (no.)	1488
	Any suitable mounting fixture.	1478

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24 (Cont)	Shock, High Impact (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1493
	Requirement(s) per 1006 document except ____	1494
	Requirement(s) as follows:	
	*No evidence of physical damage.	1495
5.25	Shock, Specified Pulse	
	(Select one test method)	
	Test per 1006 document.	1501
	Test per 1006 document except ____	1502
	Test per MIL-STD-202, Method 213.	1500
	*Test condition (letter)	1504
	Method of mounting (Select one)	
	Any suitable method.	4686
	Normal mounting means.	4685

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	Shock, Specified Pulse (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1507
	Requirement(s) per 1006 document except ____	1508
	Requirement(s) as follows:	
	*No evidence of physical damage.	1509
5.26	Solderability	
	(Select one test method)	
	Test per 1006 document.	4661
	Test per 1006 document except ____	4662
	Test per MIL-STD-202, Method 208.	4683
	Number of terminals to be tested (quantity)	4666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.26 (Cont)	Solderability (Cont)	
	Depth of immersion	
	(in.)	4667
	(mm)	4663
	Distance wrap wire applied from body	
	(in.)	4664
	(mm)	4665
	(Select one requirement)	
	Requirement(s) per 1006 document.	4673
	Requirement(s) per 1006 document except ____	4674
	Requirement(s) as follows:	
	*No evidence of physical damage.	4675
	Meet evaluation criteria specified in Method 208 of MIL-STD-202.	4672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27	Spring Life	
	(Select one test method)	
	Test per 1006 document.	1720
	Test per 1006 document except ____	1722
	Test per MIL-T-81272.	1724
	Test temperature (deg C)	1726
	Test duration (hr)	1728
	(Select one requirement)	
	Requirement(s) per 1006 document.	1738
	Requirement(s) per 1006 document except ___	1740
	Requirement(s) as follows:	
	*No evidence of physical damage.	1742
	Minimum spring tension	
	(lb)	1744
	(kg)	1746

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.28	Spring Tension	
	(Select one test method)	
	Test per 1006 document.	1780
	Test per 1006 document except ____	1782
	Test as follows:	
	*Distance spring compressed	
	(in.)	1784
	(mm)	1786
	Compression cycles (no.)	1788
	Any suitable test fixture.	1790
	(Select one requirement)	
	Requirement(s) per 1006 document.	1800
	Requirement(s) per 1006 document except ____	1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	Spring Tension (Cont)	
	Requirement(s) as follows:	
	*No evidence of physical damage	1803
	Minimum force exerted	
	(lb)	1804
	(kg)	1806
5.29	Temperature, High	
	(Select one test method)	
	Test per 1006 document.	6216
	Test per 1006 document except ____	6217
	Test per MIL-STD-810 Method 501.	6218
	*Procedure (no.)	6219
	Storage temperature if other than 71 (deg C)	6220
	Storage duration if other than 48 (hr)	6221
	Highest operating temperature (deg C)	6222

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Temperature, High (Cont)	
	Operation time (Select one)	
	(min.)	6224
	(hr)	6225
	(Select one requirement)	
	Requirement(s) per 1006 document.	6227
	Requirement(s) per 1006 document except ___	6228
	Requirement(s) as follows:	
	*No evidence of physical damage.	6229
	Maximum resistance change (ohm)	1816
5.30	Temperature, Low	
	(Select one test method)	
	Test per 1006 document.	6230
	Test per 1006 document except ____	6231
	Test per MIL-STD-810 Method 502.	6232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	Temperature, Low (Cont)	
	Storage temperature if other than -57 (deg C)	6234
	Storage duration if other than 24 (hr)	6235
	Lowest operating temperature (deg C)	6236
	Chamber air velocity.	
	(ft/s)	6237
	(m/s)	6238
	Operating time (Select one)	
	(min.)	6315
	(hr)	6316
	(Select one requirement)	
	Requirement(s) per 1006 document.	6317
	Requirement(s) per 1006 document except ___	6318
	Requirement(s) as follows:	
	*No evidence of physical damage.	6319
	Maximum resistance change (ohm)	1826

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31	Thermal Response	
	(Select one test method)	
	Test per 1006 document.	1840
	Test per 1006 document except ____	1842
	Test per MIL-STD-735 Type A test.	1844
	*Initial test temperature (deg C)	1846
	*Temperature at which timing begins (deg C)	1848
	*Temperature at which timing ends (deg C)	1850
	Tolerance (deg C)	1852
	Duration of exposure (s)	1853
	Exposure media (Select one)	
	Still air.	1854
	Air velocity	
	(ft/s)	1856
	(m/s)	1858
	Still water.	1860
	50 pct glycol/50 pct water.	1862
	Liquefied salt.	1864
	Oil.	1866

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.31 (Cont)	Thermal Response (Cont)	
	Exposure media temperature (deg C)	1868
	Bare bulb well required.	1870
	(Select one requirement)	
	Requirement(s) per 1006 document.	1880
	Requirement(s) per 1006 document except ___	1882
	Requirement(s) as follows:	
	*Maximum thermal response time (s)	1884
5.32	Thermal Shock	
	(Select one test method)	
	Test per 1006 document.	4712
	Test per 1006 document except ____	4713
	Test per MIL-STD-202, Method 107.	4714
	*Test condition (letter)	4715

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.32 (Cont)	Thermal Shock (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4720
	Requirement(s) per 1006 document except ____	4722
	Requirement(s) as follows:	
	*No evidence of physical damage.	4723
	Maximum resistance change (ohm)	1898
5.33	Vibration, High Frequency	
	(Select one test method)	
	Test per 1006 document.	1445
	Test per 1006 document except ____	1446
	Test per MIL-STD-202, Method 204.	1447
	*Test condition (letter)	1448
	Method of mounting (Select one)	
	Any suitable mounting method.	4709
	Normal means.	4708
	Method of determining mechanical resonance (Select one)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.33 (Cont)	Vibration, High Frequency (Cont)	
	Visually by means of strobotac.	1533
	Electrical output indicators.	1534
	(Select one requirement)	
	Requirement(s) per 1006 document.	1454
	Requirement(s) per 1006 document except ____	1455
	Requirement(s) as follows:	
	*No evidence of physical damage.	1456
5.34	Vibration, Low Frequency	
	(Select one test method)	
	Test per 1006 document.	1465
	Test per 1006 document except ____	1466
	Test per MIL-STD-202, Method 201.	1467
	Duration of vibration per axis if other than 2 hours (hr)	1470
	Method of mounting (Select one)	
	Any suitable mounting method.	4731
	Normal mounting means.	4730

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.34 (Cont)	Vibration, Low Frequency (Cont)	
	Direction of motion (Select as required)	
	Parallel to longitudinal axis.	1535
	Perpendicular to longitudinal axis.	1536
	Three mutually perpendicular axes.	1537
	(Select one requirement)	
	Requirement(s) per 1006 document.	1474
	Requirement(s) per 1006 document except ___	1475
	Requirement(s) as follows:	
	*No evidence of physical damage.	1476
5.35	Vibration, Random	
	(Select one test method)	
	Test per 1006 document.	1425
	Test per 1006 document except ___	1426
	Test per MIL-STD-202, Method 214.	1427

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.35 (Cont)	Vibration, Random (Cont)	
	*Test condition (number and letter)	1428
	*Duration of application (Select one)	
	(min)	1438
	(hr)	1431
	Monitoring instrumentation of excitation (Select one)	
	Any suitable system.	1452
	Calibrated ac to dc converter and strip chart recorder.	1453
	Calibrated oscilloscope.	1459
	Number of vibration monitoring test points (quantity)	1430
	Location of monitoring points (Select one)	
	Any suitable location.	1439
	As close as practical to test specimen.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.35 (Cont)	Vibration, Random (Cont)	
	Method of mounting (Select one)	
	Any suitable mounting method.	4977
	Normal mounting method.	4976
	(Select one requirement)	
	Requirement(s) per 1006 document.	1434
	Requirement(s) per 1006 document except ____	1435
	Requirement(s) as follows:	
	*No evidence of physical damage.	1436

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Thermocouples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

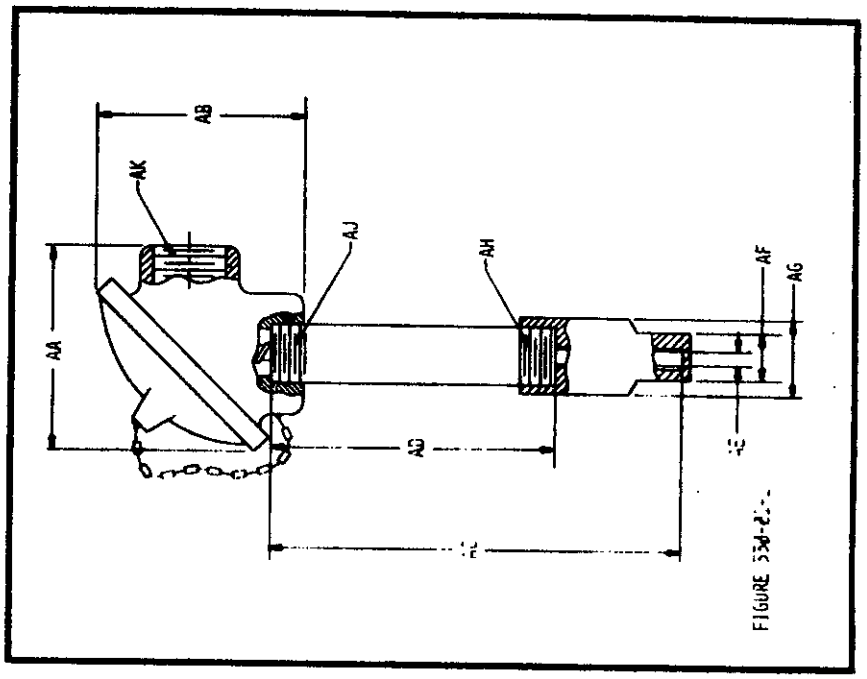


FIGURE 330-[illegible]

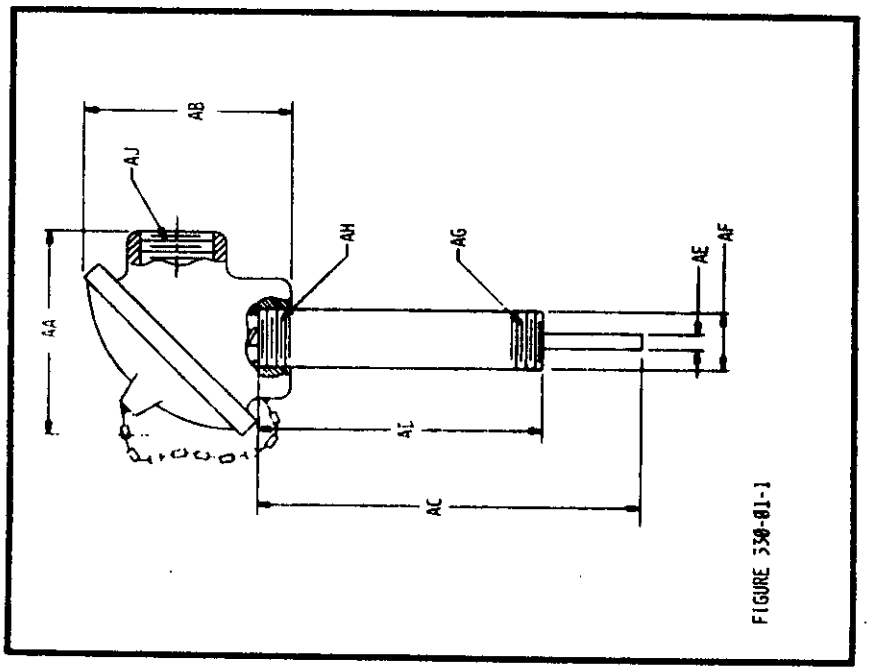


FIGURE 330-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY LEFT BLANK

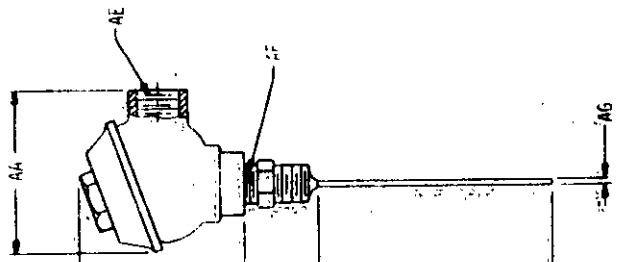


FIGURE 330-01-3

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

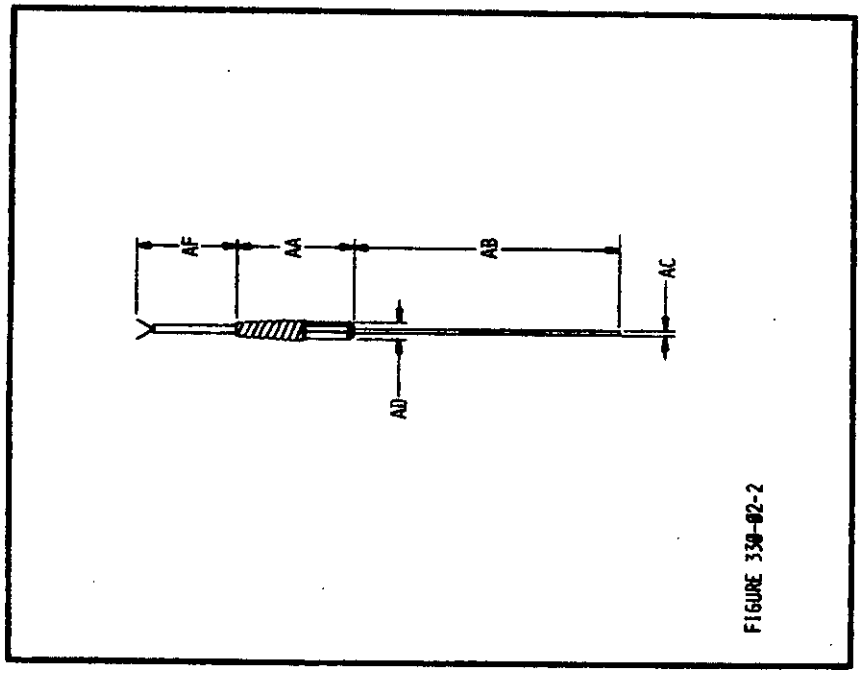


FIGURE 330-02-2

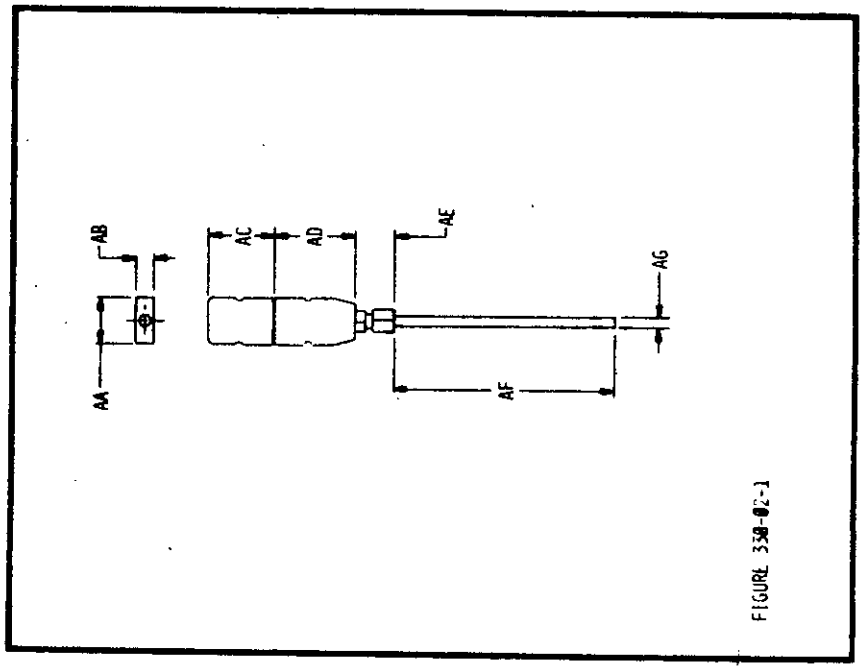


FIGURE 330-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

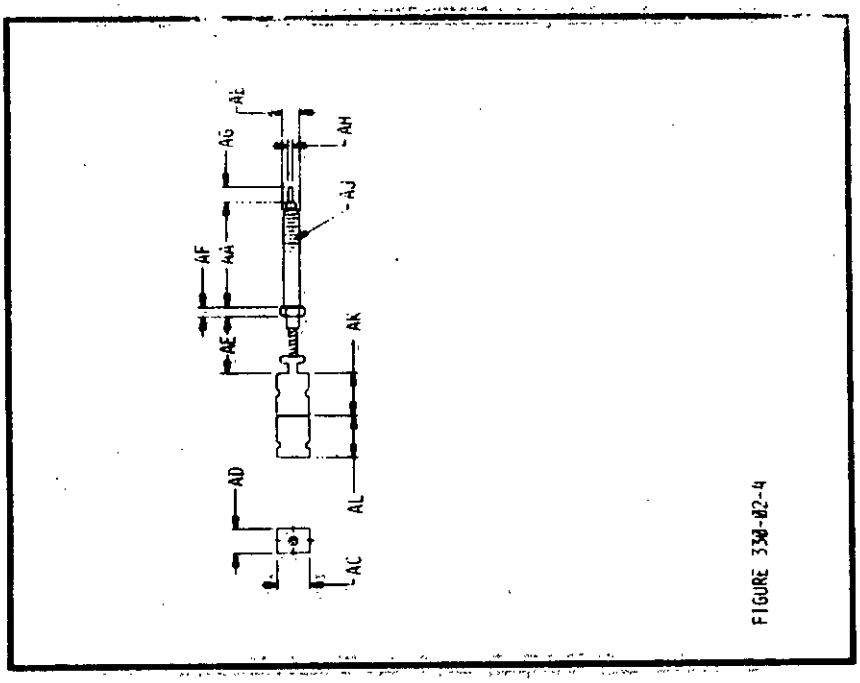


FIGURE 350-02-4

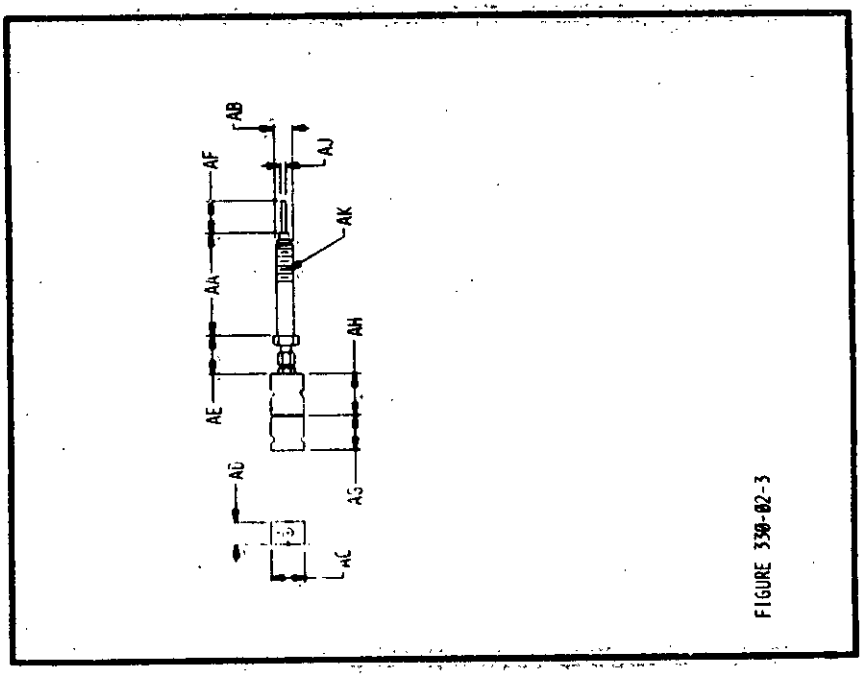


FIGURE 350-02-3

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

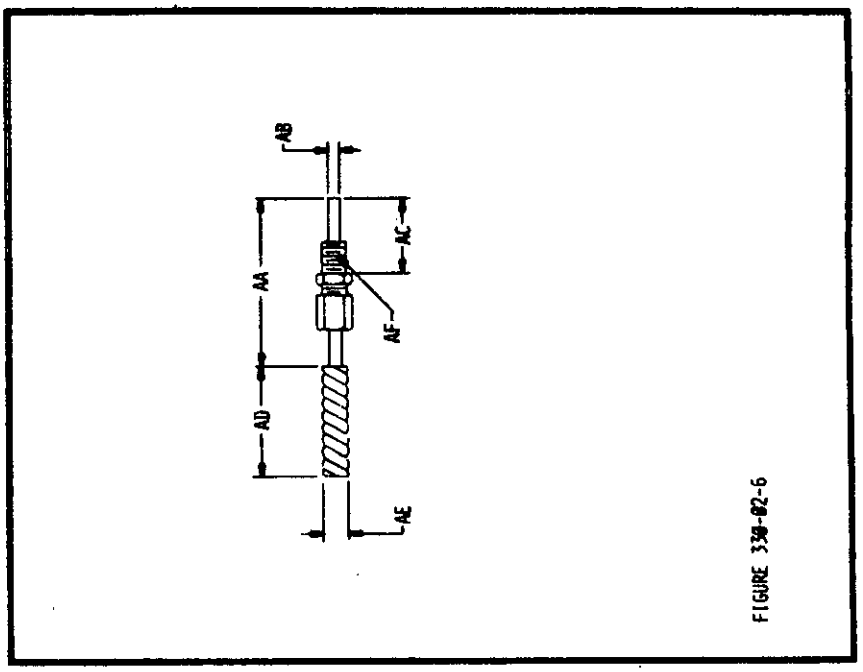


FIGURE 330-02-6

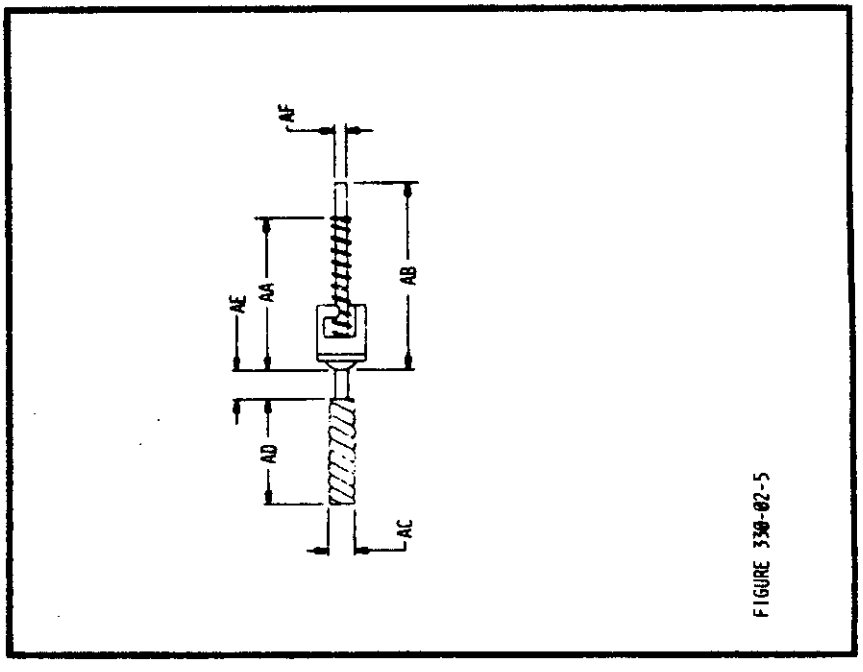


FIGURE 330-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

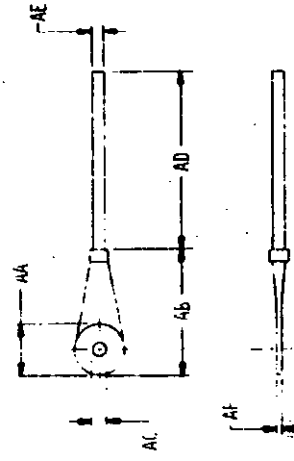


FIGURE 330-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

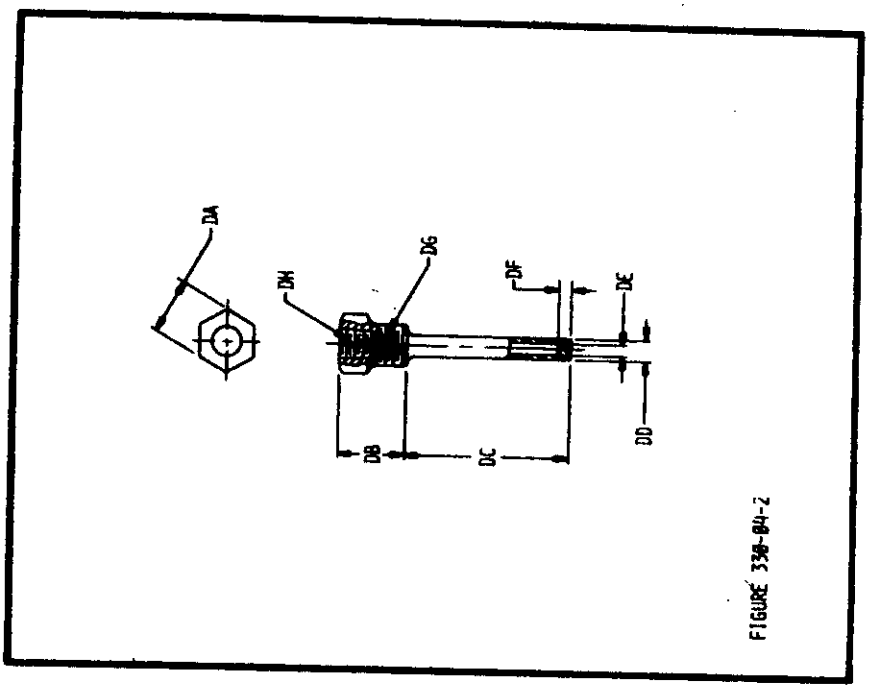


FIGURE 330-04-2

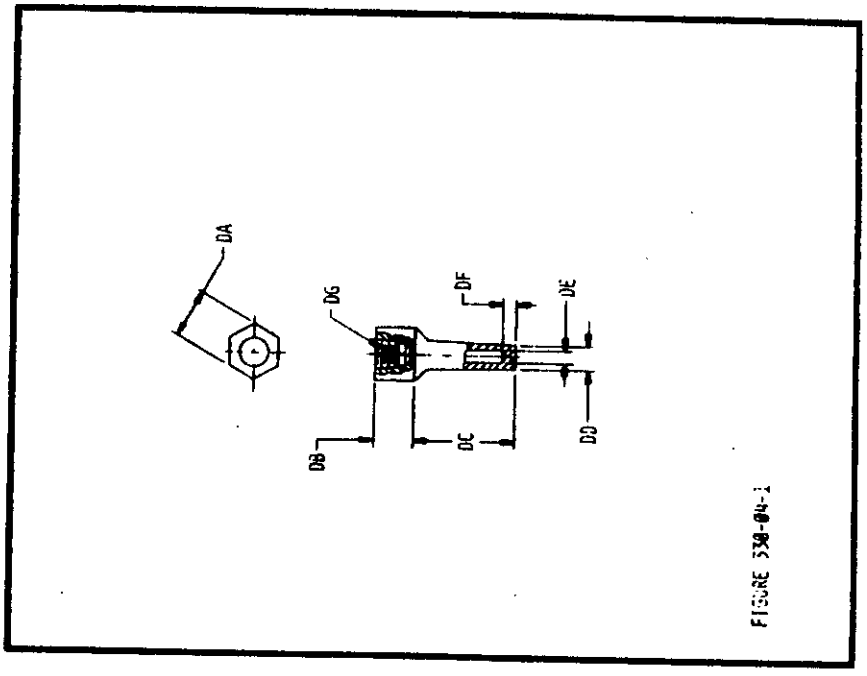


FIGURE 330-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Thermocouples.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. ELECTROMOTIVE FORCE OUTPUT TABLE
(See 5.11)

ELECTROMOTIVE FORCE OUTPUT TABLE

ELECTROMOTIVE FORCE MILLIVOLTS NOMINAL	TEMPERATURE, DEG C	
	TEST	REFERENCE JUNCTION
2100	2101	2102
2103	2104	2105
2106	2107	2108
2109	2110	2111
2112	2113	2114
2115	2116	2117
2118	2119	2120
2121	2122	2123
*19	*4	*9

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEMPERATURE RATING TABLE
(See 5.13)

TEMPERATURE RATING TABLE

TYPE OF TEMPERATURE	DEGREES CELSIUS MINIMUM	NOMINAL	MAXIMUM
AMBIENT OPERATING	5052	5053	5054
AMBIENT NON OPERATING	5055	5056	5057
STORAGE	7301	5048	7302
	*7	*7	*7

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI
Project EDS-A122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: DRSMI-RSDS
Redstone Arsenal, AL 35898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION –	4. TYPE OF ORGANIZATION *(Mark one)*
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:24Z
Check the source to verify that this is the current version before use.