MIL-STD-35-106(MI)
24 NOVEMBER 1975

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

COUNTERS, RECIPROCATING AND ROTATING

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
WASHINGTON, D.C. 20315

Automated Engineering
Document Preparation System,
Counters, Reciprocating and Rotating

MIL-STD-35-106(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is approved for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-35-106(MI)

FOREWORD

1. The purpose of MIL-STD-35-106(MI) is to facilitate the preparation of Military Specification, Exceptions for Reciprocating and Rotating Counters.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE
SECTION 1	INTRODUCTION	1-1
1.1	Scope	1-1
1.2	Purpose	1-1
1.3	Format	1-1
1.4	Military Specification, Exception Title Index	1-2
1.4.1	Title	1-2
1.4.2	Index	1-3
SECTION 2	APPLICABLE DOCUMENTS	2-1
SECTION 3	DEFINITIONS	3-1
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1
5.1	Introduction	5-1
5.2	Specification Requirement Sheet (SRS)	5-1
5.3	Specification Requirements	5-1
5.4	Code 1006 Requirements and Test Methods	5-1
5.5	Approved Item Name Code	5-2
5.6	Dimensions and Figures	5-3
5.7	Applicable Documents	5-3
5.8	Tabulation	5-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.9	Design and Construction	5-6	5-51
5.9.1	Classification	5-6	5-51
5.9.2	Color of Figures	5-6	5-51
5.9.3	Drive Type (Mechanical Counters)	5-7	5-52
5.9.4	Drive Shaft Location (Mechanical Counters)	5-8	5-52
5.9.5	Drive Shaft Rotation (Mechanical Counters)	5-8	5-53
5.9.6	Enclosure Type	5-9	5-53
5.9.7	Lubrication	5-9	5-53
5.9.8	Mounting	5-9	5-54
5.9.9	Number of Digits	5-10	5-54
5.9.10	Register Function	5-11	5-55
5.9.11	Reset Characteristics	5-12	5-56
5.9.12	Size of Figures	5-13	5-57
5.9.13	Altitude Range	5-14	5-58
5.9.14	Temperature	5-14	5-58
5.9.15	Termination Data	5-14	5-59
5.9.16	Weight	5-15	5-59
5.10	Performance Requirements	5-15	5-60
5.10.1	Coil Resistance	5-15	5-60
5.10.2	Counting Rate	5-16	5-60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.10.3	Input Voltage	5-16	5-61
5.10.4	Operating Frequency	5-17	5-61
5.10.5	Operating Shaft Speed	5-18	5-62
5.10.6	Power Consumption	5-18	5-62
5.10.7	Pulsing Characteristics	5-18	5-62
5.10.8	Rated Life	5-19	5-63
5.11	Design Reliability Rating	5-19	5-63
5.12	Accuracy	5-20	5-64
5.13	Altitude	5-20	5-64
5.14	Count Life	5-22	5-66
5.15	DC Resistance	5-22	5-67
5.16	Determination of Actuation Force	5-23	5-68
5.17	Dielectric Withstanding Voltage at Reduced Barometric Pressure	5-23	5-68
5.18	Dielectric Withstanding Voltage at Sea Level	5-24	5-70
5.19	Drop Test	5-26	5-72
5.20	Electromagnetic Interference	5-26	5-73
5.21	Fungus	5-27	5-74
5.22	High Temperature	5-28	5-75
5.23	Humidity	5-29	5-76
5.24	Insulation Resistance	5-31	5-79

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.25	Low Temperature	5-32	5-80
5.26	Magnetic Position	5-34	5-82
5.27	Operability	5-34	5-83
5.28	Power Supply Variation	5-35	5-84
5.29	Salt Fog	5-36	5-86
5.30	Seal	5-37	5-87
5.31	Shock	5-39	5-89
5.32	Shock, High Impact	5-40	5-91
5.33	Shock, Specified Pulse	5-41	5-92
5.34	Solderability	5-42	5-93
5.35	Speed	5-43	5-95
5.36	Thermal Shock	5-44	5-96
5.37	Vibration	5-45	5-97
5.38	Vibration, High Frequency	5-47	5-98
5.39	Vibration, Low Frequency	5-49	5-100
SECTION 6	USE OF AEDPS	6-1	
SECTION 7	FIGURES	7-1	
SECTION 8	TABLES	8-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT
PREPARATION SYSTEM (AEDPS)

COUNTERS, RECIPROCATING AND ROTATING

SECTION 1

INTRODUCTION

1.1 Scope

This dash-numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Reciprocating and Rotating Mechanical Readout Counters.

1.2 Purpose

The purpose of this dash-numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Reciprocating or Rotating Counter Military Specification, Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash-numbered part of MIL-STD-35. Specification Requirements which are standard for all generic families have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash-numbered part. The following list contains subjects from MIL-STD-35 which are pertinent to every dash-numbered part unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables

1.4 Military Specification, Exception Title Index

1.4.1 Title

The title of a generated MSE must be selected from one of the titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable title is not found in the Military Specification Exception Title Index, a request should be forwarded to USAMICOM, ATTN: AMSMI-RCS, along with the desired title, and the related document. A code will be assigned and the code, title, and related document will be made a part of the Military Specification Exception Title Index. The requester will be notified of the code assigned.

One of the six-digit characteristic value codes, listed in the MSE TITLE CODE column of the Military Specification Exception Title Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the index. Each MSE title listed in the index is compatible with the document(s) listed with that title in the RELATED DOCUMENT column. The list may or may not be a complete listing.

The information contained in the RELATED DOCUMENT COVERAGE column is intended for the requester's reference; when more than one document is listed for a title, this information will be found useful in determining which of the documents is most suitable for use as the applicable General Specification.

The MSE title uses the basic federal item name listed in Cataloging Handbook H6. Titles with additional modifying and identifying words are

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

provided to assist a designer in defining the scope of the MSE. To allow the designer flexibility, the title is generally not as restrictive as the basic specification to which the exception is taken. The reverse AEDPS Title comprises the words that will appear in the Scope paragraph (1.1) of the MSE.

If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. The title written on the MSE or in DODISS or FIIG will not be entered in paragraph 2.1.

1.4.2 Index

The Military Specification Exception Title index is as follows:

RELATED DOCUMENT	RELATED DOCUMENT COVERAGE	MSE TITLE	MSE TITLE CODE
MIL-C-83040	Electrically Actuated (AC or DC), Miniature, Hermetically Sealed	Counter, Electrical	172001
GG-C-00615	Fixed Mounting, Ratcheting, Manually Operated	Counter, Reciprocating	172002
GG-C-00620	Hand Held, Manually Operated		
MIL-C-60618	Mechanical, Direct Drive	Counter, Rotating	172003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

GG-C-00615	Counter, Reciprocating, Fixed Mounting
GG-C-00620	Counter, Reciprocating, Hand Held

MILITARY

MIL-C-60618	Counter, Rotating, Mechanical, Direct Drive
MIL-C-83040	Counter, Electrical, Events

STANDARDS

FEDERAL

FED-STD-595	Colors

MILITARY

MIL-STD-202	Test Methods For Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics Requirements For Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement Of
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

ASTM E380	Metric Practice Guide
H6	Federal Item Name Directory For Supply Cataloging

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Reciprocating and Rotating Counters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Reciprocating and Rotating Counters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Reciprocating and Rotating Counters consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Specification Requirement Sheet (SRS) requirements described in MIL-STD-35 and at the end of this dash-numbered part are applicable to Reciprocating and Rotating Counters.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Reciprocating and Rotating Counters.

Refer to ASTM E380 for guidance in using the International System of Units (SI).

5.4 Code 1006 Requirements and Test Methods

Many requirements and test methods are shown on the SRL as "Requirements per 1006 document" or "Test per 1006 document" with an adjacent code for each. The adjacent code, entered on the SRS with an "X", will cause the MSE to state that the requirement or test method be in accordance with the document to which exception is being taken.

Similarly, many requirements and test methods are shown on the SRL as "Requirements per 1006 document except" or "Test per 1006 document except" with an adjacent code for each. This adjacent code, entered on the SRS with the exact words desired to complete the statement shown, will specify

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

a complete statement. Only the words required to complete the statement after the "except" are entered on the SRS (Example 1).

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60
5402	THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP#

EXAMPLE 1

In Example 1, the code and entry will generate a paragraph as follows:

"GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE SPECIFICATION REFERENCED IN 3.1 EXCEPT THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP."

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for a counter is selected from the following list:

APPROVED ITEM NAME	ITEM NAME CODE
Counter, Electrical	16412
Counter, Reciprocating	30761
Counter, Rotating	30762
Unapproved Name	77777

Only the Item Name Code number is entered on the SRS with Code 1007.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to counters are contained in Section 7. It is mandatory to enter on the SRS Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and the applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirement. A document designation, with a code from TABLE B, is entered on the SRS only once.

DOCUMENTS	CODES
FED-STD-595	1578, 1579, 1581, and 1583 (Color of Figures)
GG-C-00620	1922 (Determination of Actuation Force) 1954 (Count Life) 2452 (Drop Test)
MIL-C-60618	2224 (Operability) 2172 (Speed)
MIL-C-83040	1902 (Accuracy) 2204 (Magnetic Position) 2252 (Power Supply Variation)
MIL-STD-202	6300 (DWV at Reduced Barometric Pressure) 4862 (DWV at Sea Level) 4853 (Humidity)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS (CONT)	CODES (CONT)
	1511 (Insulation resistance) 4732 (Seal) 1482 (Shock, high impact) 1500 (Shock, specified pulse) 4683 (Solderability) 4714 (Thermal shock) 1447 (Vibration, high frequency)
MIL-STD-461	2522 - 2526 (Electromagnetic interference)
MIL-STD-462	2514 - 2516 (Electromagnetic interference)
MIL-STD-810	2412 (Altitude) 4755 (Fungus) 2582 (High temperature) 4781 (Humidity) 2682 (Low temperature) 4780 (Power supply variation) 2883 (Shock) 1514 (Vibration)
Document to which exception is being taken.	1006

In addition, when the codes listed below are used to specify mounting or special preparations in accordance with a document, the document number with an appropriate code from Table B of MIL-STD-35 must be entered on the SRS.

6280 DWV at reduced barometric pressure
5000 DWV at sea level
4773 Salt fog
1468 Shock, high impact
4684 Shock, specified pulse
4719 Thermal shock
4707 Vibration, high frequency

For these codes any document from the Index, 1.4.2, may be used to specify which test in the document contains applicable mounting or preparation requirements. Enter on the SRS the test name and the document number (Example 2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40
	4684	MIL-C-83040, SHOCK#

EXAMPLE 2

Code 4684 in Example 2 specifies that the mounting in the specified pulse shock test, which is not in MIL-C-83040, shall be in accordance with the mounting in the shock test in MIL-C-83040.

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable.

In addition to dimensions from Table A, characteristics in this dash-numbered part that are candidates for tabulation are contained in the following list. Only characteristic codes from this list or Table A shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

When different units of measure are shown for a specified parameter, only one may be tabulated. For example, there could be several codes which may be used to specify weight, each of which specifies a different unit of measure, only one code may be tabulated.

TABULATION CANDIDATES FOR COUNTERS

TOP LINE	SECOND LINE	BOTTOM LINE	CODE
NUMBER	COUNTING	UNITS/TIER	1570
NUMBER	OF TIERS		1572
FIGURE	COLOR/FED-	STD-595-NO	1578
BACKGROUND	COLOR/FED-	STD-595-NO	1579
WEIGHT	(OZ)		1800
WEIGHT	(LBS)		1802
WEIGHT	(G)		1804
WEIGHT	(KG)		1806
MAX COUNTS	PER SECOND		1816
MAX COUNTS	PER MINUTE		1817
VOLTAGE	RATING	(VAC)	1830
VOLTAGE	RATING	(VDC)	1832
FREQUENCY	(HERTZ)		1850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.9 Design and Construction

5.9.1 Classification

There are four codes available to specify classification in accordance with the Code 1006 document. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1566 and a Roman numeral, entered on the SRS, will specify the type number in accordance with the 1006 document.

Code 1568 and a number, entered on the SRS, will specify the class number in accordance with the 1006 document.

Code 1570 and a value, entered on the SRS, will specify the number of counting units required per tier.

Code 1572 and a value, entered on the SRS, will specify the number of tiers required.

5.9.2 Color of Figures

There are eight codes available to specify the figure color and background color. None of these codes are mandatory. Two codes are available to select either a white or black figure color with a black or white background respectively. Two codes are available to specify the figure and background color numbers per FED-STD-595. There are four codes available to specify unit wheel color information. Two of these codes may be used to specify the figure and background color and the other two codes may be used to specify the FED-STD-595 color number for the figures and background. These codes and information concerning them are as follows:

Code 1576 and an "X", entered on the SRS, will specify that the the color of the figures shall be white on a black background.

Code 1577 and an "X", entered on the SRS, will specify that the color of the figures shall be black on white background.

Code 1578 and a value, entered on the SRS, will specify that the color of the figures shall be in accordance with the designated number in FED-STD-595.

Code 1579 and a value, entered on the SRS, will specify that the figure color background shall be in accordance with the designated number in FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1580 and a color designation, entered on the SRS, will specify the color of the unit wheel figure.

Code 1581 and a value, entered on the SRS, will specify that the unit wheel figure color shall be in accordance with the designated number in FED-STD-595.

Code 1582 and a color designation, entered on the SRS, will specify the figure background color of the unit wheel.

Code 1583 and a value, entered on the SRS, will specify that the background color of the unit wheel figure shall be in accordance with the designated number in FED-STD-595.

5.9.3 Drive Type (Mechanical Counters)

There are eight codes applicable to five types of mechanical counter drives and three bearing types. None of these codes are mandatory. Only one type of drive and one type of bearing may be selected. These codes and information concerning them are as follows:

Code 1600 and an "X", entered on the SRS, will specify that the mechanical counter shall have a direct drive.

Code 1601 and an "X", entered on the SRS, will specify that the mechanical counter shall have a geared drive.

Code 1602 and an "X", entered on the SRS, will specify that the mechanical counter shall have a ratchet drive.

Code 1604 and an "X", entered on the SRS, will specify that the mechanical counter shall have a revolution drive.

Code 1606 and an "X", entered on the SRS, will specify that the mechanical counter shall have a rotary ratchet drive.

Code 1608 and an "X", entered on the SRS, will specify that ball bearings shall be used.

Code 1610 and an "X", entered on the SRS, will specify that needle bearings shall be used.

Code 1612 and an "X", entered on the SRS, will specify that sleeve bearings shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.9.4 Drive Shaft Location (Mechanical Counters)

There are three codes applicable to the drive shaft location of a mechanical counter. Code 1622 or 1624 is mandatory to specify the reference counter figure number and the drive shaft location on that figure. Code 1625 is optional. Information concerning these codes is as follows:

Code 1622 and a complete figure number selected from the 172-02 series drawings, entered on the SRS, will specify that the shaft shall be located on end 1 (left hand side) of the referenced figure number. The complete figure number (e.g. 172-Ø2-3) shall be entered on the SRS with Code 1009.

Code 1624 and a complete figure number selected from the 172-02 series drawings, entered on the SRS, will specify that the shaft shall be located on end 2 (right hand side) of the referenced figure number. The complete figure number (e.g. 172-02-3) shall be entered on the SRS with Code 1009.

Code 1625 and an "X", entered on the SRS, will specify that a ratchet drive per Figure 172-03-1 shall be employed on the drive shaft. If Code 1625 is used, enter figure number 172-03-1 on the SRS with Code 1009 and enter the appropriate dimensional data on the SRS using codes from Table A of MIL-STD-35.

5.9.5 Drive Shaft Rotation (Mechanical Counters)

There are four codes applicable to the drive shaft rotation of a mechanical counter when viewing the drive shaft end. None of these codes are mandatory. Information concerning these codes is as follows:

Code 1640 and an "X", entered on the SRS, will specify that the drive shaft rotation shall be clockwise when viewing the drive shaft end.

Code 1642 and an "X", entered on the SRS, will specify that the drive shaft rotation shall be counterclockwise when viewing the drive shaft end.

Code 1643 and an "X", entered on the SRS, will specify that the drive shaft rotation when viewing the drive shaft end shall be clockwise to add and counterclockwise to subtract.

Code 1644 and an "X", entered on the SRS, will specify that the drive shaft rotation when viewing the drive shaft end shall be counterclockwise to add and clockwise to subtract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.9.6 Enclosure Type

There are three codes available to specify the counter enclosure. None of these codes are mandatory. Information concerning these codes is as follows:

Code 1650 and an "X", entered on the SRS, will specify that the counter shall be unenclosed.

Code 1652 and an "X", entered on the SRS, will specify that the counter shall be encased.

Code 1654 and an "X", entered on the SRS, will specify that the counter shall be hermetically sealed.

5.9.7 Lubrication

There are five codes applicable to lubrication requirements for the counter. None of these codes are mandatory. Information concerning these codes is as follows:

Code 1660 and an "X", entered on the SRS, will specify that lubrication shall not be required.

Code 1662 and an "X", entered on the SRS, will specify that the counter components shall be lubricated sparingly with oil.

Code 1663 and a complete specification designation, entered on the SRS, will specify that the oil shall be in accordance with the designated specification.

Code 1664 and an "X", entered on the SRS, will specify that the counter components shall be lubricated sparingly with grease.

Code 1665 and a complete specification designation, entered on the SRS, will specify that the grease shall be in accordance with the designated specification.

5.9.8 Mounting

There are six codes available to specify a mounting style and one code which may be used to specify the mounting arrangements in accordance with a 172-05 series figure. None of these codes are mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Information concerning these codes is as follows:

Code 1672 and an "X", entered on the SRS, will specify that the counter shall be base mounted.

Code 1674 and an "X", entered on the SRS, will specify that the counter shall be flange-mounted.

Code 1676 and an "X", entered on the SRS, will specify that the counter shall be panel mounted.

Code 1678 and an "X", entered on the SRS, will specify that the counter shall be plug-in mounted.

Code 1680 and an "X", entered on the SRS, will specify that the counter shall be rear mounted.

Code 1682 and an "X", entered on the SRS, will specify that the counter shall be stud mounted.

Code 1686 and an entire number, entered on the SRS, will specify a mounting arrangement in accordance with the 172-05 series drawing designated. The complete figure number, e.g. 172-05-2, shall also be entered on the SRS with Code 1009 when Code 1686 is used.

5.9.9 Number of Digits

There are twelve codes available to specify the number of digits and character configuration for the counter. Only one code may be selected. Information concerning these codes is as follows:

Code 1700 and an "X", entered on the SRS, will specify two digits with a character configuration from 00 to 99.

Code 1701 and two numbers, entered on the SRS, will specify that the counter shall have two digits with a character configuration from 00 to the two numbers specified.

Code 1703 and an "X", entered on the SRS, will specify that the counter shall have three digits with a character configuration from 000 to 999.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1704 and three numbers, entered on the SRS, will specify that the counter shall have three digits with a character configuration from 000 to the three numbers specified.

Code 1706 and an "X", entered on the SRS, will specify that the counter shall have four digits with a character configuration from 0000 to 9999.

Code 1707 and four numbers, entered on the SRS, will specify that the counter shall have four digits with a character configuration from 0000 to the four numbers specified.

Code 1709 and an "X", entered on the SRS, will specify that the counter shall have five digits with a character configuration from 00000 to 99999.

Code 1710 and five numbers, entered on the SRS, will specify that the counter shall have five digits with a character configuration from 00000 to the five numbers specified.

Code 1712 and an "X", entered on the SRS, will specify that the counter shall have six digits with a character configuration from 000000 to 999999.

Code 1713 and six numbers, entered on the SRS, will specify that the counter shall have six digits with a character configuration from 000000 to the six numbers specified.

Code 1715 and an "X", entered on the SRS, will specify that the counter shall have seven digits with a character configuration from 0000000 to 9999999.

Code 1716 and seven numbers, entered on the SRS, will specify that the counter shall have seven digits with a character configuration from 0000000 to the seven numbers specified.

5.9.10 Register Function

There are three codes applicable to the register function of the counter. None of these codes are mandatory. Only one code may be selected. These codes and information concerning them are as follows:

Code 1720 and an "X", entered on the SRS, will specify that the counter register function shall be to add only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1721 and an "X", entered on the SRS, will specify that the counter register function shall be to subtract only.

Code 1722 and an "X", entered on the SRS, will specify that the counter register function shall be to add and subtract.

5.9.11 Reset Characteristics

There are fourteen codes applicable to reset characteristics. None of these codes are mandatory. Five codes (1740, 1741, 1758, 1760 and 1762) are applicable to the type of reset characteristic. Only one of these codes may be selected. Five codes (1744 - 1748) are applicable to the manual reset method. Only one of these codes may be selected. Three codes (1752-1754) are available to specify the reset location when viewing the register characters. Only one reset location may be selected. The remaining code (1756) is applicable to the reset style in accordance with figure 172-04-1. Information concerning these codes is as follows:

Code 1740 and an "X", entered on the SRS, will specify that the counter shall have a manual reset which resets the register to all zeros.

Code 1741 and a value, enter on the SRS, will specify that the counter shall have a manual reset which resets the register to the designated value.

Code 1744 and an "X", entered on the SRS, will specify that the manual reset method shall be a lock and key.

Code 1745 and an "X", entered on the SRS, will specify that the manual reset method shall be a knob.

Code 1746 and an "X" entered on the SRS, will specify that the manual reset method shall be a lever.

Code 1747 and an "X", entered on the SRS, will specify that the manual reset method shall be a pushbutton.

Code 1748 and an "X", entered on the SRS, will specify that the manual reset method shall be a rotary thumbwheel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1752 and an "X", entered on the SRS, will specify that the manual reset mechanism shall be located on the left hand side of the counter when viewing the register characters.

Code 1753 and an "X", entered on the SRS, will specify that the manual reset mechanism shall be located on the right hand side of the counter when viewing the register characters.

Code 1754 and an "X", entered on the SRS, will specify that the manual reset mechanism shall be located on the front of the counter when viewing the register characters. The location shall be optional.

Code 1756 and a number, entered on the SRS, will specify the reset style configuration per the designated style number of Figure 172-04-1. If Code 1756 is used, enter figure number 172-03-1 on the SRS with Code 1009 and enter the appropriate dimensional data on the SRS using codes from Table A of MIL-STD-35.

Code 1758 and an "X", entered on the SRS, will specify that the counter shall have an electrical reset which resets the register to all zeros.

Code 1760 and a value, entered on the SRS, will specify that the counter shall have an electrical reset which resets the register to the designated value.

Code 1762 and an "X", entered on the SRS, will specify that the counter shall be nonresettable.

5.9.12 Size of Figures

There are eight codes which may be used to specify the figure height and width in inches or millimetres. These codes and information concerning them are as follows:

Code 1770 or Code 1773, or both and a value(s), entered on the SRS, will specify the figure height in inches or millimetres, respectively.

Code 1771 or Code 1774, or both and a value(s), entered on the SRS, will specify the figure height tolerance in inches or millimetres, respectively.

Code 1777 or Code 1780, or both and a value(s), entered on the SRS, will specify the figure width in inches or millimetres, respectively.

Code 1778 or Code 1781, or both and a value(s), entered on the SRS, will specify the figure width tolerance in inches or millimetres, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.9.13 Altitude Range

There are four codes which may be used to psecify operating and non-operating altitude range in feet or metres. Information concerning them is as follows:

Code 5060 or Code 5061, or both and a value(s), entered on the SRS, will specify the operating altitude range from sea level to the value specified in feet or metres, respectively.

Code 5062 or Code 5063, or both and a value(s), entered on the SRS, will specify the nonoperating altitude range from sea level to the value specified in feet or metres, respectively.

5.9.14 Temperature

There are two codes applicable to the operating temperature and two codes applicable to the nonoperating temperature. Information concerning them is as follows:

Code 5068 and a value, entered on the SRS, will specify the minimum operating temperature in degrees Celsius.

Code 5069 and a value, entered on the SRS, will specify the maximum operating temperature in degrees Celsius.

Code 5070 and a value, entered on the SRS, will specify the minimum nonoperating temperature in degrees Celsius.

Code 5071 and a value, entered on the SRS, will specify the maximum nonoperating temperature in degrees Celsius.

5.9.15 Termination Data

There are eight codes applicable to three types of electrical counter terminations. Only one termination type may be selected. Code 1790 is mandatory if wire leads are to be specified and Code 1794 is mandatory if solder terminations are to be specified. Information concerning these codes is as follows:

Code 1790 and a value, entered on the SRS, will specify the number of wire leads for the counter.

Code 1791 and a value, entered on the SRS, will specify the AWG wire size of the leads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1792 and a value, entered on the SRS, will specify the minimum length of the wire leads in inches.

Code 1794 and a value, entered on the SRS, will specify the number of solder terminals for the counter.

Code 1795 and a number, entered on the SRS, will specify the minimum number of wire leads that the solder termination shall accommodate. Code 1796 is mandatory if Code 1795 is used.

Code 1796 and a value, entered on the SRS, will specify that the wires shall be an AWG wire size of the value designated.

Code 1797 and a letter, entered on the SRS, will specify the solder termination style letter per Figure 172-05-1. If Code 1797 is used, enter figure number 172-05-1 on the SRS with Code 1009.

Code 1799 and an "X", entered on the SRS, will specify that the electrical counter shall have terminals which plugs into a socket.

5.9.16 Weight

There are four codes applicable to weight. These codes and information concerning them are as follows:

Code 1800 and a value, entered on the SRS, will specify the maximum weight in ounces.

Code 1802 and a value, entered on the SRS, will specify the maximum weight in pounds.

Code 1804 and a value, entered on the SRS, will specify the maximum weight in grams.

Code 1806 and a value, entered on the SRS, will specify the maximum weight in kilograms.

5.10 Performance Requirements

5.10.1 Coil Resistance

There are two codes applicable to coil resistance. Neither of these codes are mandatory. These codes and information concerning them are as follows:

Code 1810 and a value, entered on the SRS, will specify the nominal resistance of the count coil in ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1811 and a value, entered on the SRS, will specify the nominal resistance of the reset coil in ohms.

5.10.2 Counting Rate

There are nine codes available to specify counting rates for the counter. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1816 and a value, entered on the SRS, will specify the maximum number of counts per second.

Code 1817 and a value, entered on the SRS, will specify the maximum number of counts per minute.

Code 1819 and an "X", entered on the SRS, will specify that there shall be one count per impulse which the counter receives.

Code 1820 and a value, entered on the SRS, will specify the minimum impulse rate in impulses per second.

Code 1822 and an "X", entered on the SRS, will specify that there shall be one count per shaft revolution.

Code 1824 and a value, entered on the SRS, will specify the number of counts per shaft revolution.

Code 1825 and a "X", entered on the SRS, will specify that there shall be one count per actuation.

Code 1826 and a value, entered on the SRS, will specify the minimum arc of actuation travel in degrees.

Code 1827 and a value, entered on the SRS, will specify the maximum arc of actuation travel in degrees.

5.10.3 Input Voltage

There are seven codes applicable to the voltage rating of an electrical counter. Only one voltage rating or voltage range in either volts AC or DC may be selected. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1830 and a value, entered on the SRS, will specify the voltage rating in volts ac.

Code 1832 and a value, entered on the SRS, will specify the voltage rating in volts dc.

Code 1833 and a value, entered on the SRS, will specify the voltage rating tolerance in plus or minus percent. The use of Code 1830 or 1832 is mandatory if Code 1833 is used.

Code 1835 and a value entered on the SRS, will specify the minimum counter operating voltage in volts ac. Code 1836 is mandatory if Code 1835 is used.

Code 1836 and a value, entered on the SRS, will specify the maximum counter operating voltage in volts ac.

Code 1838 and a value, entered on the SRS, will specify the minimum counter operating voltage in volts dc. Code 1839 is mandatory if Code 1838 is used.

Code 1839 and a value, entered on the SRS, will specify the maximum counter operating voltage in volts dc.

5.10.4 Operating Frequency

There are five codes applicable to the operating frequency rating. Only one frequency rating and the frequency tolerance code, if applicable, may be used. These codes and information concerning them are as follows:

Code 1845 and an "X", entered on the SRS, will specify a frequency rating of 50 hertz.

Code 1846 and an "X", entered on the SRS, will specify a frequency rating of 60 hertz.

Code 1847 and an "X", entered on the SRS, will specify a frequency rating of 400 hertz.

Code 1850 and a value, entered on the SRS, will specify the frequency rating in hertz.

Code 1852 and a value, entered on the SRS, will specify this frequency rating tolerance in plus or minus percent. The use of Code 1845, 1846, 1847 or 1850 is mandatory if Code 1852 is used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.10.5 Operating Shaft Speed

There are two codes applicable to operating shaft speed. Neither of these codes is mandatory. These codes and information concerning them is as follows:

Code 1855 and a value, entered on the SRS, will specify the maximum continuous operating speed in rpm.

Code 1856 and a value, entered on the SRS, will specify the maximum intermittent duty operating speed in rpm.

5.10.6 Power Consumption

There are six codes which may be used to specify power consumption requirements. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1860 and a value, entered on the SRS, will specify the nominal power consumption of the count coil in watts.

Code 1861 and a value, entered on the SRS, will specify the maximum power consumption of the count coil in watts.

Code 1863 and an "X", entered on the SRS, will specify that the duty shall be continuous.

Code 1864 and a value, entered on the SRS, will specify the duty cycle in percent.

Code 1865 and a value, entered on the SRS, will specify the nominal power consumption of the reset coil in watts.

Code 1866 and a value, entered on the SRS, will specify the maximum power consumption of the reset coil in watts.

5.10.7 Pulsing Characteristics

There are five codes available to specify pulsing characteristics of an electrical counter. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1870 and a value, entered on the SRS, will specify the minimum pulse timing on-time in milliseconds for the counting operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1871 and a value, entered on the SRS, will specify the minimum pulse timing off-time in milliseconds for the counting operation.

Code 1875 and a value, entered on the SRS, will specify the minimum pulse timing on-time in milliseconds for the reset operation.

Code 1876 and a value, entered on the SRS, will specify the minimum pulse timing off-time in milliseconds for the reset operation.

Code 1878 and a value, entered on the SRS, will specify the maximum on-time in seconds for the reset operation.

5.10.8 Rated Life

There are two codes applicable to the rated life of a counter. Only one of these codes may be used. These codes and information concerning them are as follows:

Code 1880 and a value, entered on the SRS, will specify the rated life in millions of counts.

Code 1882 and a value, entered on the SRS, will specify the rated life in millions of revolutions.

5.11 Design Reliability Rating

The Automated Engineering Document Preparation System (MIL-STD-35) is for use in generating procurement documents (Military Specification Exception, MSE) containing modified characteristics of an existing military document. The accumulation of several million unit-hours of testing necessary for verifying failure rate is usually not available, nor it is cost effective to require the verification testing. Therefore, this MIL-STD-35 part does not provide for specifying compliance to a failure rate level. Provision has been made for requiring that parts be designed and manufactured using designs, materials and manufacturing processes that have demonstrated compliance with a specified failure rate.

There are four codes applicable to design reliability rating. Two of the codes (7025, and 7026) are mandatory to specify this rating. Information concerning them is as follows:

Code 7025 and a value, entered on the SRS, will specify the failure rate in percent per 1000 hours for which the part is to be designed at the confidence level and conditions specified. Code 7026 and a value must be entered on the SRS when Code 7025 is entered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 7026 and a value, entered on the SRS, will specify the confidence level percent.

Code 2490 and a value, entered on the SRS, will specify the average impulse rate in pulses per minute upon which the reliability rating is based.

Code 7029 and a value, entered on the SRS, will specify the chamber temperature in degrees Celsius applicable to the design reliability rating.

5.12 Accuracy

Code 1900 is the 1006 test code (5.4).

Code 1901 is the 1006 except test code (5.4).

Code 1902 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-83040.

Code 1910 is the 1006 requirement code (5.4).

Code 1911 is the 1006 except requirement code (5.4).

To detail requirements, there are two codes available. Neither of these codes is mandatory. These codes and information concerning them are as follows:

Code 1912 and an "X", entered on the SRS, will specify there shall be no skipping or over advancing of any number or numbers.

Code 1914 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between readings of the counter under test and the control counter.

5.13 Altitude

Code 2410 is the 1006 test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2411 is the 1006 except test code (5.4).

To detail an altitude test, Codes 2412 and 2414 are mandatory. Other codes are optional. These codes and information concerning them are as follows:

Code 2412 and an "X", entered on the SRS, will specify to test in accordance with Method 500 of MIL-STD-810.

Code 2414 and a Roman numeral, entered on the SRS, will specify the procedure number of Method 500 of MIL-STD-810.

Code 2416 and a value, entered on the SRS, will specify the rate of pressure change in torr's per minute.

Code 2417 and a value, entered on the SRS, will specify the chamber internal pressure in torr.

Code 2418 and a value, entered on the SRS, will specify the chamber internal temperature in degrees Celsius.

Code 2420 is the 1006 requirement code (5.4).

Code 2421 is the 1006 except requirement code (5.4).

To detail requirements, Code 2422 is mandatory. Other codes are optional. These codes and information concerning them are as follows:

Code 2422 and an "X", entered on the SRS, will specify there shall be no evidence of damage or degradation of performance.

Code 2424 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 2426 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test is performed.

Code 2428 and an "X", entered on the SRS, will specify there shall be no miscounting of the counter when the counter accuracy is tested at the high altitude. If Code 2428 is used, Code 2430 may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z -
Check the source to verify that this is the current version before use.

Code 2430 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between readings of the counter under test and the control counter. If Code 2430 is used, Code 2428 may not be used.

5.14 Count Life

Code 1950 is the 1006 test code (5.4).

Code 1952 is the 1006 except test code (5.4).

Code 1954 and an "X", entered on the SRS, will specify to test in accordance with GG-C-00620.

Code 1960 is the 1006 requirement code (5.4).

Code 1962 is the 1006 except requirement code (5.4).

To detail requirements, there are three codes available. These codes and information concerning them are as follows:

Code 1964 and a value, entered on the SRS, will specify the minimum number of counts which shall be required without failure. If Code 1964 is used, it is mandatory to use Code 1965.

Code 1965 and a value, entered on the SRS, will specify the counting agreement required between the master counter and test counter in plus or minus counts.

Code 1967 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between readings of the counter under test and the control counter.

5.15 DC Resistance

Code 1980 is the 1006 test code (5.4).

Code 1982 is the 1006 except test code (5.4).

Code 1984 and an "X", entered on the SRS, will specify to test in accordance with Method 303 of MIL-STD-202.

Code 1985 and a value, entered on the SRS, will specify the test voltage in volts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1990 is the 1006 requirement code (5.4).

Code 1992 is the 1006 except requirement code (5.4).

The counting coil and reset coil resistances will be specified by the use of Codes 1810 and 1811 previously discussed in Section 5.10.1. Do not use Code 1990 or Code 1992 if either Code 1810 or 1811 is used.

5.16 Determination of Actuation Force

Code 1920 is the 1006 test code (5.4).

Code 1921 is the 1006 except test code (5.4).

Code 1922 and an "X", entered on the SRS, will specify to test in accordance with GG-C-00620.

Code 1930 is the 1006 requirement code (5.4).

Code 1931 is the 1006 except requirement code (5.4).

To detail requirements, there are two codes available. These codes and information concerning them are as follows:

Code 1933 and a value, entered on the SRS, will specify the maximum actuating force in pounds.

Code 1934 and a value, entered on the SRS, will specify the maximum actuating force in newtons.

5.17 Dielectric Withstanding Voltage at Reduced Barometric Pressure

Code 4883 is the 1006 test code (5.4).

Code 4884 is the 1006 except test code (5.4).

To detail a dielectric withstanding voltage test at reduced barometric pressure, Codes 6300 and 4886, and either Code 4849 or 4885, are mandatory. Other codes are optional. Information concerning them is as follows:

Code 6300 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test in accordance with Method 301 of MIL-STD-202 shall be performed at reduced barometric pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4886 and a letter, entered on the SRS, will specify the altitude shall be specified in test condition letter Method 105 of MIL-STD-202.

Code 4885 and a value, entered on the SRS, will specify dc test voltage. Do not use Code 4885 with Code 4849.

Code 4849 and a value, entered on the SRS, will specify ac test voltage. Do not use Code 4849 with Code 4885.

Code 6311 and an "X", entered on the SRS, will specify the test voltage shall be applied between terminations tied together and mounting hardware.

Code 6312 and an "X", entered on the SRS, will specify the test voltage shall be applied between terminations tied together and case.

Code 4859 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (5.7).

Code 4891 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 6280 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 4907 is the 1006 requirment code (5.4).

Code 4908 is the 1006 except requirement code (5.4).

To detail requirements, Code 4906 is mandatory and others are optional. Infomration concerning them is as follows:

Code 4906 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4901 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

Code 4894 and a value, entered on the SRS, will specify maximum leakage current in milliampers.

5.18 Dielectric Withstanding Voltage at Sea Level

Code 4860 is the 1006 test code (5.4).

Code 4861 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a test method for dielectric withstanding voltage test at sea level, Code 4862 and either Code 4854 or 4855 are mandatory. Other codes are optional. Information concerning them is as follows:

Code 4862 and an "X", entered on the SRS, will specify to test in accordance with Method 301 of MIL-STD-202.

Code 4854 and a value, entered on the SRS, will specify test dc voltage. Do not use Code 4854 with Code 4855.

Code 4855 and a value, entered on the SRS, will specify test ac voltage. Do not use Code 4855 with Code 4854.

Code 4842 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and mounting hardware.

Code 4848 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and case.

Code 4850 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (5.7).

Code 5000 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 4867 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 4873 is the 1006 requirement code (5.4).

Code 4874 is the 1006 except requirement code (5.4).

If requirements are to be detailed for the dielectric withstanding voltage test at sea level, Code 4856 is mandatory; two other codes are optional. Information concerning them is as follows:

Code 4856 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4847 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4875 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

5.19 Drop Test

Code 2450 is the 1006 test code (5.4).

Code 2451 is the 1006 except test code (5.4).

To detail a drop test, Code 2452 is mandatory. Other codes are optional. These codes and information concerning them are as follows:

Code 2452 and an "X", entered on the SRS, will specify to test in accordance with GG-C-00620.

Code 2454 or 2455, or both and a value(s), entered on the SRS, will specify the drop height in feet or metres respectively.

Code 2457 and a value, entered on the SRS, will specify the number of drop times.

Code 2460 is the 1006 requirement code (5.4).

Code 2461 is the 1006 except requirement code (5.4).

To detail requirements, it is mandatory to use code 2463. Code 2465 is optional. These codes and information concerning them are as follows:

Code 2463 and an "X", entered on the SRS, will specify there shall be no evidence of breaking, chipping or cracking.

Code 2465 and an "X", entered on the SRS, will specify there shall be no evidence of miscounting after the test.

5.20 Electromagnetic Interference

Code 2510 is the 1006 test code (5.4).

Code 2512 is the 1006 except test code (5.4).

To detail an electromagnetic interference test, it is mandatory to use Code 2514 or 2516. These codes and information concerning them are as follows:

Code 2514 and an "X", entered on the SRS, will specify to test in accordance with Method CE03 of MIL-STD-462.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2516 and an "X", entered on the SRS, will specify to test in accordance with Method RE02 of MIL-STD-462.

Code 2520 is the 1006 requirement code (5.4).

Code 2521 is the 1006 except requirement code (5.4).

To detail requirements, there are two codes available. Neither of these codes is mandatory. These codes and information concerning them are as follows:

Code 2522 and an "X", entered on the SRS, will specify that requirements shall be in accordance with Method CE03 of MIL-STD-461.

Code 2526 and an "X", entered on the SRS, will specify that requirements shall be in accordance with Method RE02 of MIL-STD-461.

5.21 Fungus

Code 4753 is the 1006 test code (5.4).

Code 4754 is the 1006 except test code (5.4).

To detail a fungus test, Code 4755 is mandatory. Code 4756 is optional.

Code 4755 and an "X", entered on the SRS, specifies to test in accordance with Method 508 of MIL-STD-810.

Code 4756 and a value, entered on the SRS, will specify duration of test in days (if other than 28 days).

Code 4759 is the 1006 requirement code (5.4).

Code 4760 is the 1006 except requirement code (5.4).

Code 4761 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. The manufacturer shall verify by certification that all external materials are fungus resistant or shall perform the fungus test as specified. When the fungus test is performed, there shall be no evidence of fungus growth on the external surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4762 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. When the fungus test specified is performed, there shall be no evidence of fungus growth on the external surfaces.

Code 2100 and an "X", entered on the SRS, will specify there shall be no miscounting of the counter when the counter accuracy is tested. If Code 2100 is used, Code 2102 may not be used.

Code 2102 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between readings of the counter under test and the control counter. If Code 2102 is used, Code 2100 may not be used.

5.22 High Temperature

Code 2580 is the 1006 test code (5.4).

Code 2581 is the 1006 except test code (5.4).

To detail a high temperature test, it is mandatory to use Codes 2582 and 2584. Other codes are optional. These codes and information concerning them are as follows:

Code 2582 and an "X", entered on the SRS, will specify to test in accordance with Method 501 of MIL-STD-810.

Code 2584 and a Roman numeral, entered on the SRS, will specify the procedure number of Method 501 of MIL-STD-810.

Code 2586 and a value, entered on the SRS, will specify the chamber temperature in degrees Celsius (if other than 71 degrees Celsius).

Code 2587 and a value, entered on the SRS, will specify the highest operating temperature in degrees Celsius.

Code 2590 is the 1006 requirement code (5.4).

Code 2591 is the 1006 except requirement code (5.4).

To detail requirements, it is mandatory to use Code 2592. Other codes are optional. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2592 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2594 and an "X", entered on the SRS, will specify there shall be no degradation of performance after the test.

Code 2596 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at high temperature.

Code 2597 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test is performed.

Code 2600 or Code 2601, or both and a value(s), entered on the SRS, will specify the maximum drive torque at high temperature in ounce-inches or newton-metres, respectively.

Code 2604 or Code 2605, or both and a value(s), entered on the SRS, will specify the maximum reset torque at high temperature in ounce-inches or newton-metres, respectively.

Code 2607 and an "X", entered on the SRS, will specify that during and after the high temperature test there shall be no miscountir · when the counter accuracy is tested. If Code 2607 is used, Code 2608 may not be used.

Code 2608 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between readings of the counter under test and the control counter when the counter accuracy is tested during and after the high temperature test.

5.23 Humidity

Code 4787 is the 1006 test code (5.4).

Code 4788 is the 1006 except test code (5.4).

Code 4871 and an "X", entered on the SRS, will specify to test in accordance with Method 507 of MIL-STD-810.

If Code 4871 is used, five codes are available for specifying details of the test. Code 4767 is mandatory. The other codes are optional. Information concerning them is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4767 and a Roman numeral, entered on the SRS, will specify the applicable test procedure from Method 507 of MIL-STD-810.

Code 4800 and a value, entered on the SRS, will specify the number of test cycles (if other than 20 cycles is required).

Code 4764 and an "X", entered on the SRS, will specify water purity shall be determined by the conductivity method.

Code 4777 and a value, entered on the SRS, will specify the extreme temperature before testing in degrees Celsius. Code 4777 should be used only if Code 4767 is used to specify Procedure I.

Code 4778 and a value, entered on the SRS, will specify duration in hours of the exposure to the extreme temperature. Code 4778 should be used only if Code 4767 is used to specify Procedure I.

Code 4853 and an "X", entered on the SRS, will specify to test in accordance with Method 103 of MIL-STD-202.

If Code 4853 is used, four codes are available for specifying details of the test. Code 4890 is mandatory. The other codes are optional. Information concerning them is as follows:

Code 4890 and a test condition letter, entered on the SRS, will specify the test letter entered shall apply.

Code 6206 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed after drying.

When another test, (e.g., insulation resistance) is required to be performed, subparagraphs will be printed in Section 4 of the MSE specifying the test be performed. The code with which the requirement in Section 3 of the MSE is specified will cause the subparagraph in Section 4 to be printed.

Code 4797 is the 1006 requirement code (5.4).

Code 4798 is the 1006 except requirement code (5.4).

Code 4799 and an "X", entered on the SRS, will specify there shall be no evidence of corrosion or physical damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4791 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1477 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test at sea level is performed.

Code 4795 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 4805 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

Code 2120 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the humidity test. Do not use Code 2120 with Code 2122.

Code 2122 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between readings of the counter under test and the control counter when the counter accuracy is tested after the humidity test.

5.24 Insulation Resistance

Code 1370 is the 1006 test code (5.4).

Code 1371 is the 1006 except test code (5.4).

To detail an insulation resistance test, it is mandatory that Codes 1511 and Code 1378 or Code 1373 be used. Other codes are optional.

Code 1511 and an "X", entered on the SRS, will specify the insulation resistance test method shall be specified in Method 302 of MIL-STD-202.

Code 1378 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 302 of MIL-STD-202.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc shall be the value entered.

Code 1376 and a value, entered on the SRS, will specify the electrification time in seconds if other than two minutes.

Code 1377 and a value, entered on the SRS, will specify the minimum measurement error in percent permitted at the insulation resistance value required if other than 10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1497 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between terminations tied together and mounting hardware.

Code 1498 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between terminations tied together and case.

Code 1372 and a value, entered on the SRS, will specify the test temperature in degrees Celsius if other than as specified in MIL-STD-202 standard test conditions, or the first test temperature if the insulation resistance test is to be performed at two temperatures.

Code 1381 and a value, entered on the SRS, will specify the second test temperature in degrees Celsius when the insulation resistance test is to be performed at two temperatures.

Code 1383 and a value, entered on the SRS, will specify plus or minus test temperature tolerance in degrees Celsius.

Code 1379 is the 1006 requirement code (5.4).

Code 1380 is the 1006 except requirement code (5.4).

Code 1384 and a value, entered on the SRS, will specify the insulation resistance in megohms at the first test temperature specified with Code 1372.

Code 1387 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the second test temperature specified with Code 1381.

Code 1388 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1386 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when no temperature is specified with Codes 1372 or 1381.

5.25 Low Temperature

Code 2680 is the 1006 test code (5.4).

Code 2681 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a low temperature test, it is mandatory to use Code 2682. Other codes are optional. These codes and information concerning them are as follows:

Code 2682 and an "X", entered on the SRS, will specify to test in accordance with Procedure I of Method 502 of MIL-STD-810.

Code 2684 and a value, entered on the SRS, will specify the non-operating temperature in degrees Celsius.

Code 2685 and a value, entered on the SRS, will specify the conditioning time in hours. Code 2684 is mandatory if Code 2685 is used.

Code 2686 and a value, entered on the SRS, will specify the lowest operating temperature in degrees Celsius.

Code 2690 is the 1006 requirement code (5.4).

Code 2691 is the 1006 except requirement code (5.4).

To detail requirements, it is mandatory to use Code 2692. Other codes are optional. These codes and information concerning them are as follows:

Code 2692 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2694 and an "X", entered on the SRS, will specify that there shall be no degradation of performance after the low temperature test.

Code 2697 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 2698 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test is performed.

Code 2700 or Code 2701, or both and a value(s), entered on the SRS, will specify the maximum drive shaft torque at low temperature in ounce-inches or newton-metres, respectively.

Code 2703 or Code 2704, or both and a value(s), entered on the SRS, will specify the maximum reset shaft torque at low temperature in ounce-inches or newton-metres, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2706 and an "X", entered on the SRS, will specify that during and after the test there shall be no miscounting when the counter accuracy is tested. Do not use Code 2706 with Code 2707.

Code 2707 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between the readings of the counter under test and the control counter during and after the low temperature test.

5.26 Magnetic Position

Code 2200 is the 1006 test code (5.4).

Code 2202 is the 1006 except test code (5.4).

Code 2204 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-83040.

Code 2210 is the 1006 requirement code (5.4).

Code 2212 is the 1006 except requirement code (5.4).

Code 2214 and a value, entered on the SRS, will specify the maximum compass needle deflection in degrees.

5.27 Operability

Code 2220 is the 1006 test code (5.4).

Code 2222 is the 1006 except test code (5.4).

Code 2224 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-60618.

Code 2230 is the 1006 requirement code (5.4).

Code 2231 is the 1006 except requirement code (5.4).

To detail requirements there are six codes available. None of these codes are mandatory. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2233 or 2234, or both and a value(s), entered on the SRS, will specify the maximum drive shaft torque in ounce-inches or newton-metres, respectively.

Code 2236 or 2237, or both and a value(s), entered on the SRS, will specify the maximum reset shaft torque in ounce-inches or newton-metres, respectively.

Code 2239 or 2240, or both and a value(s), entered on the SRS, will specify the maximum reset shaft force in pounds or newtons, respectively.

5.28 Power Supply Variation

Code 2250 is the 1006 test code (5.4).

Code 2251 is the 1006 except test code (5.4).

Code 2252 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-83040.

To detail voltage and frequency exceptions to MIL-C-83040, twelve codes are available. Codes for three different ac test voltages and either one or two frequencies for each voltage are available. Two codes are also available to specify dc voltage exceptions. Information concerning these codes is as follows:

Code 2254 and a value, entered on the SRS, will specify a test voltage in volts ac. Code 2255 is mandatory if Code 2254 is used. Code 2256 is optional.

Code 2255 or Code 2256, or both and a value(s), entered on the SRS, will specify the test frequency(s) in hertz.

Code 2258 and a value, entered on the SRS, will specify a test voltage in volts ac. Code 2259 is mandatory if Code 2258 is used. Code 2260 is optional.

Code 2259 or Code 2260, or both and a value(s), entered on the SRS, will specify the test frequency(s) in hertz.

Code 2262 or a value, entered on the SRS, will specify a test voltage in volts ac. Code 2263 is mandatory if Code 2262 is used. Code 2264 is optional.

Code 2263 or Code 2264, or both and a value(s), entered on the SRS, will specify the test frequency(s) in hertz.

Code 2266 and a value, entered on the SRS, will specify a test voltage in volts dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2267 and a value, entered on the SRS, will specify a test voltage in volts dc.

Code 2270 is the 1006 requirement code (5.4).

Code 2272 is the 1006 except requirement code (5.4).

Code 2274 and a value, entered on the SRS, will specify the maximum difference in percent between the readings of the counter under test and the control counter.

5.29 Salt Fog

Code 4776 is the 1006 test code (5.4).

Code 4779 is the 1006 except test code (5.4).

To detail a salt fog test, Code 4780 is mandatory. Other codes are optional. These codes and information concerning them are as follows:

Code 4780 and an "X", entered on the SRS, will specify to test in accordance with Method 509 of MIL-STD-810.

Code 4786 and a value, entered on the SRS, will specify percent of salt in the solution that will be used for the test, if other than 5 percent.

Code 4783 and a value, entered on the SRS, will specify the exposure time in hours, if other than 48 hours.

Code 4775 and a value, entered on the SRS, will specify the drying period in hours.

There are three codes to specify mounting. Only one of these codes may be used. These codes and information concerning them are as follows:

Code 4765 and an "X", entered on the SRS, will specify that mounting shall be by normal mounting means.

Code 4766 and an "X", entered on the SRS, will specify that mounting shall be by any suitable method.

Code 4773 and a document designation, entered on the SRS, will specify that mounting shall be in accordance with the document. The applicable test name from the reference document should be entered on the SRS in addition to the document designation (5.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4997 is the 1006 requirement code (5.4).

Code 4998 is the 1006 except requirement code (5.4).

To detail requirements, there are four codes available. Only Code 4999 is mandatory. These codes and information concerning them are as follows:

Code 4999 and an "X", entered on the SRS, will specify no evidence of physical damage.

Code 2831 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 2832 and an "X", entered on the SRS, will specify there shall be no miscounting when the counqer accuracy is tested after the test. Do not use Code 2832 with Code 2833.

Code 2833 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between the readings of the counter under test and the control counter when the counter accuracy is tested after the test.

5.30 Seal

Code 4733 is the 1006 test code (5.4).

Code 4734 is the 1006 except test code (5.4).

To detail a seal test, Codes 4732 and 4737 are mandatory. Other codes are optional unless test condition letter C is used. If test condition letter C is used, Codes 4740 and 4741 are mandatory.

Code 4732 and an "X", entered on the SRS, will specify to test in accordance with Method 112 of MIL-STD-202.

Code 4737 and a test condition letter, entered on the SRS, will specify the test condition letter entered shall apply.

If test condition letter A or B is specified, Codes 4738 and/or 4739 may be used if exception to the parameters in the specified test condition letter are required. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4738 and a media description, entered on the SRS, will specify the media to be used for the immersion bath.

Code 4739 and a value, entered on the SRS, will specify the minimum bath temperature in degrees Celsius.

If test condition letter C is specified, Codes 4740 and 4741 are mandatory. Information concerning them is as follows:

Code 4740 and a number, entered on the SRS, will specify the applicable procedure as specified in test condition letter C, Method 112 of MIL-STD-202.

Code 4741 and a value, entered on the SRS, will specify the leak rate sensitivity setting in atm cc/sec for the applicable leak detector in accordance with the procedure specified.

Code 4750 and a letter, entered on the SRS, will specify the gross leak test condition letter applicable after completion of procedure III or IV, test condition C, Method 112 of MIL-STD-202.

Code 4751 and a value, entered on the SRS, will specify the pressure in torr to which the chamber is to be evacuated for procedure IV of test condition C, Method 112 of MIL-STD-202.

Code 4735 and a value, entered on the SRS, will specify the pressure in kilopascals to which the chamber is to be evacuated for procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 4743 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for test condition letters D or E, Method 112 of MIL-STD-202.

Code 4744 is the 1006 requirement code (5.4).

Code 4745 is the 1006 except requirement code (5.4).

Code 4746 and an "X", entered on the SRS, will specify the leak rate measured shall be not greater than the leak rate sensitivity specified. This code is intended for use when test condition letter C is specified, but may be used with any test condition letter, Method 112 of MIL-STD-202.

Code 4748 and an "X", entered on the SRS, will specify there shall be no bubbles indicative of leakage. This code is applicable to all test condition letters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.31 Shock

Code 2880 is the 1006 test code (5.4).

Code 2881 is the 1006 except test code (5.4).

Code 2883 and an "X", entered on the SRS, will specify to test in accordance with Method 516 of MIL-STD-810.

Code 2885 and a Roman numeral, entered on the SRS, will specify the procedure number from Method 516 of MIL-STD-810.

There are two codes to specify the shock pulse configuration figure number which is applicable to test procedures I, III, and IV only. Only one of these codes may be used. These codes and information concerning them are as follows:

Code 2887 and an "X", entered on the SRS, will specify that the shock pulse configuration figure shall be figure 516.1-1.

Code 2888 and an "X", entered on the SRS, will specify that the shock pulse configuration figure shall be figure 516.1-2.

Code 2890 and a value, entered on the SRS, will specify the peak shock pulse value in g's.

Code 2891 and a value, entered on the SRS, will specify the nominal shock duration in milliseconds.

There are two codes to specify shock testing at temperatures other than room ambient. Either or both codes may be used. These codes and information concerning them are as follows:

Code 2894 and a value, entered on the SRS, will specify the low temperature in degrees Celsius.

Code 2895 and a value, entered on the SRS, will specify the high temperature in degrees Celsius.

Code 2904 is the 1006 requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2905 is the 1006 except requirement code (5.4).

To detail requirements, there are four codes available. Only Code 2906 is mandatory. The other codes are optional. These codes and information concerning them are as follows:

Code 2906 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2907 and an "X", entered on the SRS, will specify that after the test there shall be no degradation of performance.

Code 2860 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the test. Do not use Code 2860 with Code 2861.

Code 2861 and a value, entered on the SRS, will specify the maximum difference in percent between the readings of the counter under test and the control counter when the counter accuracy is tested after the shock test.

5.32 Shock, High Impact

Code 1485 is the 1006 test code (5.4).

Code 1486 is the 1006 except test code (5.4).

To detail a high impact shock test, Code 1482 and Codes 1488, 1478, or 1468 are mandatory. Codes 1488, 1478, and 1468 shall be not used together. Information concerning them is as follows:

Code 1482 and "X", entered on the SRS, will specify to test in accordance with Method 207 of MIL-STD-202.

Code 1488 and a figure number, entered on the SRS, will specify the applicable mounting fixture for the high impact shock test. Only the number is entered on the SRS. The number is selected from 207-4A, 207-4B, 207-5 or 207-6 as shown in Method 207 of MIL-STD-202.

Code 1478 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for the high impact shock test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 1468 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document. The applicable test name shall be entered on the SRS in addition to the document designation (5.7).

Code 1493 is the 1006 requirement code (5.4).

Code 1494 is the 1006 except requirement code (5.4).

To detail requirements, there are four codes available. Only Code 1495 is mandatory. Information concerning them is as follows:

Code 1495 and an "X", entered on the SRS, will specify no evidence of physical damage.

Code 1464 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2864 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the shock test. Do not use Code 2864 with Code 2865.

Code 2865 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between the readings of the counter under test and the control counter when the counter accuracy is tested after the shock test. Do not use Code 2865 with Code 2864.

5.33 Shock, Specified Pulse

Code 1501 is the 1006 test code (5.4).

Code 1502 is the 1006 except test code (5.4).

To detail a specified pulse shock test, it is mandatory to use Codes 1500 and 1504. Other codes are optional.

Code 1500 and an "X", entered on the SRS, will specify to test in accordance with Method 213 of MIL-STD-202.

Code 1504 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 213 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are three codes to specify mounting. Only one of these codes may be used. Information concerning them is as follows:

Code 4684 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document. The applicable test name from the reference document shall be entered on the SRS in addition to the document designation (5.7).

Code 4685 and an "X", entered on the SRS, will specify mounting shall be by normal means.

Code 4686 and an "X", entered on the SRS, will specify mounting shall be by any suitable method.

Code 1507 is the 1006 requirement code (5.4).

Code 1508 is the 1006 except requirement code (5.4).

To detail requirements, there are four codes available. Only 1509 is mandatory. Information concerning them is as follows:

Code 1509 and an "X", entered on the SRS, will specify no evidence of physical damage.

Code 4703 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2867 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the shock test. Do not use Code 2867 with Code 2868.

Code 2868 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between readings of the counter under test and the control counter when the counter accuracy is tested after the shock test.

5.34 Solderability

Code 4661 is the 1006 test code (5.4).

Code 4662 is the 1006 except test code (5.4).

To detail a solderability test, it is mandatory to use Code 4683. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4683 and an "X", entered on the SRS, will specify to test in accordance with Method 208 of MIL-STD-202.

Code 4666 and a value (quantity), entered on the SRS, will specify the quantity of terminations on each device to be tested. This code is only used when all terminations are not tested.

Code 4667 and a value, entered on the SRS, will specify the depth in inches of immersion of flux and solder. This code and value are entered when the required depth of immersion is to be other than to within 0.05 inch of the body.

Code 4663 and a value, entered on the SRS, will specify the depth in millimetres of immersion in flux and solder.

Code 4664 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of inches from the body of the device.

Code 4665 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of millimetres from the body of the device.

Code 4673 is the 1006 requirement code (5.4).

Code 4674 is the 1006 except requirement code (5.4).

Code 4675 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are detailed. Other codes are optional.

Code 4672 and an "X", entered on the SRS, will specify the device shall meet the evaluation criteria specified in Method 208 of MIL-STD-202.

Code 4677 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

5.35 Speed

Code 2170 is the 1006 test code (5.4).

Code 2171 is the 1006 except test code (5.4).

To detail a speed test, Code 2172 is mandatory. Other codes are optional. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2172 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-60618.

Code 2174 and a value, entered on the SRS, will specify the speed in RPM at which the test shall be conducted in the clockwise direction. Code 2175 is mandatory if Code 2174 is used.

Code 2175 and a value, entered on the SRS, will specify the test duration in minutes.

Code 2177 and a value, entered on the SRS, will specify the speed in RPM at which the test shall be conducted in the counterclockwise direction. Code 2178 is mandatory if Code 2177 is used.

Code 2178 and a value, entered on the SRS, will specify the test duration in minutes.

Code 2180 is the 1006 requirement code (5.4).

Code 2182 is the 1006 except requirement code (5.4).

To detail requirements, it is mandatory to use code 2184. Other codes are optional. These codes and information concerning them are as follows:

Code 2184 and an "X", entered on the SRS, will specify there shall be no evidence of binding, slipping or miscounting.

Code 2186 or Code 2188, or both and a value, entered on the SRS, will specify the maximum drive shaft torque in ounce-inches or newton-metres, respectively, after the speed test.

5.36 Thermal Shock

Code 4712 is the 1006 test code (5.4).

Code 4713 is the 1006 except test code (5.4).

To detail a thermal shock test, it is mandatory to use Codes 4714 and 4715. Code 4714 and an "X", entered on the SRS, will specify to test in accordance with Method 107 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4715 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4719 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document (5.7).

Code 4720 is the 1006 requirement code (5.4).

Code 4722 is the 1006 except requirement code (5.4).

Code 4723 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the thermal shock test.

Code 4726 and an "A", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2480 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the test. Do not use Code 2480 with Code 2482.

Code 2482 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between the readings of the counter under test and the control counter when the counter accuracy is tested after the test. Do not use Code 2482 with Code 2480.

5.37 Vibration

Code 1521 is the 1006 test code (5.4).

Code 1505 is the 1006 except test code (5.4).

To detail a vibration test, Codes 1514 and 1518 are mandatory. Other codes are optional. Information concerning these codes is as follows:

Code 1514 and an "X", entered on the SRS, will specify that the vibration test shall be as specified in Method 514 of MIL-STD-810.

Code 1518 and a Roman numeral value, entered on the SRS, will specify the applicable procedure number from Method 514 of MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If the test curve is to be specified, it is mandatory to enter Codes 1525 and 7325 on the SRS. Information concerning these codes is as follows:

Code 1525 and a letter(s), entered on the SRS, will specify the letter(s) that identifies the test curve(s).

Code 7325 and a figure number, entered on the SRS, will specify the test curve figure number.

Code 3008 and an "X", entered on the SRS, will specify that the item shall not be operated while in the vibration test.

Code 3010 and a value, entered on the SRS, will specify limitation of transverse motion with respect to input motion in percent.

Code 3011 and a value, entered on the SRS, will specify the low test temperature in degrees Celsius. Code 3012 is mandatory if Code 3011 is used.

Code 3012 and a value, entered on the SRS, will specify the test duration in minutes.

Code 3013 and a value, entered on the SRS, will specify the high test temperature in degrees Celsius. Code 3014 is mandatory if Code 3013 is used.

Code 3014 and a value, entered on the SRS, will specify the test duration in minutes.

Code 4680 is the 1006 requirement code (5.4).

Code 4681 is the 1006 except requirement code (5.4).

To detail vibration requirements, Code 4682 is mandatory. Other codes are optional. Information concerning these codes is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4682 and an "X", entered on the SRS, will specify that there shall be no evidence of physical damage.

Code 2308 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the test. Do not use Code 2308 with Code 2309.

Code 2309 and a value, entered on the SRS, will specify the maximum difference in percent which shall be allowed between the readings of the counter under test and the control counter when the counter accuracy is tested after the test.

5.38 Vibration, High Frequency

Code 1445 is the 1006 test code (5.4).

Code 1446 is the 1006 except test code (5.4).

Code 1447 and an "X", entered on the SRS, will specify to test in accordance with Method 204 of MIL-STD-202. To detail the high frequency vibration test, Code 1447 and Code 1448 are mandatory. Other codes are optional.

Code 1448 and a letter, entered on the SRS, will specify the applicable test condition letter as selected from Method 204 of MIL-STD-202.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4709 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4708 and an "X", entered on the SRS, will specify normal usage mounting means shall be used.

Code 4707 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

There are two codes available to specify the method of determining mechanical resonance. Only one of the codes may be entered. Information concerning them is as follows:

Code 1533 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored visually by means of a strobotac.

Code 1534 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored by electrical output indicators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are three codes available to specify the direction of motion. These may be used as required.

Code 4887 and an "X", entered on the SRS, will specify motion shall be parallel to the longitudinal axis.

Code 4888 and an "X", entered on the SRS, will specify motion shall be perpendicular to the longitudinal axis.

Code 4889 and an "X", entered on the SRS, will specify motion shall be in each of three mutually perpendicular axes.

Code 1454 is the 1006 requirement code (5.4).

Code 1455 is the 1006 except requirement code (5.4).

Code 1456 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the high frequency vibration test.

Code 1469 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2300 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the test. Do not use Code 2300 with Code 2301.

Code 2301 and a value, entered on the SRS, will specify the maximum difference in percent between the readings of the counter under test and the control counter when the counter accuracy is tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.39 Vibration, Low Frequency

Code 1465 is the 1006 test code (5.4).

Code 1466 is the 1006 except test code (5.4).

Code 1467 and an "X", entered on the SRS, will specify to test in accordance with Method 201 of MIL-STD-202. To detail the low frequency vibration test, Code 1467 is mandatory. Other codes are optional.

Code 1470 and a value, entered on the SRS, will specify the duration in hours of vibration per axis. This code should only be used when the required vibration per axis is other than 2 hours as specified in Method 201 of MIL-STD-202.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4731 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4730 and an "X", entered on the SRS, will specify normal mounting means shall be used.

Code 4729 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

There are three codes available to specify the direction of motion. These may be used as required.

Code 1535 and an "X", entered on the SRS, will specify motion shall be parallel to the longitudinal axis.

Code 1536 and an "X", entered on the SRS, will specify motion shall be perpendicular to the longitudinal axis.

Code 1537 and an "X", entered on the SRS, will specify motion shall be in each of three mutually perpendicular axes.

Code 1474 is the 1006 requirement code (5.4).

Code 1475 is the 1006 except requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1476 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the low frequency vibration test.

Code 1480 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2650 and an "X", entered on the SRS, will specify there shall be no miscounting when the counter accuracy is tested after the test. Do not use Code 2650 with Code 2652.

Code 2652 and a value, entered on the SRS, will specify the maximum difference in percent between the readings of the counter under test and the control counter when the counter accuracy is tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.3	Enter on the SRS requirements from MIL-STD-35	
5.9	Design and Construction	
5.9.1	Classification (Per Code 1006 Document)	
	Type (Roman numeral)	1566
	Class (number)	1568
	Number of Counting Units per Tier (quantity)	1570
	Number of Tiers (quantity)	1572
5.9.2	Color of Figures	
	(Select as required)	
	White on black.	1576
	Black on white.	1577
	Color number per FED-STD-595	
	Figure color (no.)	1578
	Background color (no.)	1579
	Unit wheel color	
	Figure (color)	1580
	Color number per FED-STD-595 (no.)	1581
	Background (color)	1582
	Color number per FED-STD-595 (no.)	1583

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.3	Drive Type (Mechanical Counters) (Select one)	
	Direct drive.	1600
	Geared drive.	1601
	Ratchet drive.	1602
	Revolution drive.	1604
	Rotary ratchet drive.	1606
	Bearing type (Select one)	
	Ball bearings.	1608
	Needle bearings.	1610
	Sleeve bearings.	1612
5.9.4	Drive Shaft Location (Mechanical Counters)	
	*Shaft location (Select one)	
	End 1 - Left hand side of 172-02-series figure (entire figure no.)	1622
	End 2 - Right hand side of 172-02-series figure (entire figure no.)	1624
	Ratchet drive per figure 172-Ø3-1.	1625

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.9.5	Drive Shaft Rotation (Mechanical Counters)	
	(Viewing drive shaft end)	
	(Select one)	
	CW.	1640
	CCW.	1642
	CW (Add)/CCW (Subtract).	1643
	CCW (Add)/CW (Subtract).	1644
5.9.6	Enclosure Type (Select one)	
	Unenclosed.	1650
	Encased.	1652
	Hermetically Sealed.	1654
5.9.7	Lubrication (Select one)	
	Lubrication not required.	1660
	Lubricate with oil.	1662
	(Specification number)	1663
	Lubricate with grease.	1664
	(Specification number)	1665

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.8	Mounting	
	Style (Select one)	
	Base.	1672
	Flange.	1674
	Panel.	1676
	Plug-in.	1678
	Rear.	1680
	Stud.	1682
	Mounting Arrangement	
	Figure 172-Ø5 series drawing (entire figure number)	1686
5.9.9	Number of Digits (Select one)	
	Two Digits.	
	00 to 99.	1700
	00 to (no.)	1701
	Three Digits.	
	000 to 999.	1703
	000 to (no.)	1704

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.9 (Cont)	Number of Digits (Select one) (Cont)	
	Four Digits.	
	0000 to 9999.	1706
	0000 to (no.)	1707
	Five Digits.	
	00000 to 99999.	1709
	00000 to (no.)	1710
	Six Digits.	
	000000 to 999999.	1712
	000000 to (no.)	1713
	Seven Digits.	
	0000000 to 9999999.	1715
	0000000 to (no.)	1716
5.9.10	Register Function (Select one)	
	Add.	1720
	Subtract.	1721
	Add/Subtract.	1722

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.11	Reset Characteristics	
	Manual Reset (Select one)	
	To zero.	1740
	(To Number)	1741
	Reset Method (Select one)	
	Key.	1744
	Knob.	1745
	Lever.	1746
	Pushbutton.	1747
	Rotary Thumbwheel.	1748
	Reset Location (Viewing register characteristics)	
	(Select one)	
	Left hand side of counter.	1752
	Right hand side of counter.	1753
	Front of counter (location optional).	1754
	Reset Style.	
	Style per figure 172-Ø4-1 (no.)	1756

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.11 (Cont)	Reset Characteristics (Cont)	
	Electrical Reset (Select one)	
	To zero.	1758
	(To number)	1760
	Nonresettable.	1762
5.9.12	Size of Figures	
	Height	
	(in.)	1770
	(± in.)	1771
	(mm)	1773
	(± mm)	1774
	Width	
	(in.)	1777
	(± in.)	1778
	(mm)	1780
	(± mm)	1781

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.13	Altitude Range	
	Operating condition	
	Sea level to (ft)	5060
	Sea level to (m)	5061
	Nonoperating condition	
	Sea level to (ft)	5062
	Sea level to (m)	5063
5.9.14	Temperature	
	Operating	
	Minimum temperature (deg C)	5068
	Maximum temperature (deg C)	5069
	Nonoperating	
	Minimum temperature (deg C)	5070
	Maximum temperature (deg C)	5071

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.15	Termination Data (Select one)	
	Wire leads	
	*Number of leads (no.)	1790
	AWG (no.)	1791
	Minimum length (in.)	1792
	Solder terminals	
	*Number of terminals (no.)	1794
	Minimum wire accommodation (number)	1795
	*AWG (no.)	1796
	Style letter per figure 172-Ø6-1 (letter)	1797
	Plug-in terminals.	1799
5.9.16	Weight, Maximum	
	(oz)	1800
	(lb)	1802
	(g)	1804
	(kg)	1806

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.10	Performance Requirements	
5.10.1	Coil Resistance	
	Count Coil (ohms)	1810
	Reset Coil (ohms)	1811
5.10.2	Counting Rate	
	(Select as required)	
	Maximum counts per second (no.)	1816
	Maximum counts per minute (no.)	1817
	One count per impulse.	1819
	Minimum impulse rate (impulses per second)	1820
	One count per shaft revolution.	1822
	Number of counts per shaft revolution (no.)	1824
	One count per actuation.	1825
	Min arc (deg)	1826
	Max arc (deg)	1827

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.10.3	Input Voltage (Select as required)	
	(Vac)	1830
	(Vdc)	1832
	Tolerance (± pct)	1833
	Operating voltage range	
	Minimum voltage (Vac)	1835
	*Maximum voltage (Vac)	1836
	Minimum voltage (Vdc)	1838
	*Maximum voltage (Vdc)	1839
5.10.4	Operating Frequency	
	50 Hz.	1845
	60 Hz.	1846
	400 Hz.	1847
	(Hz)	1850
	Tolerance (± pct)	1852

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10.5	Operating Shaft Speed	
	Maximum continuous duty (rpm)	1855
	Maximum intermittent duty (rpm)	1856
5.10.6	Power Consumption	
	Count coil	
	Nominal (W)	1860
	Maximum (W)	1861
	Duty cycle (Select one)	
	Continuous.	1863
	(Pct)	1864
	Reset coil	
	Nominal (W)	1865
	Maximum (W)	1866
5.10.7	Pulsing Characteristics	
	Counting Operation	
	Minimum Pulse Timing	
	On-time (ms)	1870
	Off-time (ms)	1871

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10.7 (Cont)	Pulsing Characteristics (Cont)	
	Reset Operation	
	Minimum Pulse Timing	
	On-time (ms)	1875
	Off-time (ms)	1876
	Maximum On Time (s)	1878
5.10.8	Rated Life (Select one)	
	Millions of counts (no.)	1880
	Millions of revolutions (no.)	1882
5.11	Design Reliability Rating	
	*Failure rate (pct/1000 hr)	7025
	*Confidence level (pct)	7026
	Average impulse rate (pulses per minute)	2490
	Test temperature (deg C)	7029

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12	Accuracy	
	(Select one test method)	
	Test per 1006 document.	1900
	Test per 1006 document except ____	1901
	Test per MIL-C-83040.	1902
	(Select one requirement)	
	Requirement(s) per 1006 document.	1910
	Requirement(s) per 1006 document except ____	1911
	Requirement(s) as follows:	
	No skipping or over-advancing of any number or numbers.	1912
	Maximum difference between counter under test and control counter readings (± pct)	1914
5.13	Altitude	
	(Select one test method)	
	Test per 1006 document.	2410
	Test per 1006 document except ____	2411

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.13 (Cont)	Altitude (Cont)	
	Test per MIL-STD-810 Method 500.	2412
	*Procedure number (no.)	2414
	Maximum rate of pressure change (torr per min)	2416
	For test procedure II only	
	*Chamber internal pressure reduced to (torr)	2417
	Chamber internal temperature reduced to (deg C) (if other than -54 deg C)	2418
	(Select one requirement)	
	Requirement(s) per 1006 document.	2420
	Requirement(s) per 1006 document except ____	2421
	Requirement(s) as follows:	
	*No evidence of damage or degradation of performance.	2422
	Minimum insulation resistance (megohms)	2424

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13 (Cont)	Altitude (Cont)	
	After the test, no evidence of arcing, flashover, or breakdown resulting from dwv test.	2426
	Accuracy at specified altitude (Select one)	
	No miscounting allowed.	2428
	Maximum difference between counter under test and control counter readings (± pct)	2430
5.14	Count Life	
	(Select one test method)	
	Test per 1006 document.	1950
	Test per 1006 document except ____	1952
	Test per GG-C-00620.	1954
	(Select one requirement)	
	Requirement(s) per 1006 document.	1960
	Requirement(s) per 1006 document except ____	1962

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.14 (Cont)	Count Life (Cont)	
	Requirement(s) as follows:	
	Minimum counts required without failure (no.)	1964
	*Counting agreement required between master counter and test counter (± counts)	1965
	Maximum difference between counter under test and control counter readings (± pct)	1967
5.15	DC Resistance	
	(Select one test method)	
	Test per 1006 document.	1980
	Test per 1006 document except ____	1982
	Test per MIL-STD-202 Method 302.	1984
	Test voltage (V)	1985
	(Select one requirement)	
	Requirement(s) per 1006 document.	1990
	Requirement(s) per 1006 document except ___	1992
	Requirement(s) as follows:	
	As specified herein (see 5.10.1)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.16	Determination of Acutation Force	
	(Select one test method)	
	Test per 1006 document.	1920
	Test per 1006 document except ____	1921
	Test per GG-C-00620.	1922
	(Select one requirement)	
	Requirement(s) per 1006 document.	1930
	Requirement(s) per 1006 document except ____	1931
	Requirement(s) as follows:	
	Maximum actuating force	
	(lbs)	1933
	(N)	1934
5.17	Dielectric Withstanding Voltage at Reduced Barometric Pressure	
	(Select one test method)	
	Test per 1006 document.	4883
	Test per 1006 document except ____	4884

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.17 (Cont)	Dielectric Withstanding Voltage at Reduced Barometric Pressure (Cont)	
	Test per MIL-STD-202, Method 301.	6300
	*Altitude per Method 105 of MIL-STD-202.	
	Test condition (letter)	4886
	*Test voltage (Select one)	
	(Vdc)	4885
	(Vac)	4849
	Point of voltage application	
	Between termination tied together and mounting hardware.	6311
	Between termination tied together and case.	6312
	Special preparation in accordance with (document no., 5.7)	4859
	Duration of voltage application (s)	4891
	Mounting shall be in accordance with (document no., 5.7)	6280

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.17 (Cont)	Dielectric Withstanding Voltage at Reduced Barometric Pressure (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4907
	Requirement(s) per 1006 document except ____	4908
	Requirement(s) as follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
	Maximum leakage (mA)	4894
	Remain within specified tolerance.	4901
5.18	Dielectric Withstanding Voltage at Sea Level	
	(Select one test method)	
	Test per 1006 document.	4860
	Test per 1006 document except ____	4861
	Test per MIL-STD-202, Method 301.	4862
	*Test voltage (Select one)	
	(Vdc)	4854
	(Vac)	4855

Source: https://assist.dla.mil-- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.18 (Cont)	Dielectric Withstanding Voltage at Sea Level (Cont)	
	Points of voltage application	
	Between terminations tied together and mounting hardware.	4842
	Between terminations tied together and case.	4848
	Special preparation in accordance with (document no., 5.7)	4850
	Duration of voltage application(s)	4867
	Mounting in accordance with (document no., 5.7)	5000
	(Select one requirement)	
	Requirement(s) per 1006 document.	4873
	Requirement(s) per 1006 document except ____	4874
	Requirement(s) as follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
	Maximum leakage (mA)	4875
	Remain within specified tolerance.	4847

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.19	Drop Test	
	(Select one test method)	
	Test per 1006 document.	2450
	Test per 1006 document except ____	2451
	Test per GG-C-00620.	2452
	Drop height	
	(ft)	2454
	(m)	2455
	Number of drop times (no.)	2457
	(Select one requirement)	
	Requirement(s) per 1006 document.	2460
	Requirement(s) per 1006 document except ___	2461
	Requirement(s) as follows:	
	*No evidence of breaking, chipping or cracking.	2462
	No evidence of miscounting after test.	2465

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20	Electromagnetic Interference	
	(Select one test method)	
	Test per 1006 document.	2510
	Test per 1006 document except ____	2512
	Test per MIL-STD-462.	
	*Test method (Select as required)	
	Method CE03.	2514
	Method RE02.	2516
	(Select one requirement)	
	Requirement(s) per 1006 document.	2520
	Requirement(s) per 1006 document except ____	2521
	Requirement(s) as follows:	
	Requirements per Method CE03 of MIL-STD-461.	2522
	Requirements per Method RE02 of MIL-STD-461.	2526

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.21	Fungus	
	(Select one test method)	
	Test per 1006 document.	4753
	Test per 1006 document except ____	4754
	Test per MIL-STD-810, Method 508.	4755
	Test period (days)	4756
	(Select one requirement)	
	Requirement(s) per 1006 document.	4759
	Requirement(s) per 1006 document except ____	4760
	Requirement(s) as follows:	
	Fungus resistant by certification or by test.	4761
	No evidence of fungus growth when tested.	4762
	Accuracy after test (Select one)	
	No miscounting allowed.	2100
	Maximum difference between counter under test and control counter readings (± pct)	2102

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22	High Temperature	
	(Select one test method)	
	Test per 1006 document.	2580
	Test per 1006 document except ____	2581
	Test per MIL-STD-810 Method 501.	2582
	*Test procedure (no.)	2584
	Chamber temperature (if other than 71 deg C)	2586
	Operating temperature (deg C)	2587
	(Select one requirement)	
	Requirement(s) per 1006 document.	2590
	Requirement(s) per 1006 document except ____	2591
	Requirement(s) as follows:	
	*No evidence of physical damage.	2592
	No degradation of performance after high temperature test.	2594
	Minimum insulation resistance at high temperature (megohms)	2596

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22 (Cont)	High Temperature (Cont)	
	No evidence of flashover, arcing, or breakdown resulting from the dwv test.	2597
	Maximum drive torque at high temperature	
	(oz-in.)	2600
	(N-m)	2601
	Maximum reset torque at high temperature	
	(oz-in.)	2604
	(N-m)	2605
	Accuracy during and after test (Select one)	
	No miscounting allowed.	2607
	Maximum difference between counter under test and control readings (± pct)	2608
5.23	Humidity	
	(Select one test method)	
	Test per 1006 document.	4787
	Test per 1006 document except ____	4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.23 (Cont)	Humidity (Cont)	
	Test per MIL-STD-810, Method 507.	4871
	*Test procedure (no.)	4767
	Test cycles, if other than 20 (no.)	4800
	Water purity by conductivity method.	4764
	If test procedure I is used, the following may be specified:	
	Extreme temperature before testing (deg C)	4777
	*Duration of temperature exposure (hr)	4778
	Test per MIL-STD-202, Method 103.	4853
	*Test condition (letter)	4890
	Perform dielectric withstanding voltage at sea level test after drying.	6206
	Note: Measurements after test shall be in accordance with the requirements selected.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23 (Cont)	Humidity (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4797
	Requirement(s) per 1006 document except ____	4798
	Requirement(s) as follows:	
	*No evidence of corrosion or physical damage.	4799
	Remain within specified tolerance.	4791
	No evidence of arcing, flashover, or insulation breakdown when DWV applied.	1477
	Minimum insulation resistance at high humidity (megohms)	4795
	Minimum insulation resistance after drying (megohms)	4805
	Accuracy after test (Select one)	
	No miscounting allowed.	2120
	Maximum difference between counter under test and control counter readings (± pct)	2122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24	Insulation Resistance	
	(Select one test method)	
	Test per 1006 document.	1370
	Test per 1006 document except ____	1371
	Test per MIL-STD-202, Method 302.	1511
	*Condition (Select one)	
	Test condition (letter)	1378
	Test voltage (Vdc)	1373
	Electrification time, if other than 2 minutes (s)	1376
	Maximum measurement error at required value if other than 10 (pct)	1377
	Measure between terminations tied together and mounting hardware.	1497
	Measure between terminations tied together and case.	1498
	First test temperature (deg C)	1372
	Second test temperature (deg C)	1381
	Temperature tolerance (deg C)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.24 (Cont)	Insulation Resistance (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1379
	Requirement(s) per 1006 document except ____	1380
	Requirement(s) as follows:	
	Minimum insulation resistance for first test temperature (megohms)	1384
	Minimum insulation resistance for second test temperature (megohms)	1387
	Remain within specified tolerance.	1388
	Minimum insulation resistance (megohms)	1386
5.25	Low Temperature	
	(Select one test method)	
	Test per 1006 document.	2680
	Test per 1006 document except ____	2681

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	Low Temperature (Cont)	
	Test per MIL-STD-810 Method 502, Procedure I.	2682
	Nonoperating temperature (deg C)	2684
	Conditioning time (hr)	2685
	Lowest operating temperature (deg C)	2686
	(Select one requirement)	
	Requirement(s) per 1006 document.	2690
	Requirement(s) per 1006 document except ____	2691
	Requirement(s) as follows:	
	*No evidence of physical damage.	2692
	No degradation of performance after low temperature test.	2694
	Minimum insulation resistance (megohms)	2697
	No evidence of flashover, arcing, or breakdown resulting from dwv test.	2698
	Maximum drive torque at low temperature	
	(oz. - in.)	2700
	(N - m)	2701

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	Low Temperature (Cont)	
	Maximum reset torque at low temperature	
	(oz. - in.)	2703
	(N - m)	2704
	Accuracy during and after test (Select one)	
	No miscounting allowed.	2706
	Maximum difference between counter under test and control counter readings (± pct)	2707
5.26	Magnetic Position	
	(Select one test method)	
	Test per 1006 document.	2200
	Test per 1006 document except ____	2202
	Test per MIL-C-83040.	2204
	(Select one requirement)	
	Requirement(s) per 1006 document.	2210
	Requirement(s) per 1006 document except ____	2212

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26 (Cont)	Magnetic Position (Cont)	
	Requirement(s) as follows:	
	Maximum compass needle deflection (deg)	2214
5.27	Operability	
	(Select one test method)	
	Test per 1006 document.	2220
	Test per 1006 document except ____	2222
	Test per MIL-C-60618.	2224
	(Select one requirement)	
	Requirement(s) per 1006 document.	2230
	Requirement(s) per 1006 document except ____	2231
	Requirement(s) as follows:	
	Maximum drive shaft torque	
	(oz - in.)	2233
	(N - m)	2234

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27 (Cont)	Operability (Cont)	
	Maximum reset shaft torque	
	(oz - in.)	2236
	(N - m)	2237
	Maximum reset shaft force	
	(lbs)	2239
	(N)	2240
5.28	Power Supply Variation	
	(Select one test method)	
	Test per 1006 document.	2250
	Test per 1006 document except ____	2251
	Test per MIL-C-83040.	2252
	Voltage (Vac)	2254
	*Frequency (Hz)	2255
	Frequency (Hz)	2256

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	Power Supply Variation (Cont)	
	Voltage (Vac)	2258
	*Frequency (Hz)	2259
	Frequency (Hz)	2260
	Voltage (Vac)	2262
	*Frequency (Hz)	2263
	Frequency (Hz)	2264
	DC Voltages	
	(Vdc)	2266
	(Vdc)	2267
	(Select one requirement)	
	Requirement(s) per 1006 document.	2270
	Requirement(s) per 1006 document except ____	2272
	Requirement(s) as follows:	
	Maximum difference between counter under test and control counter readings (± pct)	2274

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29	Salt Fog	
	(Select one test method)	
	Test per 1006 document.	4776
	Test per 1006 document except ____	4779
	Test per MIL-STD-810 Method 509.	4780
	Salt solution if other than 5 pct (pct)	4786
	Exposure time if other than 48 hr (hr)	4783
	Drying period if other than 48 hr (hr)	4775
	Method of mounting (Select one)	
	Normal mounting method.	4765
	Any suitable mounting method.	4766
	Mount in accordance with (document no., 5.7)	4773

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Salt Fog (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4997
	Requirement(s) per 1006 document except ____	4998
	Requirement(s) as follows:	
	*No evidence of physical damage.	4999
	Minimum insulation resistance (megohms)	2831
	Accuracy after test (Select one)	
	No miscounting allowed.	2832
	Maximum difference between counter under test and control counter readings (± pct)	2833
5.30	Seal	
	(Select one test method)	
	Test per 1006 document.	4733
	Test per 1006 document except ____	4734

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	Seal (Cont)	
	Test per MIL-STD-202, Method 112.	4732
	*Test condition letter.	4737
	Test condition letter A or B	
	Media for test (if exception desired)	4738
	Media temperature minimum (deg C)	4739
	Test condition letter C	
	*Test procedure (no.)	4740
	*Leak rate sensitivity (atm cc/sec)	4741
	Procedure III in condition C	
	Gross leak test condition (letter)	4750
	Procedure IV in condition C	
	Chamber pressure (torr)	4751
	Chamber pressure (kPa)	4735
	Duration of reduced pressure (min)	4752
	Gross leak test condition letter.	4750
	Test condition letter D or E	
	Any suitable mounting fixture.	4743

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	Seal (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4744
	Requirement(s) per 1006 document except ____	4745
	Requirement(s) as follows:	
	Requirements in accordance with specified test method sensitivity.	4746
	No bubbles indicative of leakage.	4748
5.31	Shock	
	(Select one test method)	
	Test per 1006 document.	2880
	Test per 1006 document except ____	2881
	Test per MIL-STD-810 Method 516.	2883
	*Test procedure (no.)	2885
	Shock pulse configuration figure (Select one)	
	Figure 516.1-1.	2887
	Figure 516.1-2.	2888

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31 (Cont)	Shock (Cont)	
	Shock pulse peak value (g's)	2890
	Test duration (milliseconds)	2891
	Test temperature(s) (Select only if additional to room ambient is required.)	
	Low temperature (deg C)	2894
	High temperature (deg C)	2895
	(Select one requirement)	
	Requirement(s) per 1006 document.	2904
	Requirement(s) per 1006 document except ____	2905
	Requirement(s) as follows:	
	*No evidence of physical damage.	2906
	No degradation of performance.	2907
	Accuracy after test (Select one)	
	No miscounting allowed.	2860
	Maximum difference between counter under test and control counter readings (± pct)	2861

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32	Shock, High Impact	
	(Select one test method)	
	Test per 1006 document.	1485
	Test per 1006 document except ____	1486
	Test per MIL-STD-202, Method 207.	1482
	*Mounting fixture (Select one)	
	Figure number from Method 207 of MIL-STD-202 (no.)	1488
	Any suitable mounting fixture.	1478
	Mounting fixture in accordance with (document no., 5.7)	1468
	(Select one requirement)	
	Requirement(s) per 1006 document.	1493
	Requirement(s) per 1006 document except ____	1494

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32 (Cont)	Shock, High Impact (Cont)	
	Requirement(s) as follows:	
	*No evidence of physical damage.	1495
	Remain within specified tolerance.	1464
	Accuracy after test (Select one)	
	No miscounting allowed.	2864
	Maximum difference between counter under test and control counter readings (± pct)	2865
5.33	Shock, Specified Pulse	
	(Select one test method)	
	Test per 1006 document.	1501
	Test per 1006 document except ____	1502
	Test per MIL-STD-202, Method 213.	1500
	*Test condition (letter)	1504
	Method of mounting (Select one)	
	Any suitable method.	4686
	Normal mounting means.	4685
	Mount in accordance with (document no., 5.7)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33 (Cont)	Shock, Specified Pulse (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1507
	Requirement(s) per 1006 document except ____	1508
	Requirement(s) as follows:	
	*No evidence of physical damage.	1509
	Remain within specified tolerance.	4703
	Accuracy after test (Select one)	
	No miscounting allowed.	2867
	Maximum difference between counter under test and control counter readings (± pct)	2868
5.34	Solderability	
	(Select one test method)	
	Test per 1006 document.	4661
	Test per 1006 document except ____	4662

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.34 (Cont)	Solderability (Cont)	
	Test per MIL-STD-202, Method 208.	4683
	Number of terminals to be tested (quantity)	4666
	Depth of immersion (in.)	4667
	Depth of immersion (mm)	4663
	Distance wrap wire applied from body (in.)	4664
	Distance wrap wire applied from body (mm)	4665
	(Select one requirement)	
	Requirement(s) per 1006 document.	4673
	Requirement(s) per 1006 document except ____	4674
	Requirement(s) as follows:	
	*No evidence of physical damage.	4675
	Meet evaluation criteria specified in Method 208 of MIL-STD-202.	4672
	Remain within specified tolerance.	4677

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35	Speed	
	(Select one test method)	
	Test per 1006 document.	2170
	Test per 1006 document except ____	2171
	Test per MIL-C-60618.	2172
	Speed in clockwise direction (RPM)	2174
	*Test duration (min)	2175
	Speed in counterclockwise direction (RPM)	2177
	*Test duration (min)	2178
	(Select one requirement)	
	Requirement(s) per 1006 document.	2180
	Requirement(s) per 1006 document except ____	2182
	Requirement(s) as follows:	
	*No evidence of binding, slipping or miscounting.	2184
	Maximum drive shaft torque	
	(oz - in)	2186
	(N - m)	2188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.36	Thermal Shock	
	(Select one test method)	
	Test per 1006 document.	4712
	Test per 1006 document except ____	4713
	Test per MIL-STD-202, Method 107.	4714
	*Test condition letter.	4715
	Special mounting shall be in accordance with (document no., 5.7)	4719
	(Select one requirement)	
	Requirement(s) per 1006 document.	4720
	Requirement(s) per 1006 document except ____	4722
	Requirement(s) as follows:	
	*No evidence of physical damage.	4723
	Remain within specified tolerance.	4726
	Accuracy after test (Select one)	
	No miscounting allowed.	2480
	Maximum difference between counter under test and control counter readings (± pct).	2482

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.37	Vibration	
	(Select one test method)	
	Test per 1006 document.	1521
	Test per 1006 document except ____	1505
	*Test per MIL-STD-810 Method 514.	1514
	*Test procedure (no.)	1518
	Test curve selection	
	*Curve identification letter.	1525
	*Curve figure (no.)	7325
	Test item shall not be operated.	3008
	Limitation of transverse motion with respect to input motion (pct)	3010
	Test temperature (Select only if additional to room ambient is required)	
	Low temperature (deg C)	3011
	*Test duration (min)	3012
	High temperature (deg C)	3013
	*Test duration (min)	3014

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.37 (Cont)	Vibration (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4680
	Requirement(s) per 1006 document except ____	4681
	Requirement(s) as follows:	
	*No evidence of physical damage.	4682
	Accuracy after test (Select one)	
	No miscounting allowed.	2308
	Maximum difference between counter under test and control counter readings (± pct)	2309
5.38	Vibration, High Frequency	
	(Select one test method)	
	Test per 1006 document.	1445
	Test per 1006 document except ____	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.38 (Cont)	Vibration, High Frequency (Cont)	
	Test per MIL-STD-202, Method 204.	1447
	*Test condition (letter)	1448
	Method of mounting (Select one)	
	Any suitable mounting method.	4709
	Normal mounting means.	4708
	Mount in accordance with (document no., 5.7)	4707
	Method of determining mechanical resonance (Select one)	
	Visually by means of a strobotac.	1533
	Electrical output indicators.	1534
	Direction of motion (Select one)	
	Parallel to longitudinal axis.	4887
	Perpendicular to longitudinal axis.	4888
	Each of three mutually perpendicular axes.	4889

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.38 (Cont)	Vibration, High Frequency (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1454
	Requirement(s) per 1006 document except ____	1455
	Requirement(s) as follows:	
	*No evidence of physical damage.	1456
	Remain within specified tolerance.	1469
	Accuracy after test (Select one)	
	No miscounting allowed.	2300
	Maximum difference between counter under test and control counter readings (± pct)	2301
5.39	Vibration, Low Frequency	
	(Select one test method)	
	Test per 1006 document.	1465
	Test per 1006 document except ____	1466

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.39 (Cont)	Vibration, Low Frequency (Cont)	
	Test per MIL-STD-202, Method 201.	1467
	Duration of vibration per axis if other than 2 hours (hr)	1470
	Method of mounting (Select one)	
	Any suitable mounting method.	4731
	Normal mounting means.	4730
	Mount in accordance with (document no., 5.7)	4729
	Direction of motion (Select as required)	
	Parallel to longitudinal axis.	1535
	Perpendicular to longitudinal axis.	1536
	Three mutually perpendicular axes.	1537
	(Select one requirement)	
	Requirement(s) per 1006 document.	1474
	Requirement(s) per 1006 document except ____	1475

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.39 (Cont)	Vibration, Low Frequency (Cont)	
	Requirement(s) as follows:	
	*No evidence of physical damage.	1476
	Remain within specified tolerance.	1480
	Accuracy after test (Select one)	
	No miscounting allowed.	2650
	Maximum difference between counter under test and control counter readings (± pct)	2652

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Counters, Reciprocating and Rotating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

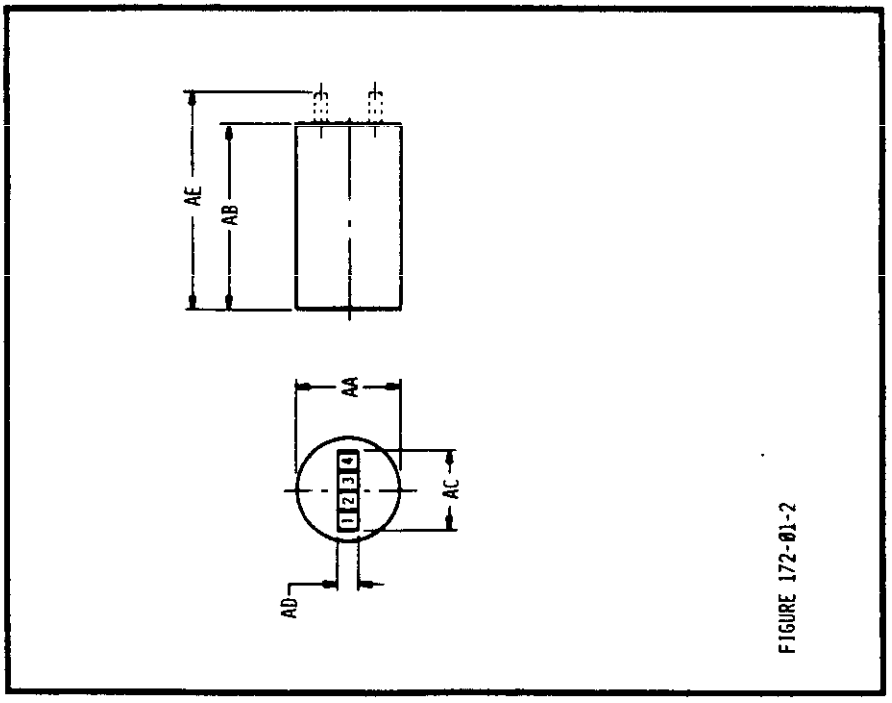


FIGURE 172-01-2

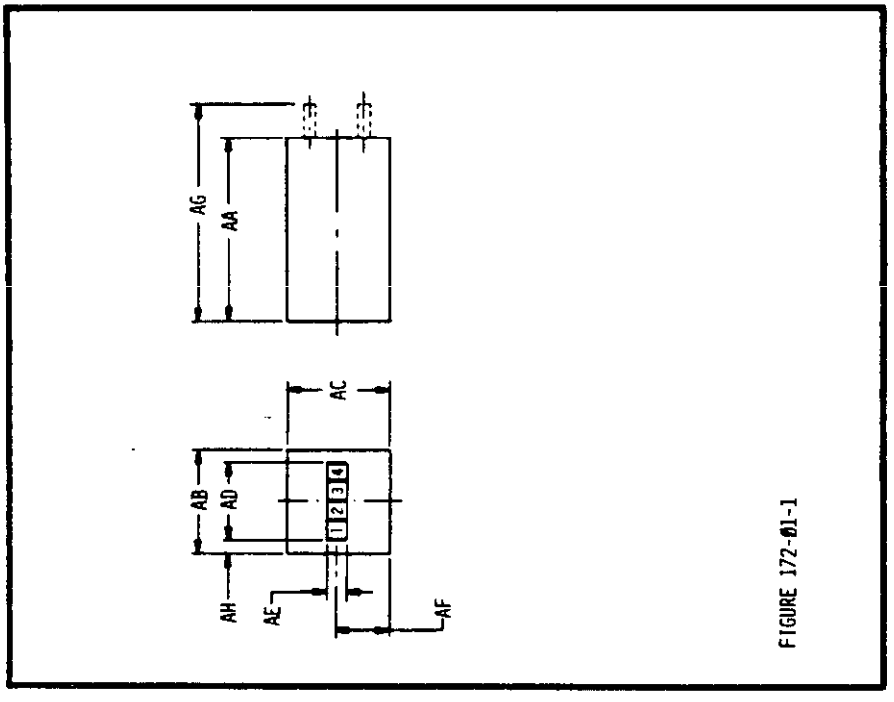


FIGURE 172-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

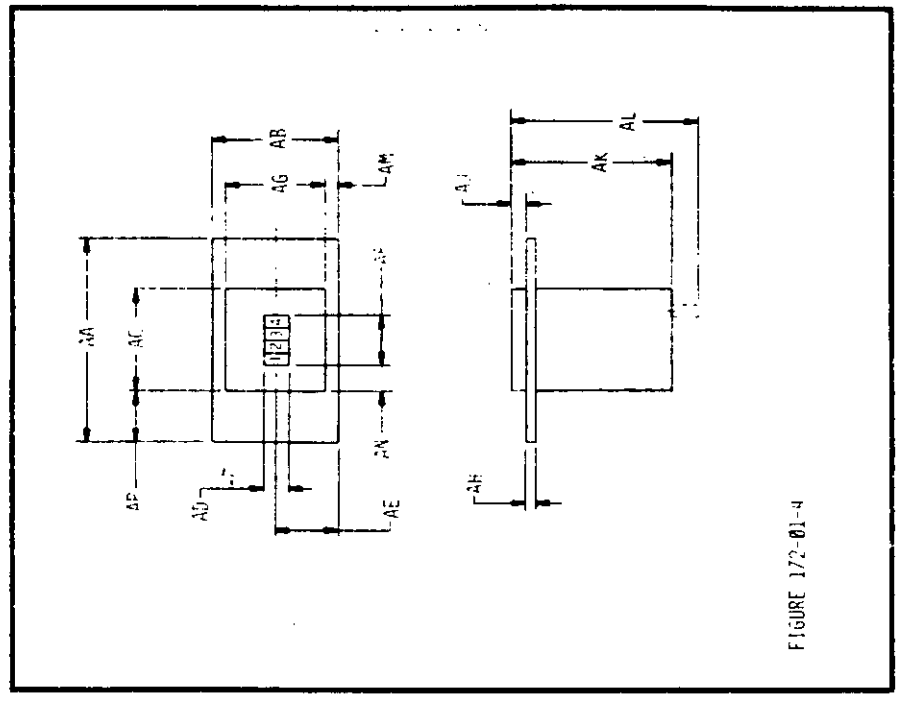


FIGURE 172-01-4

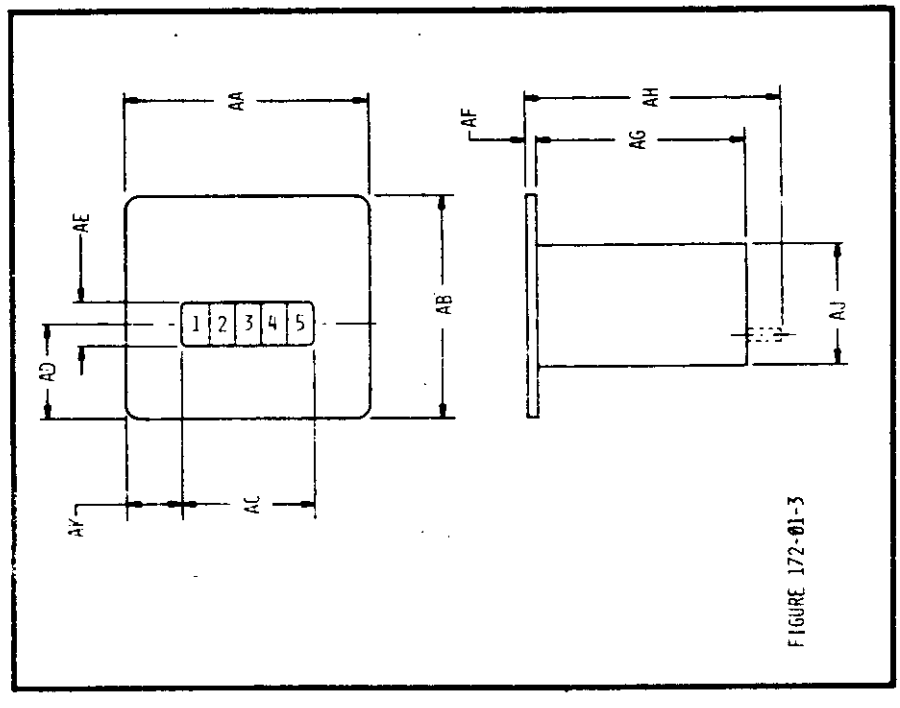


FIGURE 172-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

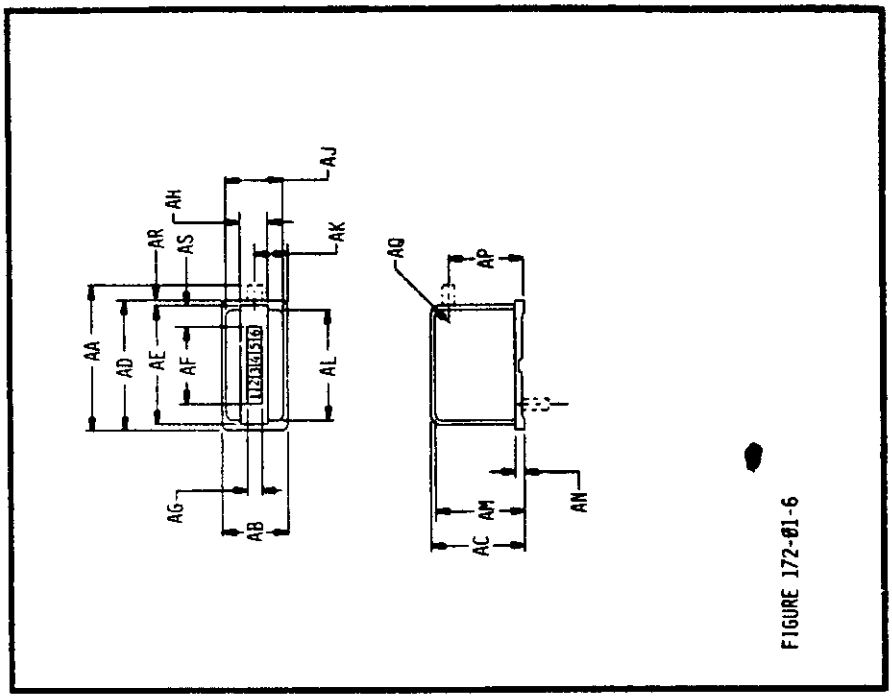


FIGURE 172-01-6

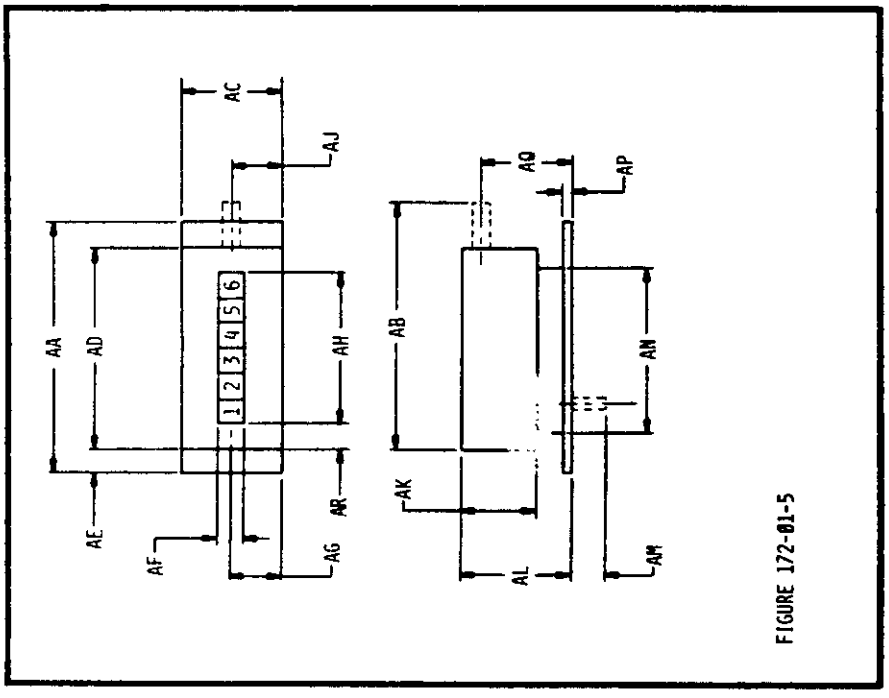


FIGURE 172-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

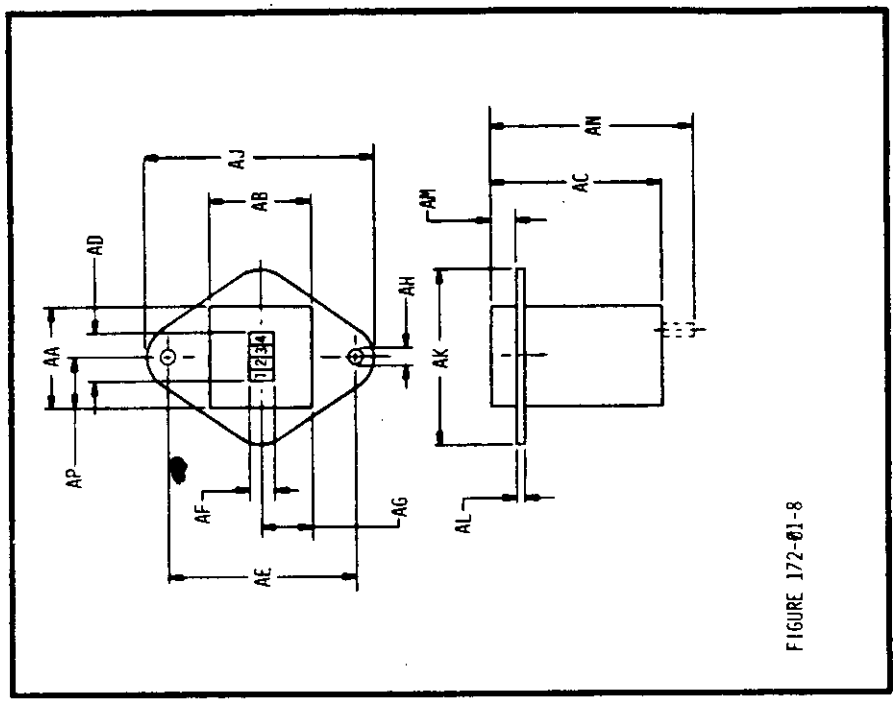


FIGURE 172-01-8

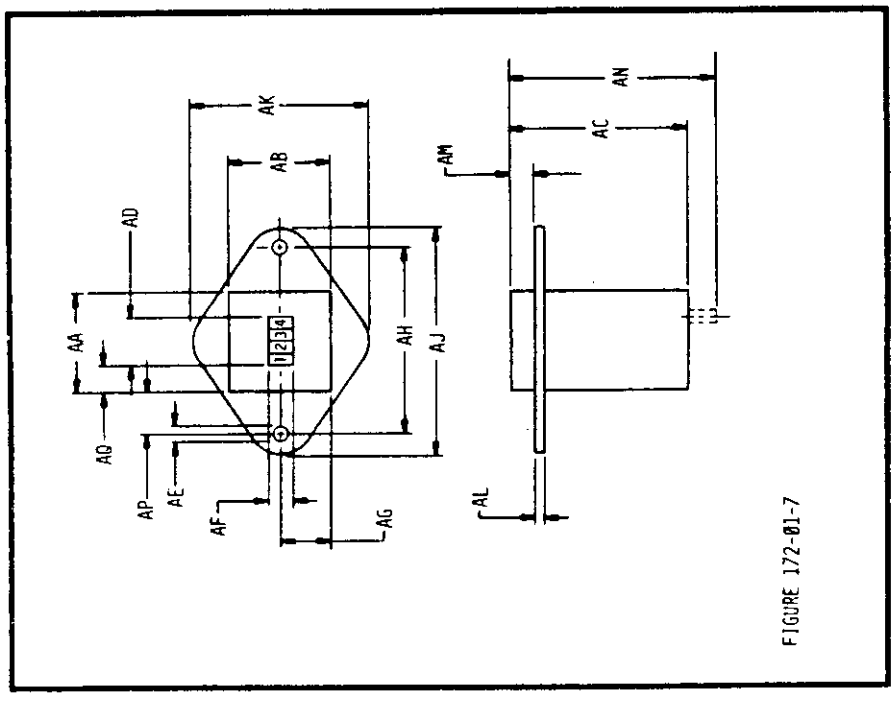


FIGURE 172-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

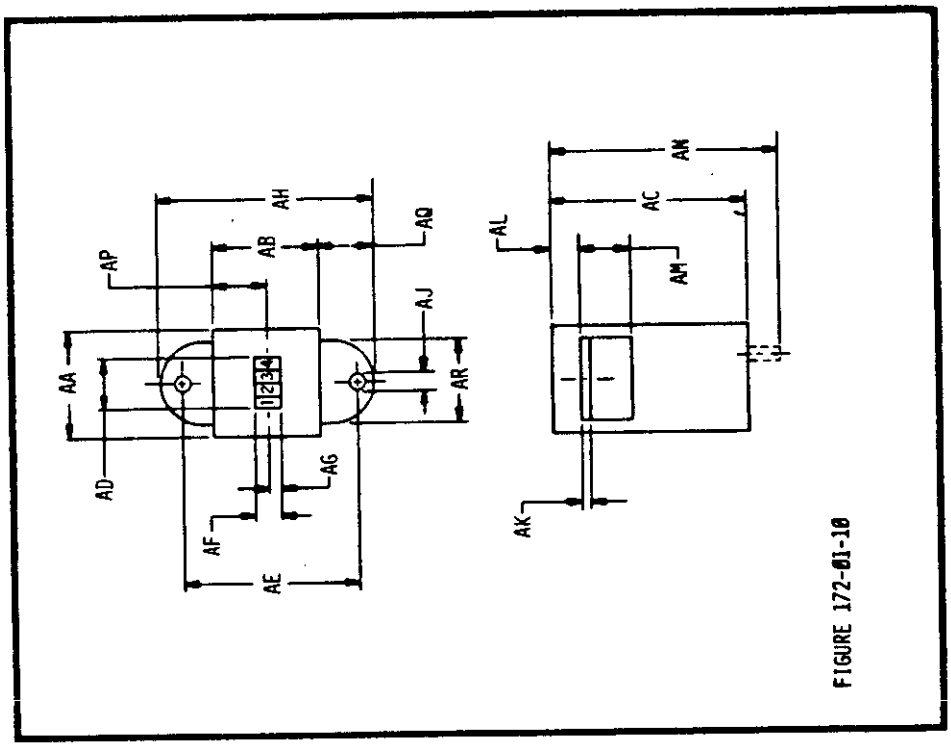


FIGURE 172-01-10

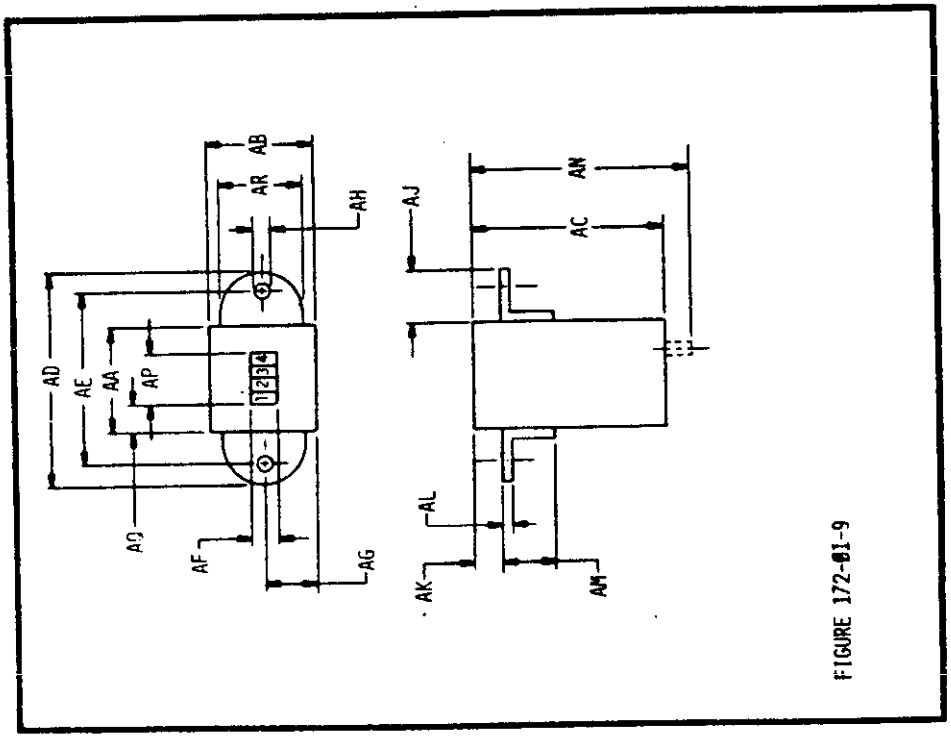


FIGURE 172-01-9

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

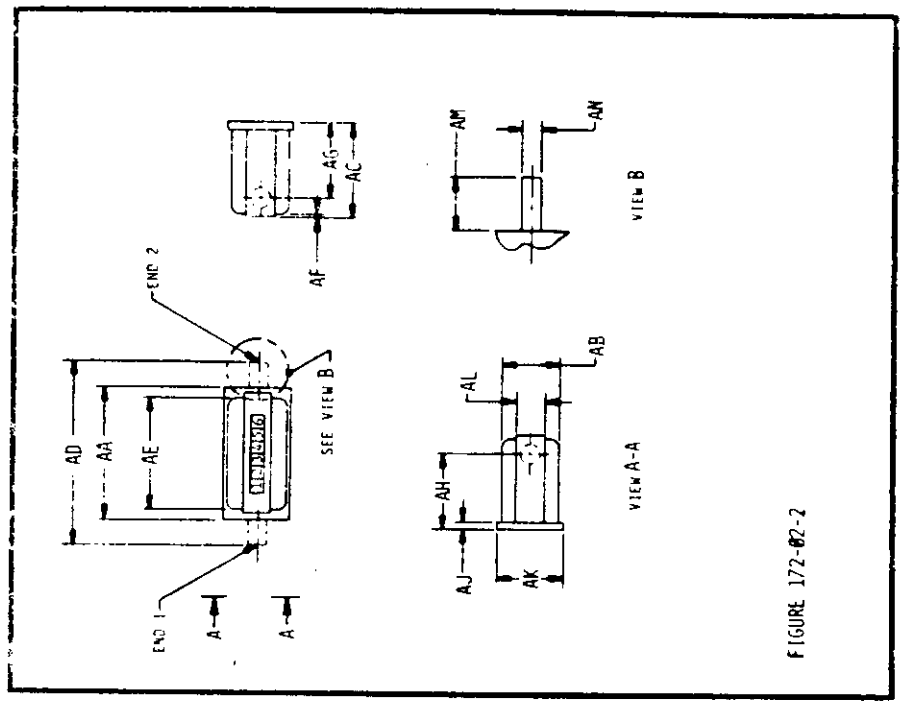


FIGURE 172-02-2

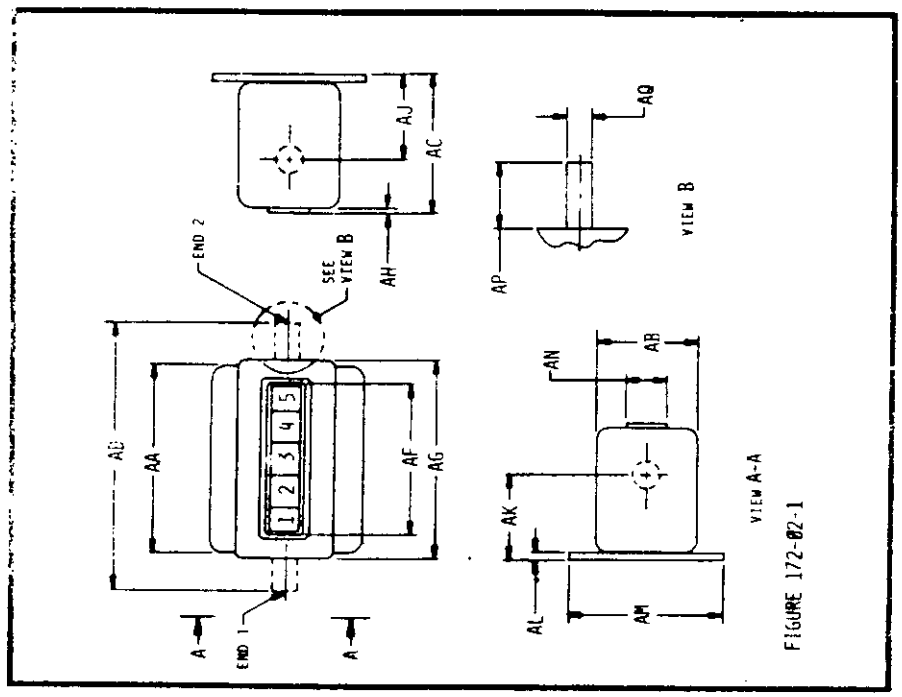


FIGURE 172-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

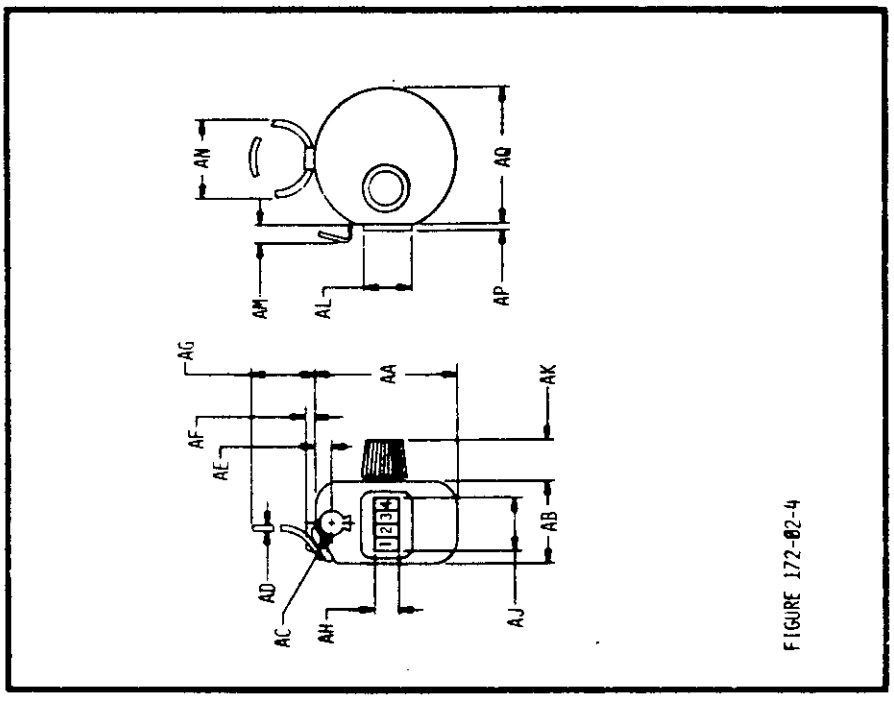


FIGURE 172-02-4

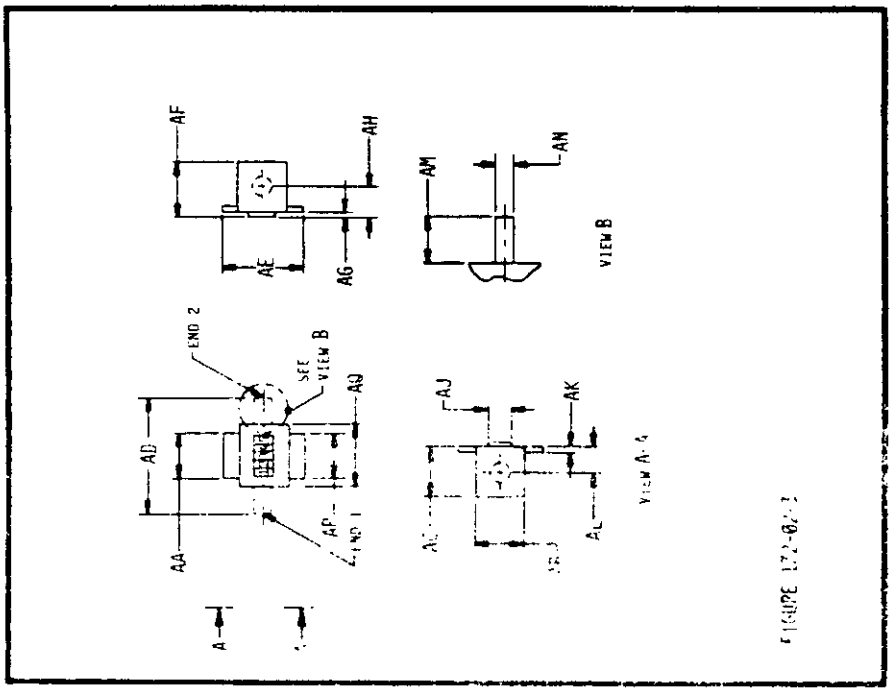


FIGURE 172-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

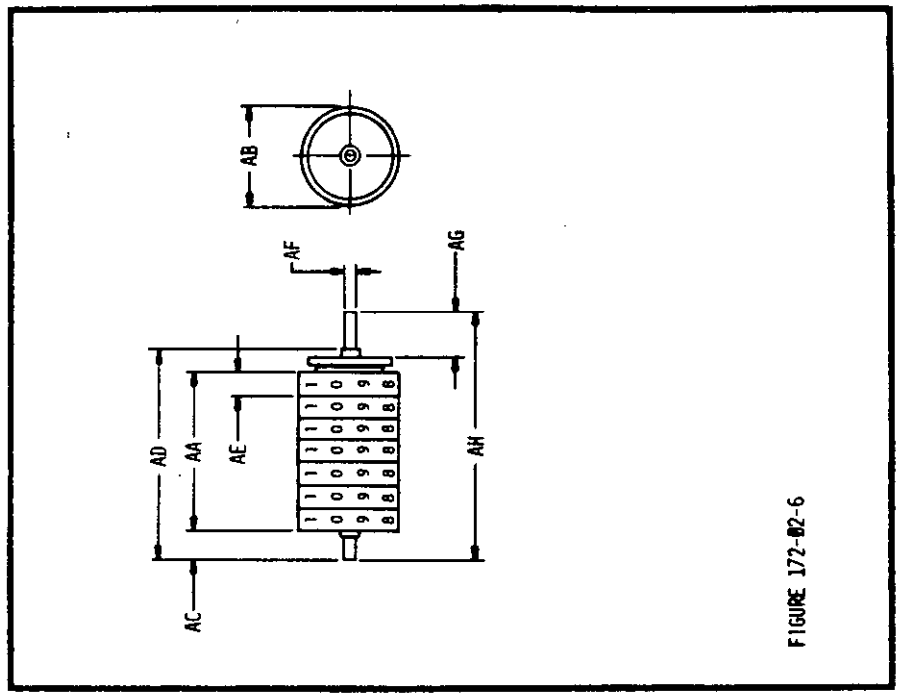


FIGURE 172-02-6

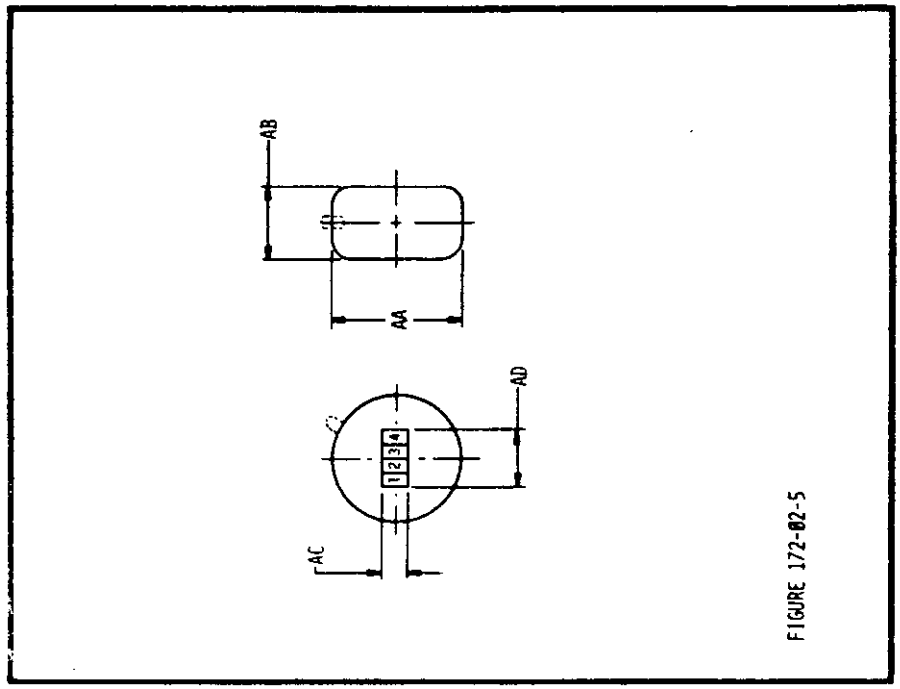


FIGURE 172-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

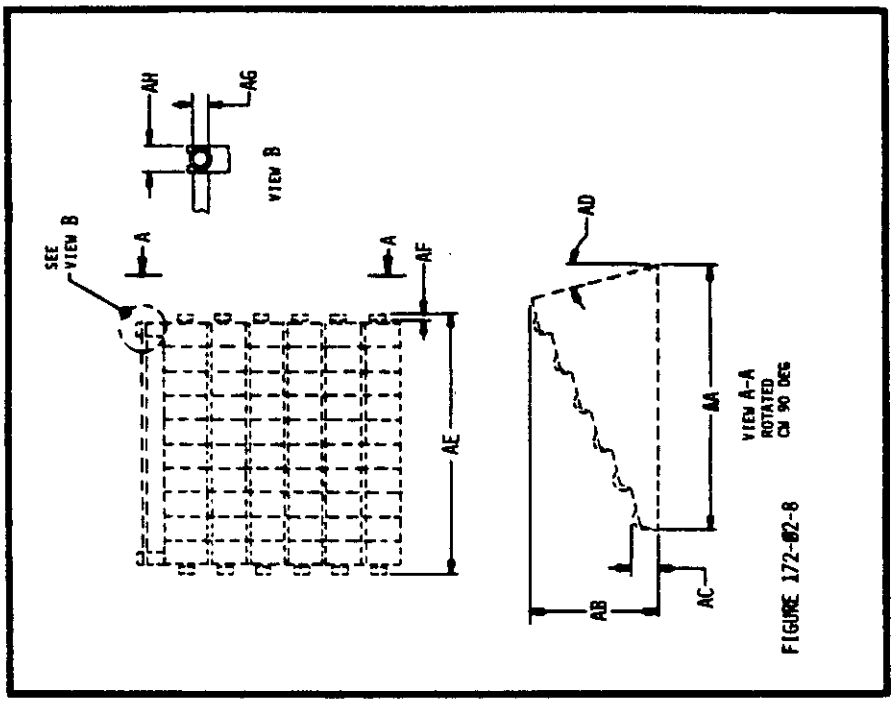


FIGURE 172-02-8

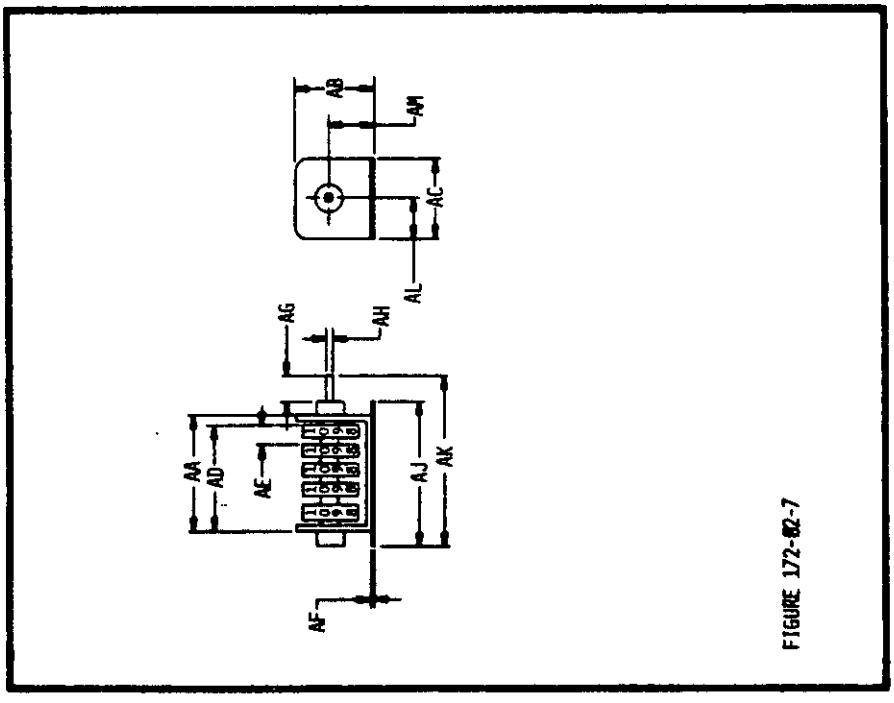


FIGURE 172-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

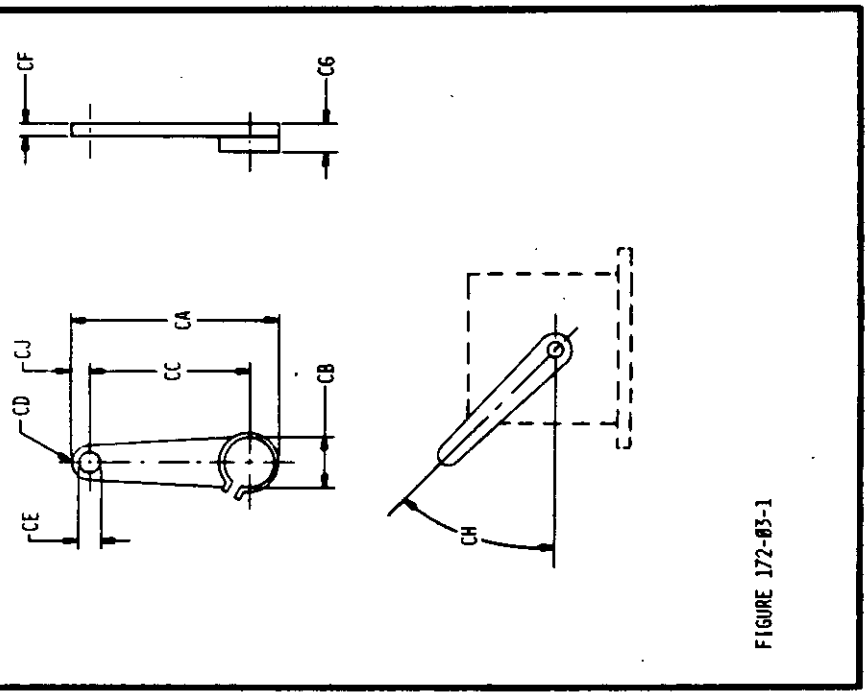


FIGURE 172-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

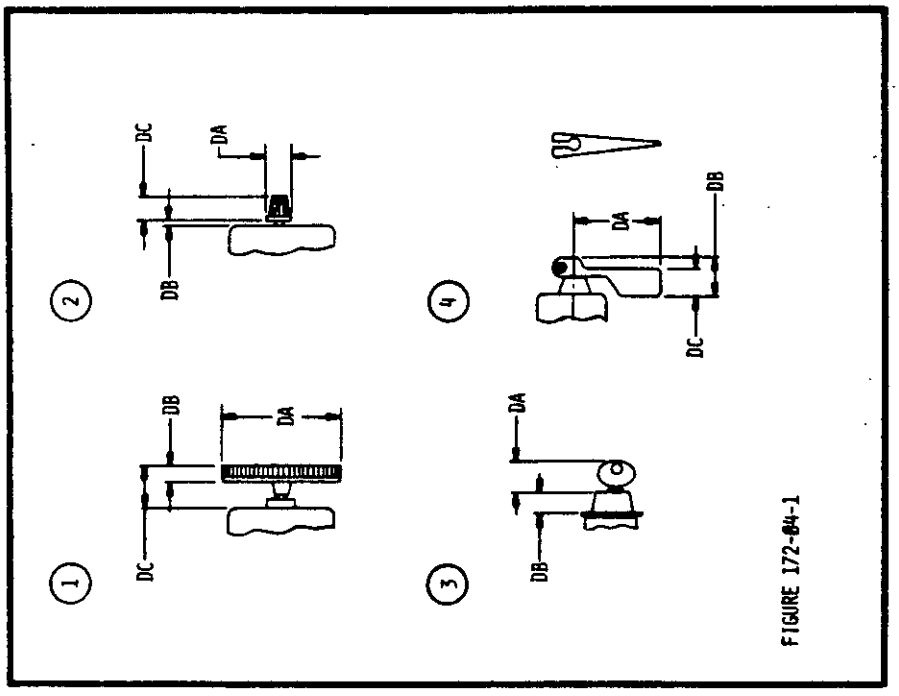


FIGURE 172-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

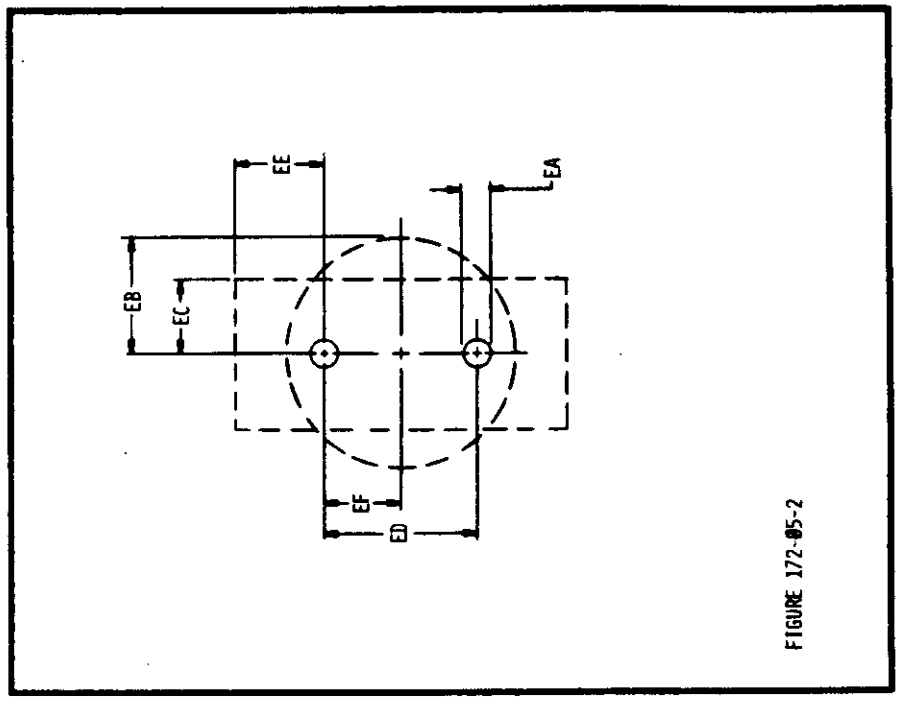


FIGURE 172-05-2

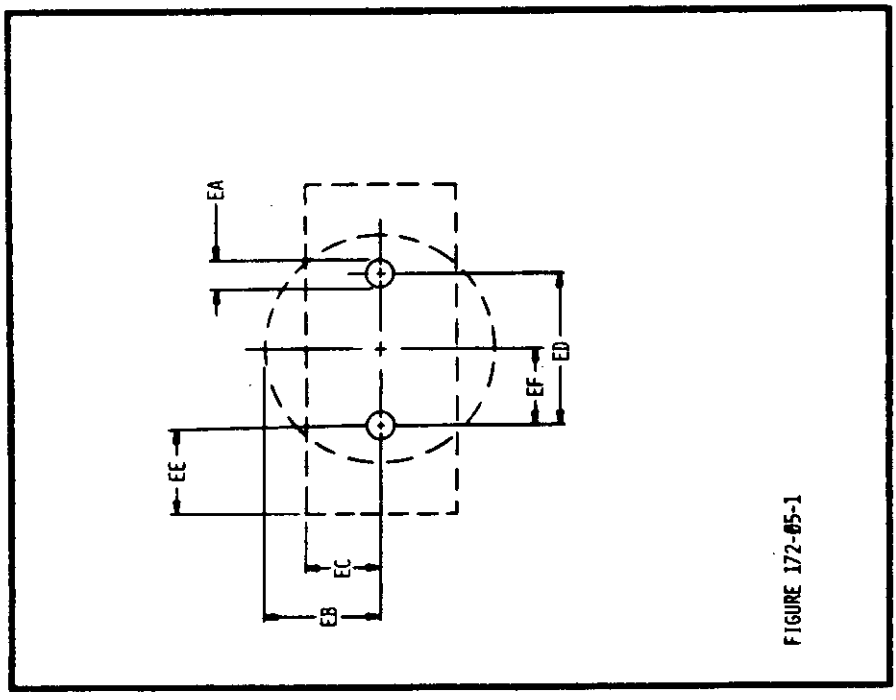


FIGURE 172-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

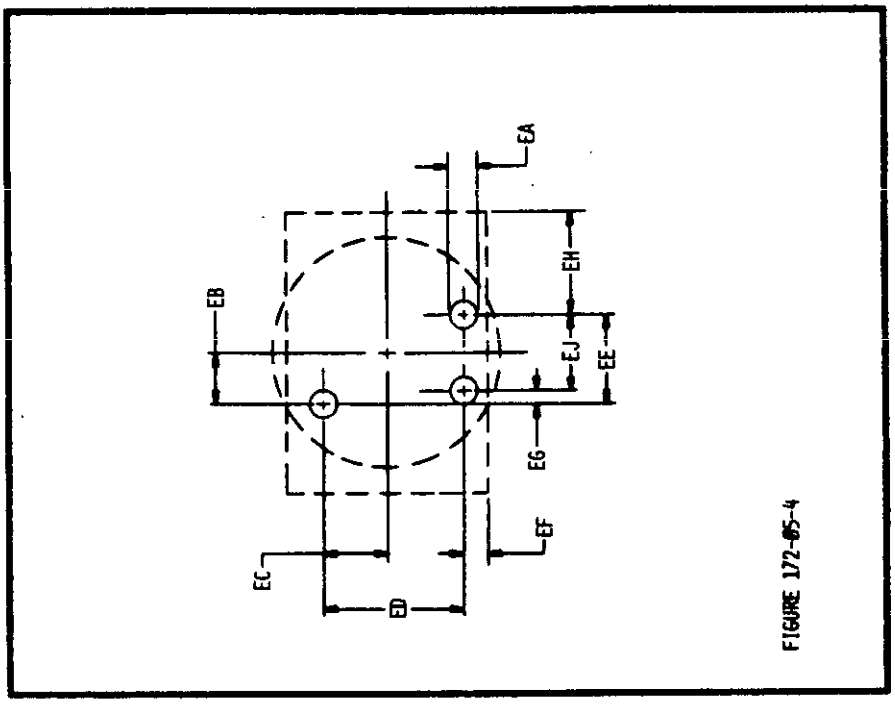


FIGURE 172-05-4

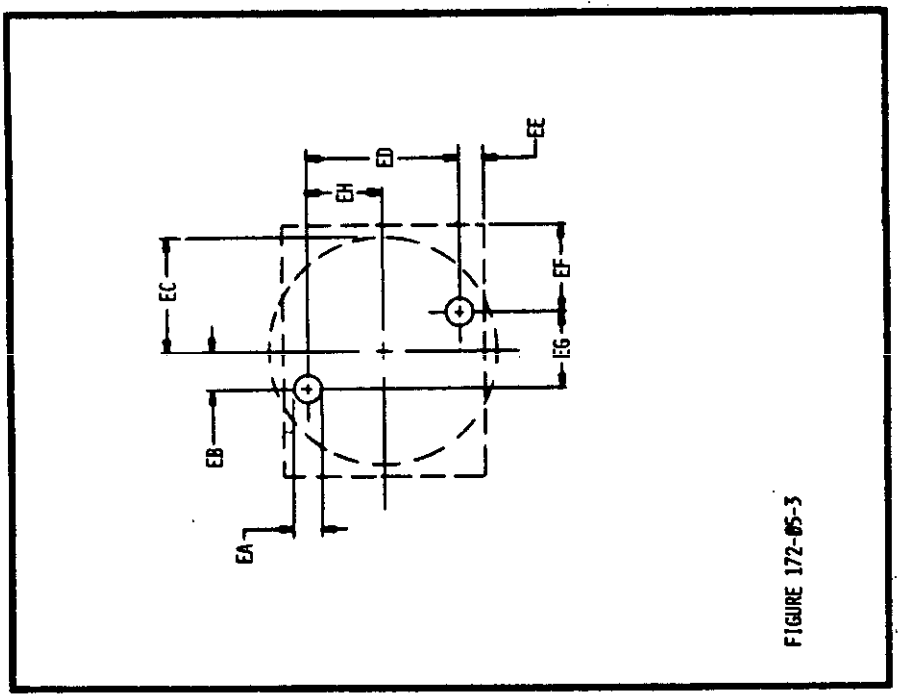


FIGURE 172-05-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

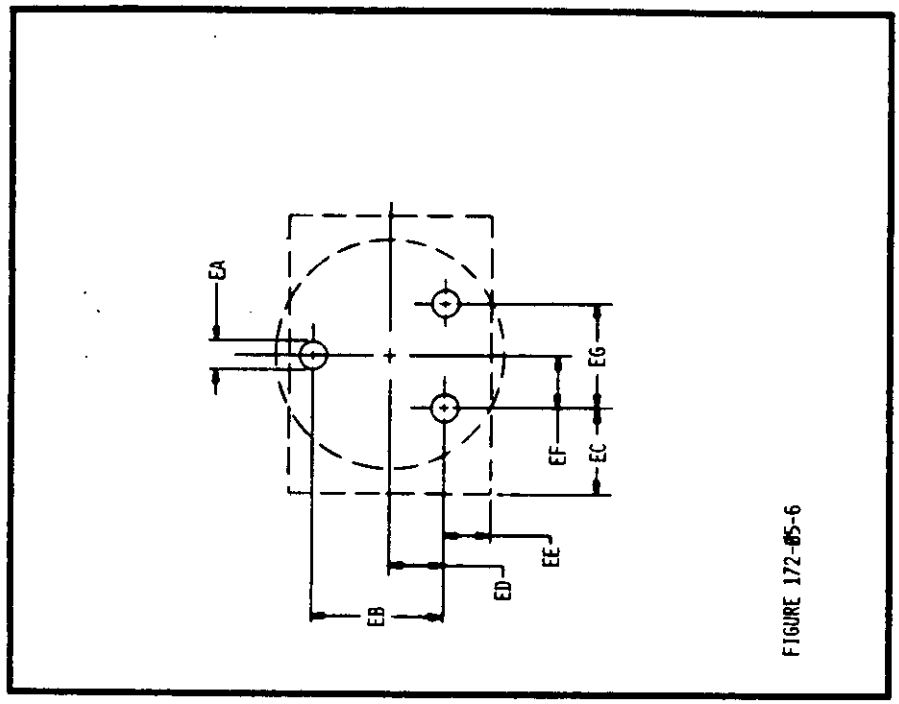


FIGURE 172-65-6

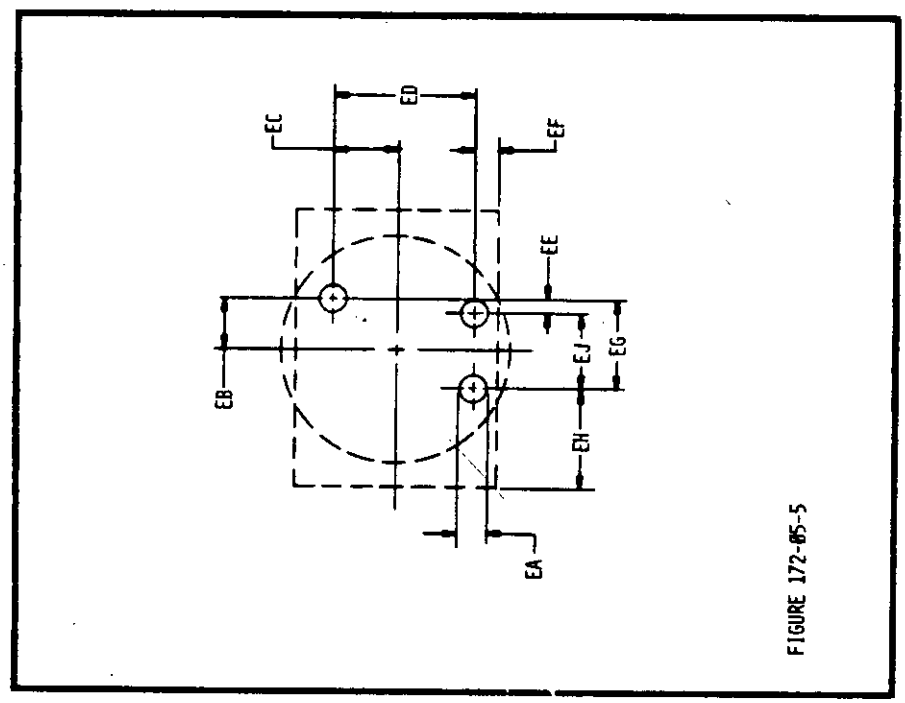


FIGURE 172-65-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

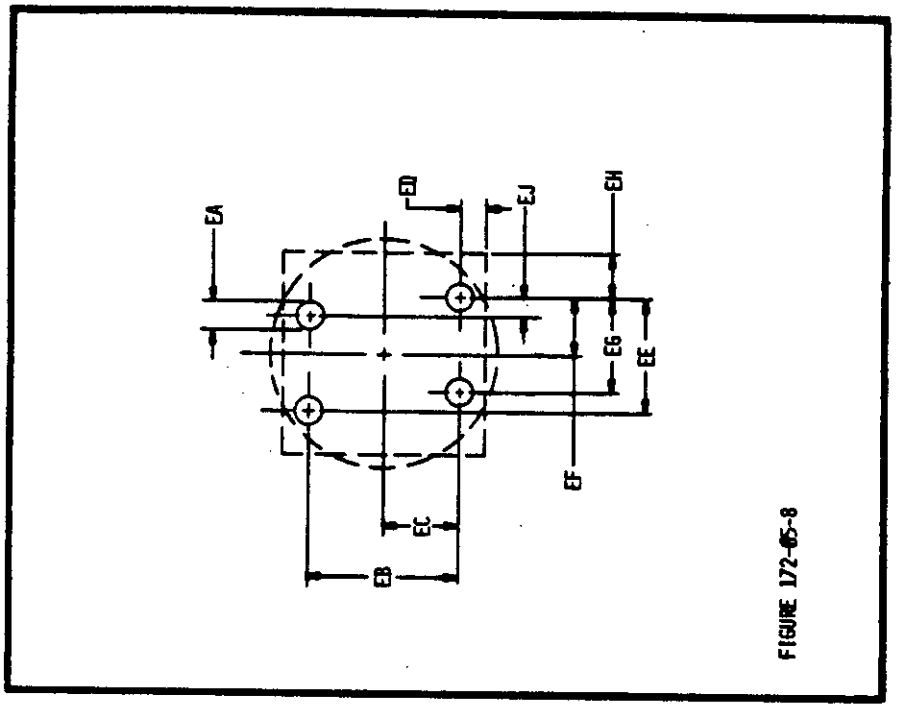


FIGURE 172-65-8

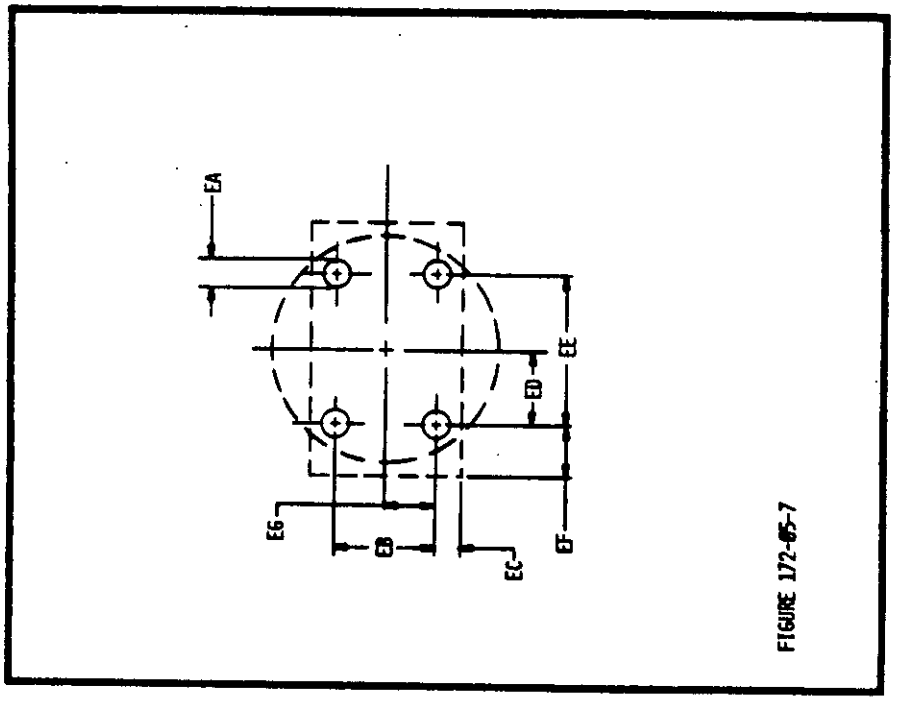


FIGURE 172-65-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

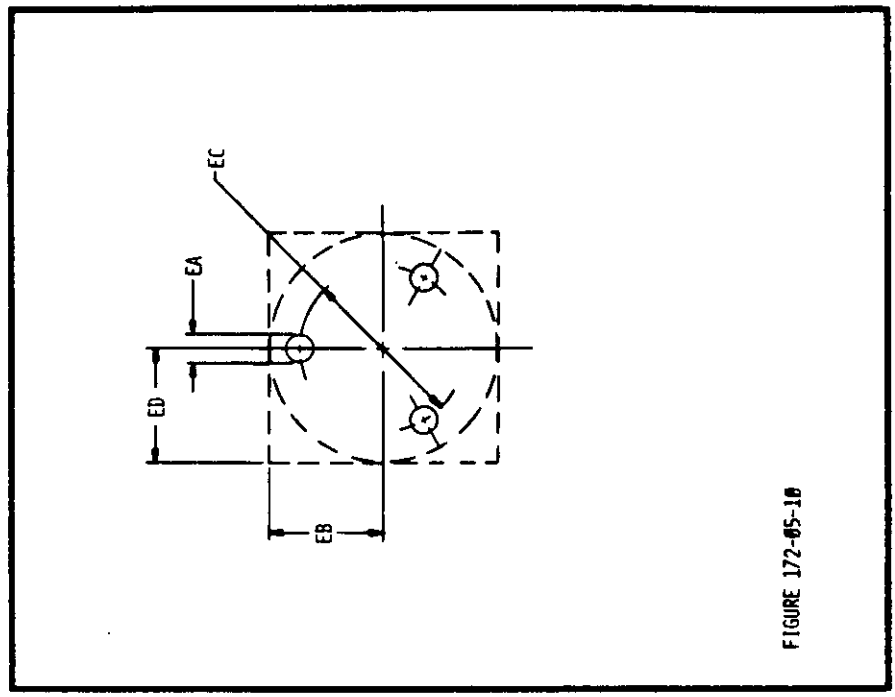


FIGURE 172-05-10

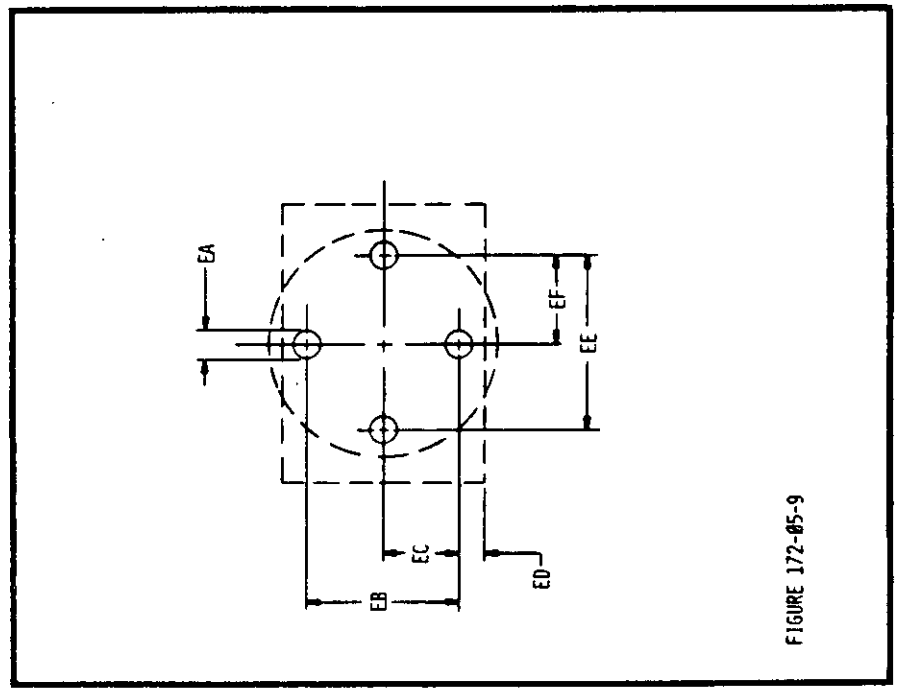


FIGURE 172-05-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

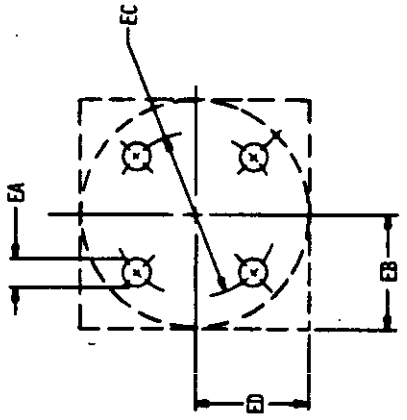


FIGURE 172-65-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

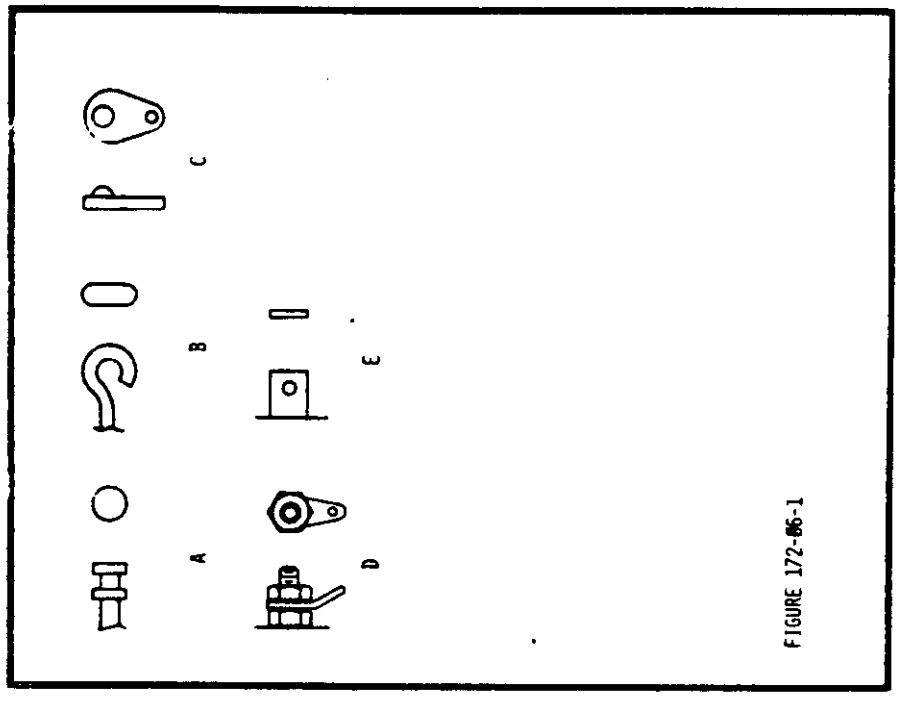


FIGURE 172-106-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Counters, Reciprocating and Rotating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
U.S. Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-35-106(MI), AEDPS Counters, Reciprocating and Rotating

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.