MIL-STD-35-107A(MI)
12 September 1983

SUPERSEDING
MIL-STD-35-107(MI)
30 JUNE 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

CONNECTORS – JACK, PLUG AND TEST POINT

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIAL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Connectors, Jack, Plug, and Test Point
Automated Engineering
Document Preparation System

MIL-STD-35-107A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RSDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-107A(MI) is to provide instructions for the preparation of Specifications Requirements Sheets (SRS) in order to produce Military Specification Exceptions for jack, plug, and test point connectors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedure described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE- - - - - - - - - - - - - - - - - -	1
	1.1	General- - - - - - - - - - - - - - - - -	1
	1.2	Purpose- - - - - - - - - - - - - - - - -	1
	1.3	Utilization- - - - - - - - - - - - - - -	1
	1.4	Military Specification Exception Title Index- - - - - - - - - - - - - -	1
	2.	REFERENCED DOCUMENTS - - - - - - - - - -	3
	2.1	Issues of documents- - - - - - - - - -	3
	2.2	Other publications - - - - - - - - - -	4
	3.	DEFINITIONS- - - - - - - - - - - - - - -	5
	4.	GENERAL REQUIREMENTS - - - - - - - - - -	7
	4.1	Introduction - - - - - - - - - - - - - -	7
	4.2	Specification Requirement Sheet (SRS)- - - - - - - - - - - - - - - -	7
	4.3	Configuration- - - - - - - - - - - - - -	7
	4.3.1	Dimensions - - - - - - - - - - - - - - -	7
	4.3.2	Illustrations- - - - - - - - - - - - - -	7
	4.4	Units of measure - - - - - - - - - - - -	7
	5.	DETAILED REQUIREMENTS- - - - - - - - - -	8
	5.1	Introduction - - - - - - - - - - - - - -	8
	5.2	MSE Formats- - - - - - - - - - - - - - -	8
	5.3	Referenced documents - - - - - - - - - -	8
	5.4	Test matrix- - - - - - - - - - - - - - -	8
	5.5	Tabulation - - - - - - - - - - - - - - -	9
	5.6	Keyword Code Index (KCI) and Standard Paragraph - - - - - - - - - -	11
	5.6.1	Interrelationship of Codes - - - - - - -	11
	5.6.2	Automatic MSE Data - - - - - - - - - -	11
	5.6.3	DOD-STD-35 Tables - - - - - - - - - - -	11

TABLES

Table	I.	Title Index- - - - - - - - - - - - - - -	2
	II.	Test matrix- - - - - - - - - - - - - - -	9
	III.	Tabulation candidates- - - - - - - - - -	10

APPENDIX

	Illustrations- - - - - - - - - - - - - - -	129
	Characteristic Code Index- - - - - - - -	161
	Index- - - - - - - - - - - - - - - - - - -	167

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specifications Exception (MSE) documentation for Connectors, Jack, Plug and Test Point.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35.

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with the title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, TEST POINT, PANEL TYPE	079002	MIL-C-28901 MIL-C-39204	PLUGS, TIP JACKS, TIP
CONNECTOR, TEST POINT, PRINTED WIRING TYPE	079003	MIL-C-39024	JACKS, TIP
JACK ASSEMBLY, PATCH PANEL	079004	MIL-C-39012	COAXIAL
JACK ASSEMBLY, TELEPHONE	079005	MIL-V-641 MIL-J-5251 MIL-C-9177 MIL-C-55074	VARIOUS JACKS SWITCH AUDIO 26 PAIR CABLE
JACK ASSEMBLY, TIP	079006	MIL-P-55149	BANANA JACKS
JACK, TELEPHONE	079007	MIL-J-641 MIL-C-9177	VARIOUS JACKS AUDIO
JACK, TIP	079008	MIL-P-55149 MS90298	BANANA JACKS GROUNDING JACK
PLUG ASSEMBLY, TIP	079009	MIL-P-642 MS3493	VARIOUS PLUGS GROUNDING PLUG
PLUG, PATCH	079010	MIL-C-28901 MIL-C-39012	PLUGS, BANANA COAXIAL
PLUG, TELEPHONE	079011	MIL-P-641 MIL-C-9177 MIL-C-55074	VARIOUS PLUGS AUDIO 26 PAIR CABLE
PLUG, TIP	079012	MIL-C-28901 MS3493	PLUGS, BANANA GROUNDING
POST, BINDING	079013	MIL-P-55149	JACKS, BANANA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-641	Jacks, Telephone, General Specification For
MIL-P-642	Plugs, Telephone, and Accessory Screws, General Specification For
MIL-C-39024	Connectors, Electrical: Jacks, Tip (Test Point, Panel or Printed Wiring Type), General Specification For
MIL-P-55194	Posts, Binding, Electrical (Insulated and uninsulated), General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Definitions contained in DOD-STD-35 are applicable to Connectors, Jack, Plug, and Test Point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for a Jack, Plug, or Test Point connector, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Connectors, Jack, Plug and Test Point.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Connectors, Jack, Plug, and Test Point.

4.3.2 Illustrations. Illustrations applicable to Connectors, Jack, Plug, and Test Point are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST / CODE	CONTACT SPRING PRESSURE 1772	CONTROLLED DROP 1818	DURABILITY(SPRING LIFE) 1903	FRAME STRENGTH 1932	RFI SHIELDING 3127	STATIC LOAD 2102	TORQUE 2155
MIL-J-641		X		X	X		X	
MIL-P-642			X				X	X
MIL-J-5251				X				
MIL-C-9177		X	X	X	X	X	X	X
MIL-C-39024				X		X		
MIL-P-55149								X
M590298				X				X

5.5 Tabulation. Instruction for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for connector characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	MAX CONT. CURRENT AMPERES	1563	MAX INTER. CURRENT AMPERES	1564	MAX WKG. VOLTS DC
1565	MAX WKG VOLTS AC	1569	WKG VOLTS DC OR RMS	1576	SCEMATIC MIL-J-641
1577	SCEMATIC BASE DOC	1602	MTG THICK INCH	1603	MTG THICK MILLIMETER
1620	INSULATION COLOR	1628	BODY COLOR	2300	MATING CONNECTOR
5060	MAX OPER ALT FEET	5061	MAX OPER ALT METERS	5069	MAX OPER TEMP RTG
7021	MASS GRAMS	7022	WEIGHT OUNCES	7023	WEIGHT POUNDS
7024	MASS KILOGRAMS				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristic have been specified refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER FSCM 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT NUMBER	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNITS OF MEASURE (CONT)	
SI.	6942
CLASSIFICATION	
JACK SCHEMATIC (SELECT ONE)	
PER BASE DOCUMENT (DESIGNATION)	1577
PER MIL-J-641 (DESIGNATION)	1576
ELECTRICAL RATINGS	
CONTINUOUS CURRENT (AMPERES)	1562
INTERMITTANT CURRENT (AMPERES)	1563
MAXIMUM DC WORKING VOLTAGE (VOLTS DC)	1564
MAXIMUM AC WORKING VOLTAGE (VOLTS AC)	1565
AC VOLTAGE FREQUENCY (HERTZ)	1566
MAXIMUM DC AND RMS WORKING VOLTAGE (VOLTS)	1569

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

CLASSIFICATION.

1577 JACK SCHEMATIC 1577 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

1576 JACK SCHEMATIC 1576 IN ACCORDANCE WITH MIL-J-641 SHALL APPLY.

ELECTRICAL RATINGS.

1562 THE MAXIMUM CONTINUOUS CURRENT RATING SHALL BE 1562 AMPERE(S).

1563 THE MAXIMUM INTERMITTENT CURRENT RATING SHALL BE 1563 AMPERE(S).

1564 THE MAXIMUM WORKING VOLTAGE RATING SHALL BE 1564 VOLT(S) DC.

1565 THE MAXIMUM WORKING VOLTAGE RATING SHALL BE 1565 VOLT(S) AC.

1566 THE FREQUENCY OF THE AC VOLTAGE RATING SHALL BE 1566 HERTZ.

1569 THE MAXIMUM WORKING VOLTAGE RATING SHALL BE 1569 VOLT(S) DC AND RMS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
FREQUENCY RATING (SELECT ONE)	
(HERTZ)	7627
(MEGAHERTZ)	7628
(KILOHERTZ)	7641
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S.	
(INCHES)	7572

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.
7628	THE FREQUENCY RATING SHALL BE 7628 MEGAHERTZ.
7641	THE FREQUENCY RATING SHALL BE 7641 KILOHERTZ.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT)	
*UNITS (CONT)	
SI	
(MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLE VI, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VI IS USED.

FINISHES (SEE TABLE VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
MATING CONNECTOR (DESIGNATION)	2300
SWITCHING ACTION _____	2310
CONCENTRICITY (SELECT ONE)	
(INCH TIR)	1600
(MILLIMETERS TIR)	1601
MOUNTING	
METHOD _____	2320

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION
	MATING CONNECTOR.
2300	THE MATING CONNECTOR(S) SHALL BE 2300.
	SWITCHING ACTION.
2310	WHEN A PLUG IS INSERTED INTO THE JACK, THE SWITCHING ACTION SHALL BE 2310.
	CONCENTRICITY.
1600	AFTER ASSEMBLY, THE CONCENTRICITY BETWEEN THE END OF SHANK AND THE TIP OF THE PLUG SHALL BE WITHIN 1600 INCH TOTAL INDICATOR READING (TIR).
1601	AFTER ASSEMBLY, THE CONCENTRICITY BETWEEN THE END OF SHANK AND THE TIP OF THE PLUG SHALL BE WITHIN 1601 MILLIMETER(S) TOTAL INDICATOR READING (TIR).
	MOUNTING.
2320	THE METHOD OF MOUNTING SHALL BE 2320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MOUNTING (CONT)	
MAXIMUM PANEL THICKNESS (SELECT ONE)	
(INCH)	1602
(MILLIMETERS)	1603
PATCH PANEL TYPE (DESIGNATION)	1604
ANTIROTATION DEVICE _____	2322
TERMINATION	
PER CONTACT TERMINATION TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1602 THE THICKNESS OF THE PANEL OR BOARD TO WHICH THE DEVICE SHALL MOUNT SHALL BE NOT GREATER THAN 1602 INCH.

1603 THE THICKNESS OF THE PANEL OR BOARD TO WHICH THE DEVICE SHALL MOUNT SHALL BE NOT GREATER THAN 1603 MILLIMETER(S).

1604 JACKS SHALL BE SUPPLIED WITH PATCH PANEL TYPE 1604.

2322 ANTIROTATION DEVICE SHALL BE 2322.

TERMINATION.

CONTACTS SHALL ACCOMMODATE CONDUCTORS AS SPECIFIED IN THE CONTACT TERMINATION TABLE.

CONTACT TERMINATION TABLE

	NUMBER OF WIRES	AWG	DIAMETER INCH	DIAMETER MILLIMETER
CONTACT 1	3000	3010	3020	3030
CONTACT 2	3001	3011	3021	3031
CONTACT 3	3002	3012	3022	3032
CONTACT 4	3003	3013	3023	3033
CONTACT 5	3004	3014	3024	3034

NOTE A. 3040
NOTE B. 3041
NOTE C. 3042

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATION (CONT)	
APPLICABLE CABLE (DESIGNATION)	1619
STRAIN RELIEF PURPOSE _____	1656
STRAIN RELIEF (PART NUMBER)	1616
SHELL SCREWS _____	2330
TERMINAL SCREWS _____	2332
TERMINATION _____	2334
COLORS	
INSULATION _____	1620
BODY _____	1628
CONTACT	
DESCRIPTION _____	1579
CLOSED ENTRY DESIGN.	1578
INTEGRAL SWITCH	
TYPE (SELECT ONE)	
PUSH.	1644
TOGGLE.	1646
SLIDE.	1648

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1619	THE APPLICABLE CABLE SHALL BE 1619.
1656	A STRAIN RELIEF SHALL BE REQUIRED FOR 1656.
1616	STRAIN RELIEF SHALL BE A CLAMP, PART NUMBER 1616.
2330	SHELL SCREW(S) SHALL BE 2330.
2332	TERMINAL SCREW(S) SHALL BE 2332.
2334	TERMINATION SHALL BE 2334.
	COLORS.
1620	THE INSULATION COLOR SHALL BE 1620.
1628	THE BODY COLOR SHALL BE 1628.
	CONTACT.
1579	CONTACT SHALL BE 1579.
1578	CLOSED ENTRY DESIGN SHALL BE REQUIRED.
	INTEGRAL SWITCH.
1644	THE SWITCH SHALL BE PUSH TYPE.
1646	THE SWITCH SHALL BE TOGGLE TYPE.
1648	THE SWITCH SHALL BE SLIDE TYPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
INTEGRAL SWITCH (CONT)	
OPERATION (SELECT ONE)	
MAINTAINED.	1652
MOMENTARY.	1650
(DOC DES)	1651
TEST CONNECTOR	
PROBE (TYPE)	1592
(DOC DES)	1594
JACK (TYPE)	1596
(DOC DES)	1598
PROBE DIAMETER (SELECT ONE)	
(INCH)	1580
(MILLIMETERS)	1582
PROBE MINIMUM LENGTH (SELECT ONE)	
(INCHS)	1588
(MILLIMETERS)	1590

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1652	SWITCH OPERATION SHALL BE MAINTAINED.
1650	SWITCH OPERATION SHALL BE MOMENTARY.
1651	SWITCH SHALL BE IN ACCORDANCE WITH 1651.
	TEST CONNECTOR.
1592	TYPE 1592 TEST PROBE SHALL BE USED FOR TESTING.
1594	THE TEST PROBE SHALL BE IN ACCORDANCE WITH 1594.
1596	TYPE 1596 TEST JACK SHALL BE USED FOR TESTING.
1598	THE TEST JACK SHALL BE IN ACCORDANCE WITH 1598.
1580	THE TEST PROBE DIAMETER SHALL BE 1580 INCH.
1582	THE TEST PROBE DIAMETER SHALL BE 1582 MILLIMETER(S).
1588	THE TEST PROBE LENGTH SHALL BE NOT LESS THAN 1588 INCH(S).
1590	THE TEST PROBE LENGTH SHALL BE NOT LESS THAN 1590 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
CABLE PULL-OUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1700
NO EVIDENCE OF PHYSICAL DAMAGE.	1702
NO DISCONTINUITY.	1701
MAXIMUM CABLE MOVEMENT (SELECT ONE)	
(INCHS)	1703

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
1700	CABLE PULL-OUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.
1702	CABLE PULL-OUT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1701	THERE SHALL BE NO DISCONTINUITY.
1703	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 1703 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE PULL-OUT (CONT)	
MAXIMUM CABLE MOVEMENT (CONT)	
(MILLIMETERS)	1705
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1688
PER MIL-STD-1344, METHOD 2009.	1690
TEST CONDITION (LETTER)	1687
CABLE _____	1689
CAP. RETENTION/SPRING PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2340
NO BINDING NOR DETACHMENT.	2342
FREE FINGER TURNING.	2344
MINIMUM SPRING PRESSURE (SELECT ONE)	
(POUNDS)	2346
(NEWTONS)	2348

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1705	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 1705 MILLIMETER(S).
1688	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1688.
1690	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2009 OF MIL-STD-1344.
1687	TEST CONDITION LETTER 1687 SHALL APPLY.
1689	THE CABLE TO BE USED SHALL BE 1689.
2340	CAP RETENTION/SPRING PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2340.
2342	CAP RETENTION/SPRING PRESSURE. THE CAP SHALL NOT BIND DURING MOVEMENT, NOR BECOME DETACHED.
2344	CAP SHALL BE FREE FINGER TURNING.
2346	CAP SPRING PRESSURE SHALL BE NOT LESS THAN 2346 POUND(S) FORCE.
2348	CAP SPRING PRESSURE SHALL BE NOT LESS THAN 2348 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAP RETENTION/SPRING PRESSURE (CONT)	
NO BINDING NOR DETACHMENT (CONT)	
MAXIMUM SPRING PRESSURE (SELECT ONE)	
(POUNDS)	2350
(NEWTONS)	2352
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1691
PER MIL-P-55194.	1693
AXIAL PULL (SELECT ONE)	
(POUNDS)	1692
(NEWTONS)	1694
MEASUREMENT DISTANCE FROM DEPRESSED POSITION (SELECT ONE)	
(INCH)	1695
(MILLIMETERS)	1697

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2350	CAP SPRING PRESSURE SHALL BE NOT GREATER THAN 2350 POUND(S) FORCE.
2352	CAP SPRING PRESSURE SHALL BE NOT GREATER THAN 2352 NEWTON(S).
1691	CAP RETENTION/SPRING PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1691.
1693	CAP RETENTION/SPRING PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-55194.
1692	AXIAL PULL SHALL BE 1692 POUND(S).
1694	AXIAL PULL SHALL BE 1694 NEWTON(S).
1695	MEASURE SPRING RETURN PRESSURE 1695 INCH FROM FULLY DEPRESSED POSITION.
1697	MEASURE SPRING RETURN PRESSURE 1697 MILLIMETER(S) FROM FULLY DEPRESSED POSITION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1730
MAXIMUM (OHMS)	1734
MAXIMUM MILLIVOLT DROP (MILLIVOLTS)	1732
AT ELEVATED TEMPERATURE (SELECT ONE)	
MAXIMUM (OHMS)	1733
MAXIMUM MILLIVOLT DROP (MILLIVOLTS)	1735
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1708
PER MIL-STD-1344, METHOD 3004.	1710
TEST CURRENT (SELECT ONE)	
(AMPERES)	1714
(MILLIAMPERES)	1712
ADDITIONAL TEST TEMPERATURE (DEGREES CELSIUS)	1713

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1730	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.
1734	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1734 OHM(S).
1732	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1732 MILLIVOLT(S) DROP.
1733	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 1733 OHM(S).
1735	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 1735 MILLIVOLT(S) DROP.
1708	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1708.
1710	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3004 OF MIL-STD-1344.
1714	THE TEST CURRENT SHALL BE 1714 AMPERE(S).
1712	THE TEST CURRENT SHALL BE 1712 MILLIAMPERE(S).
1713	IN ADDITION TO MEASUREMENT AT AMBIENT TEMPERATURE, PERFORM MEASUREMENT AT 1713 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT SPRING OVERTRAVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1754
AS FOLLOWS:	1755
MINIMUM FLEX (SELECT ONE)	
(INCH)	1756
(MILLIMETERS)	1758
MAXIMUM FLEX (SELECT ONE)	
(INCH)	1760
(MILLIMETERS)	1762
CONTACT ONE FLEX (SELECT ONE)	
(INCH)	1761
(MILLIMETERS)	1759
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1738

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1754	CONTACT SPRING OVERTRAVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1754.
1755	CONTACT SPRING OVERTRAVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1756	CONTACT SPRINGS SHALL FLEX NOT LESS THAN 1756 INCH WHEN PLUG IS INSERTED.
1758	CONTACT SPRINGS SHALL FLEX NOT LESS THAN 1758 MILLIMETER(S) WHEN PLUG IS INSERTED.
1760	CONTACT SPRINGS SHALL FLEX NOT GREATER THAN 1760 INCH WHEN PLUG IS INSERTED.
1762	CONTACT SPRINGS SHALL FLEX NOT MORE THAN 1762 MILLIMETER(S) WHEN PLUG IS INSERTED.
1761	NUMBER ONE CONTACT SPRING MAY FLEX AS MUCH AS 1761 INCH.
1759	NUMBER ONE CONTACT SPRING MAY FLEX AS MUCH AS 1759 MILLIMETER(S).
1738	CONTACT SPRING OVERTRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1738.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT SPRING OVERTRAVEL (CONT)	
TEST METHODS (CONT)	
PER MIL-S-641.	1740
CONTACT SPRING PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1776
AS FOLLOWS:	1773
MINIMUM LIFT FORCE (SELECT ONE)	
(OUNCES)	1778
(NEWTONS)	1780
MINIMUM SPRING DEFLECTION (SELECT ONE)	
(INCH)	1781
(MILLIMETERS)	1783

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1740	CONTACT SPRING OVERTRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-641.
1776	CONTACT SPRING PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1776.
1773	CONTACT SPRING PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1778	THE FORCE REQUIRED TO LIFT CONTACT SPRING(S) SUFFICIENTLY TO BREAK ELECTRICAL CONTACT SHALL BE NOT LESS THAN 1778 OUNCE(S).
1780	THE FORCE REQUIRED TO LIFT CONTACT SPRING(S) SUFFICIENTLY TO BREAK ELECTRICAL CONTACT SHALL BE NOT LESS THAN 1780 NEWTON(S).
1781	SPRING DEFLECTION IN UNMATED CONTACTS SHALL BE NOT LESS THAN 1781 INCH.
1783	SPRING DEFLECTION IN UNMATED CONTACTS SHALL BE NOT LESS THAN 1783 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT SPRING PRESSURE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM SPRING DEFLECTION (SELECT ONE)	
(INCH)	1785
(MILLIMETERS)	1787
TEST MEHTODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1770
PER (DOC DES)	1772
APPLIED FORCE (SELECT ONE)	
(OUNCES)	1767
(NEWTONS)	1769
MATED JACK TEST PROCEDURE SHALL APPLY.	1771
TEST CURRENT (AMPERES)	1774
MAXIMUM CONTINUITY (MICROSECONDS)	1775
UNMATED JACK PROCEDURE SHALL APPLY.	1777

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1785	SPRING DEFLECTION IN UNMATED CONTACTS SHALL BE NOT GREATER 1785 INCH.
1787	SPRING DEFLECTION IN UNMATED CONTACTS SHALL BE NOT GREATER THAN 1787 MILLIMETER(S).
1770	CONTACT SPRING PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770.
1772	CONTACT SPRING PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1772.
1767	THE APPLIED FORCE SHALL BE 1767 OUNCE(S).
1769	THE APPLIED FORCE SHALL BE 1769 NEWTON(S).
1771	MATED JACK TEST PROCEDURE SHALL APPLY.
1774	TEST CURRENT SHALL BE 1774 MILLIAMPERE(S).
1775	CONTINUATION OF CONTINUITY SHALL BE NOT GREATER THAN 1775 MICROSECOND(S).
1777	UNMATED JACK TEST PROCEDURE SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROLLED DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1852
NO EVIDENCE OF PHYSICAL DAMAGE OR LOOSENING OF PARTS.	1854
TEST MEHTODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1816
PER (DOC DES)	1818
CONTACT (SELECT ONE)	
US	
WEIGHT (OUNCES)	1862
DIAMETER (INCH)	1876
DROP HEIGHT (FEET)	1872
TUBE DIAMETER (INCH)	1880
SI	
WEIGHT (GRAMS)	1864
DIAMETER (MILLIMETERS)	1878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1852	CONTROLLED DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.
1854	CONTROLLED DROP. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR LOOSENING OF PARTS AFFECTING PERFORMANCE.
1816	CONTROLLED DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1818	CONTROLLED DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1818.
1862	EACH CONTACT SHALL BE SUBJECTED TO IMPACT OF A WEIGHT OF NOT LESS THAN 1862 OUNCE(S).
1876	WEIGHT DIAMETER SHALL BE 1876 INCH.
1872	DROP HEIGHT SHALL BE NOT LESS THAN 1872 FEET.
1880	TUBE DIAMETER SHALL BE 1880 INCH(S).
1864	EACH CONTACT SHALL BE SUBJECTED TO IMPACT OF A WEIGHT OF NOT LESS THAN 1864 GRAM(S).
1878	WEIGHT DIAMETER SHALL BE 1878 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROLLED DROP (CONT)	
SI (CONT)	
DROP HEIGHT (METERS)	1874
TUBE DIAMETER (MILLIMETERS)	1882
IMPACTS PER CONTACT (NUMBER)	1866
ROTATION BETWEEN IMPACTS (DEGREES)	1868
SHELL (SELECT ONE)	
US	
WEIGHT (OUNCES)	1820
DIAMETER (INCH)	1826
DROP HEIGHT (FEET)	1834
TUBE DIAMETER (INCH)	1830
SI	
WEIGHT (GRAMS)	1822
DIAMETER (MILLIMETERS)	1828
DROP HEIGHT (METERS)	1836
TUBE DIAMETER (MILLIMETERS)	1832
SHELL IMPACTS (NUMBER)	1824

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1874	DROP HEIGHT SHALL BE NOT LESS THAN 1874 METER(S).
1882	TUBE DIAMETER SHALL BE 1882 MILLIMETER(S).
1866	THERE SHALL BE 1866 IMPACT(S) PER CONTACT.
1868	CONTACT SHALL BE ROTATED 1868 DEGREES BETWEEN IMPACTS.
1820	SHELL SHALL BE SUBJECTED TO IMPACT OF A WEIGHT OF NOT LESS THAN 1820 OUNCE(S).
1826	WEIGHT DIAMETER SHALL BE 1826 INCH.
1834	DROP HEIGHT SHALL BE NOT LESS THAN 1834 FEET.
1830	TUBE DIAMETER SHALL BE 1830 INCH(S).
1822	THERE SHALL BE SUBJECTED TO IMPACT OF A WEIGHT OF NOT LESS THAN 1822 GRAM(S).
1828	WEIGHT DIAMETER SHALL BE 1828 MILLIMETER(S).
1836	DROP HEIGHT SHALL BE NOT LESS THAN 1836 METER(S).
1832	TUBE DIAMETER SHALL BE 1832 MILLIMETER(S).
1824	THERE SHALL BE 1824 IMPACTS ON THE SHELL.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4884
PER MIL-STD-1344, METHOD 3001	3250
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
3250	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	3252
UNMATED CONNECTOR.	3254
TEST CONDITION LETTER (SELECT ONE)	
II.	3256
III.	3262
IV.	3258

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
3252	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
3254	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
3256	TEST CONDITION II SHALL APPLY.
3262	TEST CONDITION III SHALL APPLY.
3258	TEST CONDITION IV SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST CONDITION LETTER (CONT)	
V.	3264
VI.	3260
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4861
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I	3280

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3264	TEST CONDITION V SHALL APPLY.
3260	TEST CONDITION VI SHALL APPLY.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
3280	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344. TEST CONDITION I SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001 (CONT)	
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	3282
UNMATED CONNECTOR.	3284
DURABILITY (SPRING LIFE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1910
NO EVIDENCE OF PHYSICAL DAMAGE.	1912
MEET INSERTION FORCE REQUIREMENTS.	1914
MEET WITHDRAWAL FORCE REQUIREMENTS.	1916
MINIMUM AFTER TEST WITHDRAWAL FORCE (PERCENT OF INITIAL REQUIREMENT)	1920
AFTER TEST CONTACT RESISTANCE (SELECT ONE)	
MEET INITIAL REQUIREMENTS	1922

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
3282	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
3284	TEST SPECIMEN SHALL CONSIST BE AN UNMATED CONNECTOR.
1910	DURABILITY (SPRING LIFE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.
1912	DURABILITY (SPRING LIFE). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1914	DEVICE SHALL CONFORM TO INSERTION FORCE REQUIREMENT(S).
1916	DEVICE SHALL CONFORM TO WITHDRAWAL FORCE REQUIREMENT(S).
1920	THE WITHDRAWAL FORCE AFTER TEST SHALL BE NOT LESS THAN 1920 PERCENT OF THE INITIAL MINIMUM WITHDRAWAL FORCE.
1922	DEVICE SHALL CONFORM TO CONTACT RESISTANCE REQUIREMENT(S) AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY (SPRING LIFE) (CONT)	
AFTER TEST CONTACT RESISTANCE (CONT)	
MAXIMUM MILLIVOLT DROP (MILLIVOLTS)	1924
MAXIMUM (OHMS)	1926
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1900
PER (DOC DES)	1903
QUANTITY OF INSERT AND WITHDRAW (CYCLES)	1904
MAXIMUM CYCLE RATE (CYCLES PER HOUR)	1906
FRAME STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1942
NO EVIDENCE OF PHYSICAL DAMAGE OR RUPTURE OF JOINTS.	1944
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1930

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1924	THE CONTACT RESISTANCE MILLIVOLT DROP AFTER TEST SHALL BE NOT GREATER THAN 1924 MILLIVOLT(S).
1926	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 1926 OHM(S).
1900	DURABILITY (SPRING LIFE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.
1903	DURABILITY (SPRING LIFE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1903.
1904	1904 CYCLES OF INSERTION AND WITHDRAWAL SHALL BE PERFORMED.
1906	THE CYCLE RATE SHALL NOT EXCEED 1906 CYCLES PER HOUR.
1942	FRAME STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
1944	FRAME STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR RUPTURE OF JOINTS.
1930	FRAME STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FRAME STRENGTH (CONT)	
TEST METHODS (CONT)	
PER (DOC DES)	1932
SUSPENDED LOAD (SELECT ONE)	
(POUNDS)	1934
(KILOGRAMS)	1936
LOAD SUSPENSION DURATION (MINUTES)	1938
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1932	FRAME STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1932.
1934	1934 POUND(S) SHALL BE SUSPENDED FROM THE MOUNTED CONNECTOR.
1936	1936 KILOGRAM(S) SHALL BE SUSPENDED FROM THE MOUNTED CONNECTOR.
1938	THE LOAD SHALL BE SUSPENDED FOR 1938 MINUTES.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLE TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLE TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (CONT)	
CERTIFICATION PART MEETS REQUIREMENT 4 OF MIL-STD-454.	3150
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3150	FUNGUS. MATERIALS OF CONSTRUCTION FOR THE CONNECTOR SHALL BE NON-NUTRIENT TO FUNGUS AS SPECIFIED IN REQUIREMENT 4 OF MIL-STD-454. CERTIFICATION OF THIS REQUIREMENT SHALL BE PROVIDED BY THE MANUFACTURER.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4785
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
MAXIMUM CONTACT RESISTANCE AFTER DRYING (MILLIOHMS)	4804
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4788
PER MIL-STD-1344, METHOD 1002.	3300

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4785	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSUALTION RESISTANCE SHALL BE NOT LESS THAN 4085 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4804	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 4804 MILLIOHMS AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
3300	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-1344, METHOD 1002 (CONT)	
PROCEDURE (SELECT ONE)	
PROCEDURE I.	3302
DURATION OF POLARIZING VOLTAGE (HOURS)	3304
PROCEDURE II.	3306
STEP 7A SHALL NOT APPLY.	3308
PROCEDURE III.	3310
STEP 7A SHALL NOT APPLY.	3312
POLARIZING VOLTAGE (VOLTS DC)	3314
POLARIZING VOLTAGE CONNECTION.	3316
TEST SPECIMEN (SELECT ONE)	
MATED, WIRED CONNECTORS.	3318
INDIVIDUAL WIRED CONNECTORS.	3320
WIRE (SIZE)	3322
WIRE (TYPE)	3324
DIELECTRIC WITHSTANDING VOLTAGE (SELECT ONE)	
(VOLTS AC)	3326

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3302	PROCEDURE TYPE I SHALL APPLY.
3304	POLARIZING VOLTAGE SHALL BE APPLIED FOR 3304 HOUR(S).
3306	PROCEDURE TYPE II SHALL APPLY.
3308	STEP 7A SHALL NOT APPLY.
3310	PROCEDURE TYPE III SHALL APPLY.
3312	STEP 7A SHALL NOT APPLY.
3314	POLARIZING VOLTAGE SHALL BE 3314 VOLTS DC.
3316	POLARIZING VOLTAGE SHALL BE APPLIED BETWEEN ALTERNATE CONTACTS CONNECTED TOGETHER ELECTRICALLY AND THE REMAINING CONTACTS AND SHELL CONNECTED ELECTRICALLY.
3318	MATED, WIRED CONNECTORS SHALL BE TESTED.
3320	INDIVIDUAL, WIRED CONNECTORS SHALL BE TESTED.
3322	CONTACTS SHALL BE WIRED WITH SIZE 3322 WIRE.
3324	WIRE TYPE SHALL BE 3324.
3326	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 3326 VOLTS AC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
DIELECTRIC WITHSTANDING VOLTAGE (CONT)	
(VOLTS DC)	3328
PERFORM DIELECTRIC WITHSTANDING VOLTAGE AT HIGH HUMIDITY.	3330
PERFORM DIELECTRIC WITHSTANDING VOLTAGE AFTER REMOVAL FROM CHAMBER.	3332
INSERTION AND WITHDRAWAL FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1978
AS FOLLOWS:	1979
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	1980
(NEWTONS)	1982
MAXIMUM WITHDRAWAL FORCE (SELECT ONE)	
(POUNDS)	1988

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3328	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 3328 VOLTS DC.
3330	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AT HIGH HUMIDITY.
3332	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AFTER REMOVAL FROM THE CHAMBER.
1978	INSERTION AND WITHDRAWAL FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1978.
1979	INSERTION AND WITHDRAWAL FORCE. THE REQUIREMENT SHALL BE AS FOLLOWS.
1980	THE INSERTION FORCE SHALL BE NOT GREATER THAN 1980 POUND(S).
1982	THE INSERTION FORCE SHALL BE NOT GREATER THAN 1982 NEWTON(S).
1988	THE WITHDRAWAL FORCE SHALL BE NOT GREATER THAN 1988 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION AND WITHDRAWAL FORCE (CONT)	
MAXIMUM WITHDRAWAL FORCE (CONT)	
(NEWTONS)	1990
MINIMUM WITHDRAWAL FORCE (SELECT ONE)	
(POUNDS)	1984
(NEWTONS)	1986
ROCKING PLUG SHALL NOT EFFECT INSERTION AND WITHDRAWAL FORCES.	1992
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1972
INSERTION AND WITHDRAWAL (CYCLES)	1974
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1990	THE WITHDRAWAL FORCE SHALL BE NOT GREATER THAN 1990 NEWTON(S).
1984	THE WITHDRAWAL FORCE SHALL BE NOT LESS THAN 1984 POUND(S).
1986	THE WITHDRAWAL FORCE SHALL BE NOT LESS THAN 1986 NEWTON(S).
1992	ROCKING OF THE PLUG IN THE JACK SHALL NOT EFFECT THE INSERTION AND WITHDRAWAL FORCES.
1972	INSERTION AND WITHDRAWAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1974	INSERTION AND WITHDRAWAL FORCE. AFTER 1974 CYCLES OF INSERTION AND WITHDRAWAL OF THE TEST PROBE, THE INSERTION AND WITHDRAWAL FORCES SHALL BE MEASURED.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1371
PER MIL-STD-1344, METHOD 3003.	3340
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1386	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
3340	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
SPECIAL PREPARATIONS _____	3342

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
3342	SPECIAL PREPARATIONS SHALL BE 3342.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW-LEVEL SIGNAL CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2360
MAXIMUM MILLIVOLT DROP (MILLIVOLTS)	2362
MAXIMUM (OHMS)	2364
MAXIMUM VARIATION BETWEEN READINGS (PERCENT)	2366
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2370
PER MIL-STD-1344, METHOD 3002.	2372
WIRE (SIZE)	2374
MINIMUM INTERFACE (PERCENT OF NOMINAL)	2376
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2002

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2360	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2360.
2362	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2362 MILLIVOLT(S).
2364	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2364 OHM(S).
2366	CONTACT RESISTANCE (VOLTAGE DROP) SHALL VARY NOT GREATER THAN 2366 PERCENT FORM ONE READING TO ANOTHER OR FROM THE READING AT NOMINAL CURRENT.
2370	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2370.
2372	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3002 OF MIL-STD-1344.
2374	CONTACTS SHALL BE WIRED WITH SIZE 2374 WIRE.
2376	CONTACT INTERFACE SHALL BE NOT LESS THAN 2376 PERCENT OF NOMINAL INTERFACE DIMENSION.
2002	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM (MU)	2004
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1996
PER MIL-STD-1344, METHOD 3006.	1997
TEST SPECIMEN SHALL BE FULLY ASSEMBLED CONNECTOR.	1999
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4689
PER MIL-STD-202, METHOD 210.	4698

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2004	MAGNETIC PERMEABILITY. THE PERMEABILITY SHALL BE NOT GREATER THAN 2004 MU.
1996	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1996.
1997	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3006 OF MIL-STD-1344.
1999	TEST SPECIMEN SHALL BE A FULLY ASSEMBLED CONNECTOR.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4829

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
RESISTANCE TO TEST PROBE DAMAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2062
NO EVIDENCE OF PHYSICAL DAMAGE.	2064
MAINTAIN CONTINUITY WHEN BENDING MOMENT APPLIED.	2066

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
2062	RESISTANCE TO TEST PROBE DAMAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2062.
2064	RESISTANCE TO TEST PROBE DAMAGE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2066	WHEN BENDING MOMENT IS APPLIED, CONTINUITY SHALL BE MAINTAINED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO TEST PROBE DAMAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2038
PER MIL-C-39024.	2040
INITIAL INSERTION DEPTH (SELECT ONE)	
(INCH)	2042
(MILLIMETERS)	2044
SECOND TEST INSERTION DEPTH (SELECT ONE)	
(INCH)	2046
(MILLIMETERS)	2048
THIRD TEST INSERTION DEPTH (SELECT ONE)	
(INCH)	2050
(MILLIMETERS)	2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2038	RESISTANCE TO TEST PROBE DAMAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2040	RESISTANCE TO TEST PROBE DAMAGE. TESTING SHALL BE IN ACCORDANCE WITH MIL-C-39024.
2042	THE TEST PROBE SHALL BE INSERTED TO A DEPTH OF 2042 INCH INITIALLY.
2044	THE TEST PROBE SHALL BE INSERTED TO A DEPTH OF 2044 MILLIMETER(S) INITIALLY.
2046	THE TEST PROBE SHALL BE INSERTED TO A DEPTH OF 2046 INCH FOR THE SECOND TEST.
2048	THE TEST PROBE SHALL BE INSERTED TO A DEPTH OF 2048 MILLIMETER(S) FOR THE SECOND TEST.
2050	THE TEST PROBE SHALL BE INSERTED TO A DEPTH OF 2050 INCH FOR THE THIRD TEST.
2052	THE TEST PROBE SHALL BE INSERTED TO A DEPTH OF 2052 MILLIMETER(S) FOR THE THIRD TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO TEST PROBE DAMAGE (CONT)	
PER MIL-C-39024 (CONT)	
BENDING MOMENT (SELECT ONE)	
(POUND-INCHS)	2054
(NEWTON-METERS)	2056
BENDING MOMENT TOLERANCE (PERCENT)	2058
RFI SHIELDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3099
PER RFI SHIELDING TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2054	AT EACH SPECIFIED INSERTION DEPTH A BENDING MOMENT OF 2054 POUND-INCH(S) SHALL BE APPLIED TO THE PROBE ABOUT THE INSERTED END OF THE PROBE AND THE CONNECTOR SHALL BE ROTATED IN ONE DIRECTION THROUGH 360 DEGREES.
2056	AT EACH SPECIFIED INSERTION DEPTH A BENDING MOMENT OF 2056 NEWTON-METER(S) SHALL BE APPLIED TO THE PROBE ABOUT THE INSERTED END OF THE PROBE AND THE CONNECTOR SHALL BE ROTATED IN ONE DIRECTION THROUGH 360 DEGREES.
2058	THE BENDING MOMENT TOLERANCE SHALL BE 2058 PERCENT.
3099	RFI SHIELDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3099. RFI SHIELDING. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE RFI SHIELDING TABLE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RFI SHIELDING (CONT)	
PER RFI SHIELDING TABLE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3120
PER (DOC DES)	3121
TEST FREQUENCIES PER RFI SHIELDING TABLE.	3122
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RFI SHIELDING TABLE

TEST FREQUENCY MEGAHERTZ	MINIMUM LEAKAGE ATTENUATION (DB)
3100	3110
3101	3111
3102	3112
3103	3113
3104	3114
3105	3115

3120 RFI SHIELDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3120.

3121 RFI SHIELDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3121.

3122 TEST FREQUENCY(S) SHALL BE AS SHOWN IN THE RFI SHIELDING TABLE.

4878 SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE.	3060
NO INCREASE IN ENGAGE AND DISENGAGE FORCE.	3062
MAXIMUM AFTER TEST CONTACT RESISTANCE	
(OHMS)	2070
(MILLIVOLTS DROP)	2072
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4770
PER MIL-STD-1344, METHOD 1001.	3350
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3060	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF EXCESSIVE CORROSION. EXCESSIVE CORROSION IS DEFINED AS THAT WHICH INTERFERES WITH THE ELECTRICAL OR MECHANICAL PERFORMANCE, OR, IN THE CASE OF PLATED METAL, CORROSION WHICH HAS PASSED THROUGH THE PLATING AND ATTACKED THE BASE METAL. THERE SHALL BE NO WARPING, CRACKING OR OTHER DAMAGE.
3062	THERE SHALL BE NO INCREASE IN FORCE REQUIRED TO ENGAGE AND DISENGAGE MATING CONNECTORS.
2070	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2070 OHM(S).
2072	THE CONTACT RESISTANCE MILLIVOLT DROP AFTER TEST SHALL BE NOT GREATER THAN 2072 MILLIVOLT(S).
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
3350	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
MOUNTING (CONT)	
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM (MILLISECONDS)	2089
MAXIMUM (MICROSECONDS)	2090
CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2094
(MILLIVOLT DROP)	2096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2089	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2089 MILLISECOND(S).
2090	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2090 MICROSECOND(S).
2094	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2094 OHM(S).
2096	THE CONTACT RESISTANCE MILLIVOLT DROP AFTER TEST SHALL BE NOT GREATER THAN 2096 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1502
PER MIL-STD-1344, METHOD 2004.	3360
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
TEST SPECIMEN (SELECT ONE)	
WIRED MATED PAIR	2088
WIRED UNMATED CONNECTOR	3362
MAXIMUM ELECTRICAL LOAD (MILLIAMPERES)	2086
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
3360	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2088	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
3362	TEST SPECIMEN SHALL BE A MIXED UNMATED CONNECTOR.
2086	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 2086 MILLIAMPERE(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STATIC LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2110
NO EVIDENCE OF PHYSICAL DAMAGE.	2112
MEET SPRING PRESSURE REQUIREMENTS.	2114
MEET CONTACT RESISTANCE REQURIEMENTS.	2118
MEET DIELECTRIC STRENGTH REQUIREMENTS.	2120
MEET INSULATION RESISTANCE REQUIREMENTS.	2122
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2100
PER (DOC DES)	2102
APPLIED LOAD (SELECT ONE)	
(POUNDS)	2104
(KILOGRAMS)	2106

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2110	STATIC LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2110.
2112	STATIC LOAD. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2114	AFTER TEST DEVICE SHALL CONFORM TO SPRING PRESSURE REQUIREMENTS.
2118	AFTER TEST DEVICE SHALL CONFORM TO CONTACT RESISTANCE REQUIREMENTS.
2120	AFTER TEST DEVICE SHALL CONFORM TO DIELECTRIC STRENGTH REQUIREMENTS.
2122	AFTER TEST DEVICE SHALL CONFORM TO INSULATION RESISTANCE REQUIREMENTS.
2100	STATIC LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.
2102	STATIC LOAD. TESTING SHALL BE IN ACCORDANCE WITH 2102.
2104	THE APPLIED LOAD SHALL BE 2104 POUND(S).
2106	THE APPLIED LOAD SHALL BE 2106 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH PLUG STACK ASSEMBLY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2138
NO EVIDENCE OF MECHANICAL IMPAIRMENT OR DEGRADATION OF PERFORMANCE.	2140
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2126
PER MIL-P-642.	2128
APPLIED LOAD (SELECT ONE)	
(POUNDS)	2130
(KILOGRAMS)	2132
LOAD DURATION (HOURS)	2134
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2138	STRENGTH, PLUG STACK ASSEMBLY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2138.
2140	STRENGTH, PLUG STACK ASSEMBLY. THERE SHALL BE NO EVIDENCE OF MECHANICAL IMPAIRMENT OR DEGRADATION OF PERFORMANCE.
2126	STRENGTH, PLUG STACK ASSEMBLY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2126.
2128	STRENGTH, PLUG STACK ASSEMBLY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-642.
2130	THE LOAD APPLIED SHALL BE 2130 POUND(S).
2132	THE LOAD APPLIED SHALL BE 2132 KILOGRAM(S).
2134	THE LOAD SHALL BE APPLIED FOR 2134 HOUR(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITION E, TORQUE (CONT)	
(NEWTON METERS)	1421
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3070
NO EVIDENCE OF DETRIMENTAL DAMAGE.	3072
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	3074
(MILLIVOLT DROP)	3076
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3078
PER MIL-STD-1344, METHOD 1003.	3080
NUMBER (CYCLES)	3082
STEP 1 TEMPERATURE (DEGREES CELSIUS)	3084

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
3070	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3070.
3072	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.
3074	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 3074 OHM(S).
3076	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 3076 MILLIVOLT(S) DROP.
3078	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3078.
3080	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
3082	THE NUMBER OF CYLCES SHALL BE 3082.
3084	THE STEP 1 TEMPERATURE SHALL BE 3084 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
PER MIL-STD-1344, METHOD 1003. (CONT)	
STEP 3 TEMPERATURE (DEGREES CELSIUS)	3086
MINIMUM DURATION OF STEPS 1 AND 3 (SELECT ONE)	
(HOURS)	3088
(MINUTES)	3090
TEST SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2142
WIRED, UNMATED CONNECTOR.	3092
PERFORM STATIC LOAD AT HIGH TEMPERATURE.	2144
PERFORM STATIC LOAD AT LOW TEMPERATURE.	2146
TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2172
NO EVIDENCE OF PHYSICAL DAMAGE OR LOOSENING OF PARTS.	2174

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3086	THE STEP 3 TEMPERATURE SHALL BE 3086 DEGREES CELSIUS.
3088	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 3088 HOUR(S).
3090	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 3090 MINUTE(S).
2142	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
3092	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2144	PERFORM STATIC LOAD TEST DURING THE FIRST HIGH TEMPERATURE CYCLE.
2146	PERFORM STATIC LOAD TEST DURING THE FIRST LOW TEMPERATURE CYCLE.
2172	TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2172.
2174	TORQUE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR LOOSENING OF PARTS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2154
PER (DOC DES)	2155
CONTACT & APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	2158
(NEWTON-METERS)	2160
INSULATING COLLAR TORQUE (SELECT ONE)	
(POUND-INCHES)	2162
(NEWTON-METERS)	2164
TORQUE APPLICATION DIRECTION (SELECT ONE)	
LOOSENING ONLY	2166
LOOSENING AND TIGHTENING.	2168
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4681

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR. CODE	STANDARD PARAGRAPH
2154	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2154.
2155	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2155.
2158	THE TORQUE APPLIED TO CONTACT 1 SHALL BE 2154 POUND-INCH(S).
2160	THE TORQUE APPLIED TO CONTACT 1 SHALL BE 2160 NEWTON-METER(S).
2162	THE TORQUE APPLIED TO THE INSULATION COLLAR SHALL BE 2162 POUND-INCH(S).
2164	THE TORQUE APPLIED TO THE INSULATING COLLAR SHALL BE 2164 NEWTON-METER(S).
2166	TORQUE SHALL BE APPLIED IN A LOOSENING DIRECTION ONLY.
2168	TORQUE SHALL BE APPLIED IN BOTH LOOSENING AND TIGHTENING DIRECTIONS.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LOOSENING OF HARDWARE.	3160
NO UNMATING OF CONNECTORS.	2202
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2204
(MILLIVOLTS DROP)	2206
TEST MEHTODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1505
PER MIL-STD-1344, METHOD 2005.	3170

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECONDS.
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECONDS.
3160	THERE SHALL BE NO LOOSENING OF HARDWARE.
2202	THERE SHALL BE NO UNINTENDED UNMATING OF CONNECTORS.
2204	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2204 OHM(S).
2206	THE CONTACT RESISTANCE MILLIVOLT DROP AFTER TEST SHALL BE NOT GREATER THAN 2206 MILLIVOLT(S).
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
3170	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
TEST CONDITION NUMBER (SELECT ONE)	
NUMBER I.	3172
DURATION EACH DIRECTION (HOURS)	3174
NUMBER II.	3176
NUMBER III.	3178
NUMBER IV	3180
NUMBER V	3182
TEST CONDITION (LETTER)	3184
MOUNTING (SELECT ONE)	
ANY SUITABLE.	3186
(DOC DES)	3188
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	3190
15 MINUTES.	3192
1.5 HOURS	3194

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3172	TEST CONDITION NUMBER I SHALL APPLY.
3174	DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 3174 HOUR(S).
3176	TEST CONDITION NUMBER II SHALL APPLY.
3178	TEST CONDITION NUMBER III SHALL APPLY.
3180	TEST CONDITION NUMBER IV SHALL APPLY.
3182	TEST CONDITION NUMBER V SHALL APPLY.
3184	TEST CONDITION LETTER 3184 SHALL APPLY.
3186	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3188	MOUNTING SHALL BE IN ACCORDANCE WITH 3188.
3190	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
3192	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
3194	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
DURATION (CONT)	
8 HOURS	3196
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	3198
THREE MUTUALLY PERPENDICULAR PLANES.	3200
TEST POINTS (NUMBER)	3202
TEST POINTS _____	3204
NUMBER VI.	3206
TEST CONDITION (LETTER)	3208
MOUNTING (SELECT ONE)	
ANY SUITABLE.	3210
(DOC DES)	3212
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	3214
15 MINUTES.	3216

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3196	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
3198	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
3200	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
3202	THERE SHALL BE 3202 TEST POINT(S).
3204	TEST POINT(S) SHALL BE 3204.
3206	TEST CONDITION NUMBER VI SHALL APPLY.
3208	TEST CONDITION LETTER 3208 SHALL APPLY.
3210	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3212	MOUNTING SHALL BE IN ACCORDANCE WITH 3212.
3214	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
3216	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
DURATION PER AXIS (CONT)	
1.5 HOURS.	3218
8 HOURS.	3220
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	3222
THREE MUTUALLY PERPENDICULAR PLANES.	3224
TEST POINTS (NUMBER)	3226
TEST POINTS _____	3228
TEST SPECIMEN (SELECT ONE)	
WIRED MATED PAIR.	2200
WIRED UNMATED CONNECTOR.	3230
MAXIMUM ELECTRICAL LOAD (MILLIAMPERES)	2194
MONITOR FOR DISCONTINUITIES.	3232
RESONANCE DETERMINATION METHOD _____	3234

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3218	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
3220	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
3222	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
3224	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
3226	THERE SHALL BE 3226 TEST POINT(S).
3228	TEST POINT(S) SHALL BE 3228.
2200	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
3230	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2194	THE ELECTRICAL LOAD, ALL CONTACTS, SHALL BE NOT GREATER THAN 2194 MILLIAMPERE(S).
3232	CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.
3234	THE METHOD FOR DETERMINING RESONANCE SHALL BE 3224.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERSEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2242
NO EVIDENCE OF LEAKAGE.	2244
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2228
PER MIL-J-641.	2230
MOUNTING DEPTH (SELECT ONE)	
(FEET)	2232
(METERS)	2234
TEST DURATION (HOURS)	2236
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2242	WATERSEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2244	WATERSEAL. THERE SHALL BE NO EVIDENCE OF WATER LEAKAGE.
2228	WATERSEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2228.
2230	WATERSEAL. TESTING SHALL BE IN ACCORDANCE WITH MIL-J-641.
2232	DEVICE SHALL BE MOUNTED 2232 FEET BELOW THE WATER SURFACE.
2234	DEVICE SHALL BE MOUNTED 2234 METER(S) BELOW THE WATER SURFACE.
2236	DEVICE SHALL BE SUBJECTED TO SPECIFIED HEAD OF WATER FOR 2236 HOUR(S).
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS (CONT)	
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
PERFORMANCE CHARACTERISTICS (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.
	MOUNTING HARDWARE. MOUNTING IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A _____	7001
B _____	7002
C _____	7003
D _____	7004
E _____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A _____	6991
B _____	6992
C _____	6993
D _____	6994
E _____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

ADDITIONAL PART MARKING.

6991 (A) 6991.

6992 (B) 6992.

6993 (C) 6993.

6994 (D) 6994.

6995 (E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

Review activities
Army-AT
Army-AV
Army-ER
Army-ME
Army-MR
Army-CR

User activity:
Army-AR

Preparing activity
Army-MI

(Project EDS-A335)


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

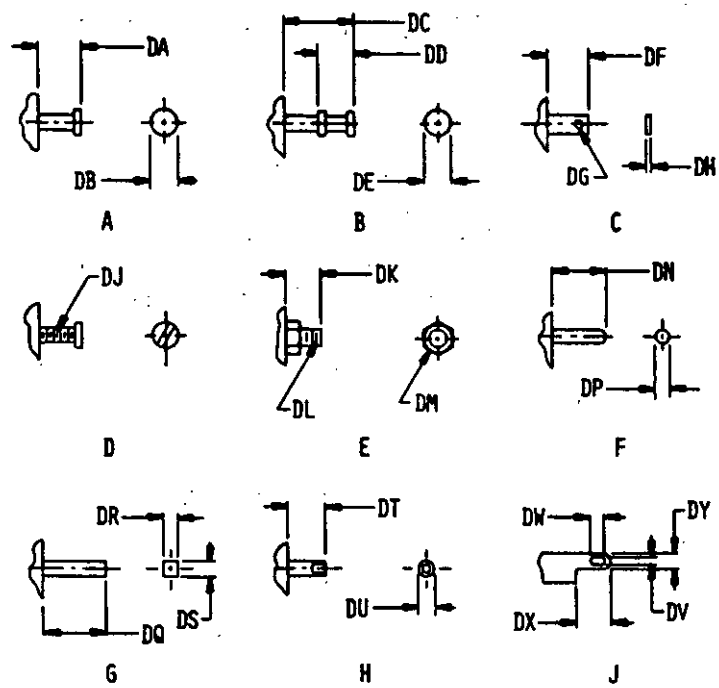


079-01-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

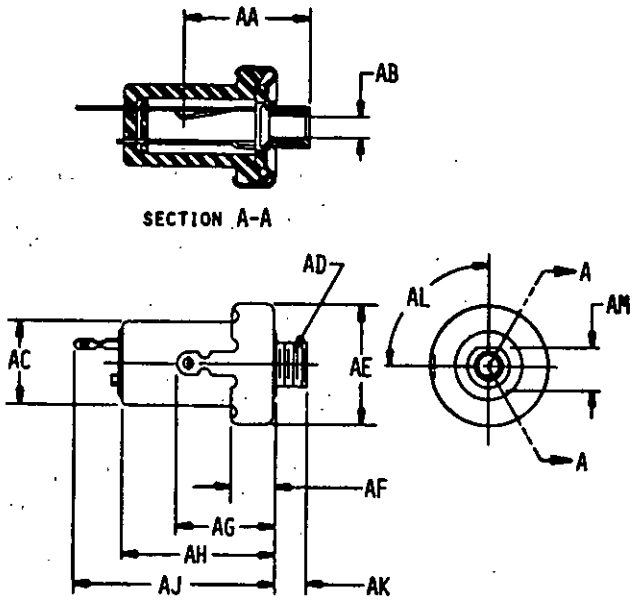


079-02-1

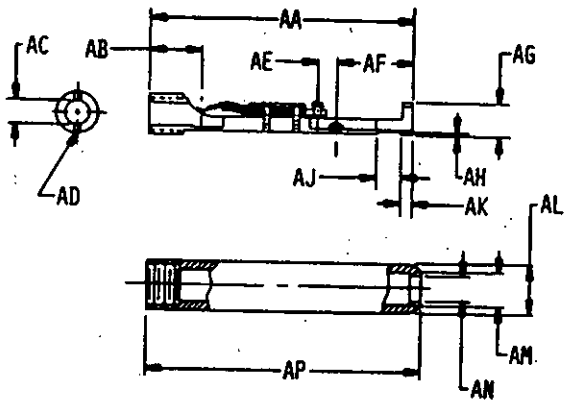


079-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

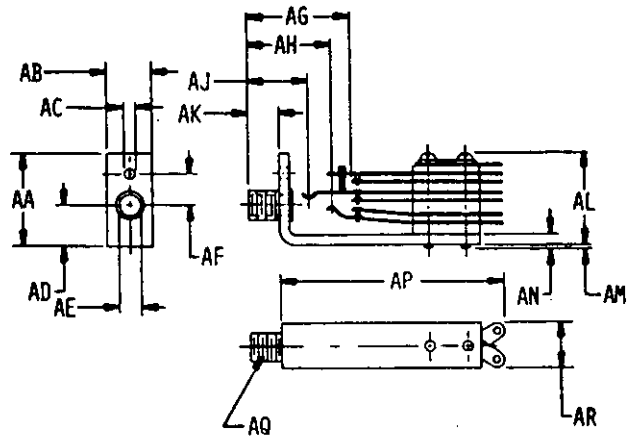


079-02-3

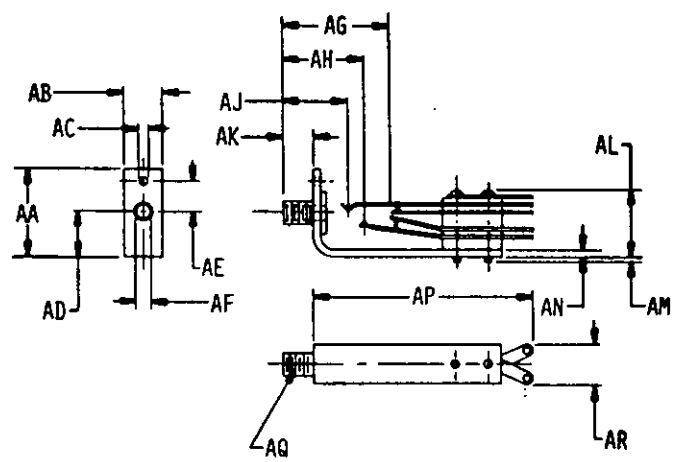


079-02-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

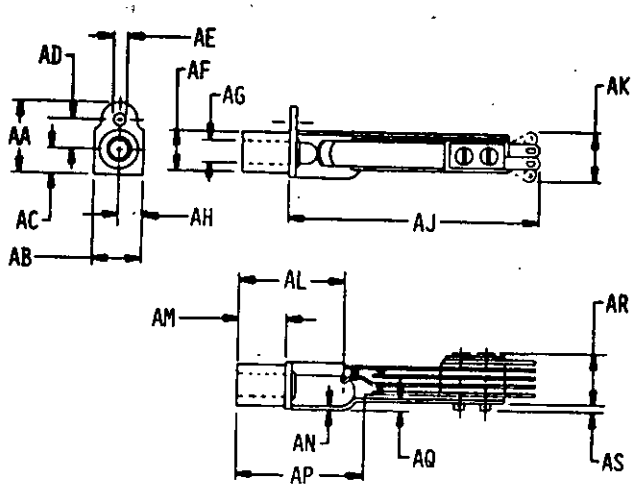


079-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

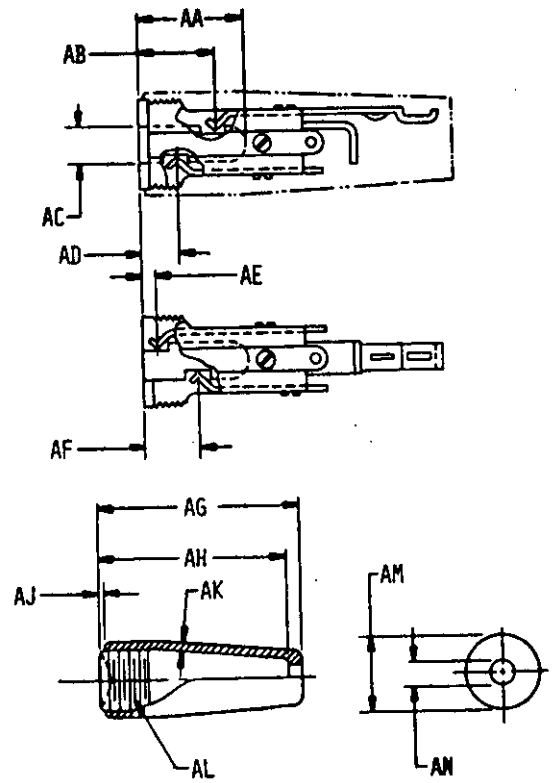


079-02-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

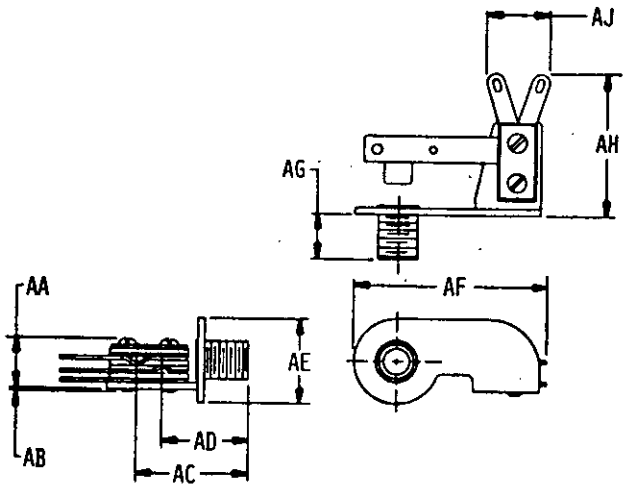


079-02-7

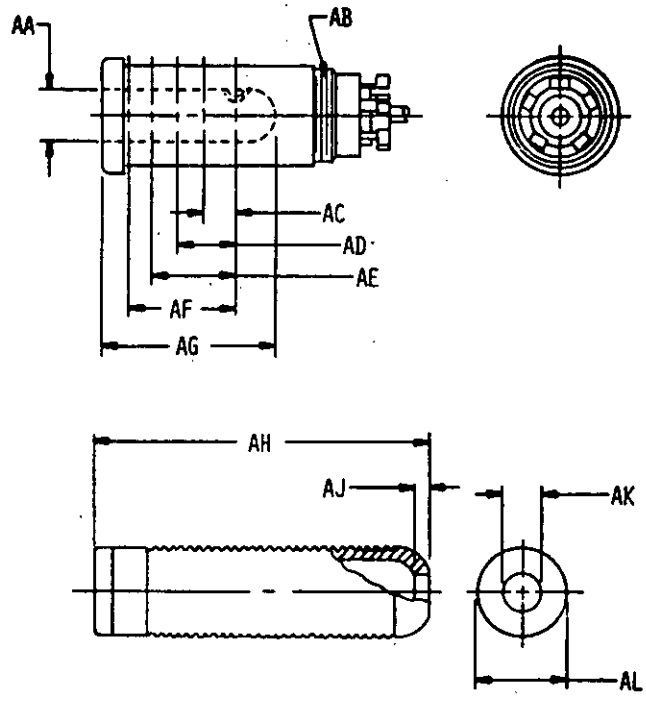


079-02-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

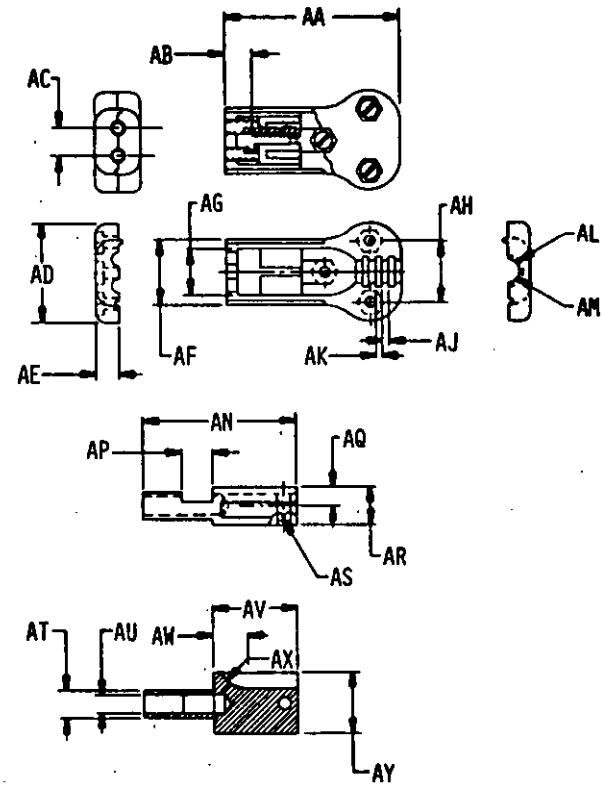


Ø79-Ø3-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

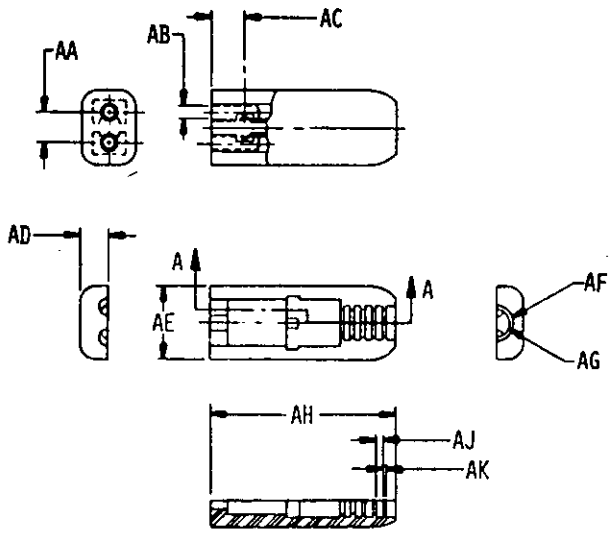


SECTION A-A

079-03-2

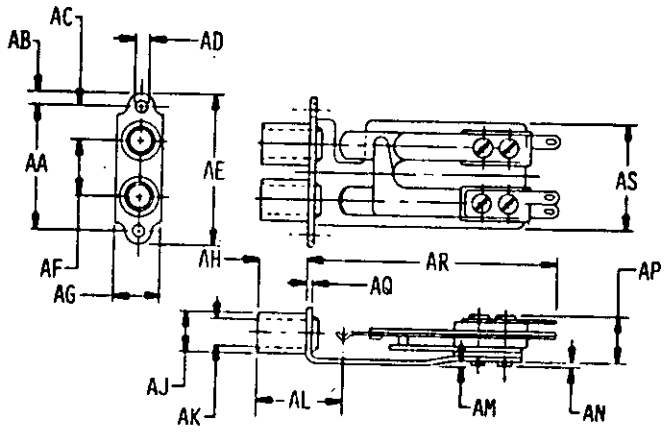


079-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

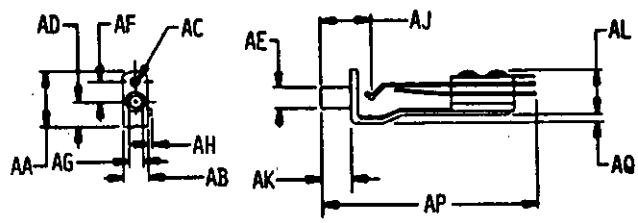


079-03-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

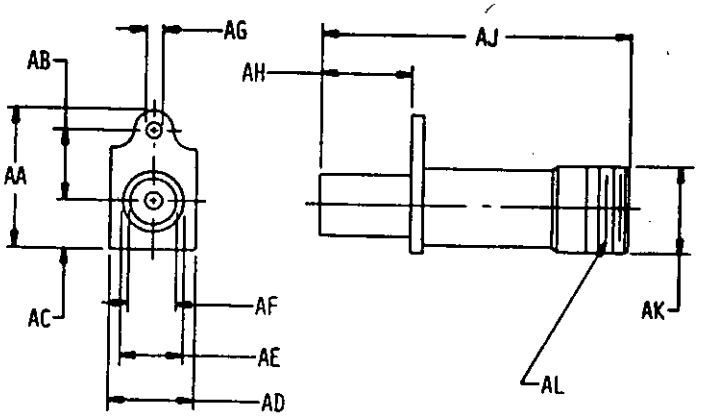


079-04-1

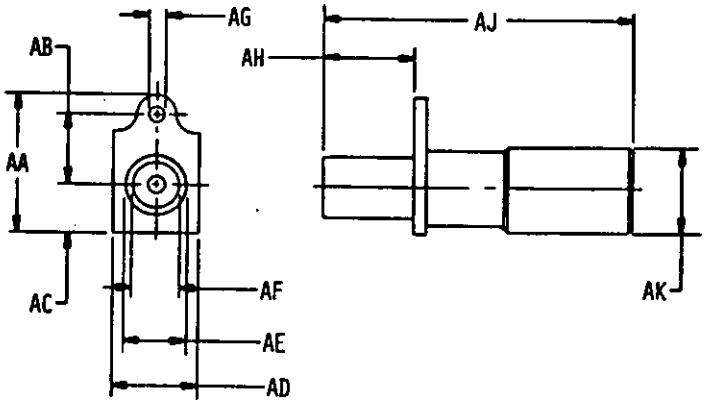


079-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

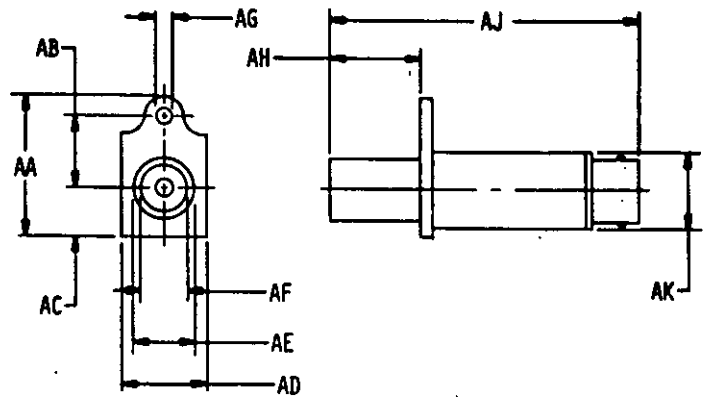


B79-84-3

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

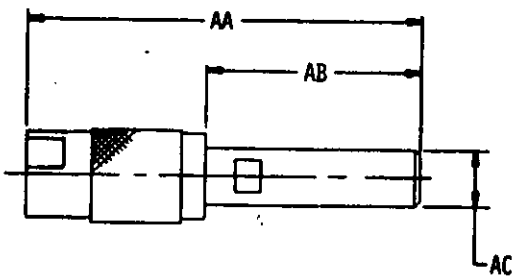


079-05-1

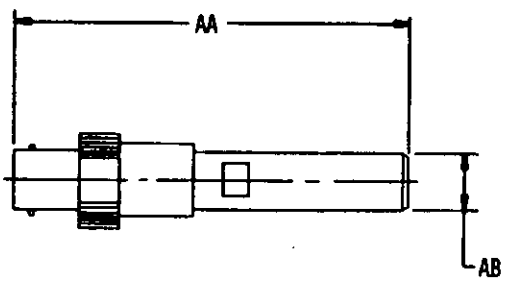


079-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

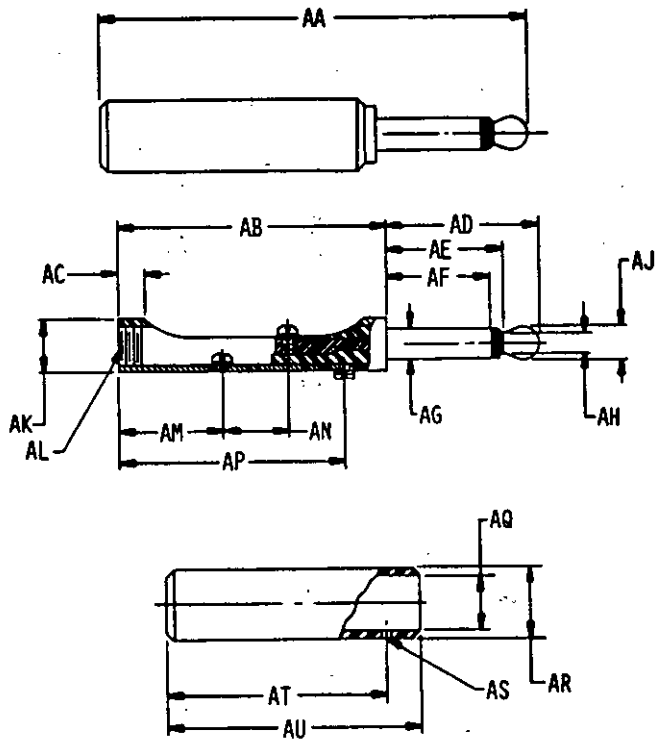


079-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

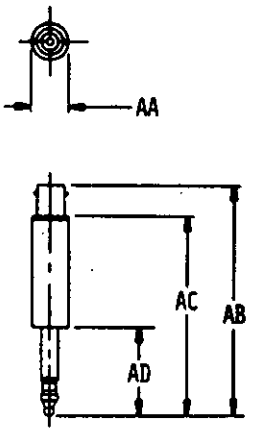


079-06-2

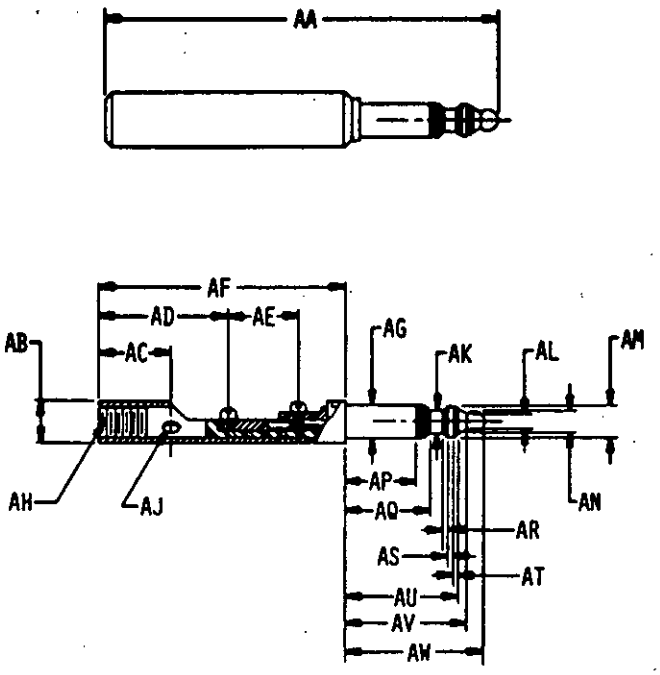


079-06-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

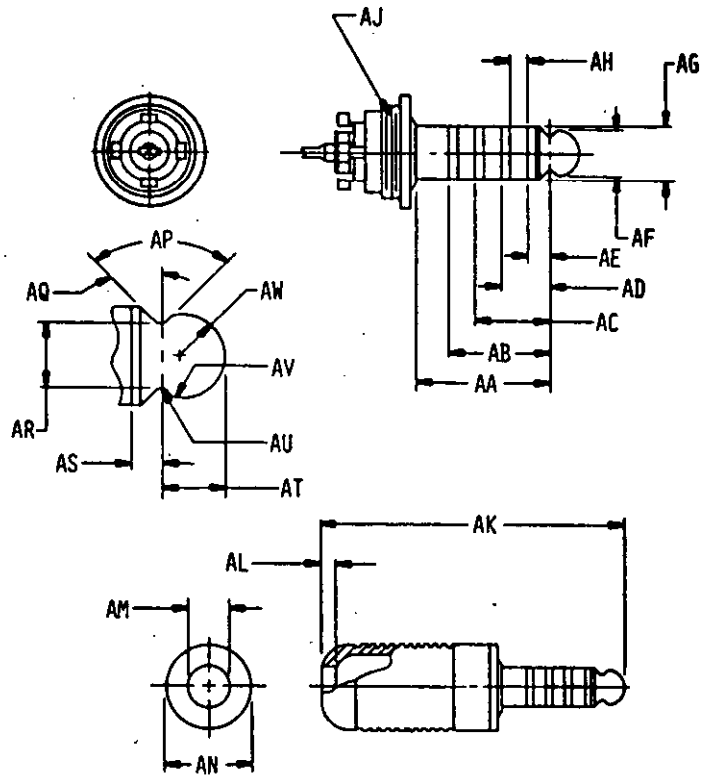


079-06-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

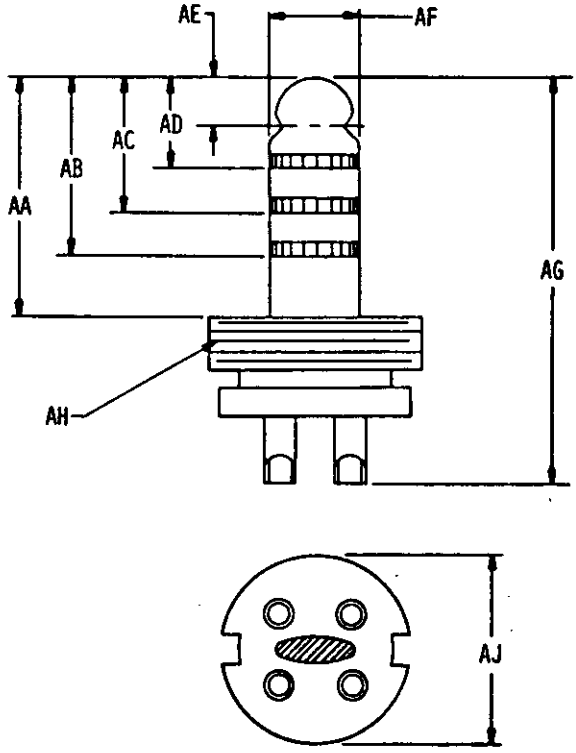


079-06-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

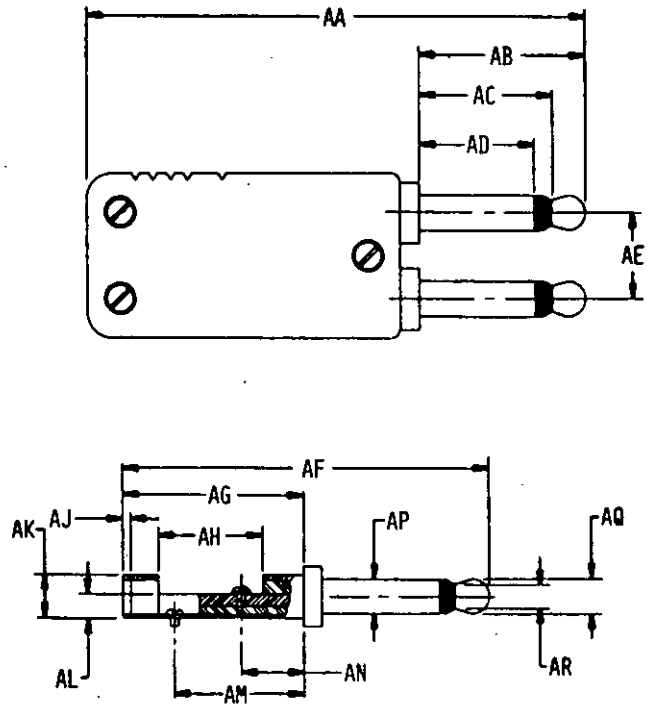


079-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

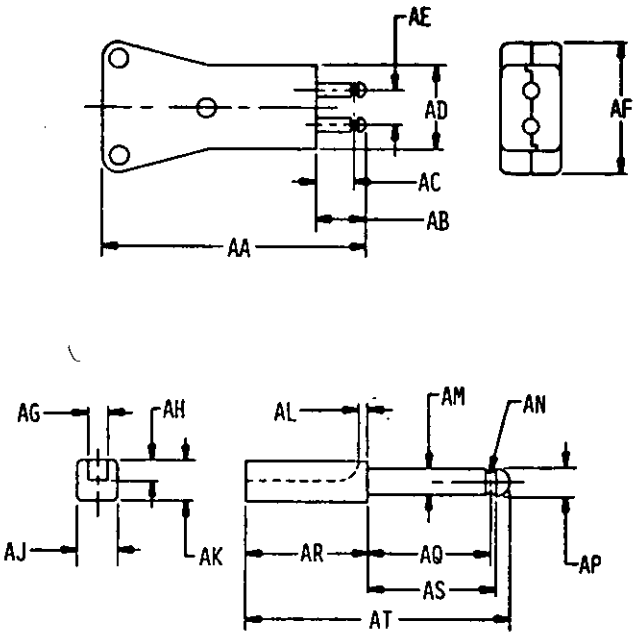


079-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

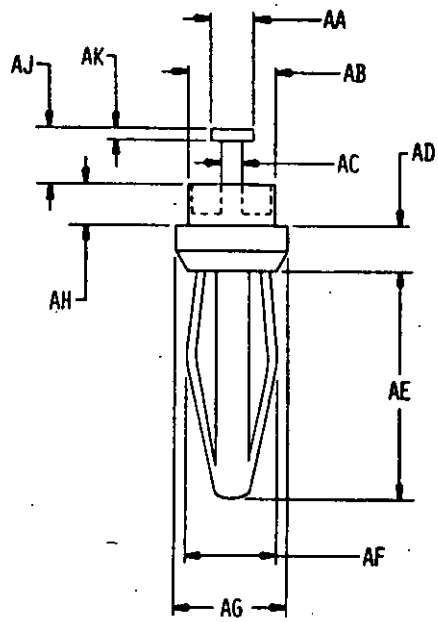


079-08-1

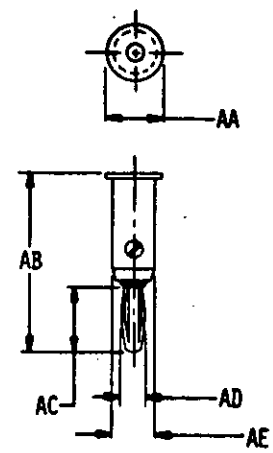


079-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

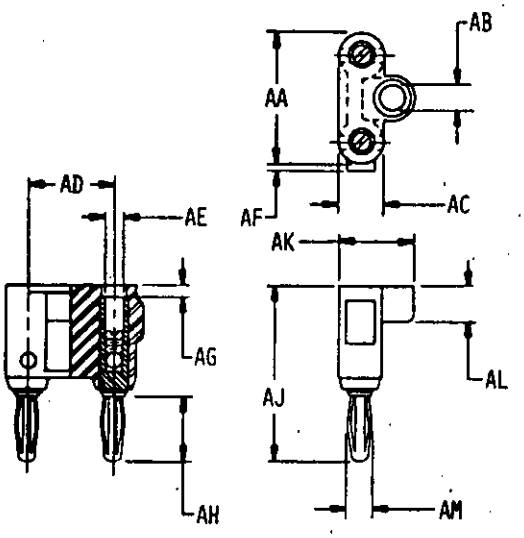


079-08-3

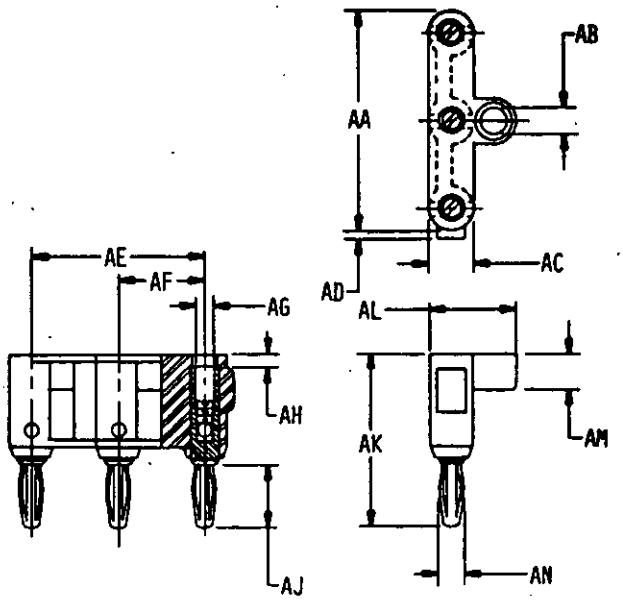


079-08-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

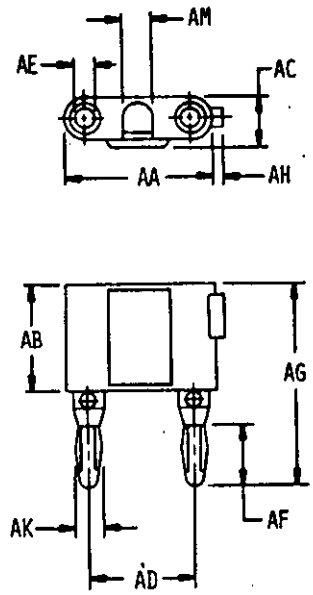


079-08-5

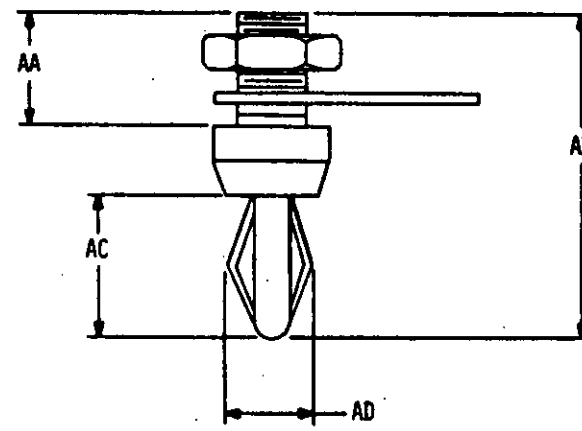


079-08-6


Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

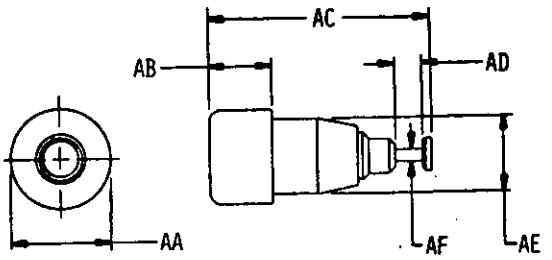


079-09-1

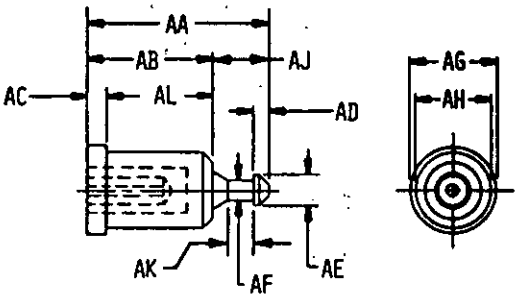

079-09-2

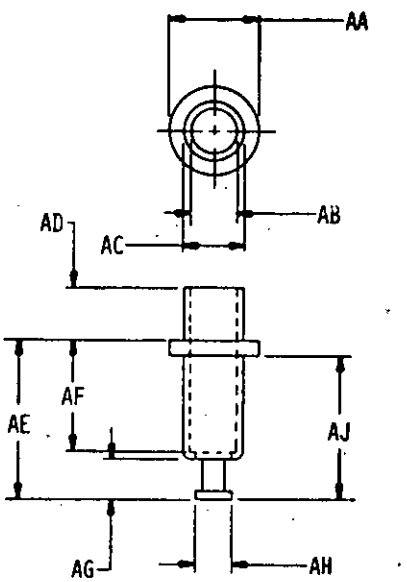


079-09-3

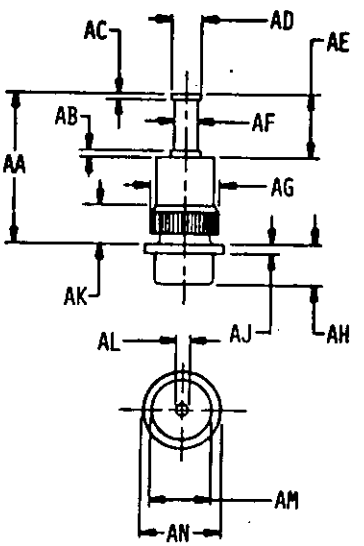


079-09-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

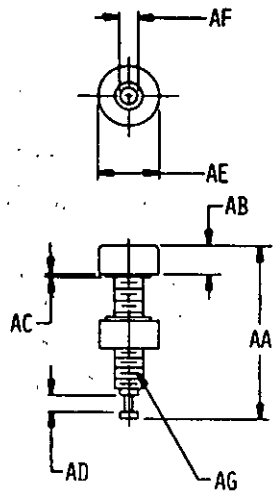


079-09-5

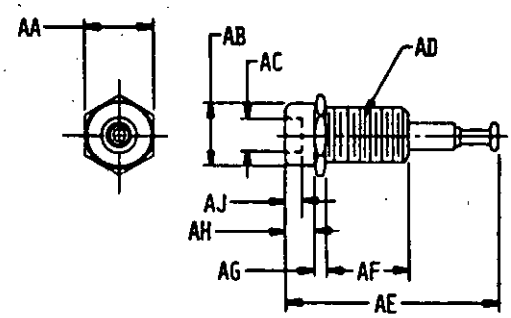

079-09-6

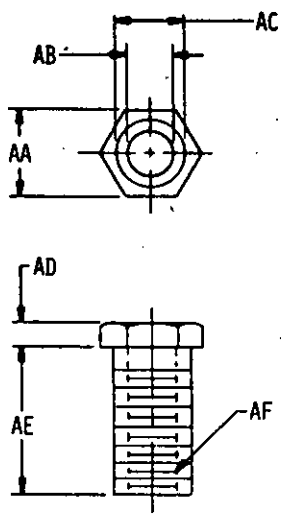


079-09-7

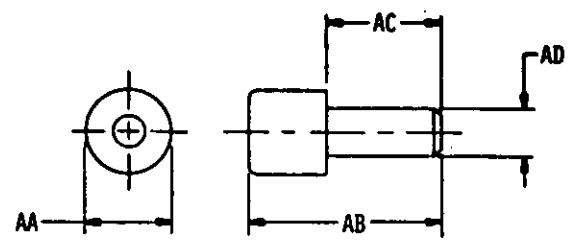


079-09-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

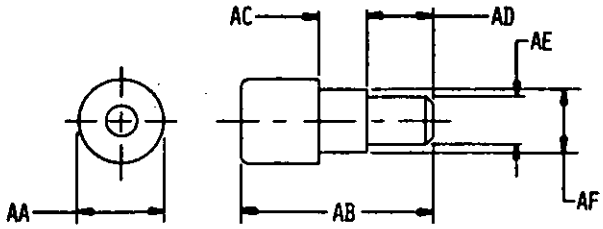

079-09-9

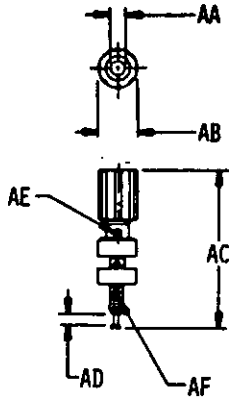


079-09-10

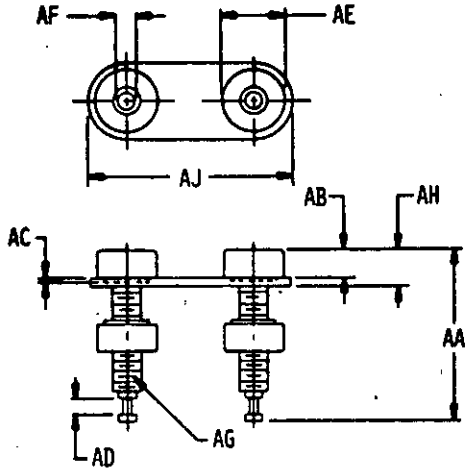


079-09-11


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

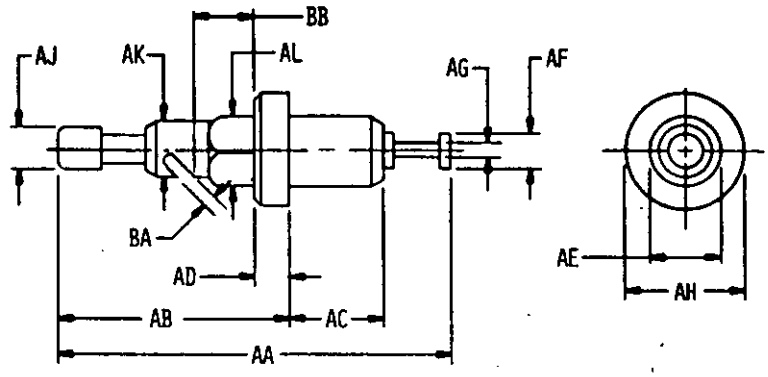

Ø79-Ø9-12

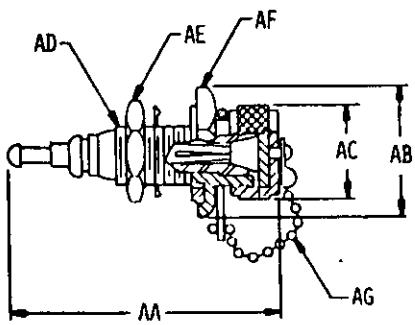


Ø79-Ø9-13

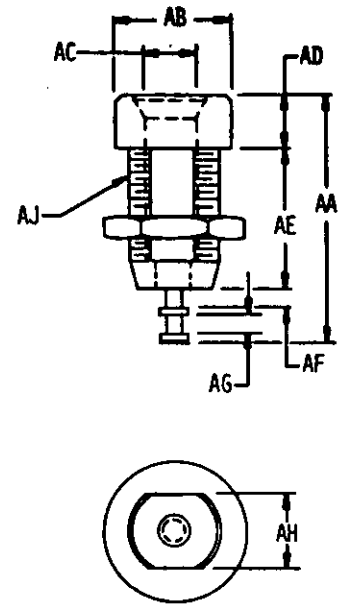


Ø79-Ø9-14

Source: https://assist.dla.mil - Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the current version before use.

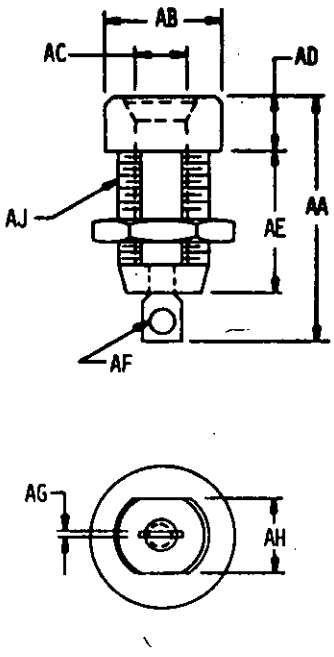


079-09-15

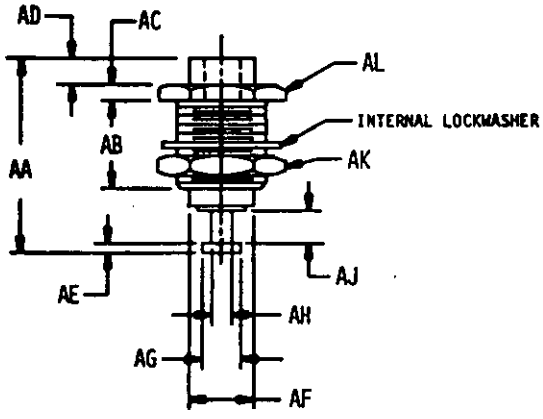


079-09-16


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

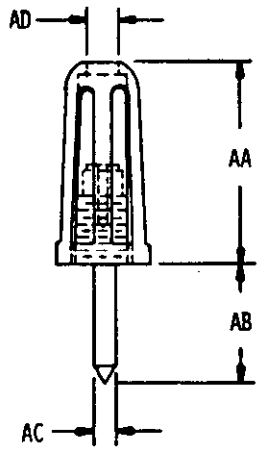

079-09-17

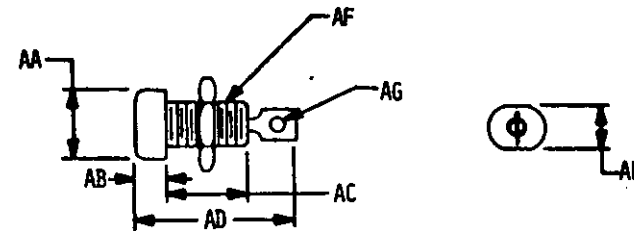


079-09-18

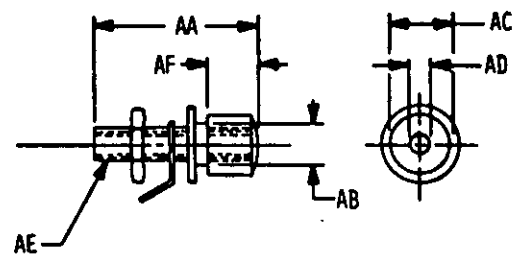


079-09-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

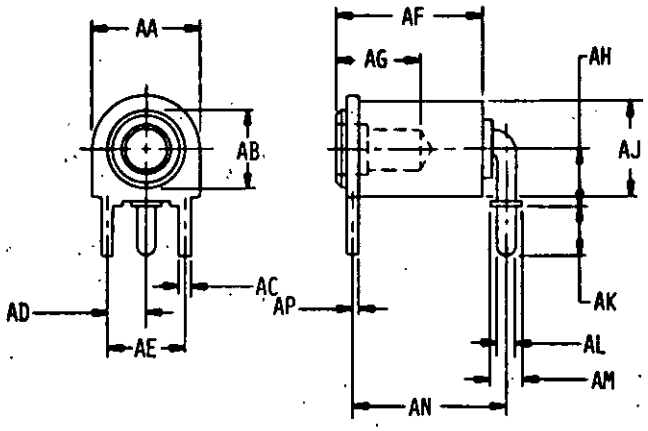


079-10-1

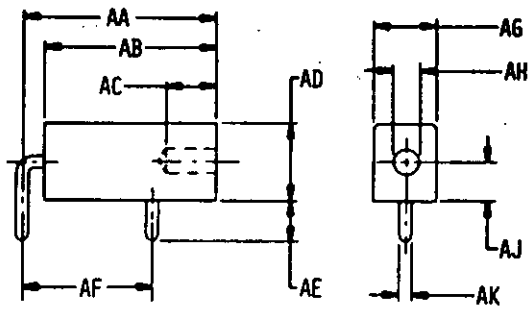


079-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

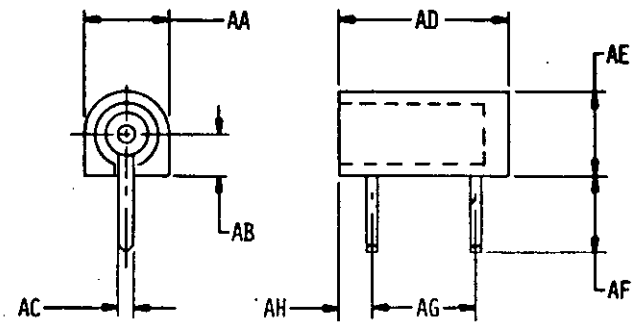


079-10-3

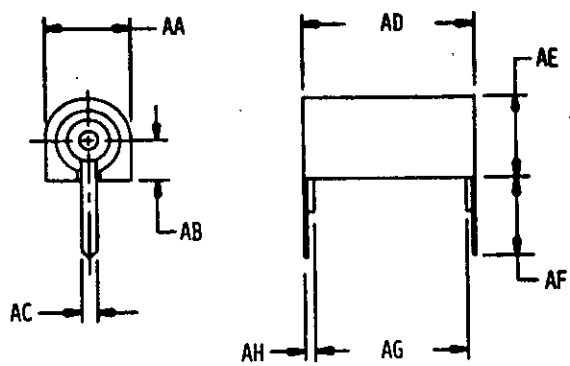


079-10-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

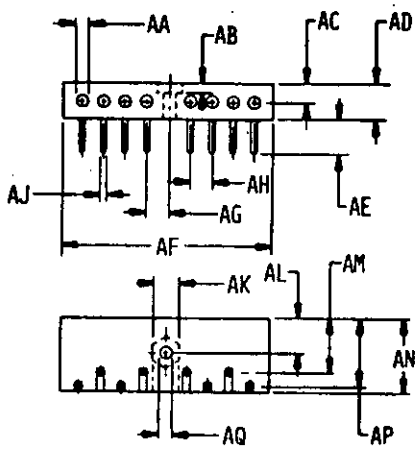


079-11-1

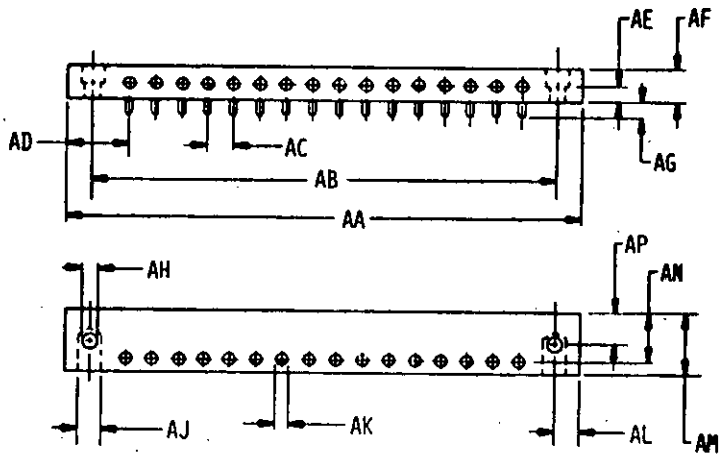

079-11-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

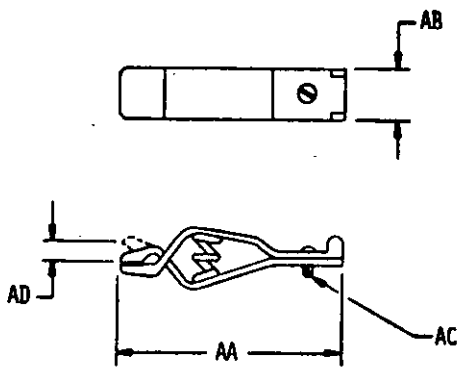

Ø79-12-1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1471	94	1619	28	1758	40
0102	12	1477	64	1620	28	1759	40
0103	12	1497	76	1628	28	1760	40
0104	12	1498	76	1644	28	1761	40
0105	12	1502	96	1646	28	1762	40
0107	14	1504	96	1648	28	1767	44
0108	14	1505	112	1650	30	1769	44
0700	12	1508	94	1651	30	1770	44
0800	12	1509	92	1652	30	1771	44
1004	12	1520	76	1656	28	1772	44
1005	12	1522	76	1687	34	1773	42
1006	12	1523	76	1688	34	1774	44
1008	12	1524	76	1689	34	1775	44
1009	20	1529	120	1690	34	1776	42
1371	74	1545	112	1691	36	1777	44
1372	76	1546	112	1692	36	1778	42
1373	74	1562	16	1693	36	1780	42
1374	112	1563	16	1694	36	1781	42
1375	104	1564	16	1695	36	1783	42
1376	74	1565	16	1697	36	1785	44
1377	76	1566	16	1700	32	1787	44
1378	74	1569	16	1701	32	1816	46
1380	72	1576	16	1702	32	1818	46
1381	76	1577	16	1703	32	1820	48
1383	76	1578	28	1705	34	1822	48
1384	74	1579	28	1708	38	1824	48
1386	74	1580	30	1710	38	1826	48
1387	74	1582	30	1712	38	1828	48
1407	74	1588	30	1713	38	1830	48
1410	104	1590	30	1714	38	1832	48
1411	104	1592	30	1730	38	1834	48
1412	104	1594	30	1732	38	1836	48
1413	104	1596	30	1733	38	1852	46
1414	104	1598	30	1734	38	1854	46
1416	104	1600	24	1735	38	1862	46
1418	102	1601	24	1738	40	1864	46
1419	104	1602	26	1740	42	1866	48
1420	104	1603	26	1754	40	1868	48
1421	106	1604	26	1755	40	1872	46
1433	102	1616	28	1756	40	1874	48

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1876	46	2040	86	2146	108	2372	78
1878	46	2042	86	2154	110	2374	78
1880	46	2044	86	2158	110	2376	78
1882	48	2046	86	2160	110	3000	27
1900	60	2048	86	2162	110	3001	27
1903	60	2050	86	2164	110	3002	27
1904	60	2052	86	2166	110	3003	27
1906	60	2054	88	2168	110	3004	27
1910	58	2056	88	2172	108	3010	27
1912	58	2058	88	2174	108	3011	27
1914	58	2062	84	2194	118	3012	27
1916	58	2064	84	2200	118	3013	27
1920	58	2066	84	2202	112	3014	27
1922	58	2070	92	2204	112	3020	27
1924	60	2072	92	2206	112	3021	27
1926	60	2086	96	2228	120	3022	27
1930	60	2088	96	2230	120	3023	27
1932	62	2089	94	2232	120	3024	27
1934	62	2090	94	2234	120	3030	27
1936	62	2094	94	2236	120	3031	27
1938	62	2096	94	2242	120	3032	27
1942	60	2100	100	2244	120	3033	27
1944	60	2102	100	2300	24	3034	27
1972	72	2104	100	2310	24	3040	27
1974	72	2106	100	2320	24	3041	27
1976	70	2110	100	2322	26	3042	27
1979	70	2112	100	2330	28	3060	92
1980	70	2114	100	2332	28	3062	92
1982	70	2118	100	2334	28	3070	106
1984	72	2120	100	2340	34	3072	106
1986	72	2122	100	2342	34	3074	106
1988	70	2126	102	2344	34	3076	106
1990	72	2128	102	2346	34	3078	106
1992	72	2130	102	2348	34	3080	106
1996	80	2132	102	2350	36	3082	106
1997	80	2134	102	2352	36	3084	106
1999	80	2138	102	2360	78	3086	108
2002	78	2140	102	2362	78	3088	108
2004	80	2142	108	2364	78	3090	108
2038	86	2144	108	2370	78	3092	108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3099	88	3214	116	3342	76	4785	66
3100	91	3216	116	3350	92	4788	66
3101	91	3218	118	3360	96	4791	64
3102	91	3220	118	3362	96	4798	64
3103	91	3222	118	4662	98	4799	64
3104	91	3224	118	4663	98	4803	66
3105	91	3226	118	4664	98	4804	66
3110	91	3228	118	4665	98	4805	66
3111	91	3230	118	4666	98	4813	66
3112	91	3232	118	4667	98	4815	64
3113	91	3234	118	4669	82	4829	82
3114	91	3250	50	4671	82	4830	82
3115	91	3252	52	4672	98	4831	84
3120	90	3254	52	4674	96	4834	82
3121	90	3256	52	4675	96	4835	84
3122	90	3258	52	4681	110	4836	82
3150	64	3260	54	4682	112	4838	84
3160	112	3262	52	4683	98	4839	84
3170	112	3264	54	4684	96	4842	56
3172	114	3280	54	4685	96	4844	56
3174	114	3282	58	4686	96	4845	56
3176	114	3284	58	4689	80	4846	56
3178	114	3300	66	4691	82	4848	56
3180	114	3302	68	4692	82	4849	50
3182	114	3304	68	4694	82	4850	56
3184	114	3306	68	4695	82	4854	56
3186	114	3308	68	4698	80	4855	56
3188	114	3310	68	4700	80	4856	54
3190	114	3312	68	4701	80	4859	52
3192	114	3314	68	4754	64	4861	54
3194	114	3316	68	4755	64	4867	56
3196	116	3318	68	4756	64	4869	56
3198	116	3320	68	4760	62	4874	54
3200	116	3322	68	4761	62	4875	54
3202	116	3324	68	4762	62	4878	90
3204	116	3326	68	4765	94	4884	50
3206	116	3328	70	4766	94	4885	50
3208	116	3330	70	4770	92	4891	52
3210	116	3332	70	4772	92	4894	50
3212	116	3340	74	4773	92	4906	50

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4908	50	6994	124				
4942	120	6995	124				
4943	122	7001	124				
4944	122	7002	124				
4950	22	7003	124				
4989	82	7004	124				
5000	56	7005	124				
5046	20	7021	32				
5048	20	7022	32				
5052	20	7023	32				
5054	18	7024	32				
5060	18	7301	20				
5061	18	7302	18				
5062	18	7572	20				
5063	18	7577	22				
5068	18	7580	24				
5069	18	7627	20				
5070	18	7628	20				
5071	18	7629	124				
5209	122	7630	124				
6205	98	7641	20				
6267	58						
6279	84						
6280	52						
6292	52						
6293	52						
6294	52						
6311	50						
6312	52						
6359	72						
6369	12						
6372	124						
6870	122						
6873	12						
6874	14						
6941	14						
6942	16						
6991	124						
6992	124						
6993	124						

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	124
Additional Requirements	124
Altitude Rating	18
Aperture Cards Required	14
Applicable Documents	126
Base Document	12
Cable Pull-out	32
Cap Retention/Spring Pressure	34
City, State, Zip	12
Classification	16
Company Name/Command	12
Configuration	20
Contact Resistance	38
Contact Spring Overtravel	40
Contact Spring Pressure	42
Contract Number/Office Symbol	12
Control	12
Controlled Drop	46
Design and Construction	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	50
Dielectric Withstanding Voltage at Sea Level	54
Durability (Spring Life)	58
Electrical Ratings	16
Finishes	22
Format	12
Frame Strength	60
Frequency Rating	20
Fungus	62
Government Design Activity FSCM	12
Humidity	64
Illustrations	22
Insertion and Withdrawal Force	70
Insulation Resistance	72
Low-Level Signal Contact Resistance	78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT.)

	Page
Magnetic Permeability	78
Materials	22
Mounting Hardware	122
Nomenclature	126
Notes	126
Packaging	126
Part Marking	124
Part Number	14
Part Number Cross-Reference	126
Performance Characteristic	122
Phone Number	12
Quality Assurance Provisions	126
Requester FSCM	12
Requester's Name	12
Resistance to Soldering Heat	80
Resistance to Solvents	82
Resistance to Test Probe Damage	84
Revision of AEDPS Document (Number)	14
RFI Shielding	88
Salt Spray	90
Scope	14
Shock, Specified Pulse	94
Solderability	96
Source Table	14
Static Load	100
Street/Building	12
Strength Plug Stack Assembly	102
Storage Conditions	120
Superseded Document	126
System Application	12
Tabulated Characteristics	10
Temperature Cycling	106
Temperature Rating	18
Terminal Strength	102
Test Connector	30
Torque	108
Units of Measure	14
Vibrations	110

Source: https://assist.dla.mil - Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT.)

	Page
Waterseal	120
Weight/Mass	32
Workmanship	122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-107A(MI), dated 12 Sep 1983 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-107A(MI), dated 12 Sep 1983 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
Commander
US Army Missile Command
ATTN: DRSMI-RSDS
Redstone Arsenal, AL 35898

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: DRSMI-RSDS
Redstone Arsenal, AL 35898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-35-107A(MI)	CONNECTOR-JACK, PLUG AND TEST POINT

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.