MIL-STD-35-110A(MI)

27 SEPTEMBER 1985

SUPERSEDING
MIL-STD-35-110(MI)
30 September 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

BANDS, DECALS, MARKERS AND PLATES

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA-EDS

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Bands, Decals, Markers, and Plates
Automated Engineering
Document Preparation System

MIL-STD-35-110A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-EDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this doucment or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

FOREWORD

1. The purpose of DOD-STD-35-110A(MI) is to provide instructions for the preparation of Specifications Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Bands, Decals, Markers and Plates.

2. In order to properly utilize this doucment, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedure described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	8
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirements Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	10
	5.1	Introduction	10
	5.2	MSE Formats	10
	5.3	Referenced documents	10
	5.4	Tabulation	10
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.5.1	Interrelationship of Codes	13
	5.5.2	Automatic MSE Data	13
	5.5.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	11

APPENDICES

Appendix	A.	Illustrations	86
	B.	Characteristic Code Index	98
		Index	102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Bands, Decals, Markers and Plates.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BAND, INFANT IDENTIFICATION	510001	MIL-B-36225	SIZE 1, MOTHER-INFANT; SIZE 2, PEDIATRIC; SIZE 3, ADULT
BAND, MARKER	510002	MIL-B-43436	BLANK, CRIMP STYLE, 2 & 3 PRONG, BELT SINGLE & DOUBLE
BAND, PATIENT IDENTIFICATION	510003	MIL-B-36225	SIZE 1, MOTHER-INFANT; SIZE 2, PEDIATRIC; SIZE 3, ADULT
DECAL	510004	MIL-D-4736	LIFE RAFT, PAULINS
		MS9244	RUBBER ASSEMBLY
DECAL SET	510005	UU-D-171	INTERIOR AND EXTERIOR SURFACE
		MS9244	RUBBER ASSEMBLY
MARKER, CASUALTY	510006	MIL-M-36233	ARCTIC REGIONS, CLOTH
MARKER, IDENTIFICATION	510007	MIL-M-3935	PERSONNEL, VEHICLE, AIRCRAFT
		MIL-M-17321	MAINTENANCE OF TRAFFIC CONTROL
		MIL-T-9906	TAPE, AIRCRAFT TUBING NON/CORR HEAT & SOLVENT RESISTANT

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
MARKER, SELF-LUMINOUS	510008	MIL-M-3935	PERSONNEL, VEHICLE, AIRCRAFT
		MIL-M-17321	MAINTENANCE OF TRAFFIC CONTROL
		MS27758	EMERGENCY EXIT
MARKER, SIGNAL	510009	MS27838	TAPE, PRESSURE SENSITIVE
MARKER, TRAFFIC	510010	MIL-M-17321	MAINTENANCE OF TRAFFIC CONTROL
MARKER, TRAFFIC CONTROL DEVICE	510011	MIL-M-17321	MAINTENANCE OF TRAFFIC CONTROL
PLATE, IDENTIFICATION	510013	MIL-P-4745	STORAGE, SHIPPING
		MIL-P-15024	DATA INFORMATION
		MIL-P-19834	METAL, FOIL SMOOTH SURFACE
		MS53007	EMERGENCY AND SERVICE AUTO
		MS63200	GENERATORS AND CONVERTERS
		MS63201	END-ITEM-ATTACHMENT
PLATE, INSTRUCTION	510014	MIL-P-514	ATTACHMENT, IDENTIFICATION
		MIL-P-3558	TAG FOR RAILWAY CARS
		MIL-P-4745	STORAGE, SHIPPING
		MS35896	IDENTIFICATION
		MS63045	MISCELLANEOUS
		MS63203	MODIFICATION
		MS90495	MECHANICAL

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
PLATE, MARKING, BLANK	510015	MIL-P-4745	STORAGE, SHIPPING
		MIL-P-15024	DATA INFORMATION
		MIL-P-19834	METAL FOIL, SMOOTH SURFACE
		MS63200	GENERATORS AND CONVERTERS
		MS63201	END-ITEM-ATTACHMENTS

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in cataloging handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil ---Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-T-60	Tape, Packaging, Waterproof
GG-M-125	Marker Set, X-Ray Film Identification
UU-D-171	Decals
P-C-437	Cleaning Compound, High Pressure (Steam) Cleaner

MILITARY

MIL-P-514	Plates, Identification, Instruction and Marking, Blank
MIL-P-3558	Plates, Identification: Locomotives, Railway Cars, and Work Equipment
MIL-P-3935	Markers, Self-Luminous
MIL-D-4736	Decal, Light Weight Paulin
MIL-D-4745	Plate, Marking, Blank
MIL-P-15024	Plates, Tags and Bands for Identification of Equipment
MIl-M-17321	Markers, Traffic
MIL-P-19834	Plates, Identification or Instruction, Metal Foil, Adhesive Backed General Specification for
MIL-C-25769	Cleaning Compound, Aircraft Surface, Alkaline Waterbase

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-B-36225	Band, Patient Identification
MIL-B-43436	Band Marker, Blank
MIL-T-9906	Tape, Aircraft Tubing, Identification Marking, Non/Corrosive, Heat and Solvent Resistant

STANDARDS

FEDERAL

FED-STD-141	Paint, Varnish, Lacquer and Related Materials; Methods of Inspection Sampling and Testing
FED-STD-191	Textile Test Methods
FED-STD-595	Colors

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Components Parts
MIL-STD-810	Environmental Test Methods
MS35896	Plate, Identification Type B
MS63045	Plate, Identification - Miscellaneous
MS90495	Plate, Identification, Blank, Mechanical Equipment

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMB117	Method of Salt Spray (Fog) Testing
ASTMD573	Accelerated Aging of Vulcanized Rubber by the Oven Method

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

ASTMD1308	Effect of Household Chemicals on Clear and Pigmented Organic Finishes

(Copies of specifications, standards, drawings, and publications required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Definitions contained in DOD-STD-35 are applicable to Bands, Decals, Markers and Plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Bands, Decals, Markers and Plates, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Bands, Decals, Markers and Plates.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Bands, Decals, Markers and Plates.

4.3.2 Illustrations. Illustrations applicable to Bands, Decals, Markers and Plates are contained in Appendix A to this document.

4.4 Units of measure. The international System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g., weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2, of the forthcoming MSE, are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column heading which may be used for Bands, Decals, Markers and Plate characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either inches or millimeters.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
5062	ALTITUDE NONOPER MAX(FT)	5063	ALTITUDE NONOPER MAX(M)	7021	MAXIMUM MASS(G)
7022	MAXIMUM WEIGHT (OZ)	7023	MAXIMUM WEIGHT (POUNDS)	7024	MAXIMUM MASS(KG)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code(s) is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked, by data base logic, to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER FSCM 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLE VI, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VI IS USED.

FINISHES (SEE TABLE VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE	
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
CHARACTER TYPE (SELECT ONE)	
GOTHIC.	1790
ARABIC.	1792
COLOR	
BACKGROUND (COLOR)	1762
FED-STD-595 (COLOR NUMBER)	1764
CHARACTERS (COLOR)	1766
FED-STD-595 (COLOR NUMBER)	1768
IDENTIFICATION	
ETCHED.	1700
RELIEF.	1702
SUNKEN.	1704
PHOTO.	1706

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6792 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.

6793 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.

CHARACTER TYPE. THE CHARACTER TYPE SHALL BE AS FOLLOWS:

1790 GOTHIC.

1792 ARABIC.

COLOR.

1762 THE BACKGROUND COLOR SHALL BE 1762.

1764 IN ACCORDANCE WITH FED-STD-595 COLOR NUMBER 1764.

1766 THE CHARACTER COLOR SHALL BE 1766.

1768 IN ACCORDANCE WITH FED-STD-595 COLOR NUMBER 1768.

IDENTIFICATION. THE IDENTIFICATION METHOD SHALL BE AS FOLLOWS.

1700 ETCHED.

1702 THE ETCHING SHALL BE RELIEF.

1704 THE ETCHING SHALL BE SUNKEN.

1706 THE ETCHING SHALL BE PHOTO.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STAMPED.	1708
ENGRAVED.	1710
RAISED.	1712
LITHO PRINTED.	1714
LAMINATED.	1716
INTEGRATED.	1718
PHOTOSENSITIZED.	1720
CAST.	1722
EMBOSSED.	1724
INKED.	1726
PER (DOC DES)	1728
MARKING FILLER (SELECT ONE)	
HARD PAINT.	1752
ENAMEL.	1754
LACQUER.	1756
NOT REQUIRED.	1758
PER (DOC DES)	1760

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1708	STAMPED.
1710	ENGRAVED.
1712	RAISED.
1714	LITHO PRINTED.
1716	LAMINATED.
1718	INTEGRATED.
1720	PHOTOSENSITIZED.
1722	CAST.
1724	EMBOSSED.
1726	INKED.
1728	IN ACCORDANCE WITH 1728.

1752	MARKING FILLER.	THE MARKING FILLER SHALL BE HARD PAINT.
1754	MARKING FILLER.	THE MARKING FILLER SHALL BE ENAMEL.
1756	MARKING FILLER.	THE MARKING FILLER SHALL BE LACQUER.
1758	MARKING FILLER.	MARKING FILLER SHALL NOT BE REQUIRED.
1760	MARKING FILLER. 1760.	MARKING FILLER SHALL BE IN ACCORDANCE WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MARKING INFORMATION (SELECT ONE)	
PER ILLUSTRATION (NUMBER)	1750
(DES)	1751
MOUNTING (SELECT ONE)	
DRILLED HOLES.	1732
PUNCHED HOLES.	1734
ADHESIVE BACKED.	1736
CEMENTED.	1738
GLUED.	1740
MECHANICAL FASTENED.	1742
CRIMPED.	1744
BELTED.	1746
PER (DOC DES)	1748
MOUNTING POSITION (SELECT ONE)	
VERTICAL.	1806
HORIZONTAL.	1808
VERTICAL/HORIZONTAL.	1810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1750	MARKING INFORMATION. THE MARKING INFORMATION SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1750.
1751	MARKING INFORMATION. THE MARKING INFORMATION SHALL BE: 1751.
1732	MOUNTING. THE MOUNTING METHOD SHALL BE DRILLED.
1734	MOUNTING. THE MOUNTING METHOD SHALL BE PUNCHED.
1736	MOUNTING. THE MOUNTING METHOD SHALL BE ADHESIVE BACKED.
1738	MOUNTING. THE MOUNTING METHOD SHALL BE CEMENTED.
1740	MOUNTING. THE MOUNTING METHOD SHALL BE GLUED.
1742	MOUNTING. THE MOUNTING METHOD SHALL BE MECHANICAL FASTENED.
1744	MOUNTING. THE MOUNTING METHOD SHALL BE CRIMPED.
1746	MOUNTING. THE MOUNTING METHOD SHALL BE BELTED.
1748	MOUNTING. THE MOUNTING METHOD SHALL BE IN ACCORDANCE WITH 1748.
1806	MOUNTING POSITION. THE MOUNTING POSITION SHALL BE VERTICAL.
1808	MOUNTING POSITION. THE MOUNTING POSITION SHALL BE HORIZONTAL.
1810	MOUNTING POSITION. THE MOUNTING POSITION SHALL BE VERTICAL OR HORIZONTAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
NOMINAL STORAGE (DEGREES CELSIUS)	5048
NOMINAL SERVICE (DEGREES CELSIUS)	5049
USAGE (SELECT ONE)	
EXTERIOR.	1800
INTERIOR.	1802
EXTERIOR/INTERIOR.	1804
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERTURE RATING.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
5049	THE NOMINAL SERVICE TEMPERATURE RATING SHALL BE 5049 DEGREES CELSIUS.
1800	USAGE. THE USAGE SHALL BE EXTERIOR.
1802	USAGE. THE USAGE SHALL BE INTERIOR.
1804	USAGE. THE USAGE SHALL BE EXTERIOR OR INTERIOR.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
ABRASION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1816
MARKING SHALL REMAIN LEGIBLE AFTER TEST.	1818
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1809
PER FED-STD-191, METHOD 5306.	1811
CYCLES (QUANTITY)	1812
ACIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1842

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
1816	ABRASION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1818	ABRASION RESISTANCE. THE MARKING SHALL BE CLEARLY VISIBLE AND LEGIBLE AFTER TEST.
1809	ABRASION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1809.
1811	ABRASION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5306 OF FED-STD-191.
1812	THE QUANTITY OF CYCLES SHALL BE 1812.
1842	ACIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM (PH)	1844
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1822
PER (DOC DES)	1824
WATER QUANTITY (MILLILITERS)	1826
PAPER (SELECT ONE)	
U.S.	
(GRAMS)	1827
SI	
(KILOGRAMS)	1828
WATER TEMPERATURE (DEGREES CELSIUS)	1829
DURATION (SELECT ONE)	
(MINUTES)	1830
(HOURS)	1832
MEASUREMENT TEMPERATURE (DEGREES CELSIUS)	1834
MAXIMUM TIME BEFORE MEASURE (SELECT ONE)	
(MINUTES)	1836
(HOURS)	1838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1844 ACIDITY. THE MINIMUM PH SHALL BE 1844.

1822 ACIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.

1824 ACIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1824.

1826 THE QUANTITY OF WATER SHALL BE 1826 MILLILITER(S).

1827 THE PAPER WEIGHT SHALL BE 1827 GRAM(S).

1828 THE PAPER MASS SHALL BE 1828 KILOGRAM(S).

1829 THE WATER TEMPERATURE SHALL BE 1829 DEGREES CELSIUS.

1830 THE DURATION OF IMMERSION SHALL BE 1830 MINUTE(S).

1832 THE DURATION OF IMMERSION SHALL BE 1832 HOUR(S).

1834 THE MEASUREMENT TEMPERATURE SHALL BE 1834 DEGREES CELSIUS.

1836 THE MAXIMUM TIME BEFORE MEASUREMENT SHALL BE 1836 MINUTE(S).

1838 THE MAXIMUM TIME BEFORE MEASUREMENT SHALL BE 1838 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1862
MAXIMUM PHYSICAL PROPERTIES CHANGE(S) AS FOLLOWS:	1863
TENSILE STRENGTH CHANGE (PERCENT)	1864
ULTIMATE ELONGATION (PERCENT)	1868
HARDNESS CHANGE (PERCENT)	1872
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1848
PER ASTMD573.	1850
TEST DURATION (SELECT ONE)	
(HOURS)	1852
TOLERANCE PLUS OR MINUS (HOURS)	1854
(DAYS)	1856
TEST TEMPERATURE (DEGREES CELSIUS)	1858

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1862	ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1863	ACCELERATED AGING. THE MAXIMUM PHYSICAL PROPERTIES CHANGE(S) SHALL BE AS FOLLOWS:
1864	THE TENSILE CHANGE SHALL BE NOT GREATER THAN 1864 PERCENT.
1868	THE ULTIMATE ELONGATION CHANGE SHALL BE NOT GREATER THAN 1868 PERCENT.
1872	THE HARDNESS CHANGE SHALL BE NOT GREATER THAN 1872 POINTS.
1848	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1848.
1850	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD573.
1852	THE DURATION OF TEST SHALL BE 1852 HOUR(S).
1854	THE DURATION OF TEST TOLERANCE SHALL BE PLUS OR MINUS 1854 HOUR(S).
1856	THE DURATION OF TEST SHALL BE 1856 DAY(S).
1858	THE TEST TEMPERATURE SHALL BE 1858 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED WEATHERING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1898
NO EVIDENCE OF PEELING, CHALKING, BLISTERING, BLEEDING OR COLOR CHANGE.	1902
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1880
PER FED-STD-141, METHOD 6151.	1884
PER FED-STD-141, METHOD 6152.	1886
EXPOSURE DURATION (DAYS)	1888
ADHESION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
AS FOLLOWS:	1920
TEST FILM REMOVAL (SELECT ONE)	
U.S.	
(INCHES)	1924

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1898	ACCELERATED WEATHERING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1898.
1902	ACCELERATED WEATHERING. THERE SHALL BE NO EVIDENCE OF PEELING, CHALKING, BLISTERING, BLEEDING, OR COLOR CHANGE.
1880	ACCELERATED WEATHERING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1880.
1884	ACCELERATED WEATHERING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST METHOD 6151 OF FED-STD-141.
1886	ACCELERATED WEATHERING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST METHOD 6152 OF FED-STD-141.
1888	THE DURATION OF EXPOSURE SHALL BE 1888 DAY(S).
1922	ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1920	ADHESION. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1924	MAXIMUM REMOVAL OF TEST FILM ON EITHER SIDE OF THE SCORED LINE SHALL BE 1924 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SI	
(MILLIMETERS)	1926
NO REMOVAL OF TEST FILM.	1928
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1906
PER UU-D-171.	1909
PER MIL-P-4736.	1910
TEST FILM, AIR-DRYING DURATION (HOURS)	1912
APPLICATION AND REMOVAL OF TAPE INTERVAL (SECONDS)	1914
TAPE STRIPPED FROM TEST FILM ANGLE (DEGREES)	1916
TAPE TYPE PER PPP-T-60 (ROMAN NUMERAL)	1918
BRIGHTNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1926	MAXIMUM REMOVAL OF TEST FILM ON EITHER SIDE OF THE SCORED LINE SHALL BE 1926 MILLIMETER(S).
1928	THERE SHALL BE NO REMOVAL OF TEST FILM BY THE TAPE.
1906	ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1906.
1909	ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH UU-D-171.
1910	ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-4736.
1912	THE DURATION OF AIR-DRYING OF TEST FILM SHALL BE 1912 HOUR(S).
1914	THE MAXIMUM INTERVAL BETWEEN APPLICATION AND REMOVAL OF TAPE SHALL BE 1914 SECONDS.
1916	THE TAPE SHALL BE STRIPPED FROM THE TEST FILM AT AN ANGLE OF 1916 DEGREES.
1918	TAPE TYPE PER PPP-T-60 ROMAN NUMERAL 1918 SHALL APPLY.
1942	BRIGHTNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	1940
BRIGHTNESS (SELECT ONE)	
U.S.	
MINIMUM (MICROLAMBERTS)	1944
NOMINAL (MICROLAMBERTS)	1946
MAXIMUM (MICROLAMBERTS)	1948
SI	
MINIMUM (MICROCANDELA PER SQUARE METER)	1945
NOMINAL (MICROCANDELA PER SQUARE METER)	1947
MAXIMUM (MICROCANDELA PER SQUARE METER)	1949
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1932
PER MIL-M-3935.	1934
TEST METHOD (SELECT ONE)	
COMPARISON.	1936
VISUAL PHOTOMETER.	1938

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1940	BRIGHTNESS. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1944	THE MINIMUM BRIGHTNESS VALUE SHALL BE 1944 MICROLAMBERT(S).
1946	THE NOMINAL BRIGHTNESS VALUE SHALL BE 1946 MICROLAMBERT(S).
1948	THE MAXIMUM BRIGHTNESS VALUE SHALL BE 1948 MICROLAMBERT(S).
1945	THE MINIMUM BRIGHTNESS VALUE SHALL BE 1945 MICROCANDELA PER SQUARE METER.
1947	THE NOMINAL BRIGHTNESS VALUE SHALL BE 1947 MICROCANDELA PER SQUARE METER.
1949	THE MAXIMUM BRIGHTNESS VALUE SHALL BE 1949 MICROCANDELA PER SQUARE METER.
1932	BRIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
1934	BRIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-3935.
1936	THE COMPARISON TEST METHOD SHALL APPLY.
1938	THE VISUAL PHOTOMETER TEST METHOD SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1978
NO DETERIORATION.	1980
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
PER ASTMD1308.	1954
MINIMUM TEST ITEMS (QUANTITY)	1956
TEST TYPE (SELECT ONE)	
SPOT, COVERED.	1958
SPOT, OPEN.	1960
IMMERSION.	1962
REAGENT EXPOSURE DURATION (HOURS)	1964
REAGENT(S) (DES)	1966
REAGENT TEMPERATURE (DEGREES CELSIUS)	1968

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1978	CHEMICAL RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1978
1980	CHEMICAL RESISTANCE. THERE SHALL BE NO DISCOLORATION, CHANGE IN GLOSS, BLISTERING, WRINKLING, SOFTENING, SWELLING OR LOSS OF ADHESION.
1952	CHEMICAL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	CHEMICAL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1308.
1956	A MINIMUM OF 1956 TEST ITEMS SHALL BE TESTED.
1958	THE TEST TYPE SHALL BE SPOT, COVERED.
1960	THE TEST TYPE SHALL BE SPOT, OPENED.
1962	THE TEST TYPE SHALL BE IMMERSION.
1964	THE DURATION OF REAGENT EXPOSURE SHALL BE 1964 HOUR(S).
1966	THE REAGENT SHALL BE 1966.
1968	THE REAGENT SHALL HAVE A TEMPERATURE OF 1968 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLEANING RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
NO EVIDENCE OF PHYSICAL DAMAGE.	2004
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1984
PER (DOC DES)	1986
CLEANING METHOD AS FOLLOWS:	
COLD STEAMING.	1990
HOSING.	1992
BRUSHING.	1994
HAND-WIPING.	1996
CLEANING DURATION (MINUTES)	1998
CLEANING AGENT (SELECT ONE)	
PER P-C-437.	1988
PER MIL-C-25769.	1989

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2002	CLEANING RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	CLEANING RESISTANCE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1984	CLEANING RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1984.
1986	CLEANING RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1986.
	THE CLEANING METHOD SHALL BE AS FOLLOWS:
1990	COLD STEAMING.
1992	HOSING.
1994	BRUSHING.
1996	HAND-WIPING.
1998	THE DURATION OF THE CLEANING SHALL BE 1998 MINUTE(S).
1988	THE CLEANING AGENT SHALL BE IN ACCORDANCE WITH P-C-437.
1989	THE CLEANING AGENT SHALL BE IN ACCORDANCE WITH MIL-C-25769.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUCTILITY	
REQUIREMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2030
AS FOLLOWS:	2028
NO RUPTURE OR FAILURE WITH A MINIMUM DEEP DRAW (SELECT ONE)	
U.S.	
(INCHES)	2032
SI	
(MILLIMETERS)	2034
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2008
PER MIL-P-4745.	2010
MINIMUM TEST ITEMS (QUANTITY)	2012
PLATE HOLE SIZE TOP AND BOTTOM MINIMUM (SELECT ONE)	
U.S.	
(INCHES)	2014

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2030	DUCTILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2030.
2028	DUCTILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2032	THERE SHALL BE NO RUPTURE OR FAILURE WITH MINIMUM DEEP DRAW OF 2032 INCH(S).
2034	THERE SHALL BE NO RUPTURE OR FAILURE WITH MINIMUM DEEP DRAW OF 2034 MILLIMETER(S).
2008	DUCTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2008.
2010	DUCTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-4745.
2012	THERE SHALL BE A MINIMUM OF 2012 TEST ITEMS.
2014	THE MINIMUM TOP AND BOTTOM SPECIMEN HOLDING PLATE HOLE SIZE SHALL BE 2014 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SI	
(MILLIMETERS)	2016
STEEL BALL PRECISION GROUND DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2018
SI	
(MILLIMETERS)	2020
BALL HARDNESS ROCKWELL "C" SCALE (NUMBER)	2022
DEPTH OF CUP GAUGE GRADUATIONS (SELECT ONE)	
U.S.	
(INCHES)	2024
SI	
(MILLIMETERS)	2026
FILM THICKNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2058

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2016	THE MINIMUM TOP AND BOTTOM SPECIMEN HOLDING PLATE HOLE SIZE SHALL BE 2016 MILLIMETER(S).
2018	THE STEEL BALL, PRECISION GROUND DIAMETER SHALL BE 2018 INCH(S).
2020	THE STEEL BALL, PRECISION GROUND DIAMETER SHALL BE 2020 MILLIMETER(S).
2022	THE BALL HARDNESS SHALL BE ROCKWELL 'C' SCALE NUMBER 2022.
2024	THE DEPTH OF CUP GAUGE GRADUATIONS SHALL BE 2024 INCH(S).
2026	THE DEPTH OF CUP GAUGE GRADUATIONS SHALL BE 2026 MILLIMETER(S).
2058	FILM THICKNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2058.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	2056
FILM THICKNESS AFTER REMOVAL OF BACKING PAPER	
MINIMUM (SELECT ONE)	
U.S.	
(INCHES)	2060
SI	
(MILLIMETERS)	2062
MAXIMUM (SELECT ONE)	
U.S.	
(INCHES)	2064
SI	
(MILLIMETERS)	2066
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2038
PER (DOC DES)	2040
TEST STRIPS (QUANTITY)	2042

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2056	FILM THICKNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2060	THE FILM THICKNESS AFTER REMOVAL OF BACKING PAPER SHALL BE A MINIMUM OF 2060 INCH(S).
2062	THE FILM THICKNESS AFTER REMOVAL OF BACKING PAPER SHALL BE A MINIMUM OF 2062 MILLIMETER(S).
2064	THE FILM THICKNESS AFTER REMOVAL OF BACKING PAPER SHALL BE A MAXIMUM OF 2064 INCH(S).
2066	THE FILM THICKNESS AFTER REMOVAL OF BACKING PAPER SHALL BE A MAXIMUM OF 2066 MILLIMETER(S).
2038	FILM THICKNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2040	FILM THICKNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2040.
2042	THERE SHALL BE 2042 TEST STRIPS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LENGTH OF TEST STRIPS (SELECT ONE)	
U.S.	
(INCHES)	2044
SI	
(MILLIMETERS)	2046
WIDTH OF TEST STRIPS (SELECT ONE)	
U.S.	
(INCHES)	2048
SI	
(MILLIMETERS)	2050
MICROMETER READINGS AFTER DRYING (QUANTITY)	2052
MINIMUM READING EACH COLOR AFTER DRYING (QUANTITY)	2054
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2069
AS FOLLOWS: (SELECT ONE)	2067
NON-BURNING.	2071
SELF EXTINGUISHING.	2073

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2044	THE LENGTH OF STRIPS SHALL BE 2044 INCH(S).
2046	THE LENGTH OF THE STRIPS SHALL BE 2046 MILLIMETER(S).
2048	THE WIDTH OF THE STRIPS SHALL BE 2048 INCH(S).
2050	THE WIDTH OF THE STRIPS SHALL BE 2050 MILLIMETER(S).
2052	THERE SHALL BE 2052 MICROMETER READINGS AFTER DRYING.
2054	THERE SHALL BE 2054 MINIMUM READINGS FOR EACH COLOR AFTER DRYING.
2069	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2069.
2067	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2071	THE MATERIAL SHALL BE NON-BURNING.
2073	THE MATERIAL SHALL BE SELF-EXTINGUISHING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2063
PER (DOC DES)	2065
FLEXIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3000
AS FOLLOWS:	2099
MAXIMUM EXTENSION OF CRACKS (SELECT ONE)	
U.S.	
(INCHES)	3002
SI	
(MILLIMETERS)	3004
WITHSTAND BENDING WITHOUT CRACKING, FLAKING OR CRAZING.	3006
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2070

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
2063	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2063.
2065	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2065.
3000	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3000.
2099	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3002	THE MAXIMUM EXTENSION OF CRACKS SHALL BE 3002 INCH(S).
3004	THE MAXIMUM EXTENSION OF CRACKS SHALL BE 3004 MILLIMETER(S).
3006	THE DEVICE SHALL WITHSTAND BENDING WITHOUT CRACKING, FLAKING OR CRAZING.
2070	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2070.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	2068
FOLDING CYCLES (QUANTITY)	2074
CYLINDER DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2096
SI	
(MILLIMETERS)	2098
FLUORESCENT COLOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3016
AS FOLLOWS:	3014
MINIMUM DOMINANT WAVE LENGTH (NANOMETERS)	3018
MAXIMUM DOMINANT WAVE LENGTH (NANOMETERS)	3020
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3010
PER MIL-M-3935.	3012

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2068	FLEXIBILITY. TESTING SHALL BE AS FOLLOWS:
2074	THERE SHALL BE 2074 BENDS, OR FOLDING AND UNFOLDING CYCLES.
2096	THE CYLINDER DIAMETER SHALL BE 2096 INCH(S).
2098	THE CYLINDER DIAMETER SHALL BE 2098 MILLIMETER(S).
3016	FLUORESCENT COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3016.
3014	FLUORESCENT COLOR. THE REQUIREMENT SHALL BE AS FOLLOWS:
3018	THE MINIMUM DOMINANT WAVE LENGTH SHALL BE 3018 NANOMETER(S).
3020	THE MAXIMUM DOMINANT WAVE LENGTH SHALL BE 3020 NANOMETER(S).
3010	FLUORESCENT COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3010.
3012	FLUORESCENT COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-3935.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUEL RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3046
NO EVIDENCE OF LOOSENING, WARPING OR CRACKING	3048
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3024
PER MIL-P-19834.	3026
PAINTED AND UNPAINTED TEST PANELS DURATION (HOURS)	3028
IMMERSION DEPTH (PERCENT OF WIDTH)	3030
FLUID PER TT-S-735.	3032
IMMERSION DURATION (HOURS)	3034
FLUID PER MIL-J-5161.	3036
IMMERSION DURATION (HOURS)	3038
TEST TEMPERATURE (DEGREES CELSIUS)	3040
FLUID PER (DOC DES)	3041
IMMERSION DURATION (HOURS)	3045
TEST TEMPERATURE (DEGREES CELSIUS)	3047

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3046	FUEL RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3046.
3048	FUEL RESISTANCE. THERE SHALL BE NO EVIDENCE OF LOOSENING, WARPING, OR CRACKING.
3024	FUEL RESITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3024.
3026	FUEL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-19834.
3028	THE DURATION AFTER THE DEVICE IS APPLIED TO PAINTED AND UNPAINTED TEST PANELS SHALL BE 3028 HOUR(S).
3030	THE IMMERSION DEPTH SHALL BE 3030 PERCENT OF THE WIDTH.
3032	THE FLUID SHALL CONFORM TO TT-S-735.
3034	THE IMMERSED DURATION SHALL BE 3034 HOUR(S).
3036	THE FLUID SHALL CONFORM TO MIL-J-5161.
3038	THE IMMERSED DURATION SHALL BE 3038 HOUR(S).
3040	THE TEST TEMPERATURE SHALL BE 3040 DEGREES CELSIUS.
3041	THE FLUID SHALL BE IN ACCORDANCE WITH 3041.
3045	THE IMMERSED DURATION SHALL BE 3045 HOUR(S).
3047	THE TEST TEMPERATURE SHALL BE 3047 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXAMINATION INTERVAL AFTER TEST (SELECT ONE)	
IMMEDIATELY.	3042
(HOURS)	3043
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3042 EXAMINATION INTERVAL AFTER TEST SHALL BE IMMEDIATELY.

3043 EXAMINATION INTERVAL AFTER TEST SHALL BE 3043 HOUR(S).

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLE TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

4755 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3060
AS FOLLOWS:	3058
HARDNESS TESTER (NAME)	3062
HARDNESS SCALE (DES)	3063
HARDNESS VALUE MINIMUM (NUMBER)	3064
HARDNESS VALUE MAXIMUM (NUMBER)	3065
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3052
PER (DOC DES)	3054
TEST PLATES MINIMUM (QUANTITY)	3056
TEST LOAD (KILOGRAMS)	3057
HEAT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3082
NO EVIDENCE OF SAGGING, ADHERING, PEELING OR DISCOLORATION.	3084

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3060	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3060.
3058	HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3062	THE HARDNESS TESTER 3062 SHALL APPLY.
3063	THE HARDNESS SCALE 3063 SHALL APPLY.
3064	THE DEVICE SHALL HAVE A MINIMUM HARDNESS OF 3064.
3065	THE DEVICE SHALL HAVE A MAXIMUM HARDNESS OF 3065.
3052	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3052.
3054	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3054.
3056	THE MINIMUM NUMBER OF TEST PLATES SHALL BE 3056.
3057	THE TEST LOAD SHALL BE 3057 KILOGRAM(S).
3082	HEAT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3082.
3084	HEAT RESISTANCE. THERE SHALL BE NO EVIDENCE OF SAGGING, ADHERING, PEELING OR SHOW OF ANY APPRECIABLE DISCOLORATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3070
PER (DOC-DES)	3072
TEST TEMPERATURE (DEGREES CELSIUS)	3074
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3076
TEST DURATION (HOURS)	3078
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
TEST CONDITION (LETTER)	4811

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3070	HEAT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3070.
3072	HEAT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3072.
3074	THE TEST TEMPERATURE SHALL BE 3074 DEGREES CELSIUS.
3076	THE TOLERANCE SHALL BE 3076 DEGREES CELSIUS.
3078	THE TEST DURATION SHALL BE 3078 HOUR(S).
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LEGIBILITY RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3102
NO EVIDENCE OF BLEEDING AFTER DRYING	3104
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3088
PER MIL-B-36225.	3090
IMMERSION MEDIA (PERCENT WATER)	3092
IMMERSION MEDIA (PERCENT ALCOHOL)	3094
TEST DURATION (HOURS)	3096
TEST TEMPERATURE (DEGREES CELSIUS)	3098
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
CLEARLY VISIBLE AND LEGIBLE.	3105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3102	LEGIBILITY RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3102.
3104	LEGIBILITY RETENTION. THERE SHALL BE NO EVIDENCE OF BLEEDING AFTER DRYING.
3088	LEGIBILITY RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3088.
3090	LEGIBILITY RETETNITON. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-36225.
3092	THE IMMERSION MEDIA SHALL BE 3092 PERCENT WATER.
3094	THE IMMERSION MEDIA SHALL BE 3094 PERCENT ALCOHOL.
3096	THE DURATION SHALL BE 3096 HOUR(S).
3098	THE TEST TEMPERATURE SHALL BE 3098 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORRSOION OR PHYSICAL DAMAGE.
3105	THE MARKING SHALL BE CLEARLY VISIBLE AND LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PAINT ADHESION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3118
NO EVIDENCE OF CRACKING OR LIFTING.	3120
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3108
PER MIL-M-17321.	3110
DURATION AFTER DRYING (HOURS)	3112
COMPRESSION DURATION (SECONDS)	3114

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
3118	PAINT ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3118.
3120	PAINT ADHESION. THERE SHALL BE NO EVIDENCE OF CRACKING OR LIFTING.
3108	PAINT ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3108.
3110	PAINT ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-17321.
3112	THE DURATION AFTER DRYING SHALL BE 3112 HOUR(S).
3114	THE COMPRESSION DURATION SHALL BE 3114 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOLOGICAL CONTAMINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3136
AS FOLLOWS:	3134
MAXIMUM RADIOACTIVE CONTENT (DISINTEGRATION PER/MINUTE)	3138
MAXIMUM RADIOACTIVE LEVEL (MILLIROENTGEN PER/HOUR)	3140
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3124
PER MIL-M-3935.	3126
SUBMERSION DURATION (HOURS)	3128
TEST TEMPERATURE (DEGREES CELSIUS)	3130
SALT SPRAY/FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6356

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3136 RADIOLOGICAL CONTAMINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3136.

3134 RADIOLOGICAL CONTAMINATION. THE REQUIREMENT SHALL BE AS FOLLOWS:

3138 THE MAXIMUM RADIOACTIVE CONTENT SHALL BE 3138 DISINTEGRATION(S) PER MINUTE.

3140 THE MAXIMUM RADIOACTIVE LEVEL SHALL BE 3140 MILLIROENTGEN(S) PER HOUR.

3124 RADIOLOGICAL CONTAMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3124.

3126 RADIOLOGICAL CONTAMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-3935.

3128 THE DURATION OF DEVICE SUBMERSION SHALL BE 3128 HOUR(S).

3130 THE TEST TEMPERATURE SHALL BE 3130 DEGREES CELSIUS.

6356 SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	6357
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6353
PER ASTMB117.	6354
EXPOSURE PERIOD (HOURS)	4783
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311
PER MIL-STD-810, METHOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
6353	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.
6354	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.
4783	DURATION OF TEST SHALL BE 4783 HOUR(S).
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C OR D (LETTER)	6342
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
SPECULAR GLOSS 60-DEGREE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3150
PER FED-STD-141, METHOD 6101.	3152
MINIMUM GLOSS (NUMBER)	3154
MAXIMUM GLOSS (NUMBER)	3156
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3144
PER FED-STD-141, METHOD 6101.	3146
STIFFNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3176

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7307 THE TEST TEMPERATURE SHALL BE 7037 DEGREES CELSIUS.

7308 THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.

3150 SPECULAR GLOSS, 60-DEGREES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3150.

3152 SPECUALR GLOSS, 60-DEGREE. THE REQUIREMENT SHALL BE IN ACCORDANCE WITH METHOD 6101 OF FED-STD-141.

3154 THERE SHALL BE A MINIMUM GLOSS OF 3154 PER METHOD 6101 OF FED-STD-141.

3156 THERE SHALL BE A MAXIMUM GLOSS OF 3156 PER METHOD 6101 OF FED-STD-141.

3144 SPECUALR GLOSS, 60-DEGREE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3144.

3146 SPECUALR GLOSS, 60-DEGREE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6101 OF FED-STD-141.

3176 STIFFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3176.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	3174
MINIMUM MACHINE DIRECT (MILLIGRAMS)	3178
MINIMUM CROSS MACHINE DIRECT (MILLIGRAMS)	3180
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3160
PER MIL-B-36225.	3162
TEST STRIPS (QUANTITY)	3164
TEST STRIP LENGTH (SELECT ONE)	
U.S.	
(INCHES)	3166
SI	
(MILLIMETERS)	3168
TEST STRIP WIDTH (SELECT ONE)	
U.S.	
(INCHES)	3170
SI	
(MILLIMETERS)	3172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3174	STIFFNESS. THE REQUIREMENT SHALL BE AS FOLLOWS:
3178	THE MINIMUM MACHINE DIRECT SHALL BE 3178 MILLIGRAM(S).
3180	THE MINIMUM CROSS MACHINE DIRECT SHALL BE 3180 MILLIGRAM(S).
3160	STIFFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3160.
3162	STIFFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-36225.
3164	THERE SHALL BE 3164 TEST STRIPS.
3166	THE LENGTH OF TEST STRIPS SHALL BE 3166 INCH(S).
3168	THE LENGTH OF TEST STRIPS SHALL BE 3168 MILLIMETER(S).
3170	THE WIDTH OF TEST STRIPS SHALL BE 3170 INCH(S).
3172	THE WIDTH OF TEST STRIPS SHALL BE 3172 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 154 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES SHALL BE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

CUSTODIANS:
ARMY-MI

USER ACITIVTY:
AMRY-MU

REVIEW ACTIVITIES:
ARMY-AT
ARMY-EV
ARMY-EL
ARMY-ME
ARMY-MR
ARMY-SG
ARMY-WC

PREPARING ACTIVITY:
ARMY-MI


(PROJECT EDS-A350)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

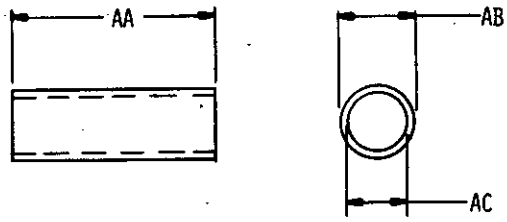


510-01-1

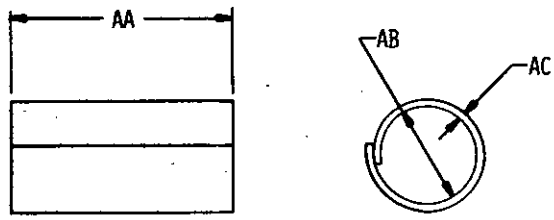


510-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

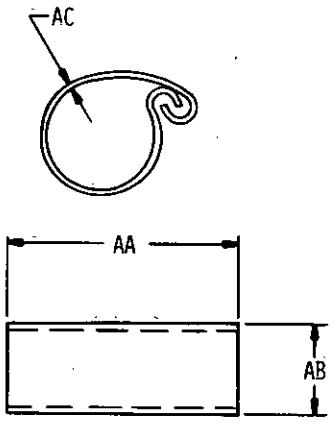


510-01-3

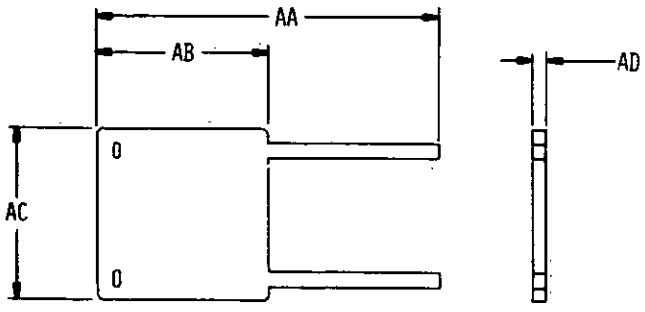


510-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

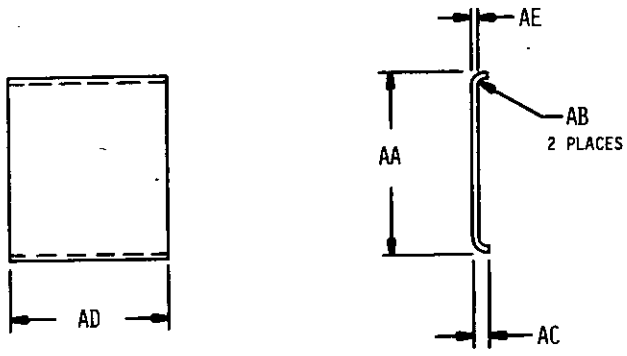


510-01-5

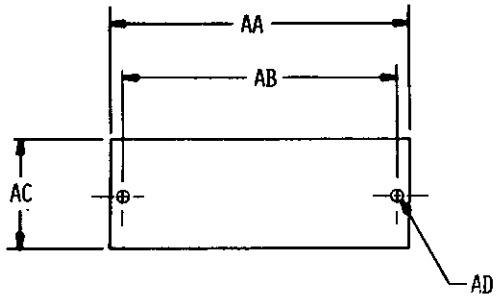


510-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

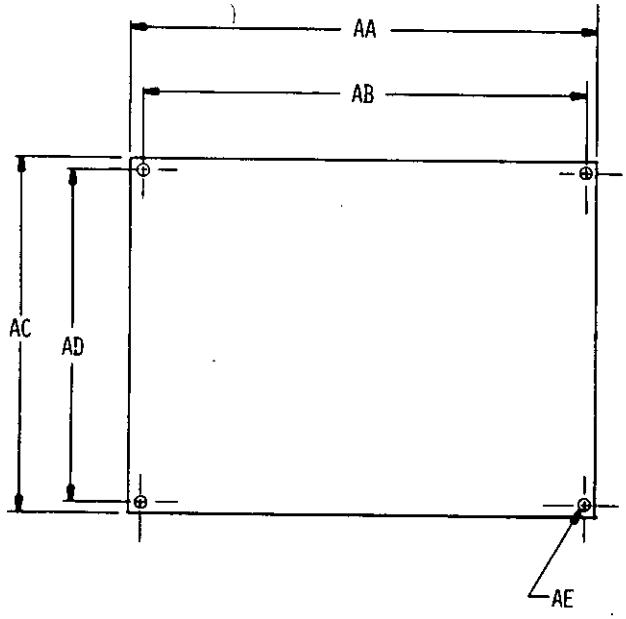


510-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

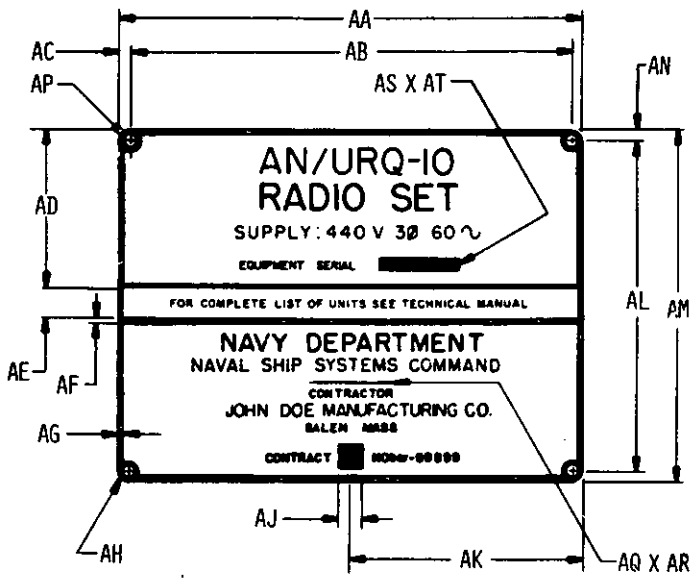


510-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

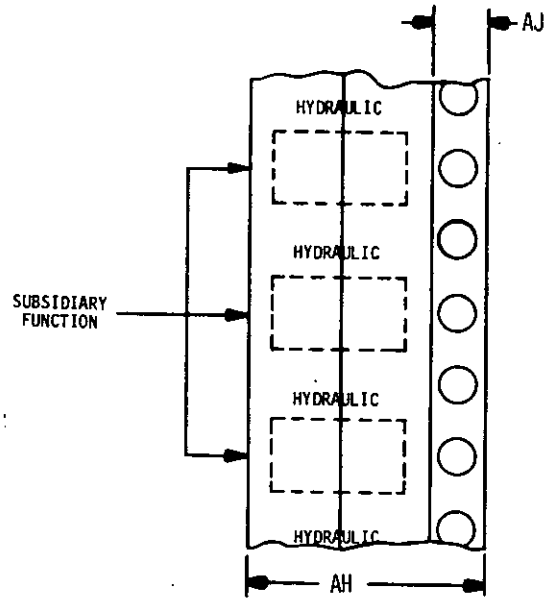


510-02-4

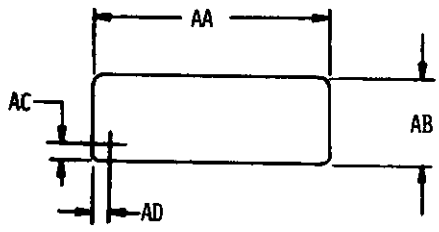


510-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

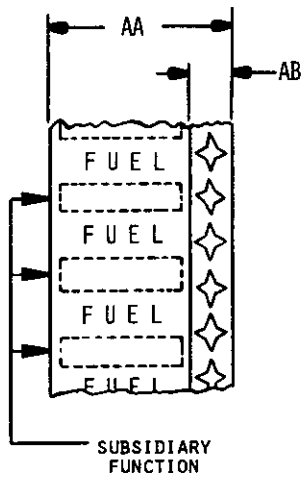


510-02-6

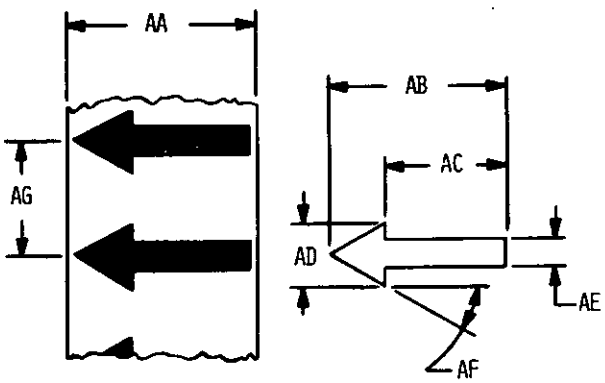


510-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

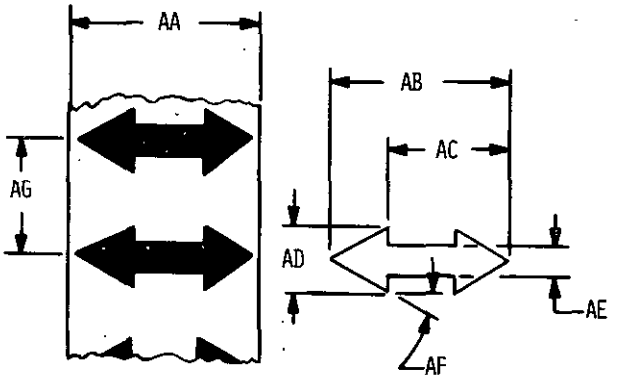


510-02-8

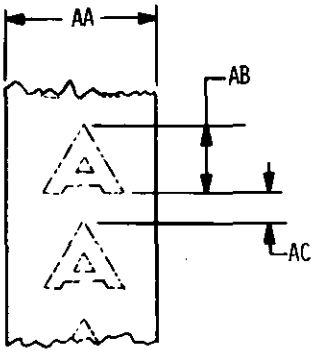


510-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

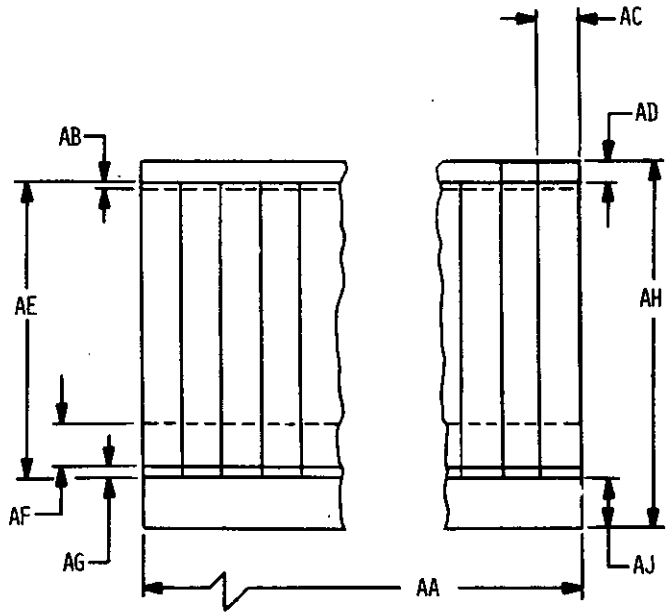


510-02-10




510-02-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

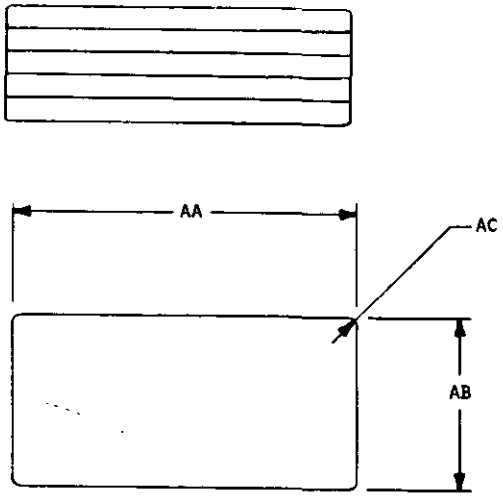


510-02-12

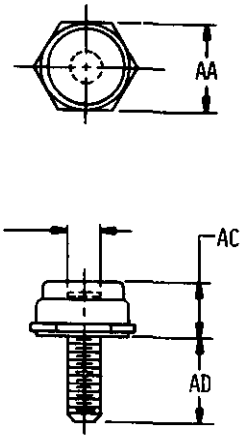

510-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

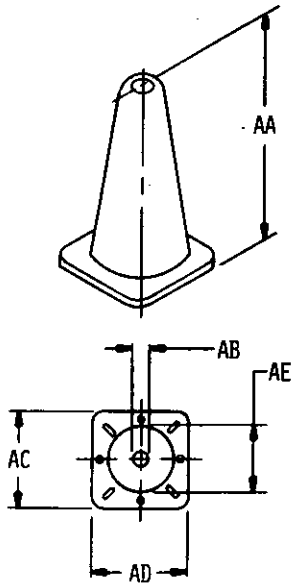

510-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1720	22	1826	30	1932	38
0102	14	1722	22	1827	30	1934	38
0103	14	1724	22	1828	30	1936	38
0104	14	1726	22	1829	30	1938	38
0105	14	1728	22	1830	30	1940	38
0107	16	1732	24	1832	30	1942	36
0108	16	1734	24	1834	30	1944	38
0700	14	1736	24	1836	30	1945	38
0800	14	1738	24	1838	30	1946	38
1004	14	1740	24	1842	28	1947	38
1005	14	1742	24	1844	30	1948	38
1006	14	1746	24	1848	32	1949	38
1008	14	1748	24	1850	32	1952	40
1009	18	1750	24	1852	32	1954	40
1391	66	1751	24	1854	32	1956	40
1396	64	1752	22	1856	32	1958	40
1397	66	1754	22	1858	32	1960	40
1400	64	1756	22	1862	32	1962	40
1449	66	1758	22	1863	32	1964	40
1505	80	1760	22	1864	32	1966	40
1514	80	1762	20	1868	32	1968	40
1518	80	1764	20	1872	32	1978	40
1525	80	1766	20	1880	34	1980	40
1532	82	1768	20	1884	34	1984	42
1538	80	1774	24	1886	34	1986	42
1540	80	1790	20	1888	34	1988	42
1542	82	1792	20	1898	34	1989	42
1543	82	1800	26	1902	34	1990	42
1544	82	1802	26	1906	36	1992	42
1559	82	1804	26	1909	36	1994	42
1700	20	1806	24	1910	36	1996	42
1702	20	1808	24	1912	36	1998	42
1704	20	1809	28	1914	36	2002	42
1706	20	1810	24	1916	36	2004	42
1708	22	1811	28	1918	36	2008	44
1710	22	1812	28	1920	34	2010	44
1712	22	1816	28	1922	34	2012	44
1714	22	1818	28	1924	34	2014	44
1716	22	1822	30	1926	36	2016	46
1718	22	1824	30	1928	36	2018	46

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2020	46	3014	54	3092	64	4713	80
2022	46	3016	54	3094	64	4714	80
2024	46	3018	54	3096	64	4715	80
2026	46	3020	54	3098	64	4719	80
2028	44	3022	52	3102	64	4722	78
2030	44	3024	56	3104	64	4723	78
2032	44	3026	56	3105	64	4726	78
2034	44	3028	56	3108	66	4754	58
2038	48	3030	56	3110	66	4755	58
2040	48	3032	56	3112	66	4756	58
2042	48	3034	56	3114	66	4760	58
2044	50	3036	56	3118	66	4761	58
2046	50	3038	56	3120	66	4762	58
2048	50	3040	56	3124	68	4783	70
2050	50	3041	56	3126	68	4809	62
2052	50	3042	58	3128	68	4810	62
2054	50	3043	58	3130	68	4811	62
2056	48	3045	56	3134	68	4819	62
2058	46	3046	56	3136	68	4820	62
2060	48	3047	56	3138	68	4822	62
2062	48	3048	56	3140	68	4904	26
2063	52	3052	60	3144	74	4905	26
2064	48	3054	60	3146	74	4950	18
2065	52	3056	60	3150	74	4985	66
2066	48	3057	60	3152	74	4986	66
2067	50	3058	60	3154	74	5048	26
2068	54	3060	60	3156	74	5049	26
2069	50	3062	60	3160	76	6231	78
2070	52	3063	60	3162	76	6234	78
2071	50	3064	60	3164	76	6235	78
2073	50	3065	60	3166	76	6237	78
2074	54	3070	62	3168	76	6238	78
2096	54	3072	62	3170	76	6318	78
2098	54	3074	62	3172	76	6319	78
2099	52	3076	62	3174	76	6323	78
3000	52	3078	62	3176	74	6327	72
3004	52	3082	60	3178	76	6338	72
3006	52	3084	60	3180	76	6339	72
3010	54	3088	64	4681	80	6340	72
3012	54	3090	64	4682	80	6341	72

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6342	72	7308	74				
6343	72	7311	70				
6344	72	7312	70				
6345	72	7313	70				
6346	72	7315	70				
6347	72	7316	70				
6348	72	7317	70				
6349	72	7318	72				
6353	70	7572	18				
6354	70	7577	18				
6356	68	7629	84				
6357	70	7630	94				
6369	14						
6372	84						
6792	20						
6793	20						
6870	82						
6873	14						
6874	16						
6941	16						
6942	16						
6991	84						
6992	84						
6993	84						
6994	84						
6995	84						
7001	82						
7002	82						
7003	82						
7004	82						
7005	82						
7021	28						
7022	26						
7023	28						
7024	28						
7301	26						
7302	26						
7305	72						
7306	72						
7307	74						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Abrasive Resistance	28
Accelerated Aging	32
Accelerated Weathering	34
Acidity	28
Additional Part Marking	84
Additional Requirements	82
Adhesion	34
Altitude	20
Aperture Cards Required	16
Applicable Documents	84
Base Document	14
Brightness	36
City, State, Zip	14
Character Type	20
Chemical Resistance	40
Cleaning Resistance	42
Color	20
Company Name/Command	14
Configuration	18
Contract Number/Office Symbol	14
Control	14
Definition of Hermetic Sealing	84
Ductility	44
Film Thickness	46
Finishes	18
Flammability	50
Flexibility	52
Fluorscent Color	54
Format	14
Fuel Resistance	56
Fungus	58
Government Design Activity	14
Hardness	60
Heat Resistance	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Identification	20
Illustrations	18
Immersion	62
Legibility Retention	64
Marking Filler	22
Marking Information	24
Materials	18
Moisture Resistance	64
Mounting	24
Mounting Hardware	82
Mounting Position	24
Nomenclature	84
Notes	84
Packaging	84
Paint Adhesion	66
Part Marking	84
Part Numbering	16
Part Number Cross-Reference	84
Phone Number	14
Quality Assurance	84
Radiological Contamination	68
Requester FSCM	14
Requester's Name	14
Revision of AEDPS Document Number	16
Salt Spray/Fog	68
Scope	16
Shock	70
Source Table	16
Specular Gloss 60-Degrees	74
Stiffness	74
Street Building	14
Superseded Document	84
System Application	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Tabulated Characteristics	18
Temperature Rating	78
Temperature, Low -	26
Temperature Shock (Temperature Cycling)	78
Usage	26
Units of Measure	16
Vibration	80
Weight	26
Workmanship	82

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-35-110A	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.