MIL-C-10750J
17 June 1988
SUPERSEDING
MIL-C-10750H
31 December 1981

MILITARY SPECIFICATION

COAT, FIREMAN'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers an outer coat with liner.

1.2 Classification. The coat shall be of one type in the following classes and sizes (see 6.2):

Class 1 - White
Class 2 - Olive Green 107

Schedule of sizes

Small	Medium	Large	X-Large	XX-Large
Short-Regular Long	Short-Regular Long	Short-Regular Long	Short-Regular Long	Short-Regular Long

* Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

* DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

*	A-A-203	- Paper, Kraft, Untreated
	V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
	V-T-280	- Thread, Gimp, Cotton, Buttonhole
	FF-R-556	- Rivet, Solid, Small; Rivet, Split, Small; Rivet, Tubular, Small; Flatwasher (Burr); and Cap, Rivet; General Purpose
	FF-W-92	- Washers, Flat (Plain)
	QQ-N-290	- Nickel Plating (Electrodeposited)
	QQ-P-416	- Plating, Cadmium (Electrodeposited)
	DDD-L-20	- Label: For Clothing, Equipage and Tentage, (General Use)
	PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

	MIL-C-3735	- Cuffs, Knit, Wrist and Ankle, and Cloth, Knitted
	MIL-F-10884	- Fasteners, Snap
	MIL-E-20652/1	- Eyelet, Metallic, Rolled Flange Type; and Eyelet Washer
	MIL-F-21840	- Fastener Tapes, Hook and Loop, Synthetic
*	MIL-L-35078	- Loads Unit: Preparation of Semi-perishable Subsistence Items; Clothing, Personal Equipment and Equipage
	MIL-C-43122	- Cloth, Sateen, Cotton, Flame Resistant Treated
	MIL-C-43410	- Cloth, Coated: Polyester/Cotton, Polyester/Rayon; Polyvinyl Chloride or Polychloroprene Coated
	MIL-T-43636	- Thread, Aramid
	MIL-C-43774	- Cloth, Plain or Pajama Check Weave, Aramid
	MIL-C-43708	- Cloth, Coated, or Cloth, Laminated, Reflective
	MIL-B-81813	- Batting, Aramid or Novoloid Fiber, Quilted

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
* MIL-STD-147 - Palletized Unit Loads
* MIL-STD-731 - Quality of Wood Members for Containers and Pallets

* (Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D 1424 - Tear Resistance of Woven Fabrics by Falling-Pendulum (Elmendorf) Apparatus

* D 3951 - Standard Practice for Commercial Packaging

(Copies may be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

* (Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.2 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this document may appear in the sample, in which case this document shall govern.

* 3.3 Materials. Materials shall be as specified herein (see 6.7).

3.3.1 Basic material. The material for the outer shell shall be fire resistant and water repellent treated, cotton sateen, conforming to MIL-C-43122, in the following colors and classes:

Class 1 Coat - Bleached White, Class 4
Class 2 Coat - Olive Green 107, Class 2

3.3.2 Coated material. The material for the lining and wristwell shall be a coated cloth conforming to MIL-C-43410. The color shall be natural or white.

3.3.3 Liner. The material for the liner shall be quilted batting conforming to MIL-B-81813. The color of the outercovering cloth shall be Olive Green 106 with the needle stitching thread of the dumbbell pattern (side facing wearer) being of a Olive Drab color and the bobbin thread (facing coat) being a natural color thread. The minimum width of the batting shall be 36 inches.

3.3.4 Top collar. The top collar cloth shall be cotton corduroy, flame resistant and water repellent treated cloth conforming to the physical requirements specified in table I when tested as specified in table VII.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T14:23Z
Check the source to verify that this is the currentversion before use.

TABLE I. Physical requirements of top collar cloth

Characteristic	Requirement	
	Minimum	Maximum
Weight, ounces per square yard	9.5	11.5
Yarns per inch:		
Warp	65	-
Filling	40	-
Breaking strength:		
Warp	95	-
Filling	50	-
Tearing strength:		
Warp	5.0	-
Filling	3.0	-
Dimensional stability, percent:		
Warp and filling	± 5.0	-
Spray rating	90	80
Flame resistance (warp and filling) initial and after five launderings:		
After flame, seconds	-	2.0
Char length, inch	-	4.0
After glow, seconds	-	6.0

* 3.3.5 Cuffs, wrist, knitted. The cuffs for attachment to the sleeves of the coat shall be dyed to match Olive Green 106 conforming to type IV, class 2, size 2, of MIL-C-3735.

3.3.6 Binding and buttonhole tabs The aramid cloth for buttonhole tabs and binding edges of liner shall be dyed OG-106 conforming to MIL-C-43774.

3.3.7 Reflectorized/fluorescent cloth. The reflectorized/fluorescent cloth shall conform to type I, class 3 or type II, class 2 of MIL-C-43708.

* 3.3.8 Labels. Each coat liner shall have a personal identification label, identification label, size label and an instruction label. All labels shall conform to DDD-L-20. The fastness to laundering requirement of DDD-L-20 shall apply.

3.3.8.1 Identification label. The identification label shall conform to type VI, class 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

3.3.8.2 Size label. The size label shall conform to type VI, class 2. Descriptive information shall be printed in letters and numbers not less than 10 point and contain the following information for each respective size:

Small, Short-Regular

Chest: Up to 37 inches
Height: Up to 71 inches
Stock No.

Small, Long

Chest: Up to 37 inches
Height: 71 inches and over
Stock No.

Medium, Short-Regular

Chest: 37 inches to 41 inches
Height: Up to 71 inches
Stock No.

Medium, Long

Chest: 37 inches to 41 inches
Height: 71 inches and over
Stock No.

Large, Short-Regular

Chest: 41 inches to 45 inches
Height: Up to 71 inches
Stock No.

Large, Long

Chest: 41 inches to 45 inches
Height: 71 inches and over
Stock No.

X-Large, Short-Regular

Chest: 45 inches to 49 inches
Height: Up to 71 inches
Stock No.

X-Large, Long

Chest: 45 inches to 49 inches
Height: 71 inches and over
Stock No.

XX-Large, Short-Regular

Chest: 49 inches and over
Height: Up to 71 inches
Stock No.

XX-Large, Long

Chest: 49 inches and over
Height: 71 inches and over
Stock No.

3.3.8.3 Personal identification label. The personal identification label shall conform to type VI, class 10, and shall be combined with the class 1 label.

3.3.8.4 Instruction label. The instruction label shall conform to type VI, class 3 and contain the following information:

COAT, FIREMAN'S

Launder using Formula 1 of TM - 10-280

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

DO NOT REMOVE THIS LABEL

WARNING: In laundering, do not use acid sour rinse. The rinse bleaches out the flame proofing agent in the garment.

3.3.9 Thread. The thread for seaming and stitching, where required, shall be aramid, size E and B conforming to type I of MIL-T-43636.

3.3.9.1 Color.

3.3.9.1.1 Outer shell. The thread color for the outer shell shall be Olive Drab S-1 (C.A. 66022).

3.3.9.1.2 Liner. The thread color for the liner shall be Olive Drab S-1 (C.A. 66022), or natural.

3.3.9.1.3 Reflectorized/fluorescent strips. The thread color for the strips shall be natural.

* 3.3.9.2 Colorfastness. The Olive Drab S-1 (S.A. 66022) thread shall show fastness to laundering (after three cycles) equal to or better than the standard sample or equal to or better than a rating of "good".

3.3.10 Gimp. The cotton gimp for reinforcing buttonholes shall be dyed Olive Drab S-1, C.A. 66022, size No. 8, conforming to type I or II of V-T-280.

* 3.3.10.1 Colorfastness. The dyed gimp shall show fastness to laundering (after three cycles) equal to or better than the standard sample or equal to or better than a rating of "good" (after three cycles).

* 3.3.11 Fastener tape. The 1 inch fastener tape shall be Green 3421 conforming to type I, class 2 of MIL-F-21840. The tape shall show good fastness to laundering. The requirement for color matching of fastener tape under incandescent lamplight shall not apply.

3.3.12 Snaps and dees with tabs. The snaps and dees with tabs shall be cast aluminum, brass, zinc or malleable iron conforming to the design and dimensions as shown on figures 3 and 4 (see 6.5). The aluminum and zinc snaps and dees shall be natural finish. The brass snaps and dees shall be nickel plated, conforming to class 2, .0005 inch minimum thickness of QQ-N-290. The malleable iron snaps and dees shall be cadmium plated conformng to type I, class 3 of QQ-P-416. The casting shall be sound, smooth and free from fracture and repair such as impregnations, peening and weld. The commercial finish of the snaps and dees shall be free from any rough spot, burr, sharp or rough edges.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

3.3.13 Eyelets and washers.

3.3.13.1 Eyelets. The eyelet dimensions shall conform to Stimpson Number A881, or J. C. Rhodes Number 1 Long Rolet, or equal (see 6.5.2). The eyelet material shall be aluminum, and shall be given a black enamel finish conforming to MIL-E-20652.

3.3.13.2 Washers. The washer shall conform to the requirements of Dash Number - ABW100 or MIL-E-20652/1 (see 6.5.3).

3.3.14 Snap fasteners. The snap fasteners for attachment of the outer shell to the coat liner and closing storm flap on coat shall consist of button, 24 line, size 1, and socket for the female half; and a size 1 eyelet with stud for the male half, conforming to style 2, finish 2 of MIL-F-10884.

3.3.15 Rivets, tubular with caps. The rivets for attaching snaps and dees shall be 9/64 inch nominal size; 5/16 inch nominal length conforming to type XII, class 3, grade B or F of FF-R-566 except that the inside of the rivet shank shall be chamfered. The caps shall conform to type II of FF-R-556. The brass rivets shall be nickel plated conforming to class 2, .0005 inch minimum thickness of QQ-N-290. The aluminum rivets shall be used in conjunction with the aluminum or zinc snaps and dees and the brass rivets shall be used in conjunction with the brass snaps and dees. As an alternate, washers conforming to type A, grade II, class C, No. 8 of FF-W-92 may be used in lieu of the caps.

3.3.16 Buttons. The buttons to attach sleeves of liner to coat shall be type II, class D, style 4, 27-line conforming to V-B-871. The color of the buttons shall be Olive Green, shade BP, Cable No. 62016 and shall have a glossy finish.

* 3.4 Design. The coat, as shown on figure 1, is a single breasted model, with a wide corduroy cloth storm collar, which includes a throat strap secured in place by fastener tape and long shaped sleeves with wrist wells ending in wristlets. It has side patch pockets with an additional layer for reinforcement, eyelets for passage of water with pocket flaps. There is a front protective flap closed by means of rigid snaps and dees. There are three vertical reflectorized/fluorescent cloth strips down the front of the coat, strips forming a box configuration in the back, two horizontal strips around the sleeves, and a horizontal strip around the hem of the coat. The outer shell of the coat is backed by a vapor barrier lining, and a quilted batting liner is permanently attached to the outer shell lining at the neckline only.

* 3.5 Figures. Figures 1 and 4 are furnished solely for guidance and information. Should variation from the written document appear in the figure, the written document shall govern.

3.6 Patterns. Standard patterns providing an allowance of 3/8 inch for safety stitch and single needle seams, and 1/2 inch for double needle seams will be furnished by the Government to the contractor for cutting working patterns.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T14:23Z
Check the source to verify that this is the currentversion before use.

The Government patterns, which show directional lines and markings for proper assembly, shall not be altered in any way except as authorized by footnotes to table II, and are to be used as a guide for cutting contractor's working patterns. The working patterns shall be identical to the Government patterns.

3.7 List of pattern parts. The coat and liner shall be cut from materials as specified with the number of parts indicated in table II.

TABLE II. List of pattern parts

Material	Nomenclature	Cut parts
	OUTER SHELL	
Flame resistant cotton sateen	Front	2
	Back	2
	Sleeve	2 2/
	Pocket	2
	Pocket flap	2 2/
	Pocket reinforcement	2
	Storm flap	1
	Undercollar	1 1/ 2/
	Undercollar interlining	1 1/
	Undercollar stand	1
	Undercollar stand interlining	1
	Top collar stand	1
	Front interlining	2
	Necktab	2
Cotton corduroy	Top collar	1
	LINING	
Coated cloth	Front	2
	Back	2
	Sleeve	2 2/
	Wristwell	2
	Storm flap facing	1
	LINER	
Aramid batting	Front	2
	Back	1 2/
	Sleeve	2 2/

1/ Use same pattern part.

2/ Parts may be cut in two pieces with seam allowances added.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

chilled turkey shall be used for

* 3.8 Construction. The construction shall conform in all respects to the requirements specified in table III and herein.

* 3.8.1 Stitches, seams and stitching. Stitch, seam, stitching types and stitches per inch specified in table III shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same part of an operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. The edge and top stitching shall be uniformly gaged. Seams required to be worked out, that have a depth between the fold of 1/16 inch or more shall be considered a defect. The gage of stitching on double stitched seams shall be 1/4 to 5/16 inch, but the same gage shall be used on all double stitched seams throughout the coat with the outside row of stitching being 1/16 to 1/8 from the edge. The gage of stitching for safety stitch construction shall be 3/8 ± 1/16 inch. The guides and knives on the safety stitch machines shall be set to trim only the ravelled ends of the fabric.

3.8.1.1 Type 301 stitching. Ends of stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.8.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1 inch behind the end of the stitching. 1/

b. Thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area and continue a minimum of 1 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitchng are not required to be backstitched.

3.8.1.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Both ends of all seams or stitching produced with 401 stitch type, when not turned under in a hem or held down by other stitching, shall have a 1/2 to 3/4 inch chain extending beyond each end. The looper (underthread) shall be on the inside of the coat. All repairs shall be in accordance with 3.8.1.1.1a and 3.8.1.1.1b. Repairs may be made using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

* 3.8.1.3 Types 503, 504, 515, 516, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.8.1.1.1a and 3.8.1.1.1b, except substitute 3/4 inch for 1 inch wherever 1 inch appears. The looper (under thread) of 515, 516 and 519 type stitching shall be on the inside of the coat. The guides and knives on the safety stitch machine shall be set to trim only the ravelled end of the fabric.

* 3.8.1.4 Bartacking. Unless otherwise specified, bartacks shall be as specified in table III and as follows:

Length	Width
1/2 inch ± 1/16	1/8 inch ± 1/32

Bartacks shall be free of thread breaks and loose stitching.

* 3.8.1.5 Automatic stitching. Automatic stitching machines may be used to perform any of the required patterns provided the requirements of the stitch pattern, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping, or backstitches are used to secure the ends of the stitching.

3.8.1.6 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch.

3.8.1.7 Buttonholes. The buttonholes shall be eyelet end, taper bar type, worked over gimp with not less than four tacking stitches at bar end (not counting crossover stitch) and shall have a finished cut length of 3/4 to 7/8 inch. The stitching shall be securely caught in the fabric and the ends shall be securely tacked. All loose thread ends shall be trimmed or fused to within 1/8 inch of the tack.

3.8.1.8 Setting of snap fasteners. A hole shall be prepunched to receive the button and eyelet components of the snap fastener. The hole shall be smaller than the outside diameter of the button and eyelet barrels so that the barrel must be forced through the hole. The hole shall not be punched in the setting operation with the button or eyelet barrel. The fasteners shall be securely clinched without cutting the adjacent materials and no more than three splits shall occur in the button or eyelet barrels.

* 3.9 Repairs. Repairs such as mends, darns, patches or splices are not permitted on the coat.

3.10 Manufacturing operations requirements. The coats and liners shall be manufactured in accordance with operation requirements specified in table III. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching is permissible provided the thread does not show in the finished garment.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

* 3.11 Marking. The component parts of the coat and liner shall be marked, ticketed or bundled to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(1) Metal fastening devices
(2) Sew-on type tickets
(3) Adhesive type tickets, which discolor and adhere to the material upon removal of the tickets

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut all parts in strict accordance with patterns furnished which show directional lines, size, shape and notches for assembly of all parts. Outer shell b. Cut all parts of the outer shell from one piece of material except collar stand and interlining, hanger loop, front interlinings, undercollar, undercollar interlinings, necktab, and the pocket flap linings (when two piece flaps are used) which may be cut from ends. The filling effect side of the material shall finish on the outside of the garment. c. Cut the top collar corduroy material to assure that the ribbed pile effect will lie in a vertical plane after assembly to the coat. d. Cut reflectorized/fluorescent cloth strips for storm flap, back to form box shape, vertical strips for shoulder/chest assembly, two strips for each arm, and around bottom hem 3 inches wide and to the lengths required in operations 6.c., 11.b., 11.c., 12.a., 12.b. and 12.c. according to marks on patterns for appropriate size of coat. Lining e. Cut coated cloth for lining and wrist wells in the direction of the warp or filling. In the finished coat, the heavy coated side of the cloth shall face the outer shell. On the wrist well the coated side shall face outward.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd)						
	Lining (cont'd)						
	f. Cut knit cuff 4-3/4 to 5-1/2 inches long assuring that cut length is consistent throughout the width of the cuff.						
	Liner						
	g. Cut the aramid batting in the direction which the dumbbell stitching runs.						
	NOTE: Care should be exercised when cutting the quilted batting and handling the cut parts in that the ends of the quilting stitching have a tendency to run back.						
	h. Cut the aramid cloth for binding on the straight or bias of sufficient width and lengths to meet the requirements specified in operation 28. Binding may be placed on rolls.						
	Sleeve buttonhole tabs						
	i. Cut nylon cloth for sleeve buttonhole tabs (2 per liner) to finish (when buttonhole tab is attached to sleeve) 1-1/2 to 1-3/4 inches long and 1-1/8 to 1-1/4 inches wide (see operation 29).						
	Coat hanger loop						
	j. Cut sateen cloth for coat hanger loop to finish 5/8 ± 1/8 inch wide by 4-3/4 to 5 inches long (see operation 7).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil/ Downloaded: 2026-01-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd)						
	Fastener tapes						
*	k. Cut 2 each hook and loop fastener tapes 1 ± 1/8 inch wide and 2 ± 1/8 inches in length (see operations 8.f., 9.c. and 9.d.).						
2.	Replacement of damaged parts.						
	a. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as classified in 4.4, are excluded and replaced with non-defective and properly matched material.						
	b. Areas of no coating on the coated fabric, not larger than 2 inches in the longest dimension, may be repaired by an application of the same coating compound as used in coated material (see 3.3.2). No more than one repair shall be permitted on any lining.						
3.	Shade and size marking.						
	All parts except lining and liner shall be marked, ticketed or bundled to insure a uniform shade, size and proper assembly throughout the garment, except those cut from ends.						
	MAKE OUTER SHELL						
4.	Make pocket flaps.						
	a. Fold flaps in half lengthwise as indicated by notches on pattern and seam side edges.	301 or 401	SSe-3(a) SSe-3(a)	8-10 8-10	E E	E B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUTER SHELL (cont'd)						
4.	Make pocket flaps. (cont'd)						
	b. Turn flap and stitch side and bottom edges with two rows of stitching.	301	SSe-3(b) and	8-10	E	E	
		301	OSf-2	8-10	E	E	
	or						
	c. The raw edges may be turned in and stitched with two rows of stitching when either the one-piece or two-piece flap is used.	301	SSc-2	8-10	E	E	
	NOTE: The flaps may be made of two pieces, but when so made, the seam allowances shall be added to the bottom edges.						
5.	Make pockets.						
	a. Superimpose reinforcement piece to pocket with bottom and side edges even, turn under top edge, position as indicated by pattern marks to pocket and double stitch.	301	LSb-2	8-10	E	E	
	NOTE: A holding stitch may be used along sides and bottom 1/8 to 1/4 inch from raw edges to aid folding and attaching pocket to coat.	301	SSa-1	8-10	E	E	
	b. Hem top of pocket as indicated by notches on pattern and with raw edge turned under, stitch the turned under edge 1/16 to 1/8 inch from edge. The top of the identification label (which includes personal identification information) shall be caught in the hem of the right pocket. The hem shall finish 1 ± 1/4 inches wide.	301	EFb-1	8-10	E	E	

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUTER SHELL (cont'd)						
5.	Make pockets. (cont'd)						
	NOTE: The stitching shall not be through the printing of the label						
	c. Attach two eyelets to bottom of each pocket through reinforcement and pocket ply as indicated by marks on pattern.						
6.	Make storm flap.						
	a. Superimpose facing to storm flap and around ends and front.	301 or 401	SSe-3(a) SSe-3(a)	8-10 8-10	E E	E B	
	b. Clip corners, turn to finished position, work out points and edges and edge stitch with double row of stitches.	301	SSe-3(b)	8-10	E	E	
	c. Position reflectorized/fluorescent cloth strip vertically on top ply of storm flap to finish 5/8 ± 1/8 inch from front finished flap and stitch sides and ends of strip to flap 1/16 to 1/8 inch from each edge. Reflective/fluorescent cloth strip stitching shall not be cut by dee rivets.	301 or 401	LSbj-1 LSbj-1	8-10 8-10	E E	E B	
7.	Make hanger loop.						
	a. Fold a strip of basic material with the raw edges turned in and stitch 1/16 to 1/8 inch from edge. or Fold strip or basic material with the raw edges turned in and stitch 1/16 to 1/8 inch from turned edges.	301 301	EFp-2 EFp-1	8-10 8-10	E E	E E	

Source: https://assist.dla.mil/ Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUTER SHELL (cont'd)						
7.	Make hanger loop. (cont'd)						
	or						
	If loop material has selvage edge, turn opposite side (raw) edge under, forming three plies of material. The raw edge ply shall be placed in between the outer plies. Stitch formed hanger loop 1/16 to 1/8 inch in from turned edges catching all plies of material.	301	EFaa-2	8-10	E	E	
8.	Make collar and attach hanger loop.						
	a. Join undercollar, when two-piece construction is used.	301 or 401	SSa-1 SSa-1	8-10 8-10	E E	E B	
	b. Quilt the undercollar to collar interlining with 3 horizontal rows of stitching, 3/4 ± 1/8 inch apart, with middle row centered on collar (1/4 inch off center tolerance) or with 4 horizontal rows of stitching, 1/2 ± 1/8 inch apart, with the 2 inner rows of stitching centered on the collar (± 1/4 inch off center tolerance).	301 or 401 or 301 or 401	SSv-3 SSv-3 or SSv-4 SSv-4	8-10 8-10 8-10 8-10	E E E E	E B E B	
	c. Quilt undercollar stand to undercollar stand interlining with one horizontal row of stitching centered on collar stand (1/4 inch off center tolerance).	301 or 401	SSv-1 SSv-1	8-10 8-10	E E	E B	
	d. Seam undercollar stand to undercollar and seam top collar stand to corduroy top collar; turn seam allowances toward stands and raise stitch each turned edge.	301 or 401 and 301	LSq-2(a) LSq-2(a) LSq-2(b)	8-10 8-10 8-10	E E E	E B E	

Source: https://assist.dla.mil-18 Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUTER SHELL (cont'd)						
8.	Make collar and attach hanger loop. (cont'd)						
	NOTE: The straight edge of the undercollar and top collar stands shall be attached to the collars.						
	e. Seam top collar to undercollar, turn, work out points and edges and double stitch 1/16 to 1/8 inch from top and side edges.	301 or 401 and 301	SSe-3(a) SSe-3(a) SSe-3(b)	8-10 8-10 8-10	E E E	E B E	
	f. Position a 2 inch length of loop fastener tape to right end of undercollar, a 1 inch length loop fastener tape to center of undercollar, as indicated by marks on pattern and stitch 1/16 to 1/8 inch from edges.	301	LSbj-1	8-10	E	E	
*	g. Center hanger loop on collar stand with end turned in to finish 4-3/4 to 5 inches long and bartack the width of the loop with two tacks 1/4 ± 1/16 inch apart on each end through all layers of stand (shall not be caught in collar seam).	Bartack		28 per bartack	B	B	
9.	Make necktab and attach to collar.						
	a. Join two plies of the necktab, right sides together, seam all edges except end.	301 or 401	SSe-2(a) SSe-2(a)	8-10 8-10	E E	E B	
	b. Turn, work out points and edges and single stitch 1/16 to 1/8 inch from edge.	301	SSe-2(b)	8-10	E	E	
	c. Position 1 inch hook fastener tape to underside of necktab (used to attach strap to collar) according to marks on pattern and stitch 1/16 to 1/8 inch from edges.	301	LSbj-1	8-10	E	E	

Source: https://assist.dla.mil/ Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUT SHELL (cont'd)						
9.	Make necktab and attach to collar. (cont'd)						
	d. Position a 2 inch length of hook fastener tape to side of necktab (exposed when necktab is fastened in position) according to marks on pattern.	301	LSbj-1	8-10	E	E	
	e. With necktab hook side up against undercollar and straight end (end not containing fastener tape) of necktab lined up to necktab location marks as indicated on pattern, with raw edge toward end of collar, stitch through collar and backstitch.	301 or 401	LSq-2(a) LSq-2(a)	8-10 8-10	E E	E B	
	f. Turn to finished position with necktab toward center back collar, and stitch through collar 1/4 to 5/16 inch from fold.	301	LSq-2(b)	8-10	E	B	
10.	Attach pockets, pocket flaps and interlinings.						
	NOTE: The pockets shall cover the pocket corners.						
	a. Turn in edges of patch pockets, position pockets to fronts as indicated by marks on pattern and stitch pockets to fronts with two rows of stitching.	301	LSd-2	8-10	E	E	
	b. Position flaps to fronts with raw edges aligned to marks on pattern; seam, turn down flaps over pockets and double stitch.	301 or 401 and 301	LSbj-1 LSbj-1 --	8-10 8-10 8-10	E E E	E B E	
	or						
	The flaps shall be double stitched to fronts in one operation.	301	LSd-2	8-10	E	E	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUTER SHELL (cont'd)						
10.	Attach pockets, pocket flaps and interlinings. (cont'd)						
	c. Bartack each corner of pocket opening with a vertical 1/2 inch bartack. The bartack shall be on the inner row of stitching.	Bartack		28 per bartack	E	E	
	d. Bartack top edge of pocket flap at each side with a horizontal 1/2 inch bartack superimposed on bottom row of stitching.	Bartack		28 per bartack	E	E	
	e. Stitch interlining to front or to coated lining along step and front edge.	301	SSa-1	8-10	E	E	
11.	Make back and attach reflectorized/fluorescent strips.						
	a. Join back pieces at center back with a double-lapped, double-stitched seam.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
	NOTE: Coat back may be cut in one piece with back seam allowances eliminated.						
	b. Position strips of reflectorized/fluorescent fabric across the back vertically and horizontally as indicated by marks on pattern with the stitching 1/16 to 1/8 inch from edges. Horizontal strips should overlap vertical strip ends and be caught in stitching.	301 or 401	LSbj-1 LSbj-1	8-10 8-10	E E	E B	
	c. Position strip of reflectorized/fluorescent fabric around bottom of coat 2 to 2-1/4 inches from bottom raw edge of coat (to finish 1 to 1-1/4 inches from finished hemmed edge).	301 or 401	LSbj-1 LSbj-1	8-10 8-10	E E	E B	

Source: https://assist.dla.mil/ - Downloaded: 2026-01-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUTER SHELL (cont'd)						
12.	Attach reflectorized/fluorescent strips to front and sleeves.						
	a. Position vertical strips according to marks on front patterns (top cut edge of strip matching shoulder seam angle). Stitch 1/16 to 1/8 inch from edges of strip.	301 or 401	LSbj-1 LSbj-1	8-10 8-10	E E	E B	
	b. Position top sleeve strip of reflectorized/ fluorescent material and stitch 1/16 to 1/8 inch in from all edges as indicated by marks on pattern.	301 or 401	LSbj-1 LSbj-1	8-10 8-10	E E	E B	
	c. Position strip (widthwise) at bottom of sleeve as indicated on sleeve pattern and stitch 1/16 to 1/8 inch from edges. Any excess strip at sleeve underarm seam shall be trimmed to facilitate double-lapped underarm seam construction.	301 or 401	LSbj-1 LSbj-1	8-10 8-10	E E	E B	
13.	Join shoulders and attach sleeves.						
	a. Join fronts to back at shoulder, back overlapping front with a double-lapped, double-stitched seam. Reflectorized/fluorescent cloth strip ends shall be caught in shoulder seam.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
	b. Join sleeves to body with body overlapping sleeves with a double-lapped, double-stitched seam.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
	NOTE: The sleeves may be made of two pieces, but when so made, the double-lapped, double-stitched seam shall be located at the back arm, 5 to 6 inches from top of sleeve head and cut in the warp direction. The back arm seam allowances shall be added to modified patterns to accomplish operation. Top sleeve shall overlap undersleeve seam.						

Source: https://assist.dla.mil -- Downloaded: 2026-01-17 14:23Z
Check the source to verify that this is the current version before use.

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE OUTER SHELL (cont'd)						
14.	Join fronts to back and close sleeves.						
	a. Join side seams and underarm seams in one operation with a double-lapped, double-stitched seam. Armhole seams shall be staggered at underarm but not more than 1 inch. The back shall lap the fronts at sides.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
15.	Join storm flap to front.						
	a. Turn under back raw edge of flap, position flap to right front as indicated by marks on pattern and stitch flap to front with two rows of stitching. The front edge of flap shall finish even with finished front edge of coat.	301	LSd-2	8-10	E	E	
	MAKE SHELL LINING						
16.	Make back, join shoulders, and attach sleeves.						
	a. Join back pieces at center back with a double-lapped, double-stitched seam.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
	NOTE: The back may be cut in one piece with back seam allowance eliminated.						
	b. Join fronts to back at shoulder with a double-lapped, double-stitched seam.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
	c. Join sleeves to body with body overlapping sleeves.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	

Source: https://assist.dla.mil -- Downloaded: 2026-01-17 14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE SHELL LINING (cont'd)						
16.	Make back, join shoulders and attach sleeves. (cont'd)						
	NOTE: The sleeves may be made of two pieces, but when so made, the double-lapped, double-stitched seam shall be located at back arm, midway (± 1 inch) between shoulder and underarm, top sleeve overlapping undersleeve. Back arm seam allowances shall be added to modified patterns to accomplish operation.						
17.	Join fronts to back and close sleeves.						
	Join side seams and underarm seams in one operation with backs overlapping fronts. Sleeve joining seams shall be staggered but not more than 1 inch.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
18.	Make wrist well, attach knit cuffs and attach to sleeve lining.						
	a. Double-lap and double-stitch side seam of wrist well with front over back.	301 or 401	LSc-2 LSc-2	8-10 8-10	E E	E B	
	b. Fold cuff in half, 2-3/8 to 2-3/4 inches long, resulting in raw edges being even and overedge stitch.	503 or 504	SSa-1 SSa-1	8-12 8-12	B B	B B	
*	c. Position knit cuff to bottom of wrist well, with raw edges of wrist well even with overedged cuff, easing in any excess coated lining cloth evenly, and stitch 3/8 ± 1/8 inch in from sleeve lining edge. or	301 or 401	SSa-1 SSa-1	8-10 8-10	E E	E B	

Source: https://assist.dla.mil/24 Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE SHELL LINING (cont'd)						
18.	Make wrist well, attach knit cuffs and attach to sleeve lining. (cont'd)						
	Position knit cuff to bottom of wrist well, and with raw edge of wrist well even with overedged cuff, overedge stitch together.	515 or	SSa-1	8-12	E (chain stitching)	B	
					E (overedge stitching)	E	
	NOTE: Knit cuff raw edges must be overedge stitched prior to being stitched to wrist well.	516 or	SSa-1	8-12	E (chain stitching)	B	
					E (overedge stitching)	E	
		519	SSa-1	8-12	E (chain stitching)	B	
					E (overedge stitching)	E	
	d. Position wrist well inside sleeve lining with bottom edge of wrist well even with bottom edge of sleeve lining. Stitch to sleeve, 4-1/2 ± 1/8 inches from bottom of sleeve lining.	301 or	SSa-1	8-10	E	E	
		401	SSa-1	8-10	E	B	
	e. Sew one button on inside of liner located over wrist well to sleeve seam on inside of coat (to attach liner buttonhole tab to).	301 or		14-16 per button	20-4	20-4	
		101 or		20-4 per button			
		Hand		4 double Not including shank wrap	16-4		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil/ 25 Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE SHELL LINING (cont'd)						
19.	Attach collar to coat and join lining to shell.						
	a. Join collar to coat between lining and shell catching the size label in the stitching (± 1 inch off center tolerance). The hanger loop shall not get caught in the stitching. Continue stitching around lapel steps and down fronts catching strips in front edges. Turn and force out points and edges.	301 or 401	SSa-1 SSa-1	8-10 8-10	E or B E or B	E or B B	
	NOTE: The stitching shall not be through the printing of the label.						
	b. Begin and end edge stitching with double needle machine 1/4 inch minimum beyond collar ends, continuing down fronts. Lining shall not show on outside of coat.	301	SSe-3(b)	8-10	E	E	
	c. Finish ends of edge stitching by forming angled closed stitch pattern, overlapping both ends of double stitching 1/2 inch being sure to stitch through collar seam allowances at an angle across end.	301	SSe-3(b)	8-10	E	E	
20.	Hem bottom of coat.						
*	With lining inside finished hem, fold shell of coat up according to marks on pattern and turn in top edge so hem will finish 3/4 ± 1/8 inch wide. Overlap double stitching of front, turn and continue stitching along top edge of hem 1/16 to 1/8 inch from edge through coat.	301	EFb-1	8-10	E	E	

Source: https://assist.dla.mil-26 Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE SHELL LINING (cont'd)						
21.	Hem sleeves. Fold sleeve shell to inside over edge of sleeve lining, turn under raw edge and stitch 1/16 to 1/8 inch from turned edge. The hem shall finish 1/2 ± 1/8 inch wide.	301	EFb-1	8-10	E	E	
22.	Attach snap fasteners to coat. a. Attach 6 snap fasteners (socket and button) to coat to accommodate liner, with socket towards inside of coat, as indicated by marks on pattern. 1. 3 on right front. 2. 3 on left front. b. Attach 2 snap fasteners (stud and eyelet) to right front (to close coat) with studs toward outside of coat, as indicated by marks on pattern. c. Attach 2 snap fasteners (socket and button) to left front with socket toward inside of coat to correspond to the studs on right front.						
23.	Attach dees and snaps. a. Rivet 4 dees to storm flap with inside back edge of dee in line with front edge of flap 1/4 inch tolerance into flap is permitted. The top and bottom dee shall be positioned 1-1/2 ± 1/4 inches from top and bottom edges of flap. The two remaining dees spaced equidistant between top and bottom dee (± 1/4 inch) with measurements taken from center line of dees.						

Source: https://assist.dla.mil/ Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE SHELL LINING (cont'd)						
23.	Attach dees and snaps. (cont'd)						
	b. Rivet 4 snaps to left front, in line with dees on storm flap, 4-1/4 ± 1/4 inches from left front edge, measured to front edge of snap. The top snap shall face out (opening away from coat) and the remaining three face toward coat.						
	MAKE QUILTED BATTING LINER						
	Finished appearance: Face side of liner shall be identified by Olive Drab needle quilting thread and face wearer. Natural bobbin quilting thread shall face coat.						
24.	Overedge stitch liner parts.						
	Overedge stitch all raw edges of liner along neck, fronts, back and sleeve bottoms.	504 or 505	EFd-1	6-12	B B	B B	
25.	Join liner, shoulders and sleeves to liner.						
	a. Backs may be made of two pieces with seam located at center back. Seam allowances shall be added to accomplish a double stitched seam (see operation 25.b).						
	b. Join back (when two piece construction is used) and shoulders with safety-stitch, turn seams to back at shoulder, and stitch 1/4 to 5/16 inch from seam.	301 or 401 301 or 401	LSq-2(a) LSq-2(a) LSq-2(b) LSq-2(b)	8-10 8-10 8-10 8-10	E E E E	E B E B	
	c. Join liner sleeves to armhole, safety-stitch, turn seam toward coat, and stitch 1/4 to 5/16 inch from seam.	301 or 401	LSq-2(a) LSq-2(a)	8-10 8-10	E E	E B	

Source: https://assist.dla.mil -- Downloaded: 2026-01-17 14:23Z
Check the source to verify that this is the current version before use.

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE QUILTED BATTING LINER (cont'd)						
25.	Join liner, shoulders and sleeves to liner. (cont'd)						
	NOTE: The sleeves may be made of two pieces, but when so made, the double-stitched seam shall be located at back arm, midway (± 1 inch) between shoulder and underarm. Backarm seam allowances shall be added to modified patterns to accomplish operation. Seam may be turned to back undersleeve.	301 or 401	LSq-2(b) LSq-2(b)	8-10 8-10	E E	E B	
26.	Join side seams and close sleeves.						
	Join sides and underarm seams in one continuous operation with a safety-stitch. Turn seam allowances toward back and stitch 1/4 to 5/16 inch from seam catching seam allowances in stitching. The armhole seams shall be staggered at underarm by more than 1/2 inch.	301 or 401 or 301 or 401	LSq-2(a) LSq-2(a) LSq-2(b) LSq-2(b)	8-10 8-10 8-10 8-10	E E E E	E B E B	
27.	Make sleeve buttonhole tabs.						
	a. Fold the strip in half, turn in the raw edges of both sides to the inside and stitch 1/16 to 1/8 inch from edges, with the stitching continued across the folded end.	301	EFn-2 and OSf-1	8-10 8-10	E E	E B	
	or						
	Make the buttonhole tabs from two pieces of material on a special banding machine, with the raw edges turned to the inside and stitch 1/16 to 1/8 inch from each edge.	301	EFn-2	8-10	E	E	

MIL-C-10750J

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE QUILTED BATTING LINER (cont'd)						
27.	Make sleeve buttonhole tabs. (cont'd)						
	b. When tabs are made on a banding machine, the raw edge of one end shall be hemmed with hem finishing 1/4 ± 1/16 inch.	301	EFb-1	10-14	E	E	
	c. Make a vertical buttonhole in the center (± 1/8 inch off center tolerance) of each tab, with the inside edge of eyelet 3/8 ± 1/8 inch from finished edge (see 3.8.1.7).	Buttonhole		52-56 per button-hole including tack	E	E	
28.	Bind edges, attach buttonhole tabs and labels.						
	Finished appearance: The binding shall finish 3/8 to 5/8 inch wide. The raw edges of the sleeve buttonhole tabs shall be caught in the binding stitching. The buttonhole tabs shall be centered (1/4 inch off center tolerance) on underarm seam with raw edge of buttonhole tabs superimposed on raw edge of sleeve bottoms.						
	a. Bind overedged liner edges, stitching 1/16 to 1/8 inch in from turned-in edges.	301	BSc-1	8-10	E	E	
	or						
	(1) With face sides of binding and batting together and edges even, stitch through binding, batting, and coated liner material.	301 or 401	SSa-1 SSa-1	8-10 8-10	E E	E B	
	(2) Turn binding overedges, turn under raw edge, and stitch.	301	SSa-1	8-10	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - 30 Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE QUILTED BATTING LINER (cont'd)						
28.	Bind edges, attach buttonhole tabs and labels. (cont'd)						
	b. The raw ends of binding shall be either turned under and caught in the stitching, or turned back (over itself) and bartacked.	301 or Bartack		8-10 28 per bartack	E B	E B	
	NOTE: The sleeve buttonhole tabs may be tacked to sleeve prior to the binding operation.						
	c. The top of the identification label shall be stitched to center back of liner on all four sides, positioned on inside with the top edge not more than 1-3/4 inches from edge of neck or the top row of stitching may be eliminated if the top of label is to be caught in the binding. The size label shall be centered directly below the identification label and stitched on all four sides. The top edge of size label may be caught in the bottom row of stitching of the identification label. (A 1 inch off center tolerance is permitted for both labels). Stitch instruction label on all four sides to right front of line to finish 4 ± 1/2 inches from finished front edge of liner and 3 ± 1/2 inches from finished bottom edge of liner, measured from front and bottom edges of label. The stitching shall not be through the printing of the labels.	301	LSbj-1	10-14	B	B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
	MAKE QUILTED BATTING LINER (cont'd)						
29.	Attach snap fasteners to liner.						
	Attach 6 snap fasteners (stud and eyelet) to liner through facings with stud on outside of liner to correspond with the 6 snap fasteners on coat.						
30.	Attach liner to coat.						
*	a. Stitch liner to coat with a single row of stitching 1/8 to 3/16 inch from top edge of liner neck bound edge through coat superimposing collar joining seam along length of stand then sloping to 1 ± 1/8 inch from neck seam for a distance of 2 ± 1/8 inches from ends of stand. Caution should be taken to avoid puckers or distorting neck area of finished coat.	301	SSa-1	8-10	E	E	
	b. Bartack ends of stitching with a vertical bartack.	Bartack		28 per bartack	B	B	
31.	Clean coat and liner.						
	a. Trim and remove all thread ends.						
	b. Remove spots and stains, and shade and size markings.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

* 3.11 Finished measurements. The coat and liner shall conform to dimensions shown in table IV (coat) and table V (liner).

TABLE IV. Coat finished measurements (inches)

Size	Small	Medium	Large	X-Large	XX-Large	Tolerance
1/2 Chest 1/	26-3/8	28-3/8	30-3/8	32-3/8	34-3/8	± 3/4
Sleeve length 2/ (Short-Regular)	22-1/2	23	23-1/2	24	24-1/2	± 1/2
Sleeve length 2/ (Long)	23-1/2	24	24-1/2	25	25-1/2	± 1/2
Back length 3/ (Short-Regular)	37	37	37	37	37	± 3/4
Back length 3/ (Long)	40	40	40	40	40	± 3/4

1/ From folded edge to folded edge at base of armhole with coat closed by means of snaps and dees.

2/ From top of sleeve head to bottom edge of sleeve.

3/ From the collar joining seam to bottom of coat along center back.

* TABLE V. Liner finished measurements (inches)

Size	Small	Medium	Large	X-Large	XX-Large	Tolerance
1/2 Chest 1/	25-1/2	27-1/2	29-1/2	31-1/2	33-1/2	± 3/4
Back length 2/ (All sizes)						
Short-Regular	34	34	34	34	34	± 3/4
Long	37	37	37	37	37	± 3/4

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

* TABLE V. Liner finished measurements (inches) (cont'd)

Size	Small	Medium	Large	X-Large	XX-Large	Tolerance
Sleeve length 3/ (short-regular)	17-3/4	18-1/4	18-3/4	19-1/4	19-3/4	± 3/4
Sleeve length 3/ (long)	18-3/4	19-1/4	19-3/4	20-1/4	20-3/4	± 3/4

1/ From folded edge to folded edge at base of armhole with front edges abutted.

2/ From top of neck to bottom edge at center back.

3/ From top of sleeve head to bottom edge of sleeve.

3.12 Workmanship. The finished coats and liners shall conform to the quality and grade of product established by this document. The occurence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

* 4.1.3 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in table VIII, and for the dimensions specified in table IV and V plus any variation between length of left and right sleeves of more than 1/2 inch. The presence of any defect shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

* 4.4.1.1 Component testing. In addition, testing shall be performed on components listed in table VII for characteristics noted. The methods of testing specified in FED-STD-191, wherever applicable, and as listed in table VII shall be followed. All test reports shall contain the individual values used in expressing the final results. The lots shall be unacceptable if one or more sample units fail to meet any test requirement specified. The unit for expressing the lot sizes and sample unit for testing each component shall be as follows.

Component	Lot sizes expressed as	Sample unit for testing
Cloth, cotton, corduroy	Yards	1/2 yard full width
Snaps and dees	1000 units	2 each

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

Sampling shall be in accordance with the following table:

TABLE VI. Sample size

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

TABLE VII. Component tests

Component	Characteristics	Requirement paragraph	Test method
Cotton corduroy cloth	Material identification	3.3.4	1200
	Weight	3.3.4	5041
	Yarns per inch	3.3.4	5050
	Breaking strength	3.3.4	5100
	Tearing strength	3.3.4	ASTM D 1424
	Dimensional stability, percent	3.3.4	5556
	Spray rating	3.3.4	5526
	Flame resistance:		
	Initial	3.3.4	5903
	After 5 launderings	3.3.4	5556
Snaps and dees	Material identification	3.3.12	1/
	Design	3.3.12	1/
	Size	3.3.12	1/

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

* 4.4.2 In-process inspection. Inspection of sub-assemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

* 4.4.3 End item visual examination. The end item shall be examined for the defects listed in table VIII. The lot size shall be expressed in units of coats with liners. The sample unit shall be one coat with liner. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0 major defects, 15 major and minor A combined defects, and 40 total (major, minor A and minor B combined) defects.

TABLE VIII. End item visual defects

Examine	Defects	Classification Major	Minor A	Minor B
Material defects and damages	Basic material			
	- Hole, cut, tear or needle chew	X		
	- Mend or patch	X		
	- Weakening defect, such as smash, multiple float or slub	X		
	Knitted fabric			
	- Run(s) or drop stitch	X		
	Coated material			
	- Areas with blister, peel or no coating over 1/4 inch in diameter	X		
	- More than one coating repair on lining	X		
	Quilting batting:			
	Broken or missing stitching not repaired:			
	- less than 1 inch			X
	- 1 inch or more	X		
	Batting filler showing face side of liner (after assembly to coat, facing wearer)			X
	Permanent crease in cloth (when caught in seaming)		X	
	Unsightly slub or shade bar:			
	- on outer shell		X	
	- on liner			X
Shaded parts	Any part of coat shaded on outside		X	

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Cleanness	Any spot or stain on outside			X
	Thread ends not trimmed as specified, or loose threads not removed throughout coat or liner			X
	One or more shade or size tickets not removed			X
	Any shade or size marking visible on outside		X	
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	X		
	Coat outer shell not lined with the coated side of lining facing the outer shell	X		
Cutting	Any component part not cut in conformance with directional lines on pattern or in accordance with document requirements	X		
Seams and stitching	Accuracy of seaming			
	- Seam or component part twisted, puckered, or pleated (unless otherwise classified herein)		X	
	- Part of garment caught in unrelated operation:			
	- up to 1/4 inch inclusive		X	
	- more than 1/4 inch	X		
	- End of stitching when not caught in other seam or stitching backtacked less than 1/4 inch			X
	- Ends of a continuous line of stitching overlapping less than 1/2 inch			X
	- Stitching on labels overlapping less than 3 stitches			X
	- Stitching overlapping each end of thread break less than 1 inch			X
	- End of stitching for reflectorized/ fluorescent material overlapped less than 1 inch			X
	- Stitching on fastener tape overlapping less than 1 inch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Various shades of thread used on the outside of same liner		X	
	Edge or raised stitching sewn too close to edge resulting in damage to quilting batting or coated liner or reflectorized/fluorescent material	X		
	Gage of stitching and width of seam allowance			
	- Irregular, i.e., unevenly gaged or rows of stitching not uniform (score only when condition exists along major portion of seam)			X
	- Not width specified or not within range or gage specified, or varies more than 1/16 inch when no range is specified			X
	Stitches broken or missing:			
	- up to 1/2 inch inclusive		X	
	- more than 1/2 inch	X		
	Skipped stitches:			
	- 1/4 to 1/2 inch inclusive			X
	- more than 1/2 inch		X	
	Runoffs			
	On outside:			
	- 1/4 to 1/2 inch inclusive			X
	- more than 1/2 inch		X	
	On inside:			
	- more than 1 inch			X
	Raw edges			
	On outside:			
	- 1/4 to 1/2 inch inclusive		X	
	- more than 1/2 inch	X		
	On inside:			
	- 1/2 inch to 1 inch inclusive			X
	- more than 1 inch		X	

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the currentversion before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Stitch tension			
	- Loose tension resulting in loose seam	X		
	- Loose tension (exposed loops of top or bottom thread):			
	- for a distance of 1/2 inch or more			X
	- Tight tension (stitches break when strain is applied in the direction of the seam or stitching)	X		
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of seam. Aramid quilted fabric has a tendency to pucker at joining seams and at stitchings. The puckering when not so excessive as to seriously affect appearance shall not be classifed as a defect.			
*	Seam and stitch type			
	- Seam type or stitch type not as specified			X
	- Looper thread on 401 stitch type on outside of garment	X		
	- Looper thread on stitch types 515, 516, or 519 on outside of garment	X		
	Stitches per inch (to be scored only when condition exists on major portion of seam or stitching)			
	Stitches less than specified:			
	- one stitch			X
	- two stitches		X	
	- three or more stitches	X		
	More than maximum specified		X	

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Bartacks			
	Missing, misplaced, or insecure, failing to serve intended purpose:			
	- one or two bartacks		X	
	- more than two bartacks	X		
	Loose tension:			
	- one or two bartacks			X
	- more than two bartacks		X	
	Less than 7/16 or more than 9/16 inch in length			X
Buttonholes	Stitching not caught on fabric, causing stitches to pull away from fabric	X		
	Not eyelet-end, taper bar-type, incomplete stitching or uncut buttonhole		X	
	One or more broken or skipped stitches in buttonhole		X	
	Gimp omitted on one or more buttonholes			X
	Cut length less than 3/4 or more than 7/8 inch		X	
	Less than 4 tacking stitches at bar end, not counting cross-over stitch		X	
Buttons	Omitted, broken, or loose:			
	- one button		X	
	- two buttons	X		
	Button stitching not locked at end of stitching cycle (tug at loose end of thread to determine)		X	
Hardware	Broken or malformed; burrs or sharp edges; any malfunctions of hardware	X		
	Misplaced, failing to serve intended purpose	X		
	Corroded areas	X		
	Finish not as specified	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Snap fasteners	Clinched too tightly, cutting fabric; insecurely clinched, becoming disengaged	X		
	Snap fastener fails to effect a secure closure or to open freely	X		
Snaps and dees	One or more rivets omitted or not securely clinched	X		
	Reversed, i.e., set with spring tongue facing front of coat for top, or with spring tongue facing in for any of the bottom three snaps	X		
Collar	Top collar tight, causing edges to curl	X		
	Top collar twisted	X		
	Top collar full		X	
	Collar short, causing pleats or puckers at neck joining seam			X
	Undercollar quilted with less than 3 rows of stitchings		X	
	Undercollar quilting stitches less than 5/8 or more than 7/8 inch apart (when applicable) or less than 3/8 or more than 5/8 inch apart (when applicable)			X
	Center row or quilting stitching more than 1/4 inch off center of undercollar			X
	Undercollar stand quilting stitch more than 1/4 inch off center of stand			X
	Fullness or twist on collar stand			X
	Collar edge uneven or not forced out			X
	Collar points uneven by more than 1/4 inch			X
	Collar ends overlapping or causing an opening of more than 1-1/2 inches between ends when snaps and dees are buckled			X
Hanger loop	Omitted or not securely stitched		X	
	Ends positioned less than 3-1/2 or more than 3-3/4 inches apart or less than 1/2 or more than 3/4 inch wide			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Storm flap	Uneven in width by more than 1/2 inch			X
	Front edge extending 1/4 inch or more beyond or back of right front edge			X
	Reflectorized/fluorescent cloth strip not securely stitched on all edges to flap		X	
	Reflectorized/fluorescent cloth strip less than 2-7/8 or more than 3-1/8 inches wide			X
	Reflectorized/fluorescent cloth strip positioned more than 5/8 and less than 1/2 inch from finished front edge			X
Snaps and dees (position and alignment)	Top and bottom dee positioned less than 1-1/4 or more than 1-3/4 inches from top and bottom edges of flap			X
	Two remaining dees not equidistant between top and bottom dees by more than 1/4 inch			X
	Back square edge of dees more than 1/4 inch or less than 1/8 inch back of front edge of flap (stitching of reflectorized/fluorescent strip between rivets)			X
	Snaps not aligned with dees causing a bulge or twist on fronts when buckled:			
	- one or two snaps		X	
	- more than two snaps	X		
	One or more snaps or dees in reverse positions	X		
	One or more dees riveted through coat front	X		
	Not vertically aligned		X	
Front	Interlining short or twisted causing fullness or twist on front	X		
	Uneven in length at bottom when buckled:			
	- by 1/2 inch to 3/4 inch inclusive		X	
	- by more than 3/4 inch	X		
	Uneven in length by 3/8 inch or more at neck when buckled		X	

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Pockets and flaps	Pocket hem(s) less than 3/4 inch or more than 1-1/4 inches wide			X
	Pockets out of alignment with each other by more than 3/4 inch		X	
	Pocket(s) or flap(s) not uniformly shaped or set on crookedly			X
	One or more eyelets missing			X
	Eyelet(s) less than 1 or more than 1-1/4 inches from bottom of pocket			X
	One or more eyelets clinched through coat	X		
	Flap(s) not covering pocket opening		X	
	Flap edge extending beyond edge of pocket by more than 1/4 inch	X		
	Pocket opening caught in flap stitching	X		
	Bartack(s) not positioned vertically on pocket openings or horizontally on flaps			X
Sleeves	Sleeves tight in armholes, causing puckers or pleats on front or back at armhole	X		
	Sleeve fullness not evenly distributed		X	
	Sleeve lapped on fronts and back at armhole seam	X		
	Armhole seam at base of armhole not staggered			X
	Armhole seam staggered more than 1 inch for shell and lining, and 1/2 inch for liner			X
	Sleeve lining tight, short or twisted causing fullness or twist on outside of sleeve	X		
	Sleeve hem twisted			X
	Sleeve hem finishing less than 3/8 or more than 5/8 inch wide			X
	Reflectorized/fluorescent cloth strip not caught in sleeve joining seam		X	
	Reflectorized/fluorescent cloth strip finishing less than 2-7/8 or more than 3-1/8 inches wide			X
	Reflectorized/fluorescent cloth strip positioned beyond 1/8 inch of marks on patterns on fronts, backs, and sleeves		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Sleeves (cont'd)	Wrist well stitched to sleeve more than 1/4 inch from marks on pattern		X	
	Wrist well omitted	X		
	Button for sleeve button tab not attached to underarm seam and (± 1/8 inch off center tolerance) wrist well sleeve lining seam			X
	Outside of sleeve puckered or pleated by stitching of wrist well to sleeve lining		X	
Back	Reflectorized/fluorescent cloth strip less than 2-7/8 or more than 3-1/8 inches wide			X
	Strip sewn on beyond marks on pattern by 1/8 inch forming box configuration			X
Body linings	Tight, short or twisted causing fullness or twist on outside of coat	X		
	Fullness in lining		X	
	Heavy coated side of lining cloth not facing outer shell		X	
Bottom hem	Reflectorized/fluorescent cloth strip less than 2-7/8 or more than 3-1/8 inches wide			X
	Reflectorized/fluorescent cloth strip sewn less than 1 or more than 1-1/4 inch from finished bottom of coat			X
	Turned edge of reflectorized/fluorescent cloth strip not caught in lining to coat front edge seam			X
Personal identification label	Label missing, incorrect, or illegible	X		
	Personal identification label not caught in right pocket hem		X	
	Stitching for labels through printing		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Seams (shell)	Front(s) lapped on back at shoulder		X	
	Sleeve(s) lapped on fronts and back			X
	Front(s) lapped on back at sides			X
Seams (lining)	Sleeve(s) overlapping body at armhole(s)			X
Seams (liner)	Bottom, neck and front of liner; bottom of sleeve; and edge of component: Overedge stitching missing or broken for a distance of:			
	- Up to 3 inches (inclusive)		X	
	- Over 3 inches	X		
	Overedge stitching omitted from edges that are required to be bound		X	
	Overedge stitching not caught through all plies of material for a distance of 1 inch or more			X
Binding	Not securely caught on fabric causing binding to pull away from fabric		X	
	Twisted, distorted, or puckered			X
	Tight, causing edges of liner to curl			X
	Stretches, causing a wavy appearance			X
	Ends not turned under and caught in the stitching or turned to the outside and tacked		X	
	Finishes less than 3/8 or more than 5/8 inch wide			X
Sleeve buttonhole tabs	One or more omitted, or not caught in binding stitching	X		
	Less than 1-1/2 or more than 1-3/4 inches long			X
	Less than 1-1/8 or more than 1-1/4 inches wide			X
	Off center on underarm seam by more than 1/4 inch			X
	Buttonhole eyelet(s) less than 1/4 or more than 1/2 inch from edge			X
	Buttonhole off center with tab by more than 1/8 inch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Liner labels	Any label missing, incorrect or illegible	X		
	Identification label more than 1-3/4 inches below neck edge or off center by more than 1 inch			X
	Any label not on inside of liner (side facing wearer)		X	
	Any label not stitched on all four sides		X	
	Stitching for labels through printing		X	
	Size label off center by more than 1 inch			X
	Instruction label positioned less than 2-1/2 or more than 3-1/2 inches from bottom of liner or less than 3-1/2 or more than 4-1/2 inches from edge of coat			X
Assembly	Liner omitted	X		
	Liner not sewn securely to coat and bartacked	X		
	Snap fastener			
	- misplaced, or located causing bulging or twisting of coat or liner	X		
	- parts reversed, i.e., stud part on coat and socket part on liner	X		
	- one or two omitted		X	
	- more than two omitted	X		
	- stud portion attached to inside of liner, i.e., result in facing body of wearer (when being worn) and outer shell assembly			X
	- any not functioning properly, i.e., fails to snap closed, provide a secure closure or to open freely	X		
	NOTE: The fasteners shall be snapped and unsnapped twice to determine determine whether parts of fastener separate freely and also effect a secure closure.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TABLE VIII. End item visual defects (continued)

Examine	Defects	Classification Major	Minor A	Minor B
Assembly (cont'd)	- clinched excessively tight, cutting adjacent material	X		
	- clinched loosely, permitting any component to rotate freely but not to the degree that any component can be expected to become detached during use			X
	- clinched loosely to the degree that components can be expected to become detached during use		X	
	NOTE: Incomplete roll of end of button or eyelet barrel is evidence of improper and insecure clinching			
	- incorrect style		X	
	- more than three splits in eyelet or button barrels			X

* 4.4.4 End item dimensional examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of coats with liners. The sample unit shall be on coat with liner. The inspection level shall be S-3 and the AQL expressed in terms of defects per hundred units, shall be 4.0.

Finished measurements of coat and liner

1/2 Chest Sleeve length Back length	Any measurement deviating from the nominal dimension and tolerance in tables IV and V shall be a defect
Equal sleeve length	Sleeve length uneven by more than 1/2 inch shall be scored as a size measurement defect

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

* 4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.
Content	Number per container is more or less than required.

* 4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each coat, with the attached quilted liner, buttoned in place and the snaps fastened to the dee rings, shall be laid out flat, front down. The sleeves shall be folded at right angles across the back one on top of another. The bottom of the coat shall be folded over approximately 9 inches. The coat shall then be folded in half by bringing the bottom up to the collar. The completely folded coat shall measure approximately 23 inches in length by 14-1/2 inches in width.

* 5.1.2 Commercial. Coats shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Five coats of one size and class only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Coats preserved as in level A shall be packed flat, five in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight draft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping except for type II, class F loads.

* 5.2.2 Level B packing. Five coats of one size and class only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275, of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Coats preserved as in level A shall be packed flat, five in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3C, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.5.

* 5.2.3 Commercial packing. Coats, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), coats packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The coats are intended for wear by fire fighting personnel of the Department of Defense.

* 6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this document.
b. Class and sizes required (see 1.2).
c. When first article is required (see section 3.1, 4.3, 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.4).
g. Type and class of unit load required (see 5.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

* 6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Sources of supply.

6.5.1 Snaps and dees with tabs. Snaps and dees with tabs specified in 3.3.12 may be obtained by ordering style numbers 701 or 702 from Custom Metal Crafters, Inc., 815 North Mountain Rd., Newington, CT 06111.

6.5.2 Eyelets. The following manufacturers dimensional requirements meet the requirements specified in 3.3.13.1.

Manufacturer	Identification symbol
J. C. Rhodes Industrial Park New Bedford, MA 02745	Part Number 1 Long Rolet
Edwin B. Stimpson 900 Sylvan Ave. Bay Port, L.I. Long Island, NY 11705	Part Number A881

6.5.3 Washer. Stimpson Company washer identified by part number C669 meets the requirements specified in 3.3.13.2. Address is as above.

6.6 Durable water repellent finish. The finish shall conform to the list of acceptable water repellent finishes maintained at the US Army Natick Research, Development and Engineering Center, Natick, MA 01760. Because of the time necessary to conduct full evaluation, only those chemical treatments already approved and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement.

* 6.7 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

* 6.8 Subject term (key word) listing.

Coat, fireman's
Uniforms

* 6.9 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

Project No. 8415-0617

Review activities:

Army - MD
* Air Force - 82, 50
* DLA - CT

User activities:

Navy - AS, OS
* Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

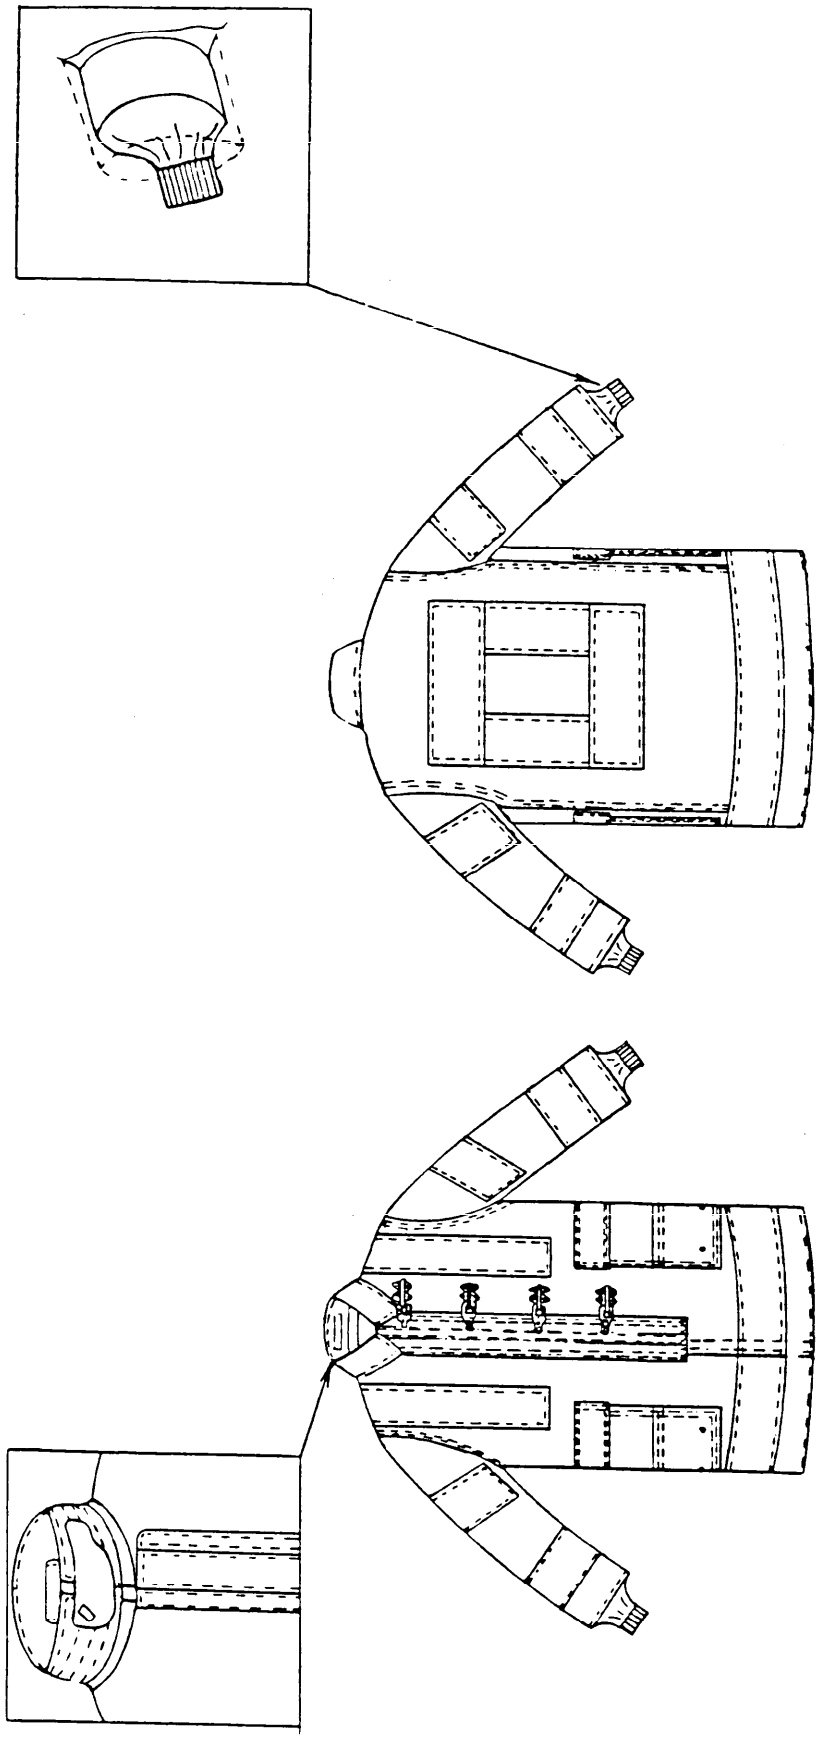


FIGURE 1. COAT, FIREMAN'S 2-1-230

Source: https://assist.dla.mil -- Downloaded: 20261O-17T14:23Z
Check the source to verify that this is the current version before use.

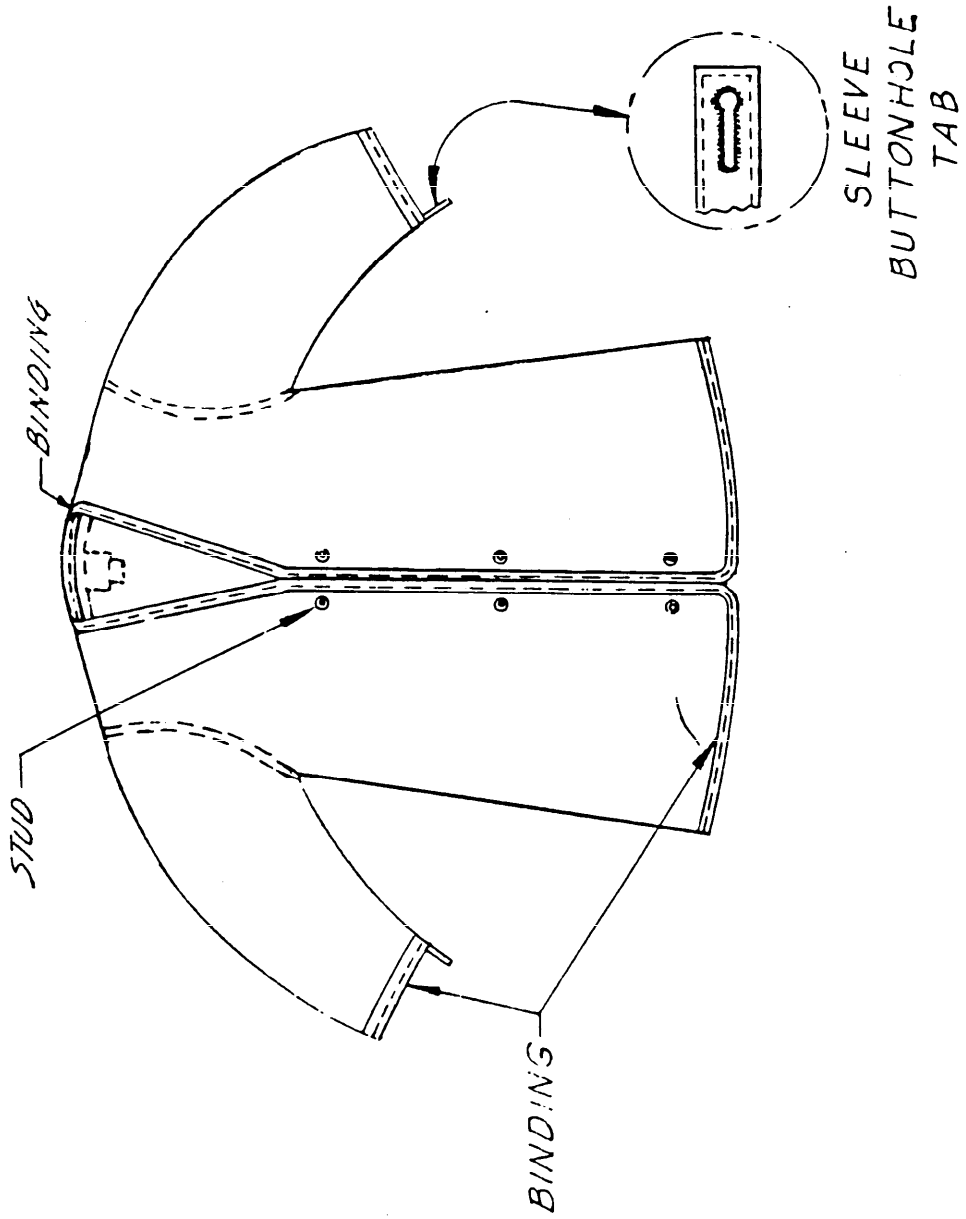


FIGURE 2 COAT, FIREMAN'S, LINER,

2-1-291

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

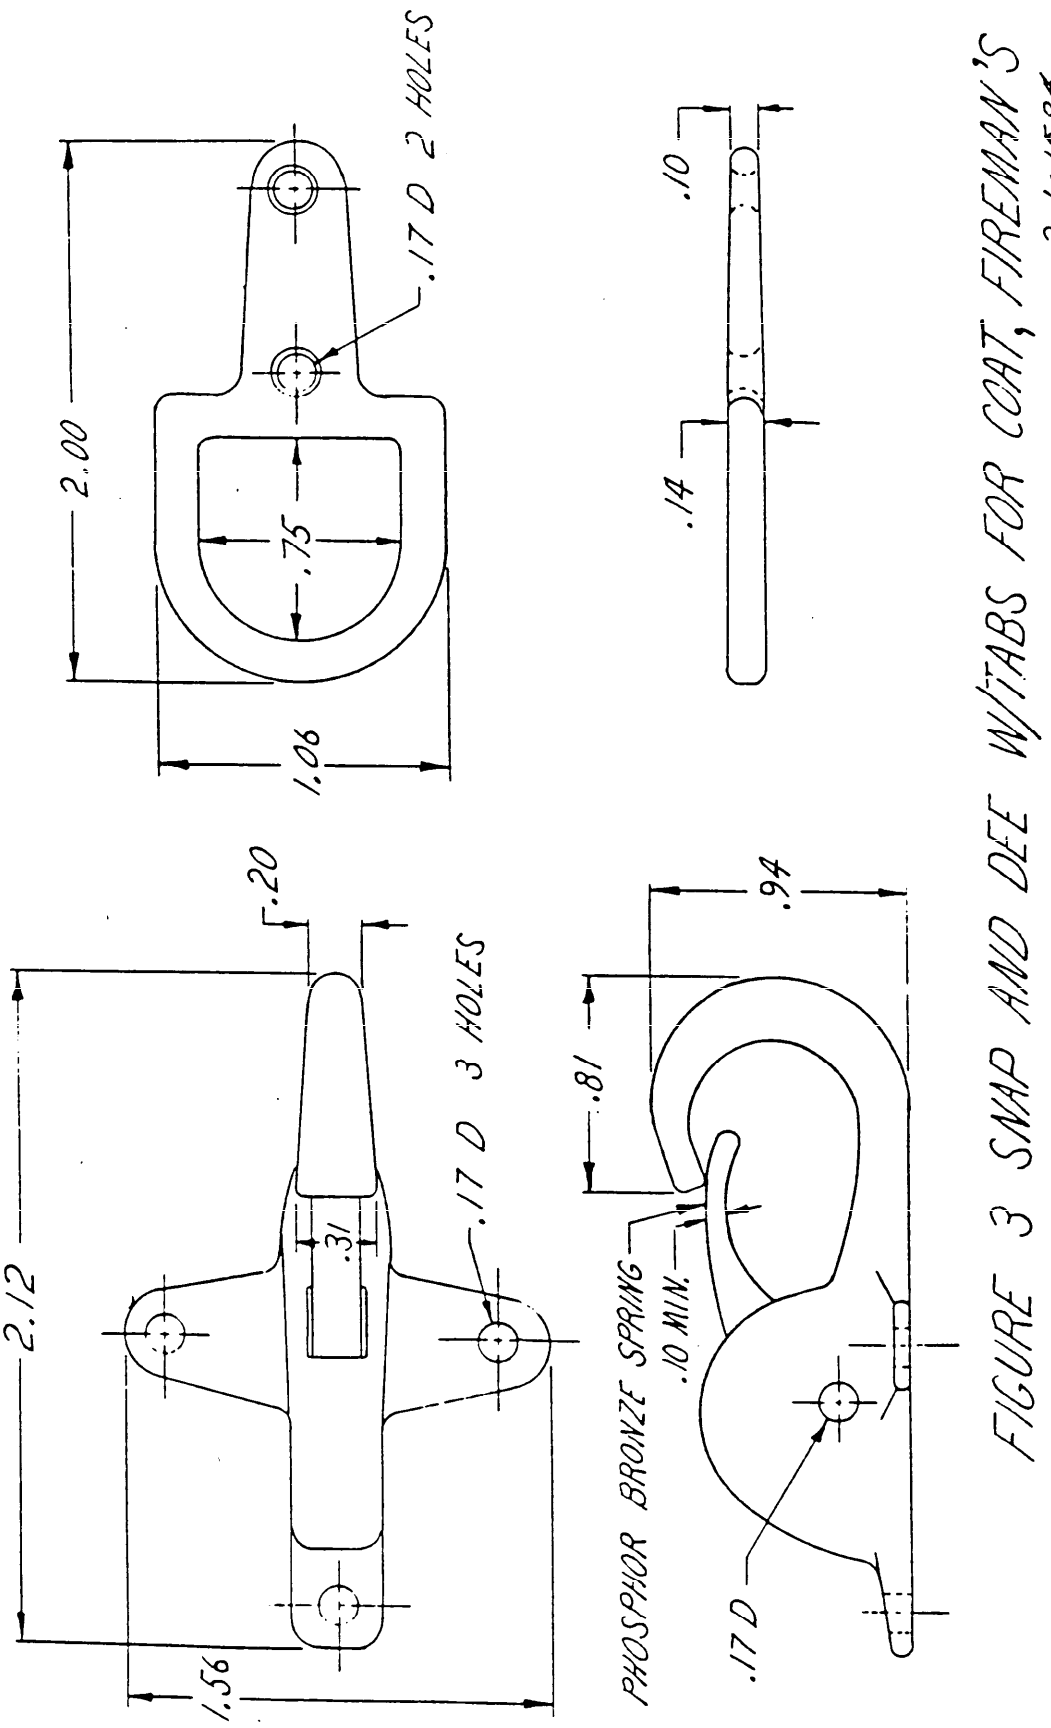


FIGURE 3 SNAP AND DEE W/TABS FOR COAT, FIREMAN'S 2-1-1528

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

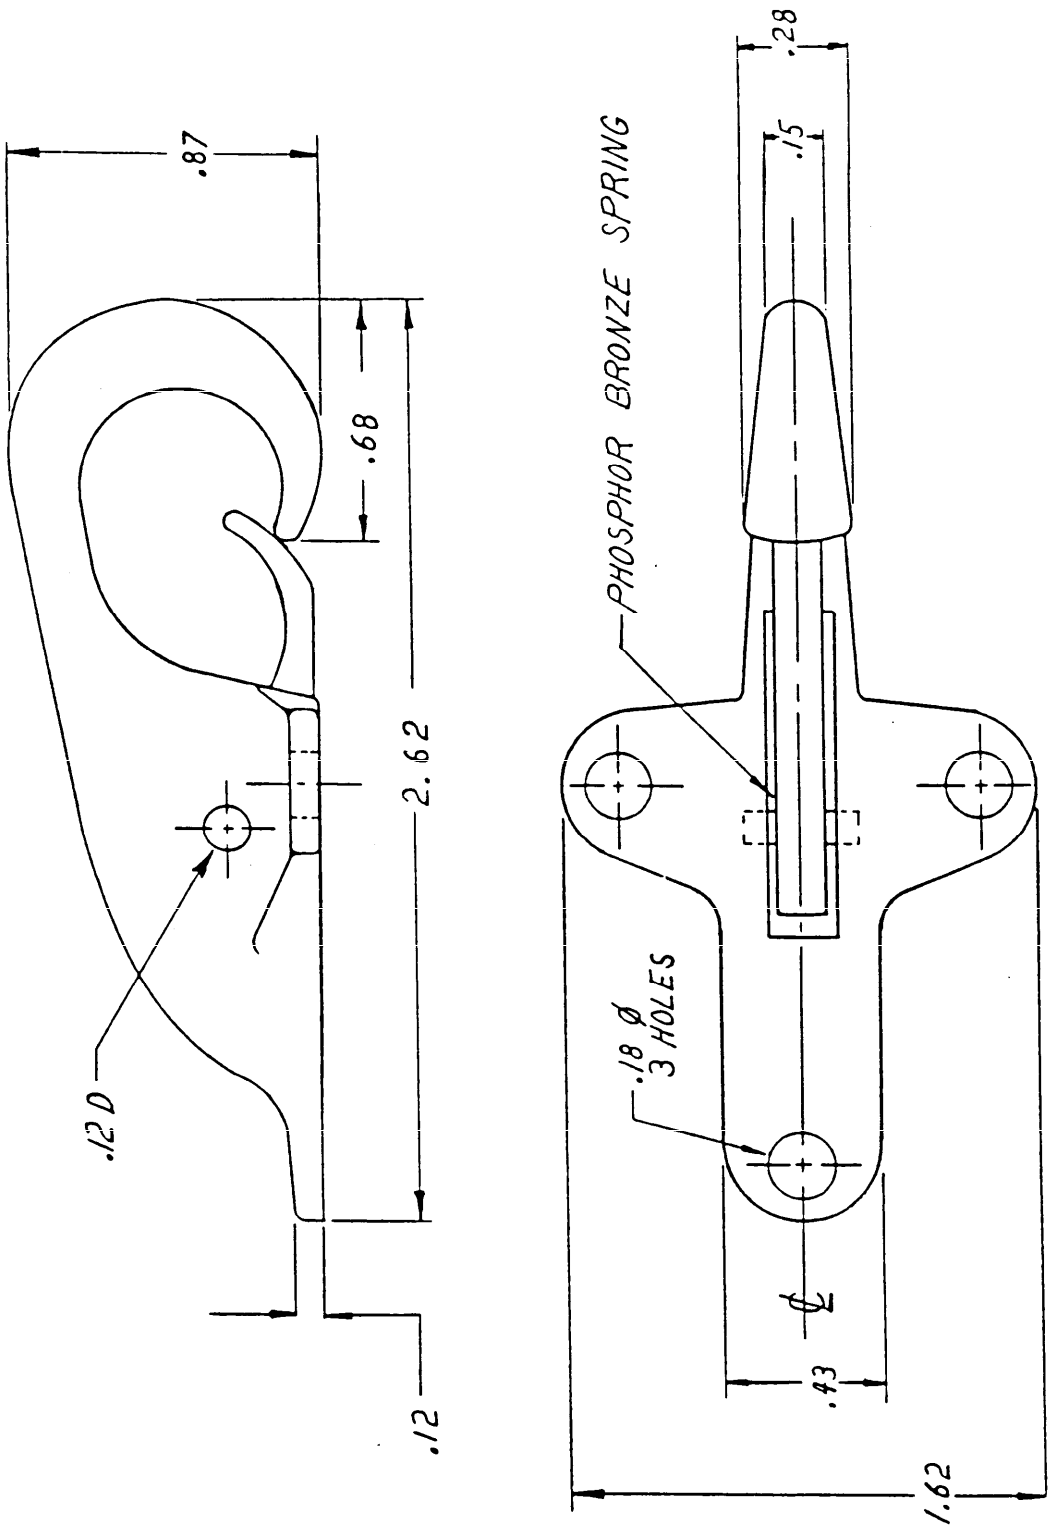


FIGURE 4 SNAP (INWARD HOOK), 3 HOLE MOUNT, AND DEE W/TAB FOR FIREMANS, COAT.

2-1-1576

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US ARMY NATICK RESEARCH
and DEVELOPMENT CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research
and Development Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-10750J	COAT, FIREMAN'S

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK/OP, 20 Nov 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.