MIL-D-10821E

20 May 1968
SUPERSEDING
MIL-D-10821D
8 January 1965

MILITARY SPECIFICATION

DESKS, FIELD

This specification is mandatory for use by all Departments and Agencies of the Department of Defence.

1. SCOPE

* 1.1 Scope.- This specification covers one type of portable desk, designed for storage and maintaining records during field operations.

* 1.2 Classification.- Field desks shall be of the following sizes, as specified (see 6.2).

Size 1 - File drawers 14-1/2 inches deep.
Size 2 - File drawers 17-1/2 inches deep (see 6.1).

* 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATION

FEDERAL

L-S-626	-	Sponge, Cellulose-Type.
QQ-A-250/11	-	Aluminum Alloy 6061, Plate and Sheet.
QQ-B-613	-	Brass, Leaded and Non-Leaded; Flat Products (Plate, Bar, Sheet, and Strip).
QQ-P-416	-	Plating, Cadmium (Electrodeposited).
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon.
QQ-S-781	-	Steel Strapping, Flat.
QQ-T-830	-	Tube, Steel, (Carbon, Mechanical; Seamless and Welded).
QQ-W-321	-	Wire, Brass.
QQ-W-423	-	Wire, Steel, Corrosion-Resisting.
QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare and Coated).

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

QQ-Z-325 - Zinc Coating, Electrodeposited, Requirements For.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-529 - Enamel, Alkyd, Semi-Gloss.
TT-P-636 - Primer Coating, Alkyd, Wood and Ferrous Metal.
MMM-A-181 - Adhesive, Room Temperature and Intermediate Temperature Setting, (Phenol, Resorcinol and Melamine Base).
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-60 - Tape; Pressure Sensitive Adhesive, Waterproof, for Packaging and Sealing.

MILITARY

MIL-C-496 - Clips, End, Strap.
MIL-W-530 - Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-R-3065 - Rubber, Fabricated Products.
MIL-A-5092 - Adhesive, Rubber Base, General Purpose.
MIL-C-5541 - Chemicals, Films and Chemical Film Material for Aluminum and Aluminum Alloys.
MIL-H-9890 - Hardware, Individual Load Carrying Equipment, and Hardware, Miscellaneous.
MIL-F-10336 - Fiber Sheet, Vulcanized.

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-417 - Rubber Compositions, Vulcanized General Purpose, Solid. (Symbols and Tests).
MS 35647 - Padlocks, Key Operated.

DRAWINGS

ARMY NATICK LABORATORIES

5-13-67 - Desks, Field; Illustration.
5-13-68 - Desks, Field; Body.
5-13-69 - Desks, Field: Cover and Hardware.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

5-13-70 - Desks, Field; Drawers, "File", "Service Records" and Drawer Partitions.
5-13-71 - Desks, Field; Drawers, "IN" "OUT" and Stool, Folding.
5-13-72 - Desks, Field; Hardware.

(Miniature copy of Drawing 5-13-67, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A176-63 Corrosion-Resisting Chromium Steel Plate, Sheet and Strip
D2016-62 Standard Method of Test For Moisture Content of Wood.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103).

U. S. DEPARTMENT OF COMMERCE

Commercial Standard CS 35-61 Hardwood Plywood.

Product Standard PS 1-66 - Softwood, Plywood; Construction and Industrial

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), the contractor shall submit a preproduction sample to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

* 3.2 Materials.- Where materials are not definitely specified, they shall be of the quality normally used for the purpose in commercial practice.

* 3.2.1 Plywood.- Plywood shall be of the thickness specified in applicable drawings and shall conform to either of the following:

(a) Hardwood, type I, fully waterproof bond, grade 2 face and back veneer, regular sanded, conforming to Commercial Standard CS 35-61.
(b) Softwood, group I, exterior type, grade B-B, sanded 2 sides, conforming to Product Standard PS 1-66.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

3.2.2 Wood, solid.- Solid wood shall be seasoned to a moisture content of not less than 6 nor more than 12 percent at time of fabrication when tested as specified in 4.3.1.1, and shall be free from decay, case-hardening, warp, loose knots, shakes or checks.

The species of wood used shall be any of the following:

Beech	Maple
Birch	Red Gum
Chestnut	Sycamore

3.2.3 Vulcanized fiber.- Vulcanized fiber shall conform to MIL-F-10336.

3.2.4 Steel.-

* 3.2.4.1 Sheet and strip.- Sheet steel shall conform to cold rolled, commercial quality, and strip steel shall conform to cold rolled of QQ-S-698. The temper of the steel strip shall conform to the manufacturer's current commercial practice.

* 3.2.4.2 Tube.- Steel tube shall be round, welded or seamless type, condition HR, CD or W of QQ-T-830.

* 3.2.4.3 Plate, sheet and strip, corrosion-resisting.- Corrosion-resisting steel plate, sheet and strip shall conform to type 430, of American Society for Testing Materials (ASTM) A176-63.

3.2.5 Aluminum.-

3.2.5.1 Tube.- Aluminum tube shall conform to 6061-T6, type I of WW-T-700/6.

3.2.5.2 Plate or sheet.- Aluminum plate or sheet shall conform to 6061-T4 of QQ-A-250/11.

3.2.6 Brass strip.- Brass strip shall conform to composition 2, half-hard temper of QQ-B-613.

3.2.7 Wire.-

3.2.7.1 Steel, carbon.- Carbon steel wire shall conform to finish 1 or 4 of QQ-W-461.

3.2.7.2 Steel, corrosion-resisting.- Corrosion-resisting steel wire shall conform to form I, composition 304, condition A of QQ-W-423.

3.2.7.3 Brass.- Brass wire shall conform to composition 6 or 7, annealed, 1/8 hard or 1/4 hard of QQ-W-321.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

3.2.8 Rubber.- Rubber shall conform to type, class, grade and suffix letters RS415A_1BD of MIL-R-3065 and MIL-STD-417.

3.2.9 Adhesive.-

* 3.2.9.1 Room-temperature and intermediate-temperature setting resin.- Room-temperature setting resin adhesive shall conform to type I or II of MMM-A-181.

3.2.9.2 Rubber.- Rubber adhesive shall conform to type I of MIL-A-5092.

* 3.2.10 Webbing, textile, cotton.- Cotton webbing shall be OD Shade No. 7 to match the standard shade sample (see 6.3), and conform to type II, class 4 of MIL-W-530.

* 3.2.11 Nails, steel.- Steel nails shall be smooth, box type, cement coated, and conforming to a size not smaller than 3d (1-1/8 inch long by 0.072 inch diameter).

* 3.2.12 Primer.- The primer shall conform to TT-P-636.

* 3.2.13 Enamel.- Enamel shall conform to class A or class B of TT-E-529. The color shall be Olive Drab conforming to Color No. X24087 of Fed. Std. No. 595.

* 3.3 Design.- The field desk shall be designed with a removable cover, folding leg stools and drawers. The body of the field desk shall house drawers for service records; general filing; drawers marked "IN" and "OUT"; and one drawer with lock and key. The side table shall serve as a cover for the body when in transport and, in addition, house the folding stools. The size 1 desk shall be provided with two folding stools. The size 2 desk shall be provided with one folding stool.

* 3.4 Construction.- The field desks shall be constructed in accordance with Drawings 5-13-67 through 5-13-72.

* 3.4.1 Panels.- Panels shall be fabricated of vulcanized fiber specified in 3.2.3, bonded with adhesive specified in 3.2.9.1 to both surfaces of plywood specified in 3.2.1 to form clean, smooth panels, free from waves or irregularity. The adhesive bond of fiber to plywood shall show a fiber failure of 95 percent average and 90 percent minimum before panels are primed or enameled when tested as specified in 4.4.1.

3.4.2 Vulcanized fiber binding.- Vulcanized fiber binding shall be fabricated from fiber specified in 3.2.3. The binding shall be bent in a right angle to the dimensions shown on applicable drawing.

* 3.4.3 Metal components.- Hinge plates, angle supports, runners, partition guides, slides, drawer pull, valance and metal bindings shall be made of steel specified in 3.2.4.1. Mitered joints shall be tight. Tongue and groove bindings shall be formed in one unit or in four pieces. When formed of four pieces, each piece shall fit the side to which it shall be attached.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

* 3.4.4 Legs.- Legs for the field desk table shall be formed of steel tubing specified in 3.2.4.2 and conform to Drawing 5-13-72. The open ends of the leg shall be plugged with wood specified in 3.2.2 and as shown on Drawing 5-13-72.

* 3.4.5 Stool, folding.- The legs for the folding stool shall be fabricated of aluminum tubing specified in 3.2.5.1 and conform to Drawing 5-13-71. The retainers for attaching the legs to the seat of the stool shall be made of aluminum specified in 3.2.5.2. The ends of the legs shall be joined as shown on the applicable drawing, either by pins or by crimping. When pinned, the pins shall be made of steel specified in 3.2.7.1, steel numbers 1015-1020, and either cadmium plated in accordance with class 2, type II of QQ-P-416, or zinc plated in accordance with type II, class 2 of QQ-Z-325. Washers used as spacers shall be fabricated of corrosion-resisting steel specified in 3.2.4.3.

* 3.4.6 Gasket, cover.- The cover gasket shall be fabricated of rubber specified in 3.2.8 and shall be held in the cover groove binding with adhesive specified in 3.2.9.2.

* 3.4.7 Strap, retaining.- The retaining strap shall be fabricated of webbing specified in 3.2.10 and the following:

(a) Buckle conforming to type XII of MIL-H-9890.
(b) End clip conforming to type I, class 2 of MIL-C-496.
(c) Rivet made of brass specified in 3.2.7.3.
(d) Burr (washer) made of brass specified in 3.2.6.

The webbing shall be inserted the full depth of the end clip prior to flattening. The clip shall be flattened to attach the webbing without cutting. The webbing shall lie flat at the point where it enters the clip.

* 3.4.8 Hardware.- Hardware components shall be the manufacturer's commercial type, fabricated of steel specified in 3.2.4.1, and shall be of similar design to those shown on drawings. Safety hasp, staple, draw bolt, and lug bolt shall have a nominal metal thickness of 0.0478 inch and other hardware shall have a nominal metal thickness of 0.0359 inch. The draw bolt loop (buckle) shall be of the welded type.

* 3.4.9 Rivets.- Solid, tubular and bifurcated rivets shall be carbon steel except as otherwise shown on applicable drawings. The rivets shall be not less than 9/64 inch diameter. The length of solid and tubular rivets shall be sufficient to provide a minimum 1/16 inch clinch. The length of bifurcated rivets and trunk tacks shall provide a minimum 1/8 inch clinch. Trunk heads shall be oval or short head with square shank. Carbon steel rivets shall be fabricated of steel specified in 3.2.7.1, composition 1007-1020. Corrosion-resisting rivets shall be fabricated of steel specified in 3.2.7.2 and to the applicable drawing. At time of attaching, rivets shall be clean and free of oil, dirt, grease, paraffine or other lubricant, rust or other foreign matter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

* 3.4.9.1 Driving of rivets, trunk tacks and screws.- Solid and tubular rivets shall be driven with heads flush against hardware, burrs (washers) or fiber, and the ends shall be securely headed or set. Holes for solid or tubular rivets shall be drilled or punched through fiber, plywood or hardware and shall be not more than 0.015 inch over the rivet diameter. All bifurcated rivets, trunk tacks and screws shall be thoroughly driven with heads flush against hardware, wood, or fiber. Rivets and tacks shall be clinched to provide a smooth finish on interior surfaces. Evidence of anvil marks on interior surfaces, due to clinch in process, will be acceptable.

* 3.4.10 Burrs (washers).- Steel burrs (washers) shall be fabricated of steel strip specified in 3.2.4. Brass burrs (washers) and caps shall be fabricated of brass strip specified in 3.2.6. At the time of attaching, burrs shall be clean and free of oil, dirt, grease, paraffine or other lubricant, rust or other foreign matter.

* 3.4.11 Gluing.- All wood joining requiring glue shall be glued at time of assembly with the adhesive specified in 3.2.9.1. Application of adhesive to the joints, fiber and plywood shall be in a uniform manner with adequate quantities as recommended by the adhesive manufacturer. Assembly, clamping or pressing time, pressure, and curing time shall be in accordance with the adhesive manufacturer's recommendations.

* 3.4.12 Nailing.- In addition to being glued, all joints of the trays, tray support, body and cover shall be nailed with nails specified in 3.2.11. All nails shall be equally spaced and thoroughly driven with heads flush against plywood, wood or fiber. The desk body shall have four nails joining each end panel to each side panel; five nails joining each end panel to bottom panel and six nails joining each side panel to top panel.

* 3.4.13 Surfacing of trays and partitions.- All surfaces and edges of each finished drawer, tray and partition shall be sanded smooth. All exposed edges shall be rounded.

* 3.4.14 Locking.- Padlocks for the drawer shall conform to MS-35647-1. Padlocks for the desk shall conform to MS 35647-3. The free end of the chain supplied with the locks shall be equipped with a clevis for fastening, by means of rivet, to the desk body as shown on applicable drawing.

* 3.5 Finish.-

* 3.5.1 Wood and fiber surface preparation.- Prior to finishing, all wood and vulcanized fiber surfaces shall be thoroughly cleaned of dust, dirt and grease.

* 3.5.2 Metal surface preparation.-

* 3.5.2.1 Cleaning and pretreatment of ferrous surfaces.- Prior to assembly, surfaces of ferrous metal parts, except steel pins, nails, rivets, burrs, and screws, shall be cleaned and prepared for painting in accordance with type I of II of TT-C-490.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

* 3.5.2.2 Cleaning and pretreatment aluminum surfaces.- Prior to assembly, aluminum surfaces shall be prepared for finishing in accordance with class 2 of MIL-C-5541.

* 3.5.3 Priming.- All parts that have been pretreated in accordance with 3.5.1, 3.5.2.1 and 3.5.2.2 shall be coated with primer specified in 3.2.12. Primer shall level out to a dry uniform coat.

* 3.5.4 Enameling.- After assembly, all parts that have been primed shall be coated with enamel specified in 3.2.13. All hardware items may be coated with enamel prior to assembly. The enamel shall level out to produce a smooth, uniform film without orange peel, sags or runs, wrinkles, drops, streaks or areas of no film. The finish shall be free of rust, dirt, grit or foreign matter. All surfaces of the drawers, tray and compartments shall be dried before final assembly.

* 3.6 Marking.- Desks shall be marked as shown on the applicable drawings. The marking shall be stamped or marked with water resistant ink. The marking shall be legible, and the original color shall not smear nor crack or peel when tested as specified in 4.4.2. The identification marking shall consist of the letters "U. S." in characters not less than 1 inch high, and the manufacturer's name, trade name or trademark of such known characters easily identifiable with said manufacturer, and number and date of contract in characters not less than 1/4 inch high.

* 3.7 Workmanship.- Metal components shall be free from sharp edges, slivers, burrs or corrosion. Fiber covering shall be free from tears and scuffs.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects in table II, dimensions specified, and tested as specified in 4.4.2.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification, or applicable purchase document.

* 4.3.1.1 Moisture content of wood.- The moisture content of wood requirement in 3.2.2 shall be determined in accordance with ASTM D2016-62 at time of assembly. The lot shall be all wood prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one piece of wood. The inspection level shall be S-1 with an Acceptable Quality Level (AQL) of 4.0, expressed in terms of defects per hundred units. When testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit.

* 4.3.2 Inprocess inspection.- Inspection shall be made during the manufacturing process for the requirements specified in table I to establish that no deviation is made from indicated requirements. Whenever nonconformance is noted, correction shall be made to affected items and process.

TABLE I.- In-process inspection

Requirement, Operation or Assembly	Requirements reference
Insertion of webbing to the full depth of the clip prior to flattening.	3.4.7
Application of sufficient length rivets to provide required length of clinch, diameter not as specified, or rivets are cleaned as specified.	3.4.9
Rivet holes in fiber, plywood or hardware are not more than 0.015 inch over the rivet diameter.	3.4.9.1
Burrs (washers) are cleaned as specified.	3.4.10
Application of adhesive to joints, fiber and plywood.	3.4.11
Assembly clamping or pressing time, pressure and curing time.	3.4.11
Nailing	3.4.12
Cleaning of wood and vulcanized fiber surfaces prior to finishing.	3.5.1
Cleaning and pretreatment of ferrous metal parts (except steel pins, nails and screws).	3.5.2.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

TABLE I.- In-process inspection (cont'd)

Requirement, Operation or Assembly	Requirements reference
Cleaning and pretreatment of aluminum surfaces prior to assembly.	3.5.2.2
Priming prior to enameling.	3.5.3

* 4.3.3 Intermediate testing.-

4.3.3.1 Vulcanized fiber adhesion test.- The test specified in 4.4.1 shall be performed on five samples from each lot. Each sample shall be a 4-inch square of fiber covered plywood. Each sample shall be taken from different panels. Any sample failing to meet requirements as specified in 3.4.1 shall be cause for rejection of the lot. The lot shall be the amount of fiber covered plywood offered for inspection at one time.

4.3.4 End item inspection.- The lot shall be all desks of one size submitted for inspection at one time. The sample unit for examination shall be one desk.

4.3.4.1 Visual examination.- Examination of the end item shall be in accordance with defects listed in table II. The inspection level shall be II with an AQL of 4.0 for major defects and 10.0 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Not specified color		X
	Not smooth and uniform film		X
	Area of no film on exterior surfaces	X	
	Area of no film on interior surfaces		X
	Area of corrosion		X
	Sags or runs		X
	Dirt, grit or foreign matter imbedded in enamel		X
	Wet or tacky enamel		X
	Peeled, wrinkled, drops or streaks		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship: Vulcanized fiber	Only one surface of plywood covered by vulcanized fiber	X	
	Not clean, smooth or free from waves or irregularity		X
	Tear or scuff		X
Vulcanized fiber binding	Not bent in a right angle where applicable		X
Steel binding	Not tight mitered joints at the corners		X
	Not tight against surfaces on drawers		X
	Tongue and groove binding not formed as specified		X
	Metal channels for the slide not formed with right angle bends		X
	Sharp edges, slivers, burrs or corrosion	X	
Leg	Ripples or dents		X
Folding stool	Washer missing or washer not placed where specified	X	
	Leg joint not pinned or crimped	X	
Cover gasket	Not held in groove binding with adhesive		X
Retaining strap	Cutting of webbing		X
	Buckle not attached to webbing		X
	Brass rivet and cap not set		X
	Webbing not flat at clip		X
Hardware	Drawbolt buckle (loop) not type specified		X
Rivets	Solid or tubular rivet missing		X
	Bifurcated rivet or trunk tack missing		X
	Trunk tack head or shank not as specified		X
Driving of rivet, trunk tack, screw and nail head	Rivet, trunk tack, screw and nail head not driven flush against hardware, burr (washer), fiber or wood as applicable		X
	Rivet end not securly headed or set		X
	Interior surface not smooth finish due to clinched rivets and tacks (except anvil marks)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Drawer, tray and partition	Drawer or tray binding, or not operating freely		X
	Exposed edges not rounded		X
Locking	Free end of chain not equipped with a clevis		X
	Clevis not fastened with rivet		X
Component	Missing	X	
	Not specified type		X
Padlock	One key or wire ring missing		X
	Two keys missing	X	
Marking	Missing (on any of the following): Top of body (exterior) Back of body (interior) Cover (exterior) Cover (interior) Drawer front (except top left hand corner) "In" or "out" drawer-back steel seat (underneath side) Defective, i.e., incomplete, illegible, wrong size or color, wrong location (misplaced more than 1 inch), incorrect		X

4.3.4.2 Dimensional examination.- Examination shall be made of the field desk for defects in dimensions. Any dimension not within specified tolerance shall be classified as a defect. The inspection level shall be S-2 with an AQL of 6.5, expressed in terms of defects per hundred units.

* 4.3.4.3 Testing of the end item.- The end item shall be tested as specified in 4.4.2. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

* 4.3.5 Examination of preparation for delivery.- An examination shall be made to determine that preservation, packaging, packing and markings are in compliance with section 5 of this specification. Defects shall be scored as specified in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

TABLE III.- Examination of preparation for delivery

Examine	Defect
Markings, exterior	Incorrect; illegible; omitted, of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of component such as positioning of corrugated fiberboard protectors and pads and loose strapping.

* 4.3.5.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and strapping shall be in accordance with PPP-B-636.

* 4.4 Test.-

* 4.4.1 Vulcanized fiber adhesion test.- Samples of the fiber covered plywood shall be immersed in boiling water for 3 hours. The samples shall then be cooled in 70°F., plus or minus 5°F., water for a period of 10 minutes and immediately subjected, while wet, to the following test: The sharp edge of a pocket-knife blade or similar sharp instrument shall be inserted at the glue line. The fiber covering shall be peeled completely off each sample while the fiber covering is held between the thumb and knife blade. The percentage area of fiber failure of fibrous material remaining adhered to the plywood at the glue line of the samples shall be calculated to determine compliance with 3.4.1.

* 4.4.2 Resistance of markings to water.- Position the desk so that the identification markings specified in 3.6 are in a horizontal plane. Place a cellulose sponge fully saturated with water (do not squeeze out) and conforming to type II, coarse pores, of L-S-626, in contact with the markings. Cover the sponge to retard evaporation of water. Leave the wet sponge in contact with the markings at 70°F. to 80°F. for 4 hours ± 10 minutes. Remove the sponge and allow the markings to air dry for 1 hour at 70°F. to 80°F. Examine the markings for legibility, color retention, cracking, and peeling. Rub vigorously with a finger. Any illegibility or tendency to smear, crack, or peel constitutes failure of the test.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- The drawers shall be located in the body of the desk and the top lefthand corner drawer locked with the padlock which shall have the keys securely attached with not less than 0.072 inch diameter annealed wire. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

support shall be folded into the cover and the stool(s) securely fastened in the cover by means of the support and the retaining strap. The cover shall be securely fastened to the body in the closed position with the drawbolts, and locked with the drawbolt padlock. The two keys for the drawbolt padlock shall be securely fastened to a handle on one side of the desk with not less than 0.072 inch diameter annealed wire. The keys, wire, and handle shall be spirally wound with tape conforming to type I or II, class 1 of PPP-T-60 in such a manner as to entirely cover the keys, wire and handle. The ends of the tape shall be securely fastened to prevent unwinding.

5.1.2 Level C.- Desks shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A.- Each desk, preserved and packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Pads, fabricated from fiberboard meeting the material requirements of grade W6c of PPP-F-320 shall be positioned between the desk and the inside surfaces of the shipping container in a manner as to protect the lock hasp and hinges of the desk. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with steel strapping or tape banding in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Each desk, preserved and packaged as specified in 5.1, shall be packed in a corrugated fiberboard protector in the form of a tube (two ends open). The tube shall run the long dimension of the desk. Each tube shall be strapped with two flat steel straps, minimum 5/8 inch by 0.020 inch, conforming to type I, class A of QQ-S-781. Each trap shall be placed approximately 4 inches in from each end. When specified (see 6.2), the fiberboard protector shall be fabricated from Grade V3c, V3s or V4s fiberboard conforming to PPP-F-320.

5.2.3 Level C.- Desks, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, fiberboard protectors and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use.- The desks covered by this specification are intended for field use by the Armed Forces for typing, writing, and storing records. The Marine Corps requirement is for size 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size of desk required (see 1.2).
(c) First article.- When preproduction sample is required (see 3.1).
(d) Selection of the applicable levels of packaging, and packing (see 5.1 and 5.2).
(e) When V-board protectors are required for level B pack (see 5.2.2).

6.3 For samples of the approved shade of olive drab No. 7 referenced in 3.2.10, address the procuring office issuing the invitation for bids.

6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activities:

Air Force - 84, 85

User activity:


Navy - MC

Preparing activity:

Army - GL

Project No. 7110-0082

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

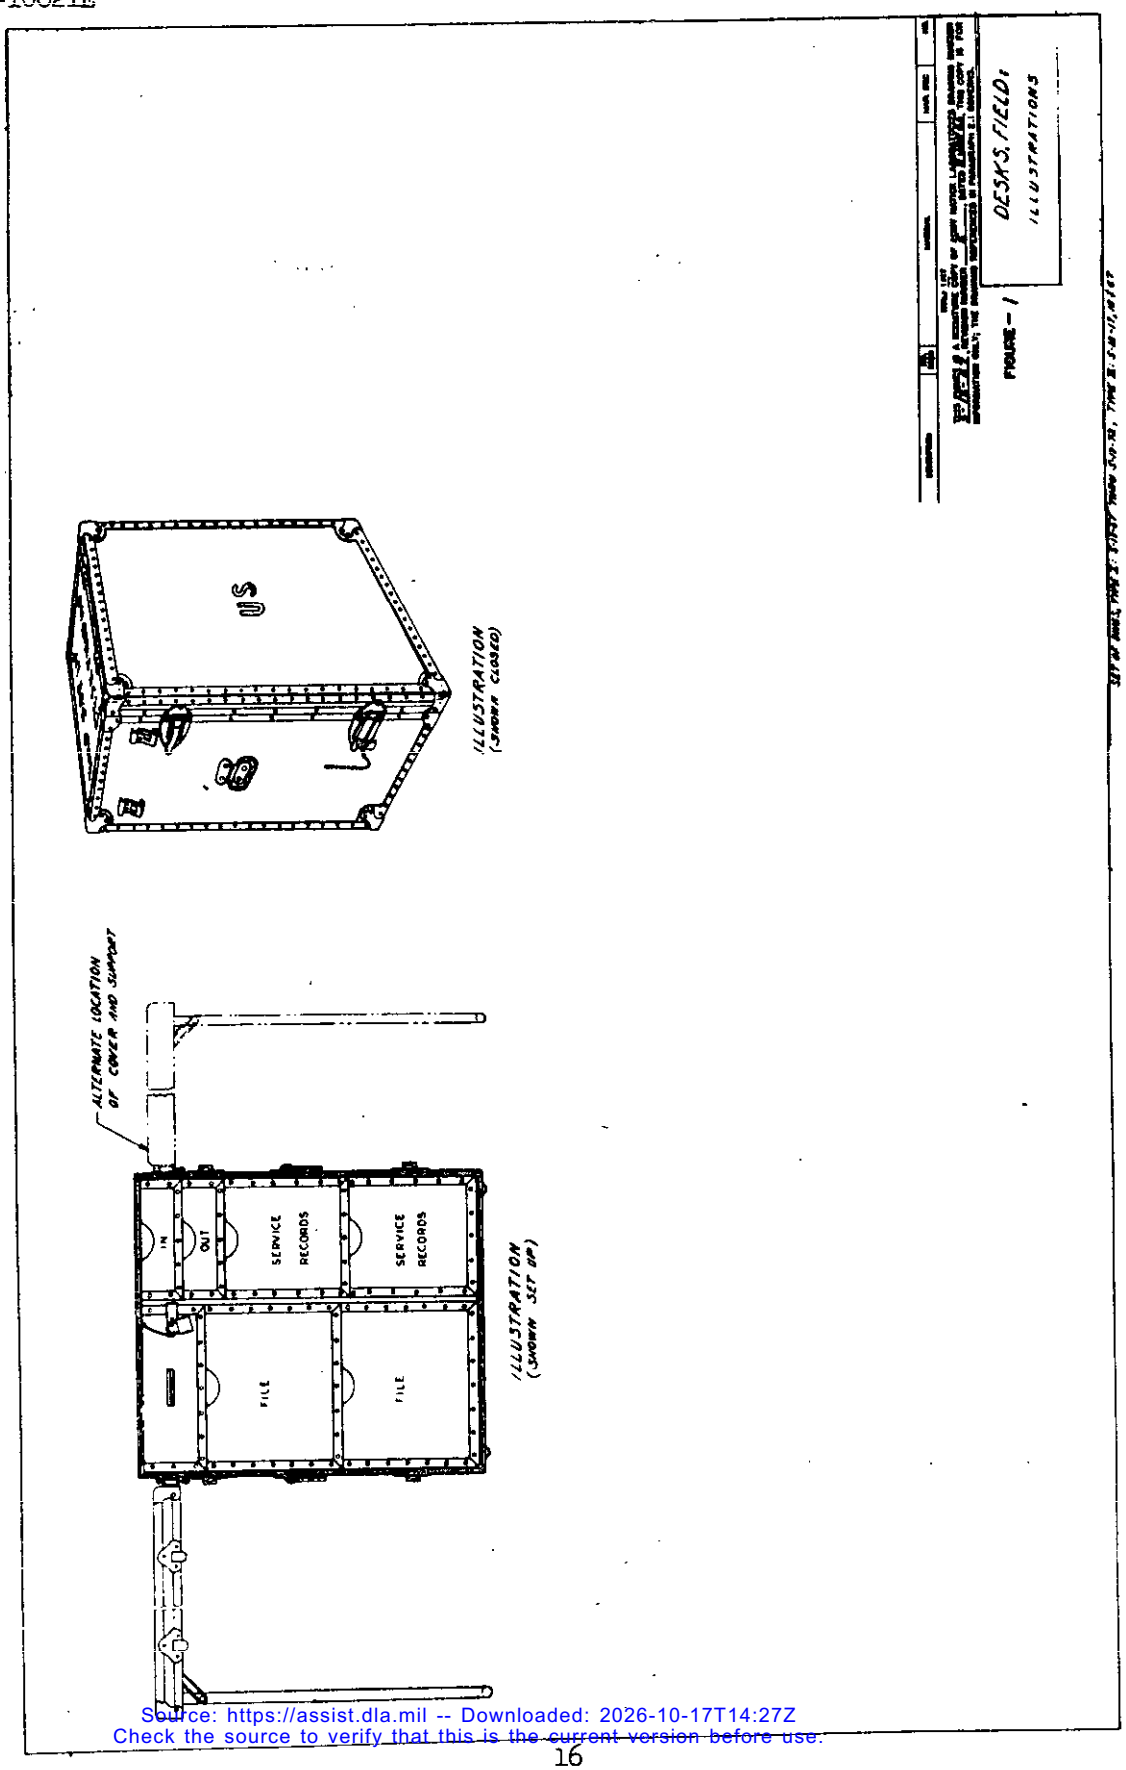

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Desks, Field = MIL-D-10821E

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:27Z
Check the source to verify that this is the current version before use.