INCH-POUND

MIL-P-0010809H(GL)
10 February 1992
USED IN LIEU OF
MIL-P-10809G
7 November 1989

MILITARY SPECIFICATION

PARKA, SNOW CAMOUFLAGE, WHITE

This specification is approved for use by the Natick Research, Development, and Engineering Center, Department of the Army, based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-P-10809. It is subject to modification. However, pending its promulgation as a coordinated military specification it may be used in acquisition.

1. SCOPE

1.1 Scope. This specification covers a snow camouflage white parka.

1.2 Classification: The parka shall be of one type in the following sizes as specified (see 6.2).

Schedule of sizes

X-Small
Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
A-A-50199	-	Thread, Polyester Core, Cotton- or Polyester-Covered
DDD-L-20	-	Label: For Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-371	-	Braid, Textile, Tubular
MIL-T-3530	-	Thread and Twine, Mildew Resistant or Water Repellent Treated
MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-43303	-	Cord, Elastic Cotton
MIL-C-44431	-	Cloth, Plain Weave, Nylon Filament, Lightweight

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

2-6-104 - Cord Lock, Single Cord

(Copies of drawings are available from the U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-UX, Natick, MA 01760-5017.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Basic material. The basic material shall be a nylon filament, plain weave, lightweight cloth conforming to MIL-C-44431.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

3.2.2 Braid. The braid for the hood, bottom, waist, and storage pouch drawcords shall conform to type IV, class 2 of MIL-B-371. The braid shall be bleached or unbleached. The ends of all drawcords shall be dipped or impregnated with cellulose acetate, or cellulose acetate butyrate to prevent ravelling. The dipped or impregnated ends shall be at least 1/2 inch.

3.2.3 Elastic cord. The elastic cord for sleeve bottoms shall conform to class 2 of MIL-C-43303. The cord shall be unbleached or bleached.

3.2.4 Cord lock. The cord lock for the hood drawcord shall conform to Drawing 2-6-104.

3.2.5 Thread. The thread for all seaming and stitching shall be cotton- or polyester-covered polyester core conforming to ticket Nos. 50, 2 ply and 70, 2 ply of A-A-50199. The color shall be bleached white AH, C.A. 66050. The thread shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530.

3.2.6 Snap fasteners. The snap fasteners for front closure and front hand opening flaps shall be brass, style 2A, finish 6, male and female complete, consisting of stud and eyelet, size 1 or 2, with button size 1 or 2 and socket conforming to MIL-F-10884, except an uncapped button shall be used to attach the socket.

3.2.7 Labels. Each parka shall have a combination identification-size label and an instruction label or a combination size, identification, and instruction label conforming to type VI of DDD-L-20. The labels shall show fastness to laundering.

3.2.7.1 Combination identification-size label. The combination identification-size label shall be a combination of class 1 and class 2 labels. The size information shall be as follows:

Size information

X-Small	Small	Medium
Chest: Up to 33 inches Stock No. NATO Size: 7080/7484	Chest: 33 to 37 inches Stock No. NATO Size: 7080/8494	Chest: 37 to 41 inches Stock No. NATO Size: 7080/9404

Large	X-Large
Chest: 41 to 45 inches Stock No. NATO Size: 7080/0414	Chest: From 45 inches up Stock No. NATO Size: 7080/1424

3.2.7.2 Instruction label. The instruction label shall conform to class 3 and contain the following information:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

PARKA, SNOW CAMOUFLAGE, WHITE

1. For camouflage only - not a substitute for outer garment.
2. Wear hood over all headgear including steel helmet.
3. Tie bottom drawcord around each leg.
4. Brush off snow and frost before entering heated shelters.
5. Machine/hand laundering. The parka is to be laundered using wash and wear setting, in warm water (90°F) with phosphate detergent, when not restricted. Rinse three times. Wash darks separately. Dry by tumble drying at the permanent press setting (temperature not to exceed 90°F) or use a clothes rack, line, or non-metal hanger to drip dry the parka.

CAUTION

Do not use chlorine bleach or starch. Discoloration and degradation of infrared protection capacity of the material will result.

6. Field laundering. The parka is to be laundered using Formula II of FM 10-280. Dry the parka by tumble drying at the permanent press setting (temperature not to exceed 90°F). Do not press this item.

DO NOT REMOVE THIS LABEL

3.2.7.3 Combination size, identification, and instruction label. The identification label (class 1), size label (class 2), and instruction label (class 3) may be combined into one label. The combination label shall conform to the requirements of the class 14 label. The coating requirement shall conform to the class 3 label.

3.3 Design. The parka is a roomy garment having front hand openings with flaps, snap fastener front closure, storage pouch, elastic wrists, and drawcords at waist, hood and bottom (see figure 1).

3.4 Figure. Figure 1 is furnished solely for guidance and information. Should variation from the written specification appear in the figure, the written specification shall govern.

3.5 Patterns. Standard patterns will be furnished by the Government and will provide a seam allowance of 1/2 inch for double-lapped, double-stitched seams and 3/8 inch for all other seams unless otherwise specified in table II. The standard patterns are provided as a guide for cutting the contractor's working patterns and shall not be altered in any way. The working patterns shall be identical to the standard patterns.

3.5.1 List of pattern parts. The component parts of the parka shall be cut from the material specified and in the quantity indicated in table I:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Nylon filament, plain weave cloth	Front	2
	Back	2
	Sleeve	2
	Front facing interlining	2
	Front hand opening flap	2
	Front hand opening facing	2
	Storage pouch	1
	Storage pouch tab	1
	Back waist tunnel	1
	Front waist tunnel	2
	Hood	2

3.6 Construction.

3.6.1 Stitches, seams and stitchings. All stitches, seams, and stitching types shall conform to FED-STD-751. When two or more seam or stitch types are given for the same part of an operation, any one of them may be used. When stitch type 401 is used, the looper thread shall be on the inside of the parka. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams shall result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Unless otherwise indicated, the gage of stitching for the double-lapped, double-stitched seams shall be 3/16 to 5/16 inch. Unless otherwise indicated in table II, the double-lapped, double-stitched seams may be overlapped in either direction. The bight of the overedge stitching shall be 1/8 to 3/16 inch. When a knife is used on overedging machine, set guide so that the edge of fabric is not cut off but only the raw edge is trimmed.

3.6.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.6.1.2 Repairs of types 401, 502 and 503 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.1a and 3.6.1.1b. Repairs to stitch type 401 may be accomplished by use of stitch type 301 except when used for eyelets.

3.6.1.3 Repairs of types 515, 516 and 519 stitching. All repairs shall be in accordance with 3.6.1.1.a and 3.6.1.1.b.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings produced with a 301 stitch type, when not caught in other seams or stitching, shall backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of each end not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired using 301 stitch type.

3.7 Bartacks. Bartacks shall measure 3/8 to 1/2 inch long, except where otherwise indicated. Bartacking shall be free from thread breaks and loose stitching.

3.8 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government furnished shaper pattern is forwarded, the component shall conform to that pattern.

3.9 Manufacturing operation requirements. The parka shall be manufactured in accordance with the operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the thread is removed or does not show on the finished parka.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the material in strict accordance with patterns furnished which show directional lines and marks and notches for proper assembly. Directional lines shall be placed in the warp direction of the material. b. Cut all the component parts of the parka out of the same piece of material except the storage pouch, storage pouch tab, waist tunnel pieces, front hand opening facing pieces, front facing interlining, snap fastener reinforcements and eyelet reinforcements, which may be cut from ends. c. Cut eyelet reinforcement pieces from basic material of sufficient size to finish not less than 3/4 inch square. Cut snap fastener reinforcement pieces from basic material of sufficient size to finish not less than 1 inch square. d. Cut drawcords in the lengths specified below. The braid shall have the ends dipped or impregnated as specified in 3.2.2. Hood (1 each) - 50 ± 1 inches all sizes Waist (1 each) - 56 ± 1 inches Size X-Small 60 ± 1 inches Size Small 64 ± 1 inches Size Medium 68 ± 1 inches Size Large 72 ± 1 inches Size X-Large						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) Bottom (2 each) - 41 ± 1 inches Size X-Small 42 ± 1 inches Size Small 44 ± 1 inches Size Medium 46 ± 1 inches Size Large 48 ± 1 inches Size X-Large Storage pouch (1 each) - 22 ± 1/2 inches all sizes e. Cut the elastic cords (2 each) of sufficient length to comply with operation 13.a. f. Cut slit for front hand openings on parka front as indicated on pattern.						
2.	Marking. Mark, ticket or bundle all components, except those cut from ends, to ensure a uniform shade and size throughout the parka. Any method of marking may be used except: a. Corrosive metal fastening devices. b. Sew-on type tickets. c. Adhesive type tickets which leave traces of paper or adhesive on the material upon removal of the tickets.						
3.	Replacement of defective or damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to ensure that material defects or damages, as classified in 4.4.2						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Replacement of defective or damaged parts. (cont'd)						
	are excluded and replaced with nondefective and properly matched components.						
4.	Make hood.						
	a. Stitch center seam with a double-lapped, double-stitched seam. The seam may be lapped in either direction but the hood and center back seam shall be lapped in the same direction.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	70 70	
	b. Position eyelet and snap fastener reinforcement pieces to hood, centered over the placement at marks indicated on pattern. Make sewn eyelets at marks indicated.	401 or 502 or 503		19-24 per eyelet 26-32 per eyelet 26-32 per eyelet	50 50 50	70 70 70	
	c. Insert hood drawcord through eyelets.						
	d. Make a 1-1/8 ± 1/8 inch hem on front of hood with raw edge turned in and with the stitching 1/16 to 1/8 inch from edge, enclosing the drawcord within the fold. Do not catch drawcord in the stitching.	301	EFb-1	10-14	50	70	
	or						
	e. The drawcord may be threaded after hemming.						
	f. Set cord locks to both ends of drawcord and individually tie each drawcord with a double twist knot.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make hood. (cont'd)						
	g. Anchor the center of the drawcord on center seam of hood with a bartack or automatic straight tack.	Bartack or 301		28 per bartack 28 per tack	50 50	70 70	
	h. Turn in the edges at bottom of face opening with raw edges turned in and stitch 1/16 to 1/8 inch from edge forming hem. Hem shall measure 1/4 to 3/8 inch in width.	301	EFb-1	10-14	50	70	
	i. Set respective male/female snaps (as indicated on patterns) to hood through reinforcement pieces.						
5.	Attach front hand opening flap.						
	a. Position one end of flap on top of the hand opening slit (on the inside of front), as indicated on pattern, and stitch together 1/4 inch from the cut line (stopping 3/8 inch from side edges of flap).	301 or 401	SSe-2(a)	10-14	50	70	
	b. Cut hand opening through front, as marked, if not previously cut in cutting operation.						
	c. Position snap fastener reinforcement piece onto flap, centering the snap location, as indicated on pattern.	301 or 401	SSc-1	10-14	50	70	
	d. Turn flap to outside of parka. Fold in half and turn in all raw edges, 1/4 inch on the lower edge and 3/8 inch on sides of flap.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach front hand opening flap. (cont'd)						
	e. Topstitch flap to front 1/16 to 1/8 inch from folded edge. Stitching shall be around the entire flap.	301	LSd-1	10-14	50	70	
6.	Attach front hand opening facing.						
	a. Position one end of facing on top of the hand opening slit, as indicated on pattern, and stitch together 1/4 from the cut line (stopping 1/4 from side edges of facing).	301 or 401	SSe-2(a)	10-14	50	70	
	b. Position snap fastener reinforcement piece on wrong side of facing, centering the snap location, as indicated on pattern.	301 or 401	SSc-1	10-14	50	70	
	c. Turn facing to inside of parka on fold line. Fold in seam allowances 3/8 inch.						
	d. Stitch facing down on back side 1/16 to 1/8 inch from turned in edge.	301	LSd-1	10-14	50	70	
	e. Topstitch flap to front on right side 1/16 to 1/8 inch from facing joining seam.	301	LSd-1	10-14	50	70	
7.	Join flap and front hand opening facing.						
	Superimpose the pocket flap and hand opening facing. Topstitch side edges 1/16 to 1/8 inch from the edge, through all layers. A vertical bartack shall be placed at each corner.	301 Bartack	LSd-1	10-14 28 per bartack	50 50	70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make storage pouch and tab.						
	a. Position eyelet reinforcement pieces on wrong side of fabric as indicated on pattern.	301 or 401	SSc-1	10-14	50	70	
	b. Stitch sewn eyelets through reinforcement pieces as indicated by marks on pattern.	401 or		19-24 per eyelet	50	70	
		502 or		26-32 per eyelet	50	70	
		503		26-32 per eyelet	50	70	
	c. Fold tab in half along fold line with wrong sides together, with 1/4 inch seam allowance turned in and stitch 1/16 to 1/8 inch from the side edges.	502 or 503	EFd-1	6-10	50	70	
	d. With right sides together, overedge stitch side and bottom edges of pouch together.	515 or 516	SSe-1	10-14	50	70	
	e. Overedge stitch around the top edge of pouch, catching the tab on outside, as indicated by marks on pattern.	515 or 516	SSe-1	10-14	50	70	
	f. Turn pouch right side out, insert drawcord into hem, through eyelets and stitch hem 5/8 inch from folded edge. Do not catch drawcord in stitching. Tab should be caught in stitching so it extends from the top of the pouch.	301	EFb-1	10-14	50	70	
	g. Place a horizontal bartack on outside of pouch, superimposed on hem stitching, catching the pouch tab.	Bartack		28 per bartack	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make backs and attach labels and pouch.						
	a. Hem each side of vent opening at center back, from notch (indicated on pattern) to bottom of parka. Hem shall be 1/4 to 1/8 inch wide, and shall enclose all raw edges.	301	EFb-1	10-14	50	70	
	b. Join backs with a double-lapped, double-stitched seam, 3/16 to 5/16 inch gage.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	70 70	
	c. Tack top of vent opening across center back seam with a bartack or automatic straight tack.	Bartack or		28 per bartack	50	70	
		301		28 per tack	50	70	
	d. Position labels on the inside of right back (when worn) not more than 1/2 inch from center back seam. The top of the combination identification size label shall not be more than 1 inch down from the hood joining seam and may be positioned so that it will be caught in the hood joining seam. The top of the instruction label shall be not more than 1/2 inch from the combination identification size label and the top edge may be caught in the bottom row of the combination identification size label stitching. The combination size, identification and instruction label, when used (see 3.2.7.3), shall be positioned the same as the combination identification-size label. The label shall be stitched 1/16 to 1/8 inch from the edges. The stitching shall not be through the printing nor shall the printing be covered by seam or other label. Place the tab of the pouch on the inside of	301	LSbj-1	8-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make backs and attach labels and pouch. (cont'd)						
	left back (when worn) not more than 1/2 inch from center back seam and tack to raw edge of left back neck seam.						
10.	Make sleeve darts.						
	a. Fold darts on inside as indicated by pattern and stitch.	301 or 401	OSf-1 OSf-1	10-14 10-14	50 50	70 70	
	b. Fold dart toward wrist and stitch folded edge to sleeve 1/16 to 1/8 inch from edge.	301	OSe-1	10-14	50	70	
11.	Join shoulder seams and set sleeves.						
	a. Join shoulders with a double-lapped and double-stitched seam, 3/16 to 5/16 inch gage. The backs shall be lapped on fronts.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	70 70	
	b. Set sleeves with a double-lapped, double-stitched seam, 3/16 to 5/16 inch gage. The body shall be lapped on the sleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	70 70	
12.	Join underarm and side seams.						
	Join underarm and side seams in one continuous operation with a double-lapped, double-stitched seam 3/16 to 5/16 inch gage. The fronts shall overlap the back. The sleeve joining seam shall not be staggered more than 1/2 inch at underarm (measured from center of seam to center of seam.)	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Hem sleeve and insert elastic.						
	a. Place the ends of each elastic cord (see operation 1.e) adjacent to each other with one end extending beyond the other 3/4 ± 1/4 inch. Bartack the ends together with the bartack extending across both widths. The elastic cord shall measure 5 to 5-1/2 inches (half wrist measurement) long in the finished parka.	Bartack		28 per bartack	50	70	
	b. The elastic cord may be anchored to the sleeve 1/2 to 1 inch from bottom with vertical tacking or bartacking through underarm seam, to hold in position.	301		10-14 or	50	70	
		301 or		28 per tack	50	70	
		Bartack		28 per bartack	50	70	
	c. Hem sleeve, enclosing elastic cord within the fold, with the raw edge turned in. Do not catch elastic cord in the stitching. The hem shall finish 1/2 to 3/4 inch wide.	301	EFb-1	10-14	50	70	
14.	Attach tunnel strips and drawcord to waist.						
	a. Hem one end of each of the front waist tunnel strips and both ends of the back tunnel strip. The hems shall be 1/4 to 3/8 inch wide.	301	EFa-1 or	8-14	50	70	
		301 or	EFb-1	8-14	50	70	
		401	EFa-1	8-14	50	70	
	b. Position eyelet reinforcement pieces to waist for waist drawcord opening as indicated by marks on pattern.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Attach tunnel strips and drawcord to waist. (cont'd)						
	c. Stitch sewn eyelets at marks indicated on pattern through reinforcement piece.	401 or		19-24 per eyelet	50	70	
		502 or		26-32 per eyelet	50	70	
		503		26-32 per eyelet	50	70	
	d. Thread drawcord through front eyelets.						
	e. Position tunnel strips on the inside of parka, at marks indicated on pattern, with the unhemmed ends facing front opening.						
	f. Turn in raw edges along sides of tunnel strips 1/4 to 3/8 inch and stitch to parka with the rows of stitching 1/16 to 1/8 inch from edges, and with the drawcord enclosed in the tunnel. Do not catch the drawcord in the stitching.	301	SSat-2	10-14	50	70	
	NOTE: The tunnel strips may be attached after operation 15 (Make front facings), in which case the unhemmed ends shall be turned under and the tunnel strip shall overlap the front facing. The turned under end may be pre-hemmed or may be stitched to front facing.						
15.	Make front facings.						
	a. Position facing interlinings on inside of fronts and with the edges even, stitch 1/16 to 1/8 inch from edge.	301 or	SSa-1	8-14	50	70	
		401	SSa-1	8-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make front facings. (cont'd)						
	b. Fold fronts to inside at marks indicated on pattern and stitch 1/4 to 3/8 inch from folded edge, catching the interlining in the stitching.	301	OSf-1	10-14	50	70	
	c. Turn in the raw edge and stitch to front 1/16 to 1/8 inch from edge. The ends of the front waist tunnels shall be caught under the facing (see "Note" in operation 14).	301	LSd-1	10-14	50	70	
16.	Attach hood.						
	a. Stitch neck of hood to body, matching center back seams (1/4 inch off center tolerance) with a double-lapped, double-stitched seam forming pleats on hood as indicated by pattern. The outside folded edge of pleats shall face the front. The pouch tab shall be caught in the seam.	301 or	LSc-2	10-14	50	70	
	b. Bartack across each end of the seam. An automatic straight tack may be used.	301 or Bartack		28 per tack 28 per bartack	50 50	70 70	
17.	Hem bottom and insert drawcords.						
	a. Hem bottom with the raw edges turned in 3/16 to 1/4 inch and with the stitching 1/16 to 3/8 inch from turned-in edge, enclosing the drawcords within the fold. The hem shall finish 1 to 1-1/8 inches wide.	301	EFb-1	10-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Hem bottom and insert drawcords. (cont'd)						
	b. Bartack each end of stitching with horizontal bartacks (four each). An automatic straight tack may be used.	301 or		28 per tack	50	70	
		Bartack		28 per bartack	50	70	
	c. Anchor the center of drawcord (1 inch off center tolerance) at side seam with a 3/8 to 1/2 inch vertical bartack or automatic straight tack, through side seam, hem, and drawcord.	301 or		28 per tack	50	70	
		Bartack		28 per bartack	50	70	
18.	Attach snap fasteners.						
	a. Attach socket part of snap fastener through hand opening flaps 3/4 to 1 inch from edge of flap and centered (1/4 inch off center tolerance).						
	b. Attach stud part of fastener through hand opening reinforcement piece to correspond with and accommodate socket part of flap.						
	c. Mark and attach five socket parts of snap fasteners on left front through front, interlining, and facing as indicated by marks on patterns and 1 ± 1/8 inches from front edge.						
	d. Mark and attach five stud parts of snap fasteners through right front, interlining, and facing to correspond with and to accommodate socket parts to snap fasteners.						
	NOTE: Measure position of snap from center of snap.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Clean parkas. a. Trim all thread ends to 1/4 inch maximum length and remove loose threads. b. Clean spots and stains. c. Knot ends of all drawcords.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The parka shall conform to the finished measurements shown in table III.

TABLE III. Finished measurements (inches)

	SIZE					
	X-Small	Small	Medium	Large	X-Large	Tolerance
1/2 face opening 1/	20-1/4	20-1/4	20-1/4	20-1/4	20-1/4	± 1/4
Sleeve length 2/	27-1/2	27-3/4	27-7/8	28	28-1/8	± 1/2
1/2 chest 3/	26-1/2	28-1/2	30-1/2	32-1/2	34-1/2	± 1/2
Back length 4/	38	38-1/2	39	39-1/2	40	± 1/4
Vent length 5/	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	± 3/8

1/ Measure from top of hood to bottom edge of hem.

2/ Measure from center of sleeve-setting seam at shoulder to bottom edge of sleeve.

3/ With parka closed, measure across front at base of armhole, from folded edge to folded edge.

4/ Measure from center of hood joining seam to top of vent opening.

5/ Measure from the top of vent to bottom of parka.

3.11 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality level.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of parkas. The sample unit shall be one parka. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 25.0 for major and minor A combined defects and 65.0 for total (major, minor A and minor B combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Material defects	Any hole, cut, tear, mend, burn or needle chew	101		
	Drill hole exposed on outside of parka			301
	Any weakening defect such as a smash, multiple float, or loose slub:			
	- on outside	102		
	- on inside			302
	Permanent crease in cloth (when caught in stitching)	103		
	Unsightly slub or shade bar:			
	- on outside	104		
	- on inside			303
Shaded parts	Outside part shaded			304
Cleanness	Any spot or stain on the outside		201	
	Two or more shade and size tickets not removed			305
	Any marking visible on outside		202	
	Thread ends not trimmed or loose threads not removed			306
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	105		
	Any operation not performed as specified (unless otherwise classified herein)			307
Cutting	Any component part not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements	106		
Seams and stitching	Accuracy of seaming:			
	Seam or component part twisted, puckered, pleated (unless otherwise classified herein)		203	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Any part of parka caught in an unrelated operation or stitching:			
	- caught in up to and including 1/4 inch of stitching		204	
	- caught in more than 1/4 inch of stitching	107		
	End of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch			308
	Stitching overlapping end(s) of thread break less than 1/2 inch			309
	Ends of a continuous line of stitching overlapped less than three stitches on labels or less than 1/2 inch on all other stitching			310
	Gage of stitching and seam allowances: Irregular, i.e. unevenly gaged or various stitching not uniform (to be scored only when condition exists on major portion of seam)			311
	Width not as specified or varies more than 1/16 inch		205	
	Stitches broken or missing:			
	- up to and including 1/4 inch			312
	- more than 1/4 inch but not more than 1/2 inch		206	
	- more than 1/2 inch	108		
	Skipped stitches or runoff stitches:			
	- 1/4 inch up to 1/2 inch			313
	- more than 1/2 inch		207	
	Raw edge:			
	- more than 1/4 inch long			314
	Seam and stitch type:			
	- not specified seam or stitch type		208	
	- looper thread of 401 stitch type on outside of parka	109		
	Stitches per inch (to be scored only when condition exists on major portion of seam):			
	- less than the minimum		209	
	- more than the maximum			315

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Stitch tension (except bartacks):			
	Loose tension resulting in a loose seam	110		
	Loose tension (exposed loops of top or bottom threads) more than 1/2 inch in length			316
	Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	111		
Bartacks	Less than 3/8 or more than 1/2 inch long			317
	Bartack anchoring drawcord at ends of hood joining seam or at top of back vent omitted	112		
	Any other bartack omitted			318
	More than one bartack not positioned as specified			319
	Loose tension:			
	- on bartack anchoring drawcord, at ends of hood joining seam, or at top of vent		210	
	- on any other bartack			320
Snap fasteners	Any part of assembly missing, mismated, broken, cracked, bent, or not securely clinched, affecting function	113		
	One or more clinched too tightly cutting surrounding fabric	114		
	Sockets out of alignment with studs causing a noticeable bulge, twist, or pull		211	
Label(s)	Not stitched on all four sides			321
	Combination identification-size label missing, incorrect, or illegible	115		
	Instruction label missing, incorrect, or illegible		212	
	Not positioned as specified			322

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Label(s) (cont'd)	Combination size, identification, and instruction label missing, incorrect, or illegible	116		
Drawcords	One or more omitted	117		
	One or more caught in seaming	118		
	One or more ends not treated			323
	One or more ends not knotted			324
	Length of drawcord(s) measured with knots untied) beyond tolerance specified:			
	- up to and including 1 inch		213	
	- more than 1 inch	119		
Hood	Outside folded edge of pleats not turned toward front			325
	One or both pleats omitted		214	
	One or both eyelets omitted	120		
	Eyelet reinforcement piece omitted		215	
	Hem (tunnel) more than 1-1/4 or less than 1 inch wide			326
	Bottom hem more than 1/2 inch or less than 3/8 inch wide (except at tapered ends)			327
	Hood center seam in opposite direction to center back seam			328
	Hood center seam and center back seam of body staggered more than 1/4 inch			329
Eyelets	Stitches not securely caught in fabric (stitches pull away from fabric)	121		
	One or more broken or more than two continuous skipped stitches in one or more eyelets		216	
	Loose stitch tension			330
	Purling of 401 stitch type on outside of parka			331
	Purling of 502 or 503 stitch type not at needle penetration or inside purling pulled to outside			332

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Eyelets (cont'd)	Thread ends on outside of parka			333
	Number of stitches per eyelet not as specified			334
	Inside diameter of eyelet less than 3/16 or more than 1/4 inch			335
	Cloth cut-out in center of eyelet not removed			336
	Thread ends less than 1/8 inch long		217	
	Thread ends more than 1/2 inch long			337
Front closure	Snap fasteners out of vertical alignment by more than 1/4 inch			338
	Fronts uneven:			
	- at top by 3/8 inch or more		218	
	- at bottom by 5/8 inch or more			339
	The ends of front waist tunnels not caught under or overlapped on front facings (whichever is applicable)			340
Hand openings	Snap fastener reinforcement piece(s) omitted		219	
	Side edge of flap not stitched to side edge of hand opening			341
Back	Front parts overlapping back parts at shoulders			342
	Backs overlapping fronts at side seams			343
	Vent opening hems less than 1/4 inch or more than 3/8 inch wide			344
Sleeves	Folded edge of dart not turned toward wrist		220	
	Folded edge of dart not stitched down			345
	Sleeve overlapping body			346
	Sleeves reversed, i.e., right sleeve set in left armhole	122		
	Armhole seam staggered more than 1/2 inch at side seam			347
	Half wrist measurement less than 5 or more than 5-1/2 inches	123		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Sleeves (cont'd)	Elastic caught in the stitching of hem	124		
	Sleeve hem (tunnel) less than 1/2 or more than 3/4 inch wide			348
Hem	Bottom hem less than 1 inch or more than 1-1/4 inches wide			349
Cord locks	Omitted, damaged or not functional			350
	Not as specified			351
Pouch	Not located as specified			352
	Poorly shaped		221	
	Not constructed as specified		222	
	Omitted	125		

4.4.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance or any sample parka with sleeves uneven in length by 1/2 inch or more shall be classified as a defect. The lot size shall be expressed in units of parkas. The sample unit shall be one parka. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of bundles per container is more or less than required. Number of parkas per bundle is more or less than required. 1/ Size shown on one or more parkas not as specified on container. 1/

1/ For this defect, two bundles from each container in the sample shall be examined.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each snap fastened parka shall be laid flat, front up. The hood shall be folded down full length and the sleeves folded one over the other across the chest. The sides shall be adjusted by folding to attain a width of approximately 23 inches. The bottom edge shall be folded over so that the parka length is 29 inches. The parka shall then be folded in half across the length. The completely folded parka shall measure approximately 23 by 14-1/2 inches.

5.1.2 Commercial preservation. Parkas shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Twenty parkas of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each fiberboard container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit bundles shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each fiberboard container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty parkas of one size only, preserved as specified in 5.1, shall be packed within a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF, (variety SW) or SF, class domestic, grade 275, variety SW of PPP-B-636. The inside of each fiberboard container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit bundles shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II, as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Parkas, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), parkas, packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The parka is intended for use by personnel of the Department of Defense to provide camouflage in snow areas.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 International standardization agreements. Certain provisions of this specification are the subject of international standardization agreement as cited in NATO, STANAG No. 2333. When amendment, revision, or cancellation of this specification is proposed that will modify the international agreement concerned, the preparing activity will take appropriate action through international standardization channels including departmental standardization offices, to change the agreement or make other appropriate accommodations.

6.5 Subject term (key word) listing.

Cold weather clothing
Water repellent clothing

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:

Army - GL

Preparing activity:

Army - GL

(Project 8415-A855)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

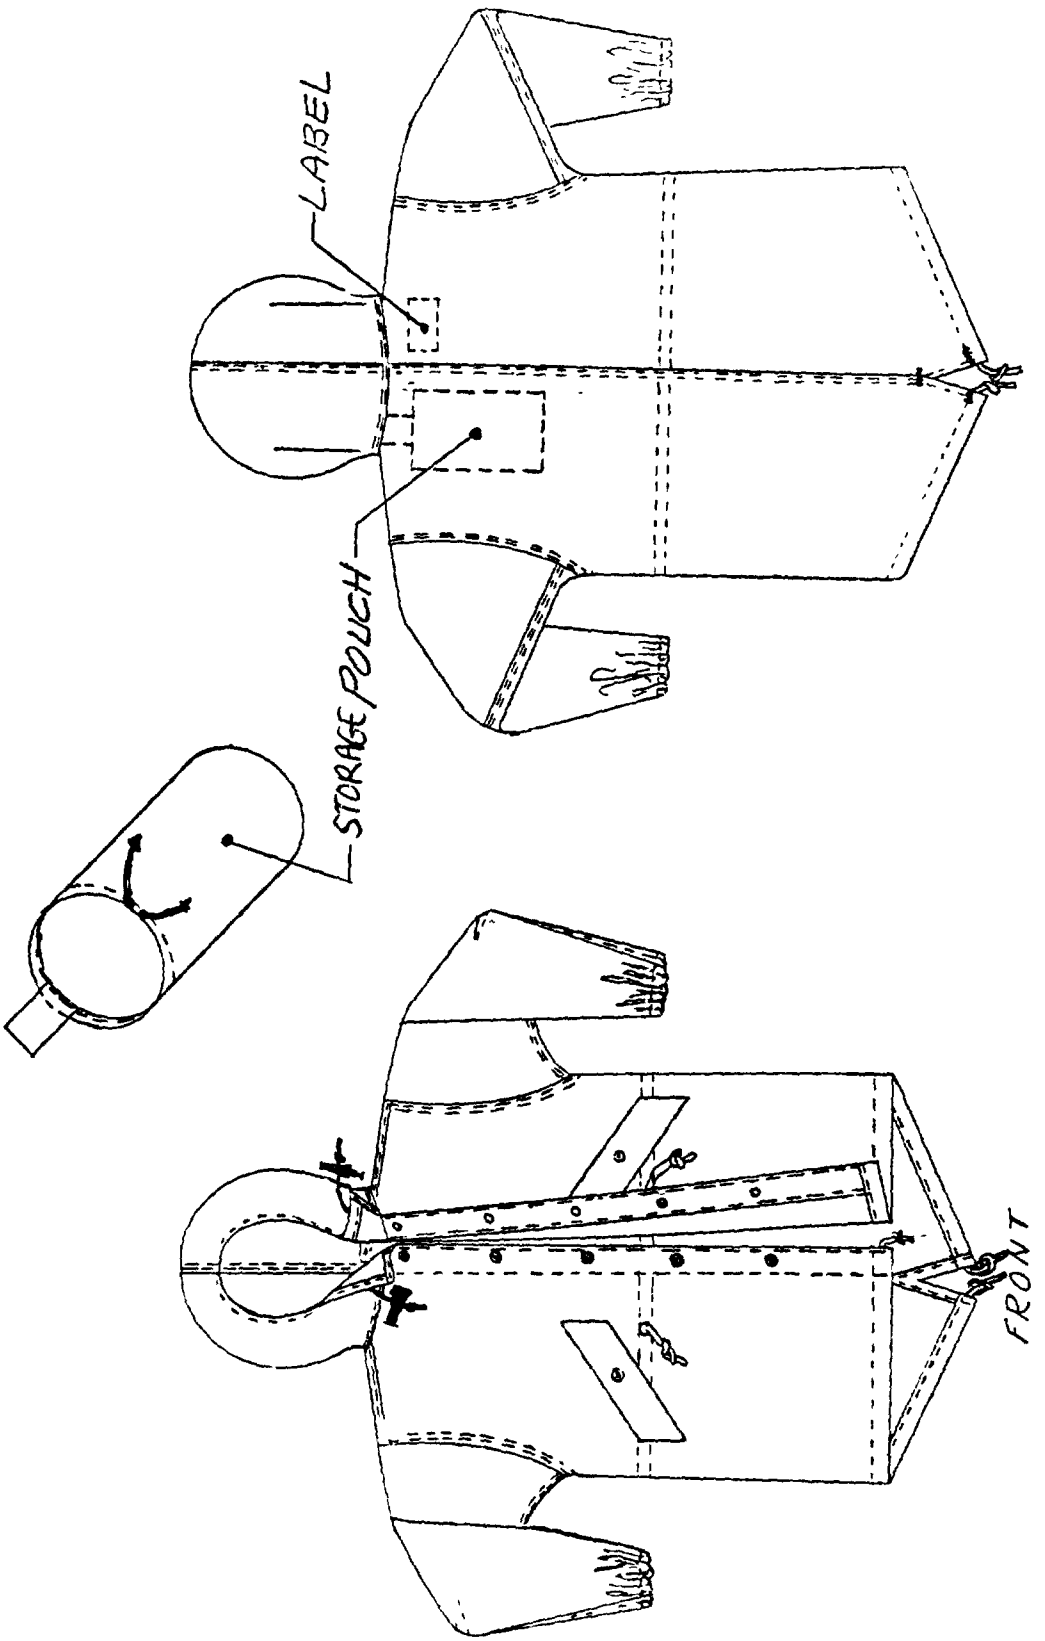


FIG. 1 PARKA, SNOW CAMOUFLAGE, WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-0010809H(GL)	1992 February 10

3. DOCUMENT TITLE

PARKA, SNOW CAMOUFLAGE, WHITE

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME	b TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON/DSN
U.S. Army Natick RD&E Center	508-651-4532	256-4532
c ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-IRT Natick, MA 01760-5019	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.