INCH-POUND

MIL-P-10809G
7 November 1989
SUPERSEDING
MIL-P-10809F
20 August 1986

MILITARY SPECIFICATION

PARKA, SNOW CAMOUFLAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a snow camouflage parka made from white quarpel treated cotton/nylon oxford cloth.

1.2 Classification. The parka shall be in the following sizes (see 6.2).

Schedule of sizes

X-Small
Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
DDD-L-20	- Label: For Clothing, Equipage and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-B-371	- Braid, Textile, Tubular
MIL-T-3530	- Thread and Twine: Mildew Resistant or Water Repellent Treated
MIL-C-3924	- Cloth, Oxford, Cotton Warp and Nylon Filling, Quarpel Treated
MIL-F-10884	- Fasteners, Snap
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage, General Specification For
MIL-C-43303	- Cord, Elastic Cotton
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Color Card for Sewing Threads

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

3.3.1 Basic material. The basic material shall be cotton warp and nylon filling oxford cloth, quarpel treated conforming to class 1 of MIL-C-3924.

3.3.2 Braid. The braid for the hood, bottom, and waist drawcords shall be white cotton tubular braid conforming to type IV, class 2 of MIL-B-371. The ends of all drawcords shall be dipped or impregnated with cellulose acetate, or cellulose acetate butyrate.

3.3.3 Elastic cord. The elastic cord for sleeve bottoms shall conform to class 2 of MIL-C-43303.

3.3.4 Thread. The thread for all seaming and stitching shall be cotton-covered polyester core thread, ticket Nos. 30, 2 or 3 ply and 50, 2 or 3 ply conforming to MIL-T-43548. The color shall be bleached white AH, C.A. 66050. The thread shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530.

3.3.5 Snap fasteners. The snap fasteners for front closure and hand opening flaps shall be style 3, finish 3 conforming to MIL-F-10884, except the pronged ring portion shall have a white enamel finish.

3.3.6 Labels. Each parka shall have a combination identification-size label and an instruction label or a combination size, identification, and instruction label conforming to type VI of DDD-L-20. The labels shall show fastness to laundering.

3 3.6.1 Combination identification-size label. The combination identification-size label shall be a combination of class 1 and class 2 labels. The size information shall be as shown in table I.

TABLE I. Size information

X-Small	Small	Medium
Chest: Up to 33 inches Stock No. NATO Size: 7080/7484	Chest: 33 to 37 inches Stock No. NATO Size: 7080/8494	Chest: 37 to 41 inches Stock No. NATO Size: 7080/9404

Large	X-Large
Chest: 41 to 45 inches Stock No. NATO Size: 7080/0414	Chest: From 45 inches up Stock No. NATO Size: 7080/1424

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

3.3.6.2 Instruction label. The instruction label shall conform to class 3 and contain the following information:

PARKA, SNOW CAMOUFLAGE

1. For camouflage only - not a substitute for outer garment.
2. Wear hood over all headgear including steel helmet.
3. Tie bottom drawcord around each leg.
4. Launder by the cotton method.

DO NOT REMOVE THIS LABEL

3.3.6.3 Combination size, identification, and instruction label. The identification label (class 1), size label (class 2), and instruction label (class 3) may be combined into one label. The combination label shall conform to the requirements of the class 14 label. The coating requirement shall conform to the class 3 label.

3.4 Design. The parka is a roomy garment having hand openings with flaps, snap fastener front closure, elastic wrists, and drawcords at waist, hood and bottom (see figure 1).

3.4.1 Figure. Figure 1 is furnished for information only. If there are any inconsistencies between the written specification and the figure, the written specification shall control.

3.5 Patterns. Standard patterns will be furnished by the Government and will provide a seam allowance of 1/2 inch for double-lapped, double-stitched seams and 3/8 inch for all other seams unless otherwise indicated. The standard patterns are provided as a guide for cutting the contractor's working patterns and shall not be altered in any way. The working patterns shall be identical to the standard patterns.

3.5.1 List of pattern parts. The pattern parts of the parka shall be cut from the materials as specified and in accordance with the pattern parts indicated below.

List of pattern parts

Material	Nomenclature	Cut parts
Cotton/nylon oxford cloth	Front	2
	Back	2
	Sleeve	2
	Front facing interlining	2
	Hand opening reinforcement	2
	Hand opening flap	4
	Hand opening welt	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

List of pattern parts (cont'd)

Material	Nomenclature	Cut parts
Cotton/nylon oxford cloth (cont'd)	Flap snap fastener reinforcements	2
	Hand opening snap fastener (stud reinforcement)	2
	Back waist tunnel	1
	Front waist tunnel	2
	Hood	2

NOTE: Pattern is not furnished for eyelet reinforcements. See table II, operation 1 for requirements.

3.6 Construction.

3.6.1 Stitches, seams and stitchings. All stitches, seams and stitching shall conform to FED-STD-751. When two or more seam or stitch types are given for the same part of an operation, any one of them may be used. When stitch type 401 is used, the looper thread shall be on the inside of the parka. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams shall result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Unless otherwise indicated, the gage of stitching for the double-lapped, double-stitched seams shall be 3/16 to 5/16 inch. Unless otherwise indicated in table II, the double-lapped, double-stitched seams may be overlapped in either direction.

3.6.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

3.6.2 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government furnished shaper pattern is furnished, the component shall conform to that pattern.

3.6.3 Bartacks. Bartacks shall measure 3/8 to 1/2 inch long, except where otherwise indicated. Bartacking shall be free from thread breaks and loose stitching.

3.6.4 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.7 Manufacturing operation requirements. The parka shall be manufactured in accordance with the operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the thread is removed or does not show on the finished parka.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the material in strict accordance with patterns furnished which show directional lines and marks and notches for proper assembly. Directional lines shall be placed in the warp direction of the material. b. Cut all component parts of the parka out of the same piece of material except flap linings, front facing interlinings, reinforcement pieces, tunnel strips and hand opening welts, which may be cut from ends. c. Cut eyelet reinforcement pieces of sufficient size to finish not less than 3/4 inch square, double thickness. d. Cut drawcords in the following lengths: Hood (1 each) - 50 ± 1 inches all sizes Waist (1 each) - 56 ± 1 inches Size X-Small 60 ± 1 inches Size Small 64 ± 1 inches Size Medium 68 ± 1 inches Size Large 72 ± 1 inches Size X-Large Bottom (2 each) - 41 ± 1 inches Size X-Small 42 ± 1 inches Size Small 44 ± 1 inches Size Medium 46 ± 1 inches Size Large 48 ± 1 inches Size X-Large e. Cut the elastic cords (2 each) of sufficient length to comply with operation 11.a.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Marking. Mark, ticket or bundle all components, except those cut from ends, to insure a uniform shade and size throughout the parka. Any method of marking may be used except: a. Corrosive metal fastening devices. b. Sew-on type tickets. c. Adhesive type tickets which leave traces of paper or adhesive on the material upon removal of the tickets.						
3.	Replacement of defective or damaged parts. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with nondefective and properly matched components.						
4.	Make hood. a. Stitch center seam with a double-lapped, double-stitched seam. The seam may be lapped in either direction but the hood and center back seam shall be lapped in the same direction. b. Set eyelets at marks indicated on pattern, through reinforcement pieces (see operation 1.c.). c. Insert hood drawcord through eyelets.	301 or 401	LSc-2 LSc-2	10-14 10-14	30 30	30 50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont d)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make hood. (cont'd)						
	d. Make a 1-1/8 ± 1/8 inch hem on front of hood with raw edge turned in and with the stitching 1/16 to 1/8 inch from edge, enclosing the drawcord within the fold. Do not catch drawcord in the stitching.	301	EFb-1	10-14	30	30	
	or						
	e. The drawcord may be threaded after hemming.						
	f. Knot each end of drawcord.						
	g. Anchor the center of the drawcord on center seam of hood with a bartack or automatic straight tack.	Bartack or 301		28 per bartack 28 per tack	30 30	30 30	
	h. Turn in the edges at bottom of face opening with raw edges turned in and stitch 1/16 to 1/8 inch from edge forming hem. Hem shall measure 1/4 to 3/8 inch in width.	301	EFb-1	10-14	30	30	
5.	Attach hand opening reinforcement pieces.						
	a. Position front snap fastener reinforcement piece on hand opening reinforcement piece at marks indicated on pattern. Stitch together with a vertical line of stitching through the center of the reinforcement piece, not less than 2 inches long. The ends of the stitching need not be backtacked.	301 or 401	SSv-1 SSv-1	8-14 8-14	30 30	30 50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach hand opening reinforcement pieces. (cont'd)						
	b. Position hand opening reinforcement pieces to the underside of parka fronts, at marks indicated on pattern. Turn in raw edges and stitch to parka 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	30	30	
6.	Make hand opening.						
	a. Superimpose flap and flap lining, face to face. Place a reinforcement piece on top at marks indicated on pattern and stitch together. Continue stitching to end of flap and flap lining. Turn flap, work out edges and edge stitch 3/16 to 1/4 inch from edge.	301 or 401 or 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30 30 30	30 50 30	
	b. Mark hand opening cut-line on reinforcement piece on the inside of parka, as indicated by marks on pattern.						
	c. Position flap on top of the reinforcement piece and front with raw edges aligned and stitch through the reinforcement piece, the flap and the front. Turn flap to outside of parka and raise stitch through the front, flap and reinforcement piece.	301		10-14	30	30	
	d. Position one side of welt (face down) on the inside of parka with the raw edge abutting the raw edge of flap (aligned with cut-line mark or cut-opening if cut during cutting operation). Fold in side seam allowances and stitch welt to front, through reinforcement pieces, catching in the folded-in seam allowance at ends in the stitching.	301		10-14	30	30	
	e. Cut hand opening through front and reinforcement piece, as marked (if not cut during cutting operation).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make hand opening. (cont'd)						
	f. Turn welt to outside of parka; fold in half lengthwise; turn in all raw edges and stitch to front, 1/16 to 1/8 inch gage, with the stitching continued along each end.	301		10-14	30	30	
	g. Stitch edge of side and bottom of welts 1/16 to 1/8 inch from edges.	301	SSa-1	10-14	30	30	
7.	Make backs and attach labels.						
	a. Hem each side of vent opening at center back, from notch (indicated on pattern) to bottom of parka. Hem shall be 1/4 to 1/8 inch wide.	301	EFb-1	10-14	30	30	
	b. Join backs with a double-lapped, double-stitched seam, 3/16 to 5/16 inch gage.	301 or 401	LSc-2 LSc-2	10-14 10-14	30 30	30 50	
	c. Tack top of vent opening across center back seam with a bartack or automatic straight tack.	Bartack or 301		28 per bartack 28 per tack	30 30	30 30	
	d. Position labels on the inside of right back (when worn) not more than 1/2 $\pm$ 1/16 inch from center back seam. The top of the combination identification size label shall not be more than 1 $\pm$ 1/16 inch down from the hood joining-seam and may be positioned so that it will be caught in the hood joining seam. The top of the instruction label shall be not more than 1/2 $\pm$ 1/16 inch from the combination identification size label and the top edge may be caught in the bottom row of the combination identification size label stitching. The combination size, identi-	301	LSbj-1	8-14	30	30	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make backs and attach labels. (cont'd)						
	fication and instruction label, when used (see 3.3.6.3), shall be positioned the same as the combination identification-size label. The stitching shall not be through the printing nor shall the printing be covered by seam or other label.						
8.	Make sleeve darts.						
	a. Fold darts on inside as indicated by pattern and stitch.	301 or 401	OSf-1 OSf-1	10-14 10-14	30 30	30 30	
	b. Fold dart toward wrist and stitch folded edge to sleeve 1/16 to 1/8 inch from edge.	301	OSe-1	10-14	30	30	
9.	Join shoulder seams and set sleeves.						
	a. Join shoulders with a double-lapped and double-stitched seam, 3/16 to 5/16 inch gage. The backs shall be lapped on fronts.	301 or 401	LSc-2 LSc-2	10-14 10-14	30 30	30 50	
	b. Set sleeves with a double-lapped, double-stitched seam. The body shall be lapped on the sleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	30 30	30 50	
10.	Join underarm and side seams.						
	Join underarm and side seams in one continuous operation with a double-lapped, double-stitched seam 3/16 to 5/16 inch gage. The fronts shall overlap the back. The sleeve joining seam shall not be staggered more than 1/2 inch at underarm (measured from center of seam to center of seam).	301 or 401	LSc-2 LSc-2	10-14 10-14	30 30	30 50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Hem sleeve and insert elastic.						
	a. Place the ends of each elastic cord (see operation 1.e) adjacent to each other with one end extending beyond the other 3/4 ± 1/4 inch. Bartack the ends together with the bartack extending across both widths. The elastic cord shall measure 5 to 5-1/2 inches (half wrist measurement) long in the finished parka.	Bartack		28 per bartack	30	30	
	b. The elastic cord may be anchored to the sleeve 1/2 to 1 inch from bottom with vertical tacking of bartacking through underarm seam, to hold in position.	301		10-14	30	30	
				or			
		301 or		28 per tack	30	30	
		Bartack		28 per bartack	30	30	
	c. Hem sleeve, enclosing elastic cord within the fold, with the raw edge turned in. Do not catch elastic cord in the stitching. The hem shall finish 1/2 to 3/4 inch wide.	301	EFb-1	10-14	30	30	
12.	Attach tunnel strips and drawcord to waist.						
	a. Hem one end of each of the front waist tunnel strips and both ends of the back tunnel strip. The hems shall be 1/4 to 3/8 inch wide.	301	EFa-1	8-14	30	30	
			or				
		301 or	EFb-1	8-14	30	30	
		401	EFa-1	8-14	30	50	
	b. Stitch eyelet reinforcement pieces to waist for waist drawcord opening as indicated by marks on pattern.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Attach tunnel strips and drawcord to waist. (cont'd)						
	c. Make sewn eyelets at marks indicated on pattern through reinforcement piece.	401 or		19-24 per eyelet	50	70	
		502 or		26-32 per eyelet	70	70	
		503		26-32 per eyelet	70	70	
	d. Thread drawcord through front eyelets.						
	e. Position tunnel strips on the inside of parka, at marks indicated on pattern, with the unhemmed ends facing front opening.						
	f. Turn in raw edges along sides of tunnel strips 1/4 to 3/8 inch and stitch to parka with the rows of stitching 1/16 to 1/8 inch from edges, and with the drawcord enclosed in the tunnel. Do not catch the drawcord in the stitching.	301	SSat-2	10-14	30	30	
	NOTE: The tunnel strips may be attached after operation 13 (Make front facings), in which case the unhemmed ends shall be turned under and the tunnel strip shall overlap the front facing. The turned under end may be pre-hemmed or may be stitched to front facing.						
13.	Make front facings.						
	a. Position facing interlinings on inside of fronts and with the edges even, stitch 1/16 to 1/8 inch from edge.	301 or	SSa-1	8-14	30	30	
		401	SSa-1	8-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Make front facings. (cont'd)						
	b. Fold fronts to inside at marks indicated on pattern and stitch 1/4 to 3/8 inch from folded edge, catching the interlining in the stitching.	301	OSf-1	10-14	30	30	
	c. Turn in the raw edge and stitch to front 1/16 to 1/8 inch from edge. The ends of the front waist tunnels shall be caught under the facing, (see "Note" in operation 12).	301	LSd-1	10-14	30	30	
14.	Attach hood.						
	a. Stitch neck of hood to body, matching center seams (1/4 inch off center tolerance) with a double-lapped, double-stitched seam forming pleats on hood as indicated by pattern. The outside folded edge of pleats shall face the front.	301 or 401	LSc-2 LSc-2	10-14 10-14	30 30	30 50	
	b. Bartack across each end of the seam. An automatic straight tack may be used.	301 or Bartack		28 per tack 28 per bartack	30 30	30 30	
15.	Hem bottom and insert drawstrings.						
	a. Hem bottom with the raw edges turned in 3/16 to 1/4 inch and with the stitching 1/16 to 3/8 inch from turned-in edge, enclosing the drawcords within the fold. The hem shall finish 1 to 1-1/4 inches wide.	301	EFb-1	10-14	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Hem bottom and insert drawstrings. (cont'd)						
	b. Bartack each end of stitching with horizontal bartacks (four each). An automatic straight tack may be used.	301 or		28 per tack	30	30	
		Bartack		28 per bartack	30	30	
	c. Anchor the center of drawcord (1 inch off center tolerance) at side seam with a 3/8 to 1/2 inch vertical bartack or automatic straight tack, through side seam, hem, and drawcord.	301 or		28 per tack	30	30	
		Bartack		28 per bartack	30	30	
16.	Attach snap fasteners.						
	a. Attach socket part of snap fastener through hand opening flaps 3/4 to 1 inch from edge of flap and centered (1/4 inch off center tolerance).						
	b. Attach stud part of fastener through front and hand opening reinforcement piece to correspond with and accommodate socket part on flap.						
	c. Mark and attach five socket parts of snap fasteners on left front through front, interlining, and facing as indicated by marks on patterns and $1 \pm 1/8$ inches from front edge.						
	d. Mark and attach five stud parts of snap fasteners through right front, interlining, and facing to correspond with and to accommodate socket parts to snap fasteners.						
	NOTE: Measure position of snap from center of snap.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Clean parkas. a. Trim all thread ends and remove loose threads. b. Clean spots and stains. c. Knot ends of all drawcords.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The parka shall conform to the finished measurements shown in table III.

TABLE III. Finished measurements (inches)

	SIZE					
	X-Small	Small	Medium	Large	X-Large	Tolerance
1/2 face opening 1/	20-/14	20-1/4	20-1/4	20-1/4	20-1/4	± 1/4
Sleeve length 2/	27-1/2	27-3/4	27-7/8	28	28-1/8	± 1/2
1/2 chest 3/	26-1/2	28-1/2	30-1/2	32-1/2	34-1/2	± 1/2
Back length 4/	38	38-1/2	39	39-1/2	40	± 1/4
Vent length 5/	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	± 3/8

1/ Measure from top of hood to bottom edge of hem.

2/ Measure from center of sleeve-setting seam at shoulder to bottom edge of sleeve.

3/ With parka closed, measure across front at base of armhole, from folded edge to folded edge.

4/ Measure from center of hood joining seam to top of vent opening.

5/ Measure the top of vent to bottom of parka.

3.9 Workmanship. The finished parka shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of parkas. The sample unit shall be one parka. The inspection level shall be II (see 6.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Material defects	Any hole, cut, tear, mend, burn or needle chew	101		
	Drill hole exposed on outside of parka			301
	Any weakening defect such as a smash, multiple float, or loose slub:			
	- on outside	102		
	- on inside			302
	Permanent crease in cloth (when caught in stitching)	103		
	Unsightly slub or shade bar:			
	- on outside	104		
	- on inside			303
Shaded parts	Outside part shaded			304
Cleanness	Any spot or stain on the outside		201	
	Two or more shade and size tickets not removed			305
	Any marking visible on outside		202	
	Thread ends not trimmed or loose threads not removed			306
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	105		
	Any operation not performed as specified (unless otherwise classified herein)			307
Cutting	Any component part not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements	106		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching	Accuracy of seaming: Seam or component part twisted, puckered, pleated (unless otherwise classified herein)		203	
	Any part of parka caught in an unrelated operation or stitching: - caught in up to and including 1/4 inch of stitching		204	
	- caught in more than 1/4 inch of stitching	107		
	End of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch			308
	Stitching overlapping end(s) of thread break less than 1/2 inch			309
	Ends of a continuous line of stitching overlapped less than three stitches on labels or less than 1/2 inch on all other stitching			310
	Gage of stitching and seam allowances: Irregular, i.e. unevenly gaged or various stitching not uniform (to be scored only when condition exists on major portion of seam)			311
	Width not as specified or varies more than 1/16 inch		205	
	Stitches broken or missing: - up to and including 1/4 inch			312
	- more than 1/4 inch but not more than 1/2 inch		206	
	- more than 1/2 inch	108		
	Skipped stitches or runoff stitches: - 1/4 inch up to 1/2 inch			313
	- more than 1/2 inch		207	
	Raw edge: - more than 1/4 inch long			314
	Seam and stitch type: - not specified seam or stitch type		208	
	- looper thread of 401 stitch type on outside of parka	109		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Seam and stitch type: (cont'd)			
	Stitches per inch (to be scored only when condition exists on major portion of seam):			
	- less than the minimum		209	
	- more than the maximum			315
	Stitch tension (except bartacks):			
	Loose tension resulting in a loose seam	110		
	Loose tension (exposed loops of top or bottom threads) more than 1/2 inch in length			316
	Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	111		
Bartacks	Less than 3/8 or more than 1/2 inch long			317
	Bartack anchoring drawcord at ends of hood joining seam or at top of back vent omitted	112		
	Any other bartack omitted			318
	More than one bartack not positioned as specified			319
	Loose tension:			
	- on bartack anchoring drawcord, at ends of hood joining seam, or at top of vent		210	
	- on any other bartack			320
Snap fasteners	Any part of assembly missing, mismated, broken, cracked, bent, or not securely clinched, affecting function	113		
	One or more clinched too tightly cutting surrounding fabric	114		
	Sockets out of alignment with studs causing a noticeable bulge, twist, or pull		211	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Label(s)	Not stitched on all four sides			321
	Combination identification-size label missing, incorrect, or illegible	115		
	Instruction label missing, incorrect, or illegible		212	
	Not positioned as specified			322
	Combination size, identification, and instruction label missing, incorrect, or illegible	116		
Drawcords	One or more omitted	117		
	One or more caught in seaming	118		
	One or more ends not treated			323
	One or more ends not knotted			324
	Length of drawcord(s) measured with knots untied) beyond tolerance specified:			
	- up to and including 1 inch		213	
	- more than 1 inch	119		
Hood	Outside folded edge of pleats not turned toward front			325
	One or both pleats omitted		214	
	One or both eyelets omitted	120		
	Eyelet reinforcement piece omitted		215	
	Hem (tunnel) more than 1-1/4 or less than 1 inch wide			326
	Bottom hem more than 1/2 inch or less than 3/8 inch wide (except at tapered ends)			327
	Hood center seam in opposite direction to center back seam			328
	Hood center seam and center back seam of body staggered more than 1/4 inch			329
Eyelets	Stitches not securely caught in fabric (stitches pull away from fabric)	121		
	One or more broken or more than two continuous skipped stitches in one or more eyelets		216	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major A	Minor B
Eyelets (cont'd)	Loose stitch tension		330
	Purling of 401 stitch type on outside of parka		331
	Purling of 502 or 503 stitch type not at needle penetration or inside purling pulled to outside		332
	Thread ends on outside of parka		333
	Number of stitches per eyelet not as specified		334
	Inside diameter of eyelet less than 3/16 or more than 1/4 inch		335
	Cloth cut-out in center of eyelet not removed		336
	Thread ends less than 1/8 inch long	217	
	Thread ends more than 1/2 inch long		337
Front closure	Snap fasteners out of vertical alignment by more than 1/4 inch		338
	Fronts uneven:		
	- at top by 3/8 inch or more	218	
	- at bottom by 5/8 inch or more		339
	The ends of front waist tunnels not caught under or overlapped on front facings (whichever is applicable)		340
Hand openings	Snap fastener reinforcement piece(s) omitted	219	
	Side edge of welt not stitched to side edge of flap		341
Back	Front parts overlapping back parts at shoulders		342
	Backs overlapping fronts at side seams		343
	Vent opening hems less than 1/4 inch or more than 3/8 inch wide		344

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Sleeves	Folded edge of dart not turned toward wrist		220	
	Folded edge of dart not stitched down			345
	Sleeve overlapping body			346
	Sleeves reversed, i.e., right sleeve set in left armhole	122		
	Armhole seam staggered more than 1/2 inch at side seam			347
	Half wrist measurement less than 5 or more than 5-1/2 inches	123		
	Elastic caught in the stitching of hem	124		
	Sleeve hem (tunnel) less than 1/2 or more than 3/4 inch wide			348
Hem	Bottom hem less than 1 inch or more than 1-1/4 inches wide			349

4.4.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance or any sample parka with sleeves uneven in length by 1/2 inch or more shall be classified as a defect. The lot size shall be expressed in units of parkas. The sample unit shall be one parka. The inspection level shall be S-3 (see 6.7).

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 (see 6.7).

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.
Content	Number of bundles per container is more or less than required. Number of parkas per bundle is more or less than required. 1/ Size shown on one or more parkas not as specified on container. 1/

1/ For this defect, two bundles from each container in the sample shall be examined.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 (see 6.7).

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each snap fastened parka shall be laid flat, front up. The hood shall be folded down full length and the sleeves folded one over the other across the chest. The sides shall be adjusted by folding to attain a width of approximately 23 inches. The bottom edge shall be folded over so that the parka length is 29 inches. The parka shall then be folded in half across the length. The completely folded parka shall measure approximately 23 by 14-1/2 inches. Five folded parkas of one size only shall be stacked in a bundle, alternated, end for end, and securely tied with cotton tape or twine approximately 4 inches from each end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial preservation. Parkas shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Twenty parkas of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each fiberboard container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit bundles shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each fiberboard container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty parkas of one size only, preserved as specified in 5.1, shall be packed within a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF, (variety SW) or SF, class domestic, grade 275, variety SW of PPP-B-636. The inside of each fiberboard container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit bundles shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II, as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Parkas, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), parkas, packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The parka is intended for use by personnel of the Department of Defense to provide camouflage in snow areas.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).
i. Acceptance criteria required (see 6.7).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 International standardization agreements. Certain provisions of this document are the subject of international standardization agreement as cited in NATO, STANAG No. 2333. When amendment, revision, or cancellation of this document is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

6.6 Subject term (key word) listing.

Ensemble cold weather
Protective clothing

6.7 Acceptance criteria. The acceptance criteria below is recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.7.1 For end item visual examination. An acceptable quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 15.0 for major and minor A defects combined and 40.0 for total (major, minor A and B combined) defects is recommended.

6.7.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.7.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.7.4 For palletization examination. An AQL, expressed in terms of defects per hundred units, of 6.5 is recommended.

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - GL
Navy - NU
Air Force - 99

Preparing activity:
Army - GL

(Project 8415-0692)

Review activities:
Army - MD
Navy - MC
Air Force - 11, 82
DLA - CT

User activity:
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

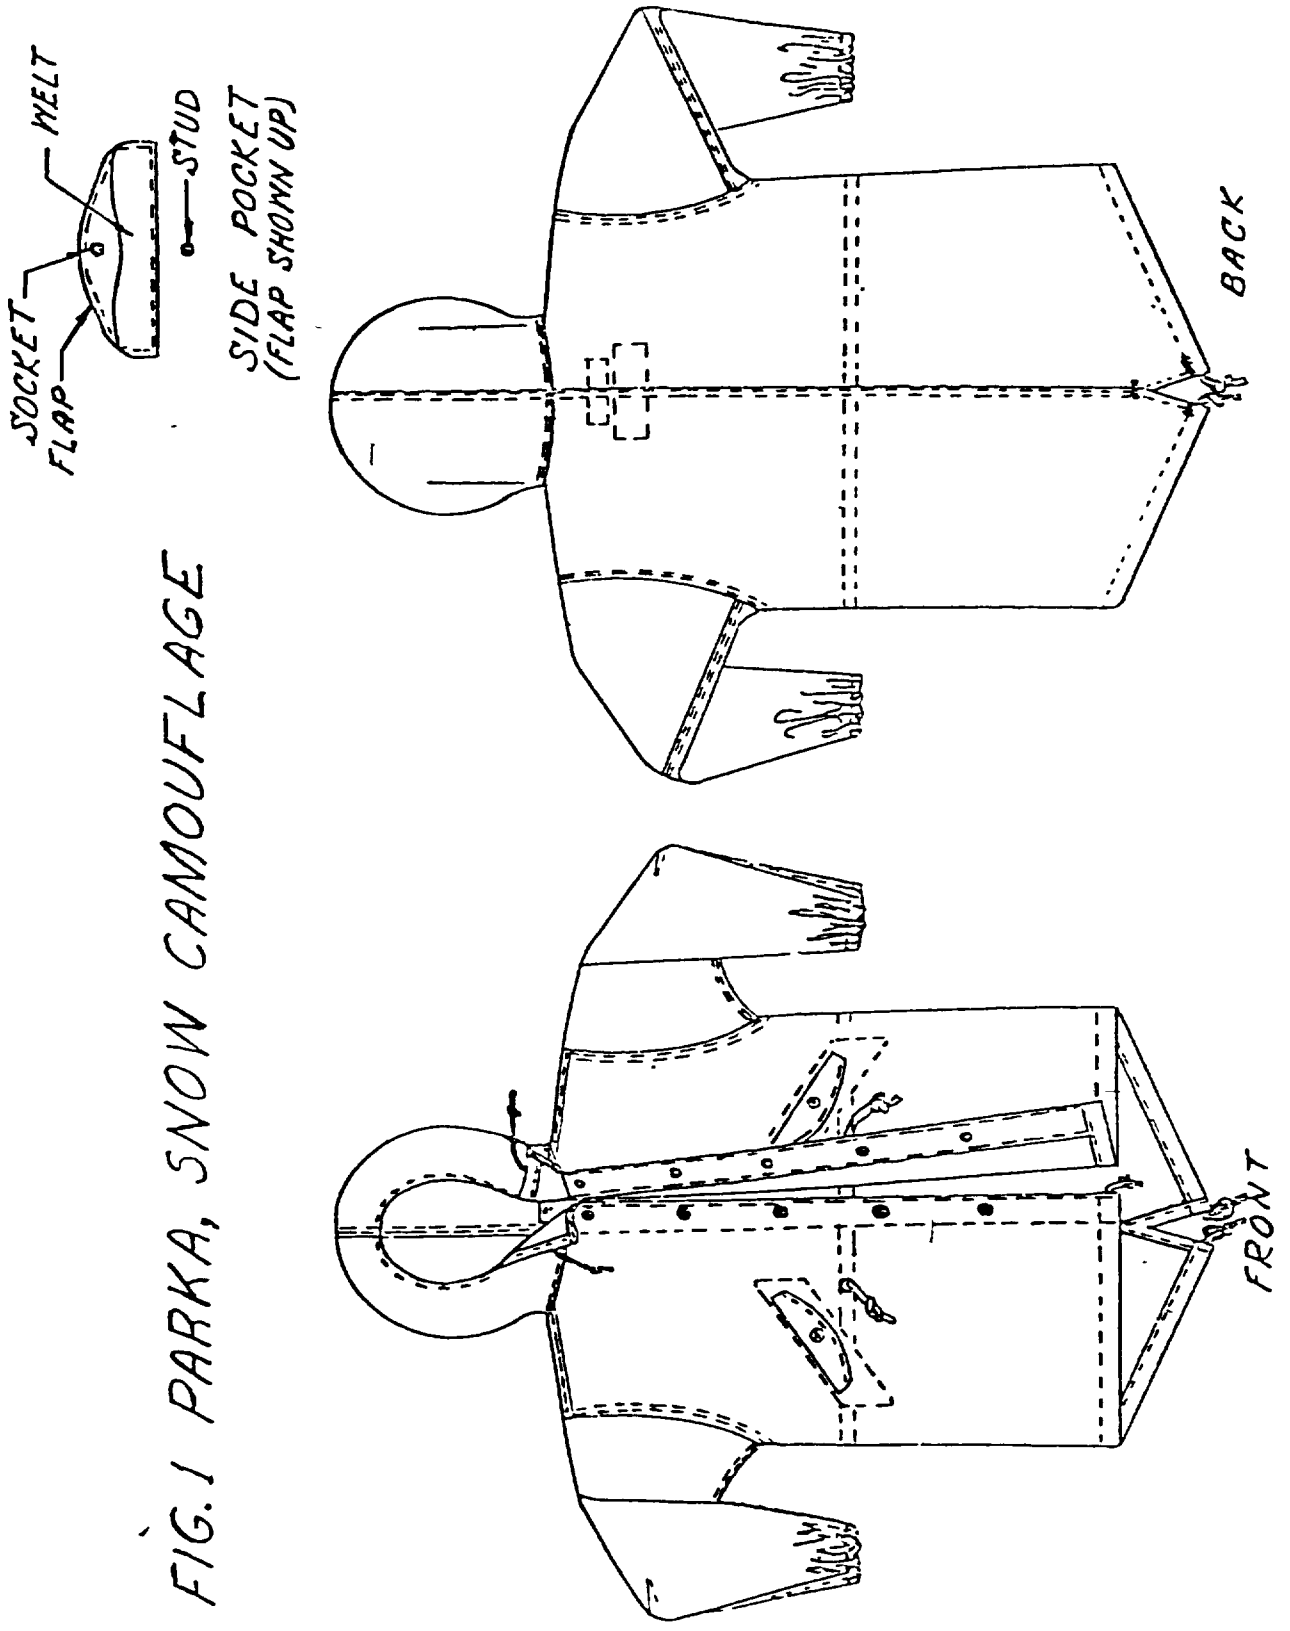


FIG. 1 PARKA, SNOW CAMOUFLAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-10809G	Parka, Snow Camouflage

3a. NAME OF SUBMITTING ORGANIZATION

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

b. ADDRESS *(Street, City, State, ZIP Code)*

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:26Z
Check the source to verify that this is the current version before use.