MILITARY SPECIFICATION

STOVE, GASOLINE BURNER, M1950, AND CASE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a one-burner, leaded or unleaded gasoline fired stove and a cylindrical case for the stove.

1.2 Classification. The stove with case; the stove without case; and the case without the stove shall be the following items as specified (see 6.2)

Item I	-	Stove with case
Item II	-	Stove without case
Item III	-	Case without stove

2. APPLICABLE DOCUMENTS

* 2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

O-S-605	-	Sodium Silicate Solution
KK-L-164	-	Leather, Cattlehide, Packing, Vegetable Tanned, Chrome Tanned, Chrome-Vegetable Retanned
QQ-A-250/2	-	Aluminum Alloy 3003, Plate and Sheet
QQ-B-613	-	Brass, Leaded and Nonleaded; Flat Products (Plate, Bar, Sheet, and Strip)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

QQ-B-626 - Brass, Leaded and Nonleaded: Rod, Shaped, Forgings, and Flat Products With Finished Edges (Bar and Strip)
QQ-B-650 - Brazing Alloy, Copper, Copper-Zinc, and Copper-Phosphorus
QQ-B-654 - Brazing Alloys, Silver
QQ-N-281 - Nickel-Copper-Alloy Bar, Plate, Rod, Sheet, Strip, Wire, Forgings, and Structural and Special Shaped Sections
QQ-S-571 - Solder, Tin Alloy; Lead-Tin Alloy, and Lead Alloy
QQ-S-698 - Steel, Sheet and Strip, Low Carbon
QQ-S-763 - Steel Bars, Wire, Shapes, and Forgings, Corrosion-Resisting
QQ-S-766 - Steel, Plates, Sheets and Strip, Corrosion-Resisting
QQ-W-321 - Wire, Copper Alloy
QQ-W-390 - Wire, Nickel-Chromium-Iron Alloy
QQ-W-470 - Wire, Steel, Carbon, Spring, Music
RR-W-360 - Wire, Fabric, Industrial
TT-E-485 - Enamel, Semi-Gloss, Rust-Inhibiting
WW-T-791 - Tube, Brass, Seamless
PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-B-676 - Boxes, Setup
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-P-291 - Paperboard, Wrapping and Cushioning

MILITARY

MIL-M-14 - Molding Plastics and Molded Plastic Parts, Thermosetting
MIL-R-3065 - Rubber, Fabricated, Products

STANDARDS

FEDERAL

FED-STD-595 - Colors

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-130	-	Identification Marking of U.S. Military Property
MIL-STD-147	-	Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base
MIL-STD-417	-	Rubber Compositions, Vulcanized General Purpose, Solid (Symbols and Tests)

DRAWINGS

US ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

2-2-104	-	Stove, Gasoline Burner, M-1950, With or Without Case; Assembly and Sections
2-2-105	-	Stove, Gasoline Burner, M-1950, With or Without Case; Gasoline Tank
2-2-106	-	Stove, Gasoline Burner, M-1950, With or Without Case; Gasoline Tank Details
2-2-107	-	Stove, Gasoline Burner, M-1950, With or Without Case; Burner Shield
2-2-108	-	Stove, Gasoline Burner, M-1950, With or Without Case; Valve
2-2-109	-	Stove, Gasoline Burner, M-1950, With or Without Case; Valve Details
2-2-110	-	Stove, Gasoline Burner, M-1950, With or Without Case; Preheater Cup and Generator
2-2-111	-	Stove, Gasoline Burner, M-1950, With or Without Case, Burner and Wrench
2-2-112	-	Stove, Gasoline Burner, M-1950, With or Without Case; Pump
2-2-113	-	Stove, Gasoline Burner, M-1950, With or Without Case; Pump Details
2-2-148	-	Case, Gasoline Burner Stove
2-2-283	-	Stove, Gasoline Burner, M-1950, With or Without Case; Item List

(Miniature copies of referenced Drawings 2-2-104 and 2-2-148, identified as figures 1 and 2 are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement function should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM)

A 108 - Steel Bars, Carbon, Cold Finished, Standard Quality

A 682 - Steel, Carbon, Strip, Cold Rolled Spring Quality, General

A 684 - Steel, Carbon, Strip, Cold Rolled Soft, Untempered Spring Quality

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the contractor shall furnish a sample of the item to be purchased under this specification for first article inspection and approval (see 4.3 and 6.3).

* 3.2 Materials and components. Materials and components shall conform to the requirements specified on the drawings and as specified hereinafter. Materials and components not definitely specified shall be of the quality normally used by the manufacturer for his stoves and cases provided the completed items conform to all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the current version before use.

3.2.1 Brass.

3.2.1.1 Bar and rod. Brass bar and rod shall conform to copper alloy No. 360 of QQ-B-626.

3.2.1.2 Sheet and strip. Brass sheet and strip shall conform to the chemical composition and mechanical properties of QQ-B-613.

3.2.1.3 Seamless tube. Seamless brass tube shall conform to WW-T-791.

3.2.1.4 Forgings. Brass forgings shall conform to the chemical composition and mechanical properties of QQ-B-626.

3.2.1.5 Wire. Copper alloy wire shall conform to QQ-W-321.

3.2.2 Carbon steel.

3.2.2.1 Sheet and strip. Carbon steel sheet and strip shall be cold-rolled and shall conform to the chemical composition and mechanical properties of QQ-S-698.

3.2.2.2 Bar. Carbon steel bar shall conform to the chemical compositions and mechanical properties of ASTM A-108.

3.2.2.3 Wire. Carbon steel wire shall conform to the chemical compositions and mechanical properties of QQ-W-470.

3.2.2.4 Spring strip. The carbon steel spring strip specified on the drawings shall conform to the chemical compositions and mechanical properties of ASTM A-682 or ASTM A-684, as applicable.

3.2.3 Corrosion-resisting steel.

3.2.3.1 Sheet and strip. Corrosion-resisting steel sheet and strip shall conform to class 430, finish 2B or better of QQ-S-766.

3.2.3.2 Bar stock. Corrosion-resisting steel bar stock shall conform to class 321 of QQ-S-763.

3.2.4 Nickel-copper-alloy wire. Nickel-copper-alloy wire shall conform to class A of QQ-N-281.

3.2.5 Nickel-chrome-alloy wire. Nickel-chrome-alloy wire shall conform to temper C of QQ-W-390.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

3.2.6 Solder.

3.2.6.1 Brazing. Brazing solder shall be either a commercial grade of copper wire or brazing wire conforming to QQ-B-650. Silver solder conforming to QQ-B-654 may be substituted for brazing wire.

3.2.6.2 Soft. Soft solder shall conform to QQ-S-571.

3.2.7 Leather. Leather shall conform to the requirements for tannage III, treatment B of KK-L-164.

3.2.8 Plastic. Plastic shall be black or red, phenolformaldehyde, thermo-setting mineral filled and shall conform to type MFE of MIL-M-14.

3.2.9 Synthetic rubber. Synthetic rubber shall meet the requirements of type, class, grade and suffix letters SC 815 ABE5 of MIL-STD-417 and the requirements of MIL-R-3065.

3.2.10 Valve body eccentric stem packing. The valve body eccentric stem packing shall be Garlock Company style number 7276 or equivalent.

3.2.11 Braided asbestos tubing. Braided asbestos tubing shall be of the grade used for the purpose in commercial practice.

3.2.12 Wire fabric. Wire fabric shall be made of either brass (70 percent copper and 30 percent zinc) or monel wire fabric and shall conform to RR-W-360.

3.2.13 Liquid sodium silicate. Liquid sodium silicate (water glass) shall conform to class II of O-S-605.

3.2.14 Aluminum sheet. Aluminum sheet shall conform to temper 0 of QQ-A-250/2.

3.3 Design and construction. The end items shall be as indicated in 1.2 and shall conform to the design, details and dimensions specified herein and on the applicable drawings.

3.3.1 Item I. Item I shall consist of an assembly of items II and III.

3.3.2 Item II. The stove as illustrated on Drawing 2-2-104 (figure 1) shall be of the design and construction specified herein and on Drawings No. 2-2-104 through 2-2-113 inclusive and Drawing No. 2-2-283.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T14:22Z
Check the source to verify that this is the currentversion before use.

The burner assembly shall not project more than 3/16 inch above the burner shield assembly after the stove is assembled. The grate legs shall be riveted flush to the burner shield and shall be at right angles to the bottom edge of the burner shield. When tested as specified in 4.5.6, the top edge of the three open grate supports shall be in contact with the bottom of a 7-1/2 inch approximate diameter pot when placed on the grate supports.

3.3.2.1 Asbestos wick. The asbestos wick shall be glued to the preheater cup with liquid sodium silicate (water glass) specified in 3.2.13.

3.3.2.2 Gasoline tank assembly. The gasoline tank assembly shall be brazed in a controlled atmosphere copper brazing furnace and shall not leak when tested as specified in 4.5.2.

3.3.2.3 Complete valve and generator assembly. The complete valve and generator assembly shall allow air to pass with the valve open and shall be air tight with the valve closed when tested as specified in 4.5.3.

3.3.2.4 Burner. The burner body and liner shall be assembled to prevent relative rotation between the two. At the option of the contractor the openings in the burner body and liner may be of other sizes and shapes than shown, provided the open area is the same.

3.3.2.5 Grate-support bar. The flat pinchlock on the end of the grate-support bar relative to the grate support arm may be at an angular position other than that shown on Drawing 2-2-107 at the option of the manufacturer.

3.3.2.6 Valve bushing. Thread sealing compound shall be applied to the threads on the valve body prior to assembly of valve into the tank.

3.3.2.7 Plastic indicator knob. The plastic indicator knob shall show no sign of deterioration when tested as specified in 4.5.1.

3.3.2.8 Air pump. The air pump leather cup shall be lubricated with thin silicone base oil prior to assembly.

3.3.2.9 Threads. Threads which are to be plated (except on commercial hardware) shall be machined undersized before plating.

3.3.2.10 Complete assembled stove. The completely assembled stove shall show no leaks when tested as specified in 4.5.4. The stove shall operate on a commercial regular leaded grade gasoline in accordance with the instructions in3.6.1 and the valve shall be capable of passing an air-fuel mixture in the "light" position and shall be gas tight in the "off" position when tested as specified in 4.5.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

3.3.3 Item III. The case (see figure 2) shall be of the design and construction specified herein and on Drawing No. 2-2-148. The case shall include a large utility cup, and a small utility cup. Each cup shall be of one piece construction and shall be fabricated of the aluminum sheett specified in 3.2.14. When tested as specified in 4.5.7 the small utility cup shall drop over the large utility cup without binding and shall lock in the retaining grooves without excessive force.

3.3.3.1 Large utility cup. The teats of the large utility cup shall be formed without metal fractures and shall be 180 degrees apart. There shall be no welding of ruptures.

3.3.3.2 Small utility cup. The embossing of the small utility cup retaining grooves shall be accomplished without metal fracture and shall be 180 degrees apart. There shall be no welding of ruptures. Beads shall be rolled or crimped tight.

3.4 Spare parts and wrench. The spare parts and wrench listed in table I, shall be furnished with each stove (item II), or with each stove with case (item I) and shall be packed in the pump plunger tube, with the exception of one generator which shall be secured in a metal spare generator holder clipped to one of the grate legs. The wrench shall be constructed as specified on Drawing No. 2-2-111 and shall be secured between two of the grate legs.

TABLE I. Spare parts and wrench

Quantity	Nomenclature	Drawing	Item No.
1	Cup, leather, air pump	No. 2-2-112	8 - 5
1	Gasket, filler cap	No. 2-2-113	8 - 13
2	Generator assembly	No. 2-2-110	5
1	Packing, eccentric stem, valve body	No. 2-2-108	4 - 5
1	Wrench	No. 2-2-111	9

3.5 Finish.

Source: https://assist.dla.mil -- Downloaded: 2026/0-17T14:22Z
Check the source to verify that this is the current version before use.

3.5.1.1 Plating. Both sections of the gasoline tank including the bushings shall be electro-nickel plated with a minimum thickness of 0.00004 inch prior to brazing on both the inside and outside. The feet, plunger grip and wrench shall be electro-zinc plated with a minimum thickness of 0.0005 inch. The rivets and screws shall be zinc plated in conformance with commercial practice.

3.5.1.2 Baked enamel. Each gasoline tank shall be thoroughly cleaned, degreased and then coated on the outside with a baking enamel conforming to TT-E-485, applied to dry film thickness of 1.0 mil minimum and baked 45 minutes at 250 F., or at a time-temperature cycle recommended by the contractor and approved by the contracting officer. The enamel shall be color No. 24087 of FED-STD-595.

3.5.2 Case without stove (item III). All burrs, slivers, fins or roughness shall be removed from the edges and surfaces of each cup (large and small utility cup) prior to applying a chemically produced frosted (etched) finish. Each cup shall then be given a chemically produced frosted (etched) finish and shall then be rinsed in clear water and dried.

3.6 Decalcomanias. Two decalcomanias as shown on Drawing 2-2-105, containing instructions and warnings as specified in 3.6.1 and 3.6.2, shall be affixed to the gasoline tank of each stove in the positions shown on Drawing 2-2-104. The information on the decalcomanias shall be in characters not less than 1/16 inch high except the words "ON", "OFF", "LIGHT", "WARNING", and "STOVE, GASOLINE BURNER, M1950", shall be in upper case characters not less than 5/64 inch high.

3.6.1 Instructions. The following instructions shall be printed in black with a gold or silver field:

ON LIGHT OFF

STOVE, GASOLINE BURNER, M1950

1. Fill 3/4 full of clean gasoline - pump 10 strokes.
2. Turn valve extreme left (ON) 3 seconds, then (OFF) position - apply match and allow to burn 1 minute.
3. Open valve to vertical (LIGHT) position until flame turns blue, then open full (ON) - pump 10 strokes.
4. After use turn valve to (OFF) position and wait until stove cools before releasing pressure in tank by loosening pump caps.
5. Spare parts are contained in pump plunger.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T14:22Z
Check the source to verify that this is the currentversion before use.

3.6.2 Warning. The following warnings shall be printed in black with a red field:

WARNING

1. When used in confined quarters provide adequate ventilation.
2. Thoroughly wash case before using as food container.
3. Thoroughly wash any utensil in which stove has been stored before using for cooking purposes.

3.7 Marking for identification. The letters "U.S.", the manufacturer's name, tradename, or trademark and the year of contract shall be marked on the stove (item II) as shown on Drawing No. 2-2-104 and on the case (item III) as shown on Drawing No. 2-2-148. Marking shall be applied in accordance with MIL-STD-130.

3.8 Over-all dimensions. The finished stove, when arranged for packing, shall fit longitudinally inside a 4.088-inch-diameter cylinder and at right angles inside a 7.1075-inch-diameter cylinder (see 6.6).

3.9 Workmanship. The finished items shall be complete and clean and free of slivers, burrs, dents, punctures, cracks, sharp edges, and sharp corners. The embossed markings shall be legible and free of visible evidence of penetration, cracks, and fissures.

3.9.1 Stove.

3.9.1.1 Rivets. Rivet heads shall be round and in full contact with the joined metal surfaces. There shall be no empty rivet holes.

3.9.1.2 Welds. Welds shall be continuous, sound and free of pits, burn holes, cracks, and fissures. All flux and scale and excess metal shall be removed and the welds shall be finished to blend with the adjacent metal surfaces.

3.9.1.3 Soldering and brazing. Soldering and brazing shall be smooth, sound, and free of imbedded foreign matter. All flux shall be removed.

3.9.1.4 Decalcomanias. Decalcomanias shall be free of tears and scratches. The printed information shall be legible and the decalcomanias shall be firmly affixed to the stove without areas of poor or no adhesion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

3.9.1.5 Threads and threaded fasteners. Threads shall not be missing, broken, stripped or fractured. There shall be no missing or loose threaded fasteners.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, it shall be examined for the defects in table II, and for compliance with dimensions specified and tested as specified in 4.5.4, 4.5.5, 4.5.6, and 4.5.7 as applicable to each item. The presence of any defect listed in table II, any dimension not within specified requirements, or failure to pass any test shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Inspection of indicator knob. The indicator knob shall be tested as specified in 4.5.1. The lot shall be the number of knobs offered for inspection at one time. The sample unit shall be one knob. The inspection level shall be S-2 with an acceptable quality level (AQL) of 2.5 expressed in terms of defects per hundred units. Any non-compliance with specified requirements shall be a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

4.4.1.2 Plastic. The plastic may be accepted on the basis of contractor's certification of compliance for the basic properties of the molding compound specified in 3.2.8.

4.4.2 In-process inspection.

4.4.2.1 Visual examination of operation Examination shall be made of the following operations to establish conformance to specified requirements. Whenever nonconformance is noted correction shall be made to the items affected and to the operation.

a. Gluing of asbestos wick to preheater cup (see 3.3.2.1).
b. Brazing of gasoline tanks assembly (see 3.3.2.2).
c. Assembling of burner body and liner (see 3.3.2.4).
d. Application of thread sealing compound (see 3.3.2.6).
e. Lubrication of air pump leather cup (see 3.3.2.8).
f. Machining of thread undersize (see 3.3.2.9).
g. Plating, including thickness, (see 3.5.1.1).
h. Cleaning and degreasing prior to enameling (see 3.5.1.2).
i. Removal of burrs, fins, slivers and roughness from cup edges and surfaces prior to applying finish (see 3.5.2).
j. Application of chemically produced frosted finish (see 3.5.2).
k. Rinsing in clear water and drying of cups after application of frosted finish (see 3.5.2).

4.4.2.2 Gasoline tank assembly test. Each gasoline tank assembly shall be tested as specified in 4.5.2 to determine compliance with the requirements specified in 3.3.2.2. Any evidence of leaks shall be cause for rejection.

4.4.2.3 Complete valve and generator assembly test. Each complete valve and generator assembly shall be tested as specified in 4.5.3 to determine compliance with the requirements specified in 3.3.2.3. Any evidence of air not passing with the valve in the open position or evidence of leaks with the valve in the off position shall be cause for rejection.

4.4.3 End item inspection. The inspection lot shall consist of all the same items offered for inspection at one time. The sample unit shall be one completely fabricated item.

* 4.4.3.1 Visual examination. Examination shall be made of the end item for defects in table II. The inspection level shall be II and the acceptable quality level (AQL) shall be 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the currentversion before use.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Minor
Item II Stove			
Finish	Not color 24087 of FED-STD-595		X
Construction and workmanship (general)	Sliver, burr, dent or crack	X	
	Sharp edge or corner	X	
	Missing component parts	X	
Rivet	- Missing		X
	- Head not round and in full contact with the joined metal surfaces		X
Welds	- Not continuous, not smooth, pits, burnholes, cracks, fissures, flux or scale not removed, not finished to blend with adjacent surfaces		X
Solder and brazing	Scale, grease, flux or foreign matter not removed		X
Threads	Missing, broken, stripped or or fractured	X	
Threaded fasteners	Loose, broken or missing	X	
Grate legs	Not riveted flush to the burner shield	X	
	Not at right angles to the bottom edge of burner shield	X	
Decalcomanies	Missing	X	
	Improper location	X	
	Loose, torn, or scratched, poor adhesion		X
	Illegible	X	
	Improper color	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Item III case			
Large utility cup	Teats not opposite each other (180 degrees)	X	
Small utility cup	Teats missing	X	
	Retaining groove(s) missing	X	
Finish	Not frosted (chemically etched)	X	
Construction and workmanship	Dent, nick, crack, split or puncture	X	
	Cups not one piece construction	X	
	Teats on large utility cup fractured or repaired by welding. Beads not rolled or crimped tight	X	
	Surfaces opposite markings penetrated, uneven or distorted	X	
Marking for identification (items II & III)	Missing, incomplete, illegible, not indented, or incorrect		X

4.4.3.2 Dimensional examination. Examination shall be made of the end item for compliance with dimensions specified. Any dimension not within specified tolerance shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

4.4.3.3 Testing of the end items. The end items shall be tested as specified in table III. The AQL for all tests shall be 4.0 expressed in terms of defects per hundred units. Any noncompliance with specified requirements shall be a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

TABLE III. Testing of the end items

Item description	Test paragraph	Type test	Requirement paragraph	Inspection level
I, Stove with case	4.5.4	Stove leak	3.3.2.10	II
	4.5.5	Operational	3.3.2.10	S-2
	4.5.6	Grate supports	3.3.2	II
	4.5.7	Case assembly	3.3.3	II
II, Stove without case	4.5.4	Stove leak	3.3.2.10	II
	4.5.5	Operational	3.3.2.10	S-2
	4.5.6	Grate support	3.3.2	II
III, Case without stove	4.5.7	Case assembly	3.3.3	II

4.4.4 Packaging inspection. An inspection shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table IV. The lot shall be the number of containers offered for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence of method of application
Materials	Component missing, damaged, or otherwise defective
Contents	More or less than specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

4.4.4.1 Inspection of preparation for delivery. Preservation, packaging, packing, and marking shall be inspected in accordance with the appendix in PPP-B-636.

4.4.4.2 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be as indicated in table V. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE V. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirements
Palletization	Not as specified Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application

4.5 Tests.

4.5.1 Indicator knob. Subject the indicator knob to a temperature of 400 F. for not less than four hours to determine compliance with 3.3.2.7. Any noncompliance to specified requirements shall constitute failure of this test.

* 4.5.2 Tank leak. Seal the gasoline tank assembly and apply an air pressure of not less than 30 pounds per square inch gauge (psig) through an opening in the seal. Submerge the tank in clear liquid and examine for evidence of leaks to determine compliance with 3.3.2.2. Any noncompliance with specified requirements shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the current version before use.

4.5.3 Complete valve and generator assembly. Apply an air pressure of 25 psig through the fuel tube of the complete valve and generator assembly. Submerge the assembly in a clear liquid with the valve open and then move the valve to off. Examine the passage of air and examine for evidence of leaks to determine compliance with 3.3.2.3. Any noncompliance with specified requirements shall constitute failure of this test.

4.5.4 Stove leak. Pump 45 strokes on the plunger with the valve in the "OFF" position and submerge the stove in clear liquid and examine for evidence of leaks to determine compliance with 3.3.2.10. Any noncompliance with specified requirements shall constitute failure of this test.

4.5.5 Operational. Start and operate the stove in accordance with the instruction specified in 3.6.1 using a regular grade gasoline. While operating observe the flame to determine compliance with the valve position specified in 3.3.2.10. Any noncompliance with specified requirements shall constitute failure of this test. Remove unused gasoline after operating.

4.5.6 Grate supports. Open the three grate supports and place a 7-1/2 inch nominal diameter pot on the supports and examine the bottom surface of the pot in contact with the top edges of the grate supports to determine compliance with 3.3.2. Any noncompliance with specified requirements shall constitute failure of this test.

4.5.7 Case assembly. Set the large utility cup on a flat level surface. Hold the small utility cup over the large utility cup and bring them together to lap 1/4-inch. Align the teat grooves of the small cup with embossings of the large cup, then drop the small cup over the large cup to determine compliance with the nonbinding requirement of 3.3.3. Rotate the top cup, engaging first the top bayonet grooves, then the lower bayonet grooves until the cups lock in each instance to determine compliance with the nonbinding and excessive force requirements of 3.3.3. Any noncompliance with specified requirements shall constitute failure of this test.

5. PACKAGING

5.1 Unit packaging. Unit packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A unit packaging.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the current version before use.

5.1.1.1 Prepackaging. Spare parts, and wrench specified in 3.4 shall be prepackaged with each stove in the following manner: One spare generator assembly shall be placed in the generator holder and the holder clipped to the grate legs. The remaining generator assembly, together with air pump leather cup, eccentric stem-valve body packing, filler cap gasket, and air-check valve assembly, shall be placed within the pump plunger chamber. The grate support and feet of the stove shall be folded inward, and the wrench placed between two of the grate legs, as shown on Drawing 2-2-104.

5.1.1.2 Stove with case. Each stove, prepared as specified in 5.1.1.1, shall be placed in its case with a fiberboard disc conforming to type CF, class domestic, variety SW, B flute, grade 125 of PPP-F-320, placed in the bottom of the case. A paperboard collar fabricated from material conforming to type III, style 1 or 2 of PPP-P-291, shall line the wall of the case adjacent to the upper half of the stove. Each complete stove and case shall then be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 200 of PPP-B-636. The inside dimensions of the box shall approximate 4-3/8 inches in length, 4-3/8 inches in width, and 7-1/8 inches in depth. Approximate dimensions are furnished as a guide only. Each box shall be closed in accordance with PPP-B-636.

5.1.1..3 Stove without case. Each stove, prepared as specified in 5.1.1.1, shall be packaged in a snug-fitting fiberboard box as specified in 5.1.1.2.

* 5.1.2 Level C unit packaging. Each stove, with or without case shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Stoves, with or without case. Forty stoves with cases, or forty stoves without cases, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Level A packages shall be packed upright, five in length, four in width, and two in depth. The inside dimensions of the shipping container shall approximate 24 inches in length, 19-1/4 inches in width, and 15-1/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with strapping or tape banding in accordance with PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

5.2.1.2 Case only. Seventy-five cases, (each assembled and locked into the lower bayonet) shall be packed upright, five in length, five in width, and three in depth in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be furnished with slotted partitions forming individual cells for each case. The slotted partitions shall be 1/16-inch less than the inside length and width of the container and equal in height to a case. Each of the three layers shall be separated with a pad cut 1/16-inch less than the inside length and width of the container. The layer pads and slotted partitions shall be made from fiberboard conforming to type CF, class domestic, variety SW, grade 275 of PPP-F-320, or minimum 0.040-inch thick paperboard conforming to PPP-B-566, or PPP-B-676. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with strapping or tape banding in accordance with PPP-B-636.

5.2.2 Level B.

5.2.2.1 Stoves, with or without case. Forty stoves with cases, or forty stoves without cases, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1 except that the shipping container shall conform to type CF, variety SW or type SF, class domestic of PPP-B-636, and closure shall be in accordance with method II of the appendix thereto.

5.2.2.2 Case only. Seventy-five cases (each assembled and locked into the lower bayonet groove) shall be packed as specified in 5.2.1.2, except that the shipping container shall be as specified in 5.2.2.1.

5.2.2.3 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping containers shall be V3c, V3s, or V4s, fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Stoves, with or without cases, or the cases only, packaged as specified in 5.1 when applicable, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Palletization. Unless otherwise specified (see 6.2), stoves, with or without cases, or cases alone, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages, shipping containers and unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The stove, item II, covered by this specification is intended for use in the field for cooking rations, heating water and melting snow for groups of 2 to 5 men. The case, item II, is intended for use as a protection cover for the stove. Each of the utility cups comprising the stove are also intended for use with the stove as utensils for heating rations and water.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Item required (see 1.2).
(c) When a first article is required (see 3.1, 4.2, and 6.3).
(d) Selection of the applicable levels of unit packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant class fiberboard shipping containers are required for level B packing (see 5.2.2.3).
(f) When palletization is not required (5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Armed Services Procurement Regulations ASPR 7-104.55. The first article should be a preproduction sample, initial production item, or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

* 6.4 Contract data requirements. Any data items to be delivered under any contract for the items covered by this specification should specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the current version before use.

6.5 Miscellaneous data. The stove weighs approximately 1 pound, 6 ounces. The case weighs approximately 9.8 ounces. The capacity of the gasoline tank is approximately 11 ounces of gasoline. The stove will burn approximately 2-1/2 hours when started with a full tank of gasoline.

6.6 Over-all dimension test gages. The case, item III of this specification, the inner pot of the Cooking Outfit, Field 5-Man (Specification MIL-C-1417) may be used as test gages for the stove providing these items are of the minimum size allowed by the respective specifications (see 3.8).

* 6.7 Certain provisions of this specification are the subject of quadripartite standardization agreement QSTAG-316. When amendment, revision or cancellation of this specification is proposed, which affects or violates the quadripartite agreement concerned, the preparing activity will take appropriate reconciliation action through quadripartite standardization channels including departmental standardization offices, if required.

6.8 Packaging. The method of packaging referred to in 5.1.1, is similar to method III of MIL-P-116.

6.9 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - YD
Air Force - 84

Preparing activity:

Army - GL

Project No. 7310-0525


Review activity:

Army - MD
DSA - GS


User activity:

Navy - MC

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the current version before use.

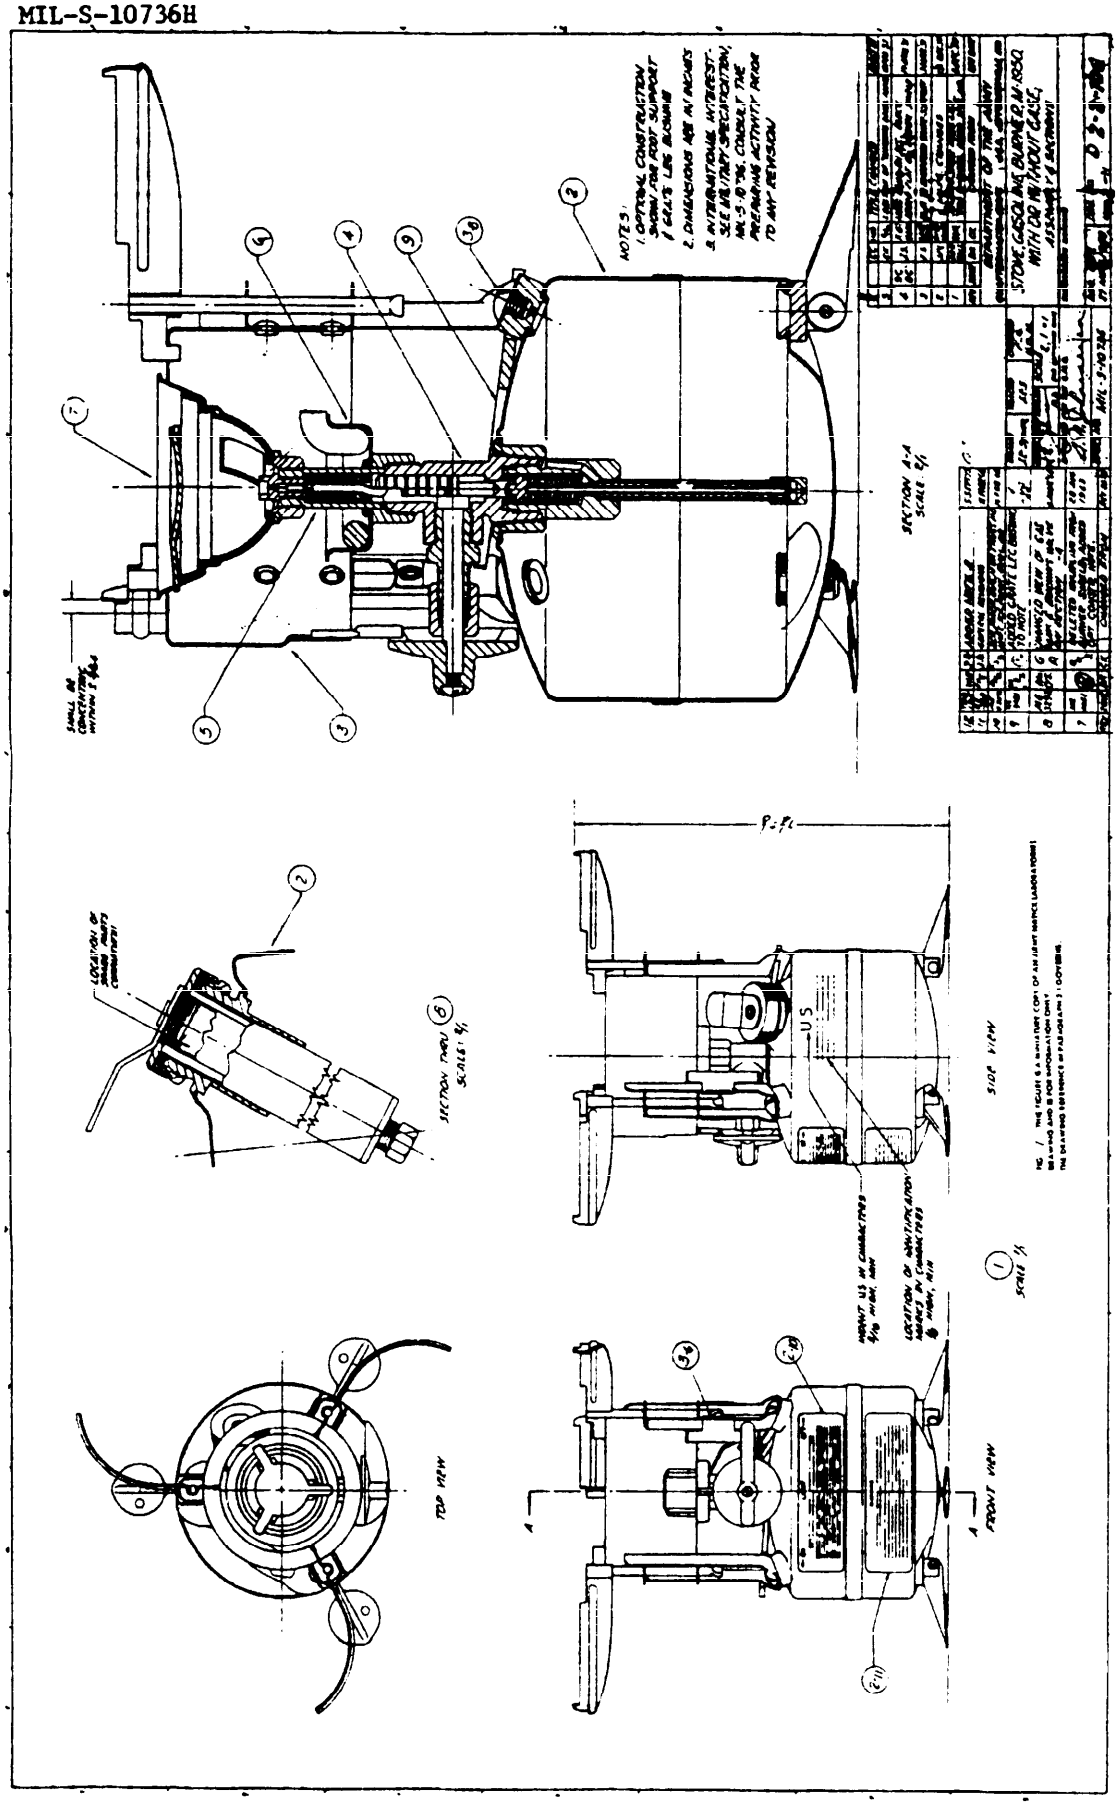

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the currentversion before use.

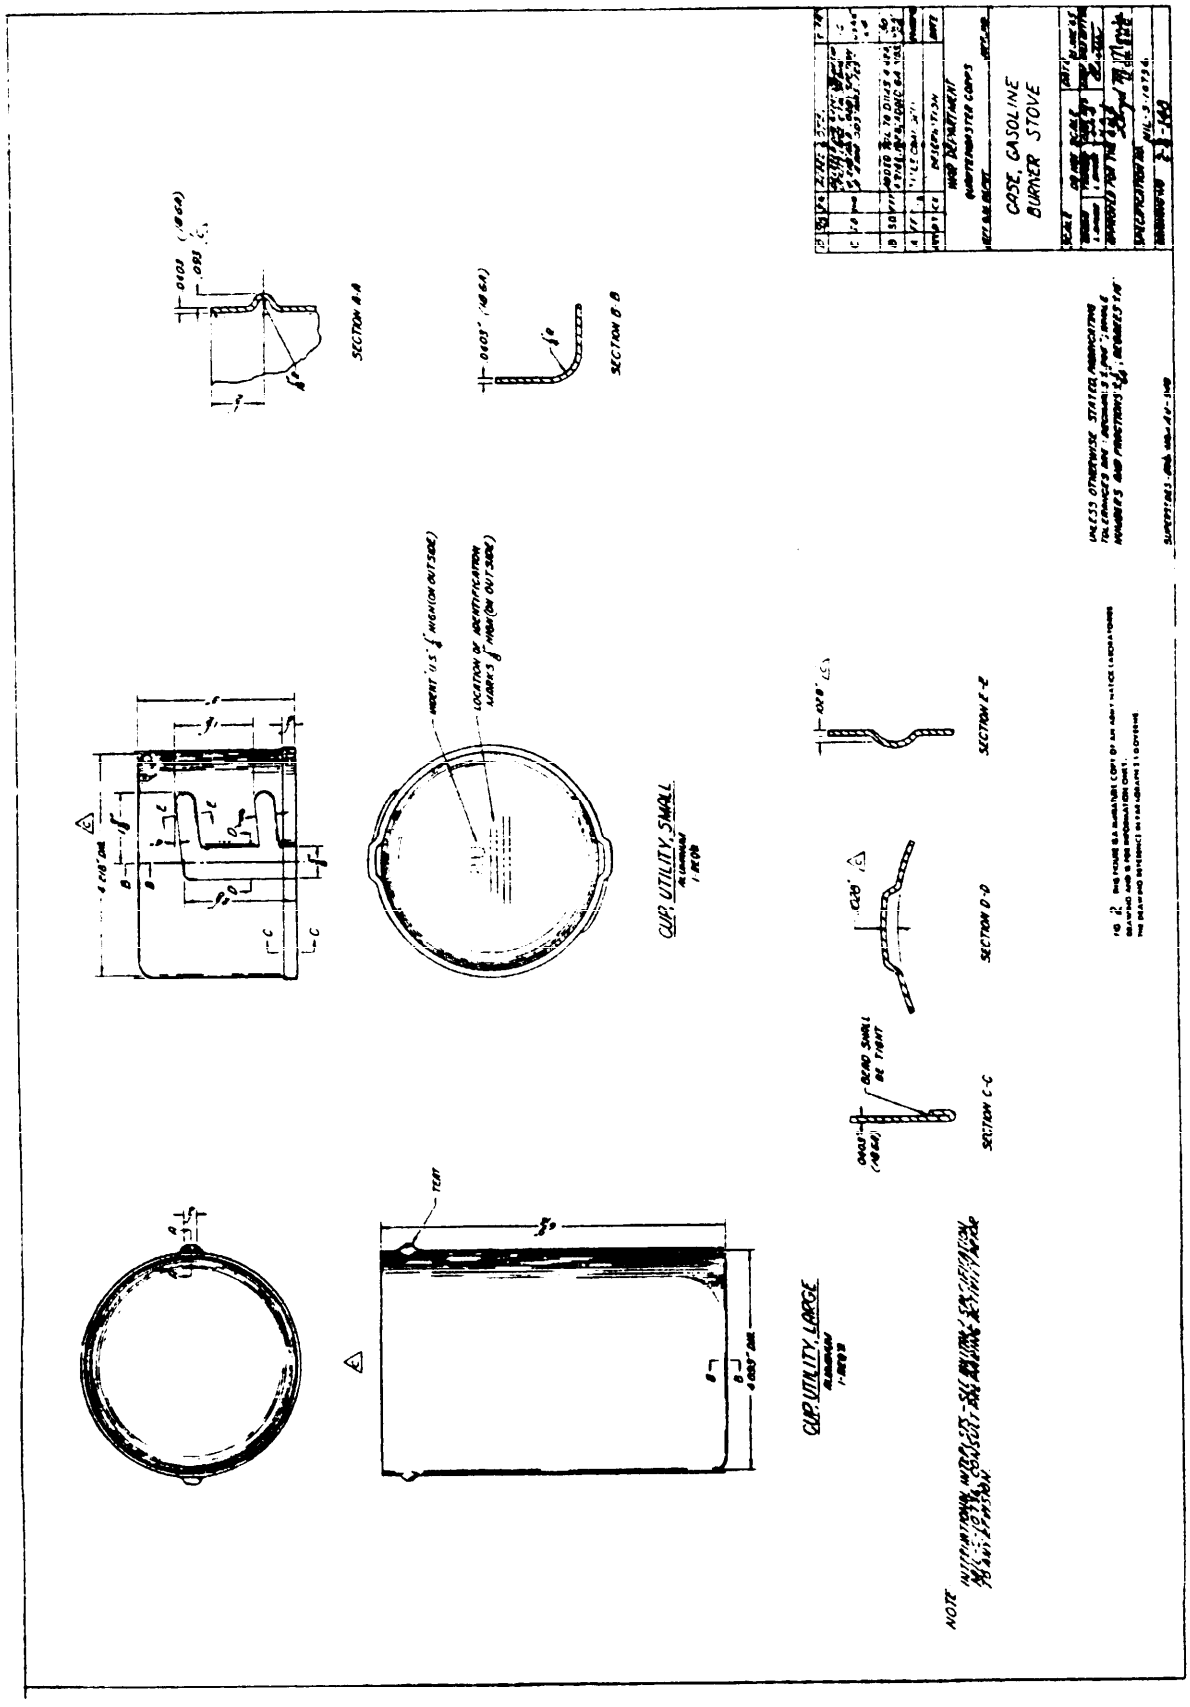

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:22Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK DEVELOPMENT CENTER
NATICK, MA 01760
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AMXNM-TD G

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

Commander
US Army Natick Development Center
ATTN: AMXNM-TD G
Natick, MA 01760

NATICK OP 1 MAY 75
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-S-10736H - STOVE, GASOLINE BURNER, M1950, AND CASE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:22Z
Check the source to verify that this is the current version before use.