MIL-T-10760C(EL)
27 March 1978
Superseding
MIL-T-10760B(EL)
11 September 1972

MILITARY SPECIFICATION

TANK, PROCESSING, PHOTO FK-1( )

This specification is approved for use by Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of tank used for washing of photographic film and designated as Tank, Processing, Photo FK-1( ). (See 6.2.)

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this *specification to the extent specified herein.*

SPECIFICATIONS

FEDERAL

T-T-871	Twine, Fibrous Cotton, Wrapping
NN-P-71	Pallet, Material Handling, Wood (Stringer Construction 2-Way and 4-Way (Partial)
QQ-S-766	Steel Plates, Sheets, and Strip-Corrosion Resisting
QQ-S-781	Strapping, Steel, Flat and Seals
TT-P-1757	Primer Coating, Zinc Chromate, Low Moisture-Sensitivity
PPP-B-585	Boxes, Wood, Wirebound

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: *Commander*, US Army Electronics Research and Development Command, ATTN: DELSD-D-TS-S, Ft. Monmouth, NJ 07703, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this *document or by letter.*

FSC 6740

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock Corner
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-F-320	Fiberboard, Corrugated and Solid Sheet Stock (Container Grade), and Cut Shapes
PPP-P-291	Paperboard, Wrapping, Cushioning
PPP-S-760	Strapping, Non-Metallic (and Connectors)
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing
PPP-T-76	Tape, Packaging, Paper (for Carton Sealing)
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced

MILITARY

MIL-P-116	Preservation-Packaging, Methods of
MIL-R-3065	Rubber, Fabricated Parts
MIL-T-8606	Tubing, Steel, Corrosion Resistant (18-8 Stabilized) and Extra Low Carbon

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U. S. Military Equipment
MIL-STD-147	Palletized and Containerized Unit Loads 40 Inch X 48 Inch Pallets, Skids, Runners, or Pallet Type Base
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-1188	Commercial Packaging of Supplies and Equipments

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, the contractor shall furnish first article units in accordance with 4.3.

3.2 Function description. Tank, Processing, Photo FK-1( ) shall consist of a tank, removable rack and cross piece, piping, and rubber hose conforming to Figure 1 and the following requirements.

3.3 Parts, Materials, and Processes: General. The following requirements shall apply.

3.3.1 Rivets. Rivets shall conform to requirement 12 of MIL-STD-454. Rivets shall be driven wet using a zinc-chromate primer conforming to TT-P-1757. In riveted joints that must be made pressure tight by caulking the edge of the plate, the edge distance shall not exceed 1-1/2 times the diameter of the rivet or 4 times the thickness of the plate.

3.3.2 Welding. Welding shall conform to requirement 13 of MIL-STD-454 except as specified herein.

3.3.3 Welded assemblies. Welded assemblies shall be cleaned to remove rust, scale, oxidation products, and excess flux by sandblasting, wire brushing, or other suitable means.

3.4 Construction.

3.4.1 Tank. The tank shall be leakproof and shall be constructed of one piece, .4874MM (.031 inch) thickness, class 304, type 4 finish, stainless steel conforming to QQ-S-766, eight, 7.938MM (5/16 inch) diameter, equally spaced holes shall be provided at the top of each side of the tank as indicated in Figure 1. Two handles, one at each end, shall be provided and located as in Figure 1. Inside dimensions of the tank shall be 508.0MM (20 inches) long, 330.2MM (13 inches) wide, and 330.2MM (13 inches) deep ± 1.588MM (± 1/16 inch) in each dimension (approximately 53.2 liters) (14 gallons) liquid capacity. A metal hose fitting shall be provided, welded or otherwise secured and sealed to provide a water-tight seal (see 3.4.3).

3.4.2 Rack and cross piece. The rack and cross piece shall be constructed of class 304, type 4 finish, 1.588MM (.0625 inch) thickness, stainless steel conforming to QQ-S-766. Dimensions shall be compatible

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

TANK, PROCESSING, PHOTO
FK-1( )

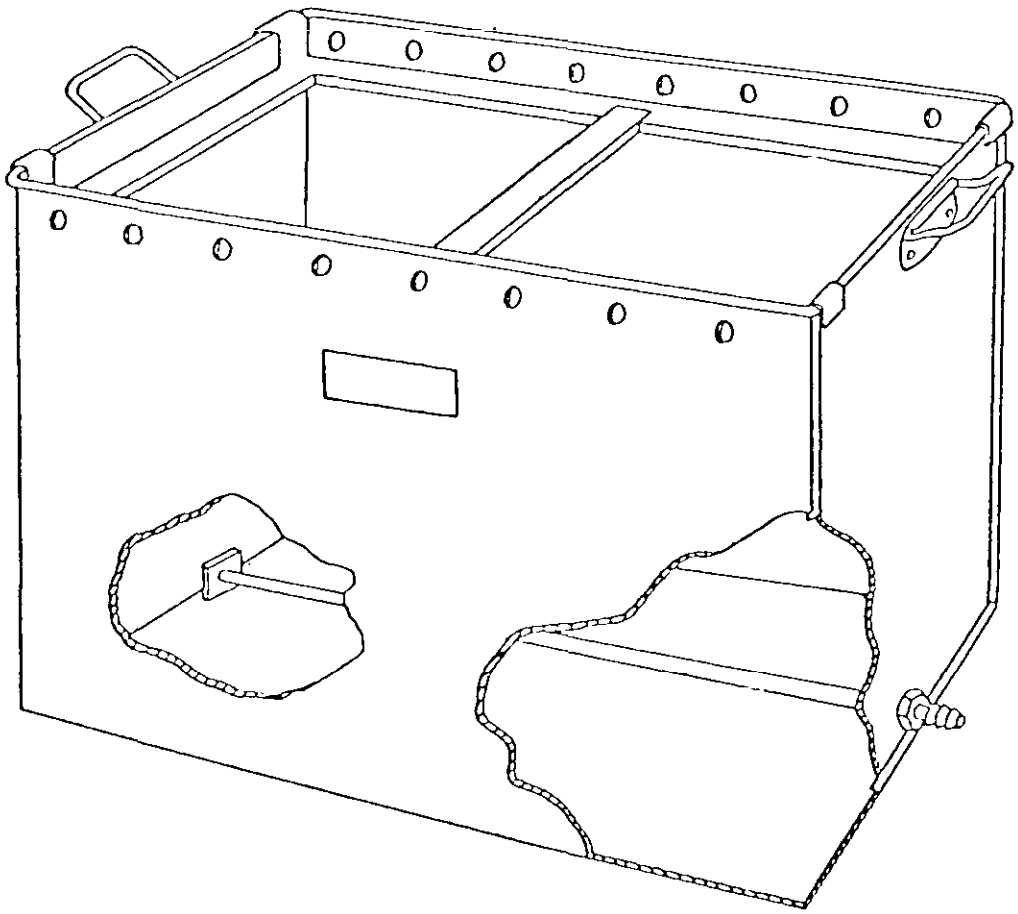


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

with the above-specified tank and such as to accommodate 203.2MM (8 inch) by 254.0MM (10 inch) film hangers. The rack shall be equipped with clips at each corner suitable to provide easy installation and removal from the tank.

3.4.3 Water pipe. The water pipe shall be 6.350MM (1/4 inch), type 1, composition G347 stainless steel tubing conforming to MIL-T-8606. The tubing shall be perforated along a center line, with 0.794MM ± .1270MM (.031 ± .005 inch) diameter holes spaced 6.350MM (1/4 inch) apart. One end shall be plugged or otherwise sealed; the other end terminating in a metal hose fitting that will accommodate a 6.350MM (1/4 inch) inside diameter rubber hose. The pipe shall be block supported along the center line of the tank bottom as in Figure 1 and shall be installed so that the line of perforations is located at the bottom of the piping.

3.4.4 Hose. The hose shall be fabricated of natural or synthetic rubber conforming to MIL-R-3065, 6.350MM (1/4 inch) inside diameter, and 1828.8MM (6 feet) in length.

3.5 Interchangeability. Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable without modification of such items or of the equipment. In case of unspecified dimensions, the manufacturer's design limits shall determine compliance with dimensional requirements.

3.6 Marking. Identification marking shall conform to applicable portions of MIL-STD-130.

3.7 Workmanship. The equipment shall be manufactured and assembled in accordance with requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).

(b) Inspections covered by subsidiary documents (see 4.4).

(c) Quality conformance inspections (see 4.5).

(d) Packaging inspection (see 4.9).

4.3 First article. Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor.

4.3.1 First article units. The contractor shall furnish two first article units of the FK-1( ), Tank, Processing, Photo.

4.3.2 First article inspection. The first article inspection shall consist of the inspections specified in subsidiary documents covering the item(s) listed in 4.4 and the inspections specified for Group A, Group B and Group C. The inspection shall be performed in the following order: 4.4, Group A and Group B for all units; and designated units for Group C in accordance with 4.5.3.1. After completion of Group C test, conforming units shall be reinspected and shall pass all Group A inspection.

4.3.3 First article data. The first article test plan and test report(s) shall be as required in the contract or purchase order.

4.4 Inspection covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the inspections required by this specification, and the inspection requirement specified in the contract or purchase order.

Item	Where required
Marking	3.6

4.5 Quality conformance inspection. The contractor shall perform the inspections specified in 4.4, and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

4.5.1 Group A inspection. Each unit on contract or purchase order shall be inspected for conformance to the inspections of 4.6. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subjected to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels. The AQL shall be 1.0 percent defective for major defects and 4.0 percent defect for minor defects.

4.5.2 Group B inspection. Group B inspection shall normally be performed in inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met Group A inspection. This inspection including sampling shall conform to 4.7 and to the procedures for small sample inspection of MIL-STD-105, using the special inspection levels. The AQL shall be 6.5 percent defective and the inspection level shall be S-4.

4.5.3 Group C inspection. Group C inspection shall be performed on units that have passed Group A and Group B inspection. The inspection shall consist of the inspections specified in 4.8. Samples shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for Group C inspection. Two sample units shall be selected at random for every 100 or fraction thereof produced. The first sample selected shall be at the start of the contract from the first quality conformance inspection production lot.

4.5.3.2 Group C failures. Actions required relative to Group C failures shall be specified in the contract or purchase order.

4.5.4 Reinspection of conforming Group B and Group C sample units. Unless otherwise specified, sample units which have been subjected to and passed both Group B and Group C inspection may be accepted on the contract provided all damage is repaired and the sample units are resubjected to pass Group A inspection.

4.6 Visual and mechanical inspection. Equipment on order shall be inspected for conformance to 3.7. Classification of defects shall be according to the definitions of major and minor defects in MIL-STD-105.

4.6.1 Water tightness test. Upon completion of visual and mechanical inspection, the tank shall be filled with water. The exterior surfaces shall be wiped dry. The tank shall be allowed to stand undisturbed for one hour in the filled condition. At the end of one hour, the welded seams shall be inspected for leakage. Evidence of leakage shall be classified as a major failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

4.7 Inspection for dimensional interchangeability. The dimensions specified in 3.4 through 3.4.4 shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.5. Where a specified dimension is not within specification or design limits, it shall be considered a major defect.

4.8 Vibration. The unit shall be tested in accordance with Method 514.2, Procedure IX, Part 2 of MIL-STD-810. At the conclusion of the test the tank shall be filled with water, the outside surfaces shall be wiped dry, the tank shall then be allowed to stand for 24 hrs. in the filled condition. At the end of the 24 hr. period, the tank shall be inspected for leakage to meet the requirement of paragraph 4.6.1. Evidence of leakage shall be considered a major failure.

4.9 Packaging inspection. Packaging shall be tested in accordance with MIL-P-116 to determine conformance to the requirements of Section 5. The rough handling test will be performed only when invoked in the bid request or contract (see 6.2).

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B or commercial, as specified (see 6.2(c)).

5.1.1 Level A.

5.1.1.1 Cleaning. Tank, Processing, Photo FK-1( ) shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Tank, Processing, Photo FK-1( ) shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservative application. No preservative required.

5.1.1.4 Unit packing. Each Tank, Processing, Photo FK-1( ) with components, rack, crosspiece, and rubber hose shall be unit packed method III, in accordance with MIL-P-116 as follows: cushion the rack and crosspiece individually by wrapping in two thicknesses of paperboard conforming to PPP-P-291, type I, and secure with tape conforming to PPP-T-45, type III, grade A. Coil the hose to proportionate dimensions and tie in three places with cotton twine conforming to T-T-871. Wrap coiled hose in paperboard

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

conforming to PPP-P-291, type I, and secure with tape conforming to PPP-T-45, type III, grade A. Secure the components within the tank body with tape conforming to PPP-T-76. Cushion the tank on all surfaces with pads or cells or both fabricated of fiberboard conforming to PPP-F-320, type CF, variety SW, grade W5c, class weather-resistant, designed to protect all projections and absorb the shock of impact in handling and transit. Place the cushioned tank within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Close the box in accordance with the appendix of the box specification.

5.1.2 Level B. Cleaning, drying, preservative application shall be as specified in 5.1.1.

5.1.3 Commercial preservation. Preservation shall be in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or commercial, as specified (see 6.2(c)). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of Tank, Processing, Photo FK-1( ), unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

5.2.1.1 Unitization. Palletization shall be required when: containers specified in 5.2.1 do not require skids; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers packed as specified in 5.2.1, except that container strapping may be omitted, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.2 Level B. A quantity of Tank, Processing, Photo FK-1( ), unit packed as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

class weather-resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

5.2.2.1 Unitization. Palletization shall be required when quantities per destination comprise a pallet load. A quantity of Tank, Processing, Photo FK-1( ), unit packed as specified in 5.1, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.3 Commercial packing. Packing shall be in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. Tank, Processing, Photo FK-1( ) is intended to be used for washing photographic film.

Source: https://assist.dla.mil -- Downloaded: 202640-17T14:23Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type required.

(c) Level of preservation, and packing required for shipment. (Level A, Level B or commercial) see Section 5.

(d) When rough handling test is required.

(e) When first article is required for inspection and approval (see 3.1 and 4.3).

6.3 Group C inspection. Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action (see 4.5.3).

6.4 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design: For example FK-1W. The contractor should apply for nomenclature in accordance with the applicable clause in the contract (see 1.1).

6.5 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

CUSTODIAN
Army - EL

PREPARING ACTIVITY
Army - EL

Project No. 6740-A121

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Electronics Command
ATTN: DRSEL-RD-TS
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to *preparing activity*. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form *shall not be used to submit requests for waivers*, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE MIL-T-10760C(EL) TANK, PROCESSING, PHOTO FK-1 ( )

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT *CREATED PROBLEMS* OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:23Z
Check the source to verify that this is the current version before use.