MIL-W-10698C
30 September 1969

SUPERSEDING
MIL-W-10698B
28 February 1962

MILITARY SPECIFICATION

WRENCHES, OPEN END, AND WRENCH ASSEMBLY, STAMPED STEEL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope.- This specification covers stamped steel wrenches and a wrench assembly (see 6.1).

* 1.2 Classification.- Wrenches covered by this specification shall be of the following types and sizes as specified (see 6.2):

Type I - Double head, open end

Size - 9/16 inch by 3/4 inch
Size - 3/8 inch by 9/16 inch
Size - 5/16 inch by 7/16 inch
Size - 1/4 inch by 7/16 inch

Type II - Alligator jaw and screwdriver

Size - 7/8 inch maximum

Type III - Wrench assembly

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-P-416 - Plating, Cadmium, (Electrodeposited).
QQ-S-700 - Steel, Sheet, and Strip, Medium Carbon.
QQ-Z-325 - Zinc Coating, Electrodeposited, Requirements for

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:21Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-H-15424 - Hand Tools; Packaging of.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

DRAWINGS

U.S. ARMY NATICK LABORATORIES

2-9-108 - Wrenches and Wrench Assembly, Stamped Steel.

(Miniature copy of Drawing 2-9-108, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards and drawings required by the supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following publication forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bid or request for proposal shall apply:

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 18-65 - Rockwell Hardness and Rockwell Superficial Hardness for Metallic Materials

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa., 19103).

(Technical society and Technical association specifications and standards are available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced, a sample wrench covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:21Z
Check the source to verify that this is the current version before use.

in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all other applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

* 3.2 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for wrenches, provided the completed item complies with all the provisions of this specification.

* 3.2.1 Steel.- Steel shall be cold rolled, any temper, quality or condition of QQ-S-700.

3.3 Construction.- Construction shall be in accordance with the requirements specified herein and as shown on Drawing 2-9-108.

* 3.3.1 Heat treatment.- The wrenches shall be heat treated to a hardness of not less than Rockwell C-40 when tested in accordance with 4.4.1.

3.4 Finish.- The wrenches and wrench assembly shall be electro-zinc plated in accordance with type I, class 2 of QQ-Z-325, or cadmium plated in accordance with type I, class 2 of QQ-P-416.

3.5 Marking for identification.- The wrenches shall be permanently and legibly marked with the size of the wrench and manufacturer's name or trademark as shown on Drawing 2-9-108.

* 3.6 Workmanship.- The finished wrenches shall be clean, free of burrs, slivers, sharp edges, rust, peeling, blistering or area of no plating.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- The preproduction sample or initial production unit, as applicable, shall be examined for defects listed in table I, dimensions specified, and tested in accordance with 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:21Z
Check the source to verify that this is the current version before use.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in the specification or applicable purchase document.

* 4.3.1.1 Intermediate testing.- The hardness test specified in 4.4.1 shall be performed prior to plating. A minimum of three determinations shall be made on each sample tested. Any reading not within specified requirements shall constitute a defect. The inspection level shall be S-4 with an acceptable quality level (AQL) of 2.5 defects per hundred units.

4.3.2 End item inspection.- The inspection lot shall consist of all wrenches of one type and size offered for inspection at one time. The sample unit shall be one completely fabricated wrench.

* 4.3.2.1 Visual examination.- Examination of the end item shall be made in accordance with the classification of defects in table I. The inspection level shall be level II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Not zinc or cadmium plated as specified.	X	
	Indication of rust or scratch.		X
	Peeling or blistering.		X
	Dirt, grit or foreign matter imbedded in finish.		X
	Area of no plating or poor plating.		X
Construction and workmanship	Fractured, split, punctured, sprung, malformed or otherwise impared.	X	
	Burred or sharp edges or projections.	X	
	Operation omitted or not properly performed.	X	
	Wrinkles or waves in metal.	X	
Marking for identification	Missing, incomplete, not legible, not located as specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:21Z
Check the source to verify that this is the current version before use.

* 4.3.2.2 Dimensional examination.- Examination shall be made for compliance with dimensions specified herein and on the drawing. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.3 Examination of preparation for delivery.- Examination of preservation, packaging, packing, and marking shall be made in accordance with MIL-H-15424.

4.4 Tests.-

4.4.1 Hardness test.- The wrenches shall be tested for Rockwell hardness in accordance with American Society for Testing and Materials (ASTM) E18-65.

5. PREPARATION FOR DELIVERY

* 5.1 Preservation, packaging, packing and marking.- Preservation, packaging, packing and marking for level A, B, or C shall be in accordance with MIL-H-15424 (see 6.2).

6. NOTES

* 6.1 Intended use.- The type I and II wrenches covered by this specification are intended for light duty use in the servicing, adjustment, and maintenance of the M-41 and Yukon stoves of MIL-H-13514 and MIL-S-12340 respectively. The type III wrench assembly is for use with MIL-R-14601-Range and Accessory Outfit, Field, Gasoline; MIL-B-40098 - Burner Unit, Gasoline Field Range Outfit, M-2; and MIL-S-40608 - Stove, Gasoline, 2 Burner.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type and size wrench required (see 1.2).
(c) First article.- When preproduction sample is required (see 3.1).
(d) Selection of applicable levels of preservation, packaging and packing (see 5.1).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, corrections, modifications, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T14:21Z
Check the source to verify that this is the current version before use.

MIL-W-10698C

Custodians:

Army - GL

Navy - YD

Air Force - 84

Review activities:

Navy - YD

Air Force - 84

User activity:

Navy - MC

Preparing activity:

Army - GL

Project No. 5120-0564

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:21Z
Check the source to verify that this is the current version before use.

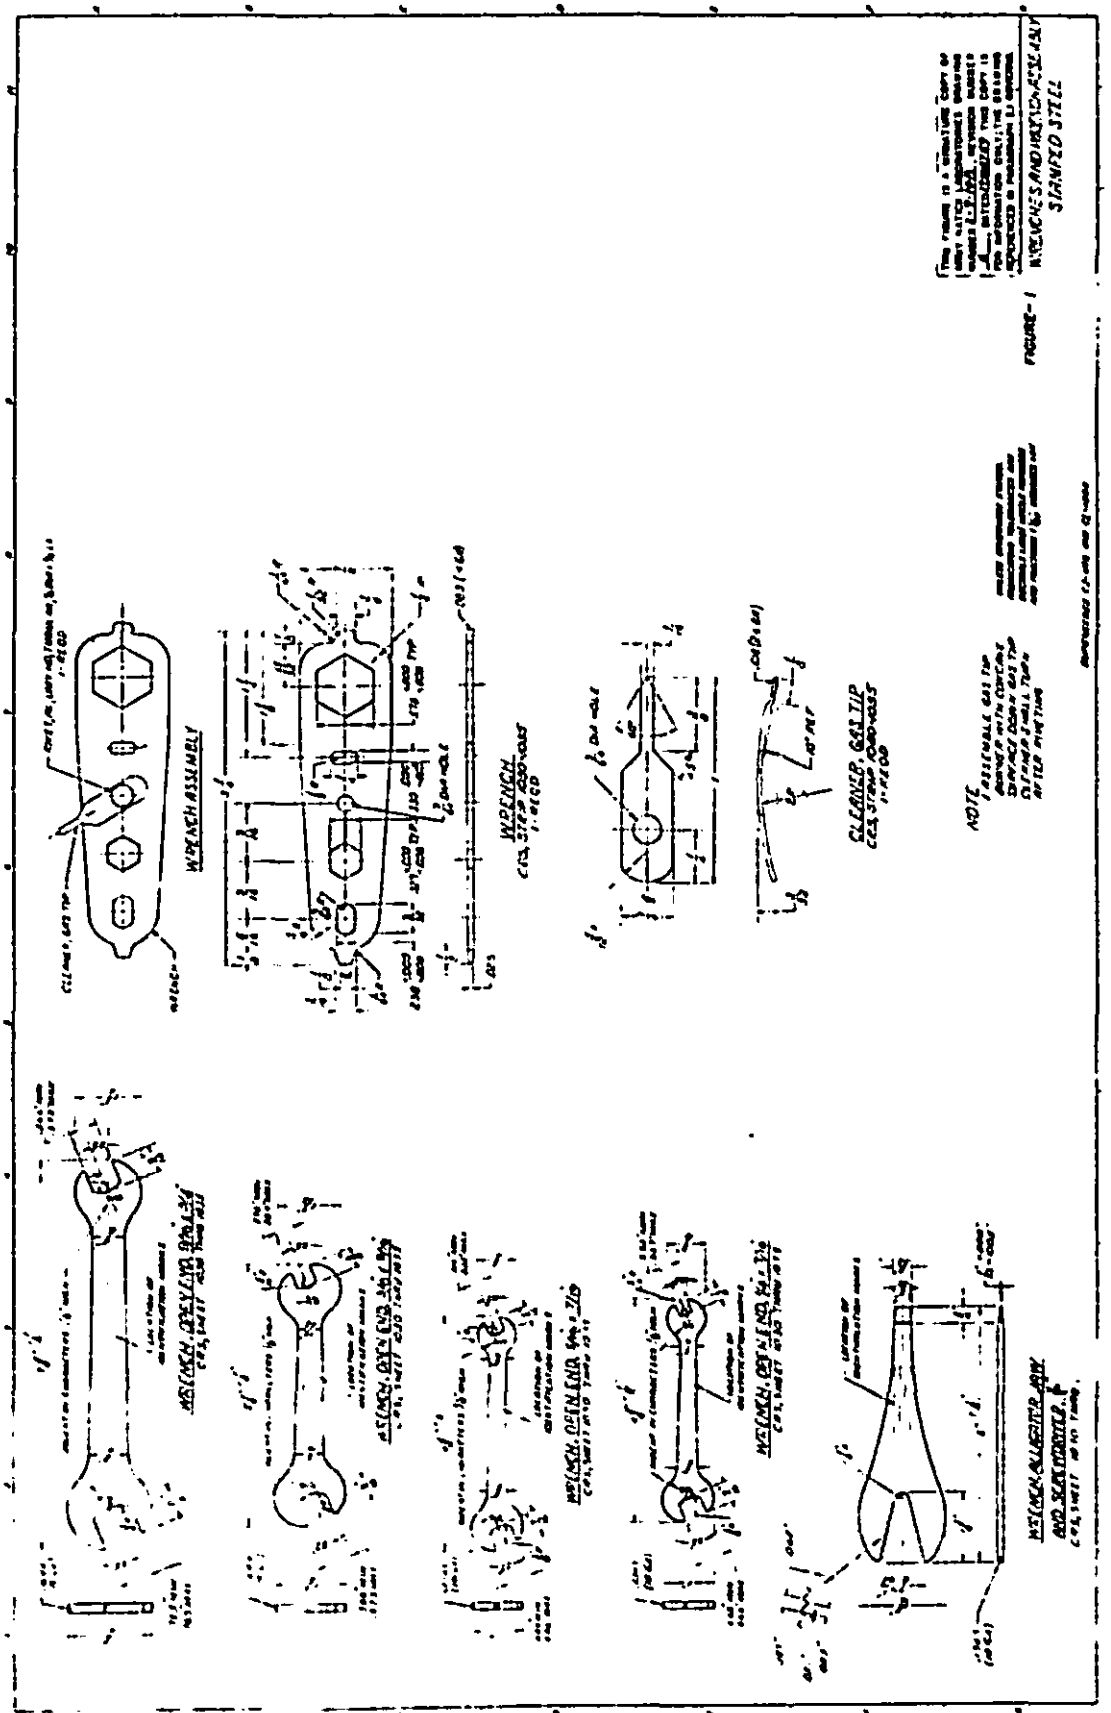


FIGURE 1. WRENCHES AND WRENCH ASSEMBLY STAMPED STEEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:21Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Wrenches, Open End, And Wrench Assembly, Stamped Steel MIL-W-10698C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:21Z
Check the source to verify that this is the current version before use.