NOT MEASUREMENT SENSITIVE

MIL-I-11132/4E
17 January 1995
SUPERSEDING
MIL-I-11132/4D
30 June 1987

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, ADVANCE COURSE, SENIOR DIVISION AND CADET OFFICER, JUNIOR DIVISION, ROTC, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-11132.

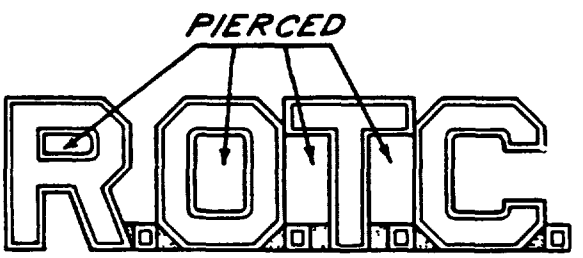

MATERIAL:
-1: Red Brass
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: Mirror-like Polished and shall match TIOH Metal Finish Chip Number 1.
-2: Dull, Flat Black Enamel.

DIMENSIONS:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 1-3/8 inches (3.49 cm) (REF)
THICKNESS (THICKEST POINT): 0.075 inch ± 0.005 inch (0.191 cm ± 0.12 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:09Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The dull flat black enamel for Dash No. -2 shall match FED-STD-595, Chip No. 37038.

3. Piercing shall be as indicated.

4. Prongs shall be made from any type hard drawn brass.

5. Attaching device shall be prong and catch type. Prongs shall be located on a horizontal center line of the insignia and the vertical center line of the letters "R" and the center of the vertical portion of the letter "C".

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0791)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:09Z
Check the source to verify that this is the current version before use.