NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/5L(IH)
3 April 2026
SUPERSEDING
MIL-DTL-11132/5K(IH)
4 March 2021

DETAIL SPECIFICATION SHEET

INSIGNIA, GARRISON CAP, SERVICE CAP, SENIOR DIVISION, ROTC AND INSIGNIA, BERET, JUNIOR DIVISION, ROTC, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-I-11132.

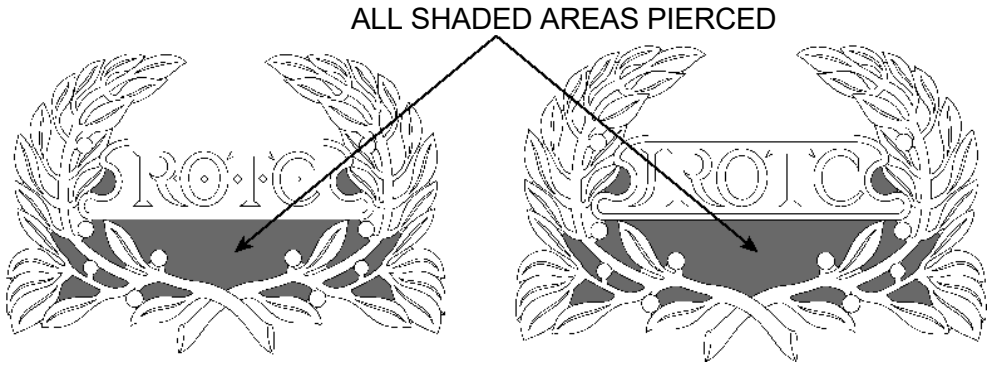

-1 and -2 -3

DASH NO.
-1: Insignia Garrison Cap, Senior Division, ROTC, U.S. Army
-2: Insignia, Service Cap, Senior Division ROTC, U.S. Army

-3: Insignia, Beret, Junior Division, ROTC, U.S. Army

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Brass, Matte Finish, Polished Highlights and shall match The Institute of Heraldry Metal Finish Chip Number 3

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
-1 and -2:
HEIGHT (Overall): 1-3/16 inches (REF)
WIDTH (Overall): 1-3/4 inches
THICKNESS (Top of the wreath): 0.070 inch ±0.005 inch
-3:
HEIGHT: 1-1/4 inches (REF)
WIDTH: 1-7/8 inches (REF)
THICKNESS: 0.072 inch ± 0.005 inch

ATTACHING DEVICE:

1. Except for the attaching device and the dapping requirements, -1 and -2 are identical:

2. Attaching device for -1 and -3 shall be prong with wing type clutch. Two prongs shall be located on the intersections of a horizontal line 11/16 inch ± 1/32 inch above the base of the insignia and the center of each side of the wreath.

3. Attaching device for -2 shall consist of registration prongs and a screw post and thumb nut. Two prongs shall be located as above. The post shall be located on the vertical center line of the insignia at the center of the bar connecting the letters "ROTC.

4. -2 insignia shall be dapped in the horizontal direction through a radius of 4 inches ± 1/2 inch.

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. Piercing shall be as indicated.

3. A mock forcer may be used to bring up the lettering.

4. At the option of the manufacturer, -1 may be die cast in zinc aluminum.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-239)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.