NOT MEASUREMENT SENSITIVE

MIL-I-11132/6H
17 January 1995
SUPERSEDING
MIL-I-11132/6G
19 October 1990

MILITARY SPECIFICATION SHEET


INSIGNIA, SERVICE AND GARRISON CAP, ROTC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-11132.



DASH NO. 1 & 3

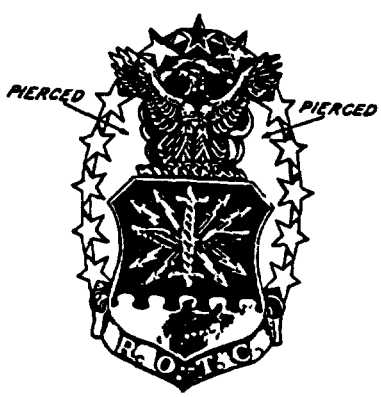

DASH NO. 2

DASH NO.
-1: Garrison Cap, Basic Course
-2: Garrison Cap, Advance Course
-3: Service Cap, JROTC

MATERIAL: Nickel Silver or Red Brass

FINISH: Nickel Plated (Red Brass Only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

DIMENSIONS:

HEIGHT (Overall):
-1: 1-7/32 inches (3.10 cm) (REF)
-2: 1-5/16 inches (3.33 cm) (REF)
-3: 2-1/2 inches (6.35 cm) (REF)

WIDTH (Overall):
-1: 23/32 inches (1.83 cm) (REF)
-2: 31/32 inches (2.46 cm) (REF)
-3: 1-1/2 inches (3.81 cm) (REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.

THICKNESS:
-1, -2 (Thickest Point of Shield): 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm)
-3 (At Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing for Dash No. -2 shall be between the upper three stars and the eagle only.

3. A mock forcer may be used for Dash No. 3 to bring up the design provided the forced area maintains a minimum thickness of 0.045 inch (0.114 cm).

4. The attaching device for Dash No. -1 and -2 shall be prong and clutch type. Prongs shall be located on the vertical center line 7/8 inch ± 1/32 inch (2.22 cm ± 0.08 cm) apart with the bottom prong 7/32 inch ± 1/32 inch (0.56 cm ± 0.08 cm) above the bottom of the insignia.

5. The attaching device for Dash No. -3 shall be a screw post, thumb nut, and registration prong. The screw post shall be located on the vertical center line 1-5/16 inches ± 1/32 inch (3.33 cm ± 0.08 cm) above the base of the insignia. The registration prong shall be located on the vertical center line 3/16 inch ± 1/32 inch (0.48 cm ± 0.08 cm) below the top of the insignia.

Custodians:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0791)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.