NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/6J
6 June 1997
SUPERSEDING
MIL-I-11132/6H
17 January 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE AND GARRISON CAP, ROTC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11132 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

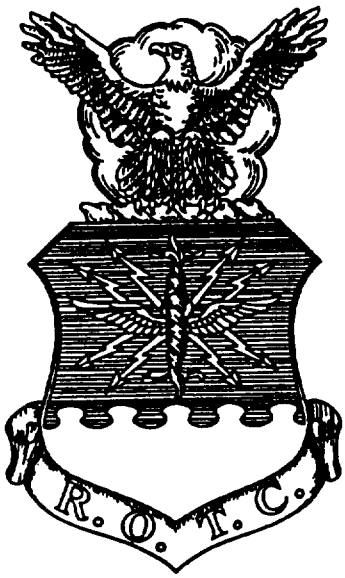

DASH -1, -3



DASH -2

DASH NO.
-1: Garrison Cap, Basic Course
-2: Garrison Cap, Advance Course
-3: Service Cap, JROTC

MATERIAL: Nickel Silver or Red Brass

FINISH: Nickel Plated (Red Brass Only), Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall):

-1: 1-7/32 inches (3.10 cm) (REF)

-2: 1-5/16 inches (3.33 cm) (REF)

-3: 2-1/2 inches (6.35 cm) (REF)

WIDTH (Overall):

-1: 23/32 inches (1.83 cm) (REF)

-2: 31/32 inches (2.46 cm) (REF)

-3: 1-1/2 inches (3.81 cm) (REF)

THICKNESS:

-1, -2 (Thickest Point of Shield): 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm)

-3 (At Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing for Dash No. -2 shall be between the upper three stars and the eagle only.

3. A mock forcer may be used for Dash No. 3 to bring up the design provided the forced area maintains a minimum thickness of 0.045 inch (0.114 cm).

4. The attaching device for Dash No. -1 and -2 shall be prong and clutch type. Prongs shall be located on the vertical center line 7/8 inch ± 1/32 inch (2.22 cm ± 0.08 cm) apart with the bottom prong 7/32 inch ± 1/32 inch (0.56 cm ± 0.08 cm) above the bottom of the insignia.

5. The attaching device for Dash No. -3 shall be a screw post, thumb nut, and registration prong. The screw post shall be located on the vertical center line 1-5/16 inches ± 1/32 inch (3.33 cm ± 0.08 cm) above the base of the insignia. The registration prong shall be located on the vertical center line 3/16 inch ± 1/32 inch (0.48 cm ± 0.08 cm) below the top of the insignia.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0894)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.