INCH POUND

MIL-DTL-11132/6K
15 December 2007
SUPERSEDING
MIL-DTL-11132/6J
6 June 1997

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE AND GARRISON CAP, ROTC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-I-11132.

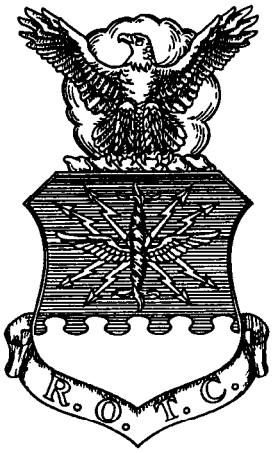

DASH -1, -3

DASH -2

DASH NO.
-1: Garrison Cap, Basic Course
-2: Garrison Cap, Advance Course
-3: Service Cap, JROTC

MATERIAL: Nickel Silver or Red Brass

FINISH: Nickel Plated (Red Brass Only), Mirror-like Polished and shall match The Institute Of Heraldry (TIOH) Metal Finish Chip Number 16.

DIMENSIONS:

HEIGHT (overall):
-1: 1-7/32 inches (REF)
-2: 1-5/16 inches (REF)
-3: 2-1/2 inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.

WIDTH (overall):
-1: 23/32 inches (REF)
-2: 31/32 inches (REF)
-3: 1-1/2 inches (REF)
THICKNESS:
-1, -2 (thickest point of shield): 0.100 inch ± 0.005 inch
-3 (at edge): 0.065 inch ± 0.005 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing for Dash No. -2 shall be between the upper three stars of the five stars arrayed to either side of the device and the eagle only. Please see illustration DASH -2 on page 1 of this specification.

3. A mock forcer may be used for Dash No. 3 to bring up the design provided the forced area maintains a minimum thickness of 0.045 inch.

4. The attaching device for Dash No. -1 and -2 shall be prong and clutch type. Prongs shall be located on the vertical center line 7/8 inch ± 1/32 inch apart with the bottom prong 7/32 inch ± 1/32 inch above the bottom of the insignia.

5. The attaching device for Dash No. -3 shall be a screw post, thumb nut, and registration prong. The screw post shall be located on the vertical center line 1-5/16 inches ± 1/32 inch above the base of the insignia. The registration prong shall be located on the vertical center line 3/16 inch ± 1/32 inch below the top of the insignia.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH
(Project No.8455-2008-059)

Review activities:
Air Force - 99
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the urrency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.