NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/6N
27 November 2023
SUPERSEDING
MIL-DTL-11132/6M
23 January 2019

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE AND GARRISON CAP, ROTC, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-I-11132.

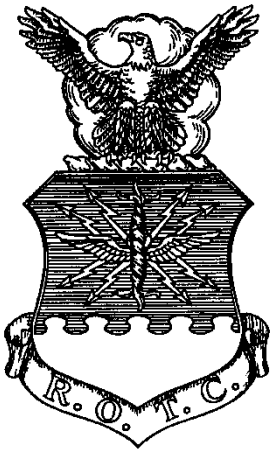

DASH -1, -3



DASH -2

DASH NO.
-1: Garrison Cap, Basic Course
-2: Garrison Cap, Advance Course
-3: Service Cap, JROTC

MATERIAL: Nickel Silver 65/35 (UNS Alloy No. C-752) or Red Brass 85/15 (UNS Alloy No.C-230)

FINISH: Nickel Plated (C-230 only), Mirror-like Polished and shall match The Institute of Heraldry Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT (overall):
-1: 1-7/32 inches (REF)
-2: 1-5/16 inches (REF)
-3: 2-1/2 inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.

WIDTH (overall):
-1: 23/32 inches (REF)
-2: 31/32 inches (REF)
-3: 1-1/2 inches (REF)
THICKNESS:
-1, -2 (thickest point of shield): 0.100 inch ± 0.005 inch
-3 (at edge): 0.065 inch ± 0.005 inch

ATTCHING DEVICE:

1. The attaching device for -1 and -2 shall be prong and clutch type.

2. Prongs shall be located on the vertical center line 7/8 inch ± 1/32 inch apart with the bottom prong 7/32 inch ± 1/32 inch above the bottom of the insignia.

3. The attaching device for -3 shall be a screw post, thumb nut, and registration prong. The screw post shall be located on the vertical center line 1-5/16 inches ± 1/32 inch above the base of the insignia. The registration prong shall be located on the vertical center line 3/16 inch ± 1/32 inch below the top of the insignia.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A mock forcer may be used for -3 to bring up the design provided the forced area maintains a minimum thickness of 0.045 inch.

3. Piercing for -2 shall be between the upper three stars of the five stars arrayed to either side of the device and the eagle only. Please see illustration -2 on page 1 of this specification.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No.8455-2024 010)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:10Z
Check the source to verify that this is the current version before use.