NOT MEASUREMENT SENSITIVE

MIL-DTL-11132/9E
6 June 1997
SUPERSEDING
MIL-I-11132/9D
17 January 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, CADET, LIEUTENANT COLONEL, ROTC AND JROTC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11132 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

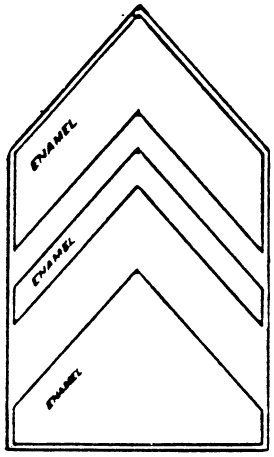

DASH NO.
-1: ROTC Regular Size
-2: ROTC Miniature Size
-3: JROTC (See Note 2)

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT (Overall):
-1: 2-1/4 inches (5.72 cm) (REF)
-2, -3: 1-3/16 inches (3.02 cm) (REF)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:11Z
Check the source to verify that this is the current version before use.

WIDTH (Overall):
-1: 1-5/16 inches (3.33 cm) (REF)
-2, -3: 11/16 inch (1.75 cm) (REF)

THICKNESS (Overall):
-1, -2: 0.070 inch ± 0.010 inch (0.178 cm ± 0.025 cm)
-3: 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)(Including Plastic Back Plate)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The design of Dash No. -2 and -3 are identical with the exception of a plastic back plate which is added to designate JROTC.

3. Enameled areas shall be as indicated. The blue color shall conform to TIOH chip No. 18.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. The attaching device shall be prong and clutch type as follows:

a. Dash No. -1 shall have three prongs and clutches. One prong shall be located on the vertical center line 3/16 inch ± 1/32 inch (0.48 cm ± 0.08 cm) below the top of the insignia and one prong in each of the lower corners 3/16 inch ± 1/32 inch (0.48 cm ± 0.08 cm) in from the sides and up from the bottom.

b. Dash No. -2 and -3 shall have two prongs located on the vertical center line of the insignia, equidistant from each end and 3/4 inch ± 1/32 inch (1.91 cm ± 0.08 cm) apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0894)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:11Z
Check the source to verify that this is the current version before use.