INCH-POUND
A-A-59614/4
13 January 2014

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

COUPLING ASSEMBLY, HOSE (GARDEN, WATER, AND WATER SUCTION), LONG SHANK WITH PIN LUG SWIVEL

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the hose coupling assemblies described herein shall consist of this document and the latest issue in effect of A-A-59614.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59614	-1G	-4	-04
CID number	Type and class (See table I)	Style (See table I)	Size (See table II)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Coupling assemblies supplied to this CID specification sheet shall meet the general requirements specified in A-A-59614 and be as specified herein (see figure 1).

Clamps. Unless otherwise specified, clamps shall be types A through F, conforming to A-A-52506.

Tightening provisions. The male section shall have either lugs or wrench flats, and the swivel nut on the female section shall have rocker lugs, pin lugs, or wrench flats.

Construction. Unless otherwise specified, type I coupling parts shall be cast or machined from copper allow (brass), zinc-base alloy, stainless steel, or steel and coupling components shall consist of the following (see figure 1):

a. Female section.
b. Swivel nut for female section.
c. Male section.
d. Gasket recess in swivel (recess may be omitted provided the standard commercial gasket does not fall out when the two sections are disconnected).
e. Clamps (one for each male and female section, or ferrules (outside crimp).

AMSC N/A FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

Class A couplings. When attached to hose, class A couplings (garden hose) shall be able to withstand an internal hydrostatic pressure of 100 psi for at least one minute without showing any signs of leakage.

Class AA couplings. When attached to hose, class AA couplings shall be able to withstand an internal hydrostatic pressure of 300 psi for sizes .50 through 1 inch, 250 psi for sizes 1.25 and 1.50 inch, 200 psi for sizes 2.00 through 4.00 inch, and 100 psi for sizes 4.50 through 5 inch, for at least one minute without showing any signs of leakage.

TABLE I. PIN codes for type, class, and style.

Type	Class	Style	PIN type and class code	PIN style code
I	A	4	1G	4
	AA	4	1W	4


TABLE II. Size codes for all types. 1/

Class A size	Class AA size	PIN size code
.50	—	-04
.625	—	-05
.75	.75	-06
—	1.00	-08
—	1.25	-10
—	1.50	-12
—	2.00	-16
—	2.50	-20
—	3.00	-24
—	3.50	-28
—	4.00	-32
—	4.50	-34
—	5.00	-40
—	6.00	-48


1/ The size indicates the nominal size of the coupling to fit the hose with that inside diameter (ID). For example, size .50 is for a coupling to fit the .50 inch ID hose.

Dimensions. Dimension A shall be sized so as not to restrict the free flow of the hose attached; B shall be as required to accommodate the hose specified; and C shall be as required to meet the pull-off and leakage requirements and to accommodate the required clamp(s) or ferrule(s) (see figure 1). Clamps or ferrules shall not extend closer than .062 inch to the end of the shank.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

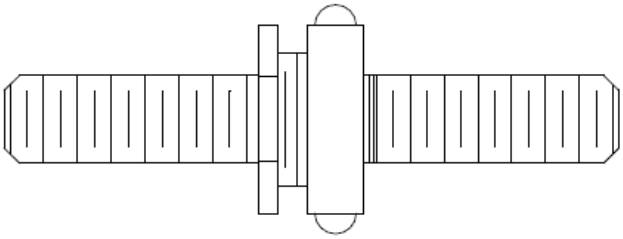

CLASS A, AA, STYLE 4

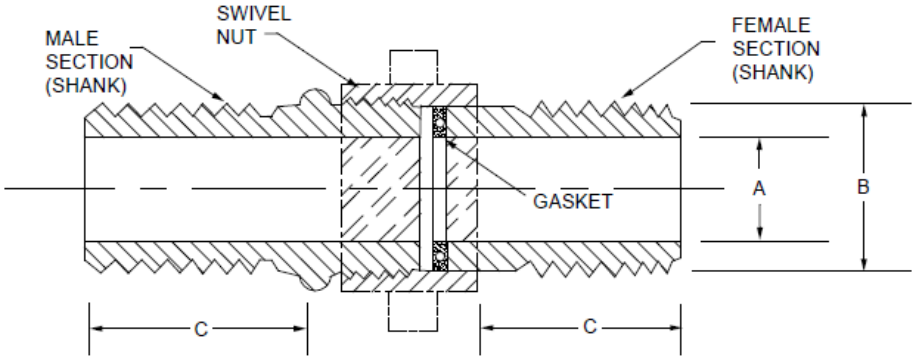

Dimension C (minimum) (inches).

For hose size	Styles 3 and 4
.50	1.125
.625	1.125
.75	1.125
1.00	1.125
1.25	2.00
1.50	2.50
2.00	3.50
2.50	4.00
3.00	5.00
3.50	5.50
4.00	5.75
4.50	5.875
5.00	5.875
6.00	6.50

FIGURE 1. Style 4 couplings.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

Source of documents.

Federal Specifications

A-A-52506 -Clamp, Hose

COMMERCIAL ITEM DESCRIPTIONS

A-A-59614 -Coupling Assembly, Hose (Garden, Water, And Water Suction)

(Copies of these documents are available online at http://assist.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
1U339	Labarge Products, Inc. 2900 Brannon Avenue St. Louis, MO 63139 Phone number: 1-314-776-2900 Fax number: 1-314-776-6444 sales@whsmithco.com www.labargepro.com
30659	Moon American Inc. 167-B SW Cutoff Worchester, MA 01604 Phone number: 1-507-798-8887 Fax number: 1-508-798-7839 sales@moon-american.com www.moon-american.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Navy - SA
Air Force - 71

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing activity:
DLA - CC

(Project 4730-2013-086)

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.