MILITARY SPECIFICATION SHEET

GROMMET, HARD SEAT, RELIABILITY AND MAINTAINABILITY (NEW CONSTRUCTION AND REPAIR) REQUIREMENTS FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. The grommets are intended for use in access panels. The function of the grommet is to reduce wear and elongation in the hole for the fastener used to attach the access panel. The grommet's boss, which extends beyond the surface of the back (under) side of the access panel, will prevent the total preload on the bolt from being transferred to the adjacent seal (preventing seal crushing). The grommet will prevent warping of the access panel at the fastener hole.

2. The installed hard seat grommet shall be flush with the top surface of the test plate within the limits shown in figure 1.

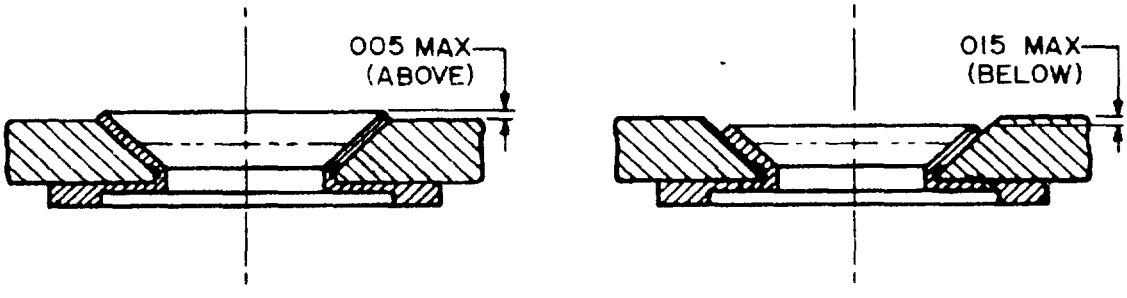

FIGURE 1. Installation flushness.

3. There are no restrictions on the hard seat grommet used in new access panel fastener designs.

4. When the grommet is used to repair one damaged or worn access panel fastener hole, grommets shall be installed in all holes in the panels.

FSC 5325

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.

5. Appropriate engineering approval shall be required in the following applications:

   a. When grommet is used to repair damaged or worn access panel fastener holes.

   b. When the grommet is used to compensate for "knife edges" on the countersunk sheet.

6. The grommet shall be installed with wet sealant or primer.

Custodians:
Navy - AS
Air Force - 11
Army - AV

Preparing activity:
Navy - AS
(Project No. 5325-0218)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.