MILITARY SPECIFICATION SHEET

GROMMET, HARD SEAT, SWAGED, COUNTERSINK, TENSION HEAD, PANEL FASTENER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the grommets described herein shall consist of this document and the latest issue of MIL-G-85613.

1. DESIGN INFORMATION

Hard seat grommets covered by this specification sheet are for use in the holes of aircraft access panels and quick-operating panel fasteners. The grommets are especially suitable on thin aluminum and composite access panels.

2. APPLICATION AND DESIGN SELECTION

The hard seat grommets selected from this specification sheet shall be used in accordance with MIL-G-85613/1.

3. MILITARY INSTALLATION AND TOOLS

No applicable document.

4. GENERAL REQUIREMENTS

4.1 MATERIAL: Corrosion resistant steel AISI 304 condition A in accordance with QQ-S-763 or MIL-S-5059.

4.2 PROTECTIVE TREATMENT: Unplated grommets shall be passivated in accordance with QQ-P-35.

4.3 PLATING: Plated grommets shall be cadmium plated in accordance with QQ-P-416, Type II, Class 2.

4.4 SURFACE TEXTURE: In accordance with ANSI B46.1; surface texture shall not exceed 125 microinches.

4.5 WORKMANSHIP: Break all sharp edges and remove all burrs and slivers.

4.6 DIMENSIONS AND TOLERANCES: Dimensions are in inches and are after plating. Tolerances are as indicated.

4.7 LUBRICATION: None.

FSC 5325

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.

5. ILLUSTRATIONS

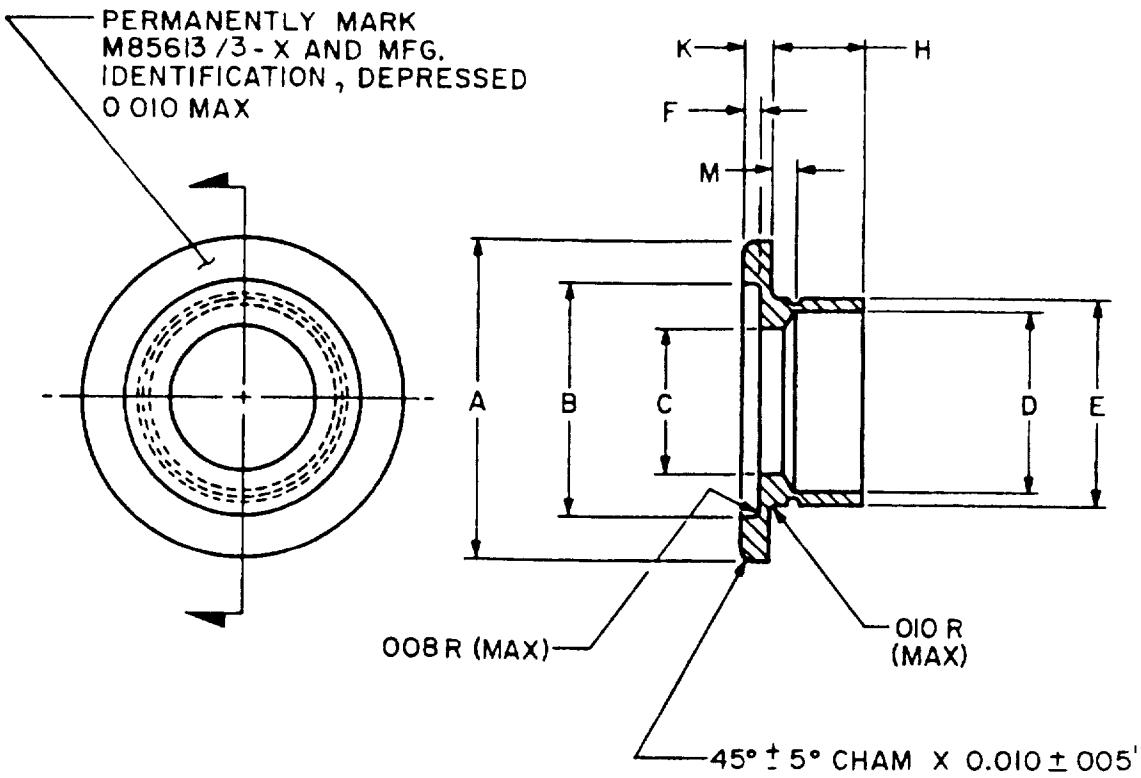


FIGURE 1. Uninstalled grommet.

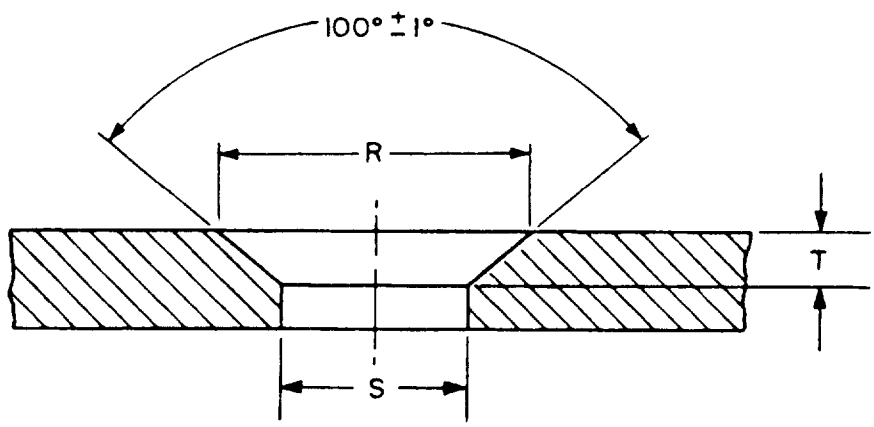


FIGURE 2. Grommet hole.

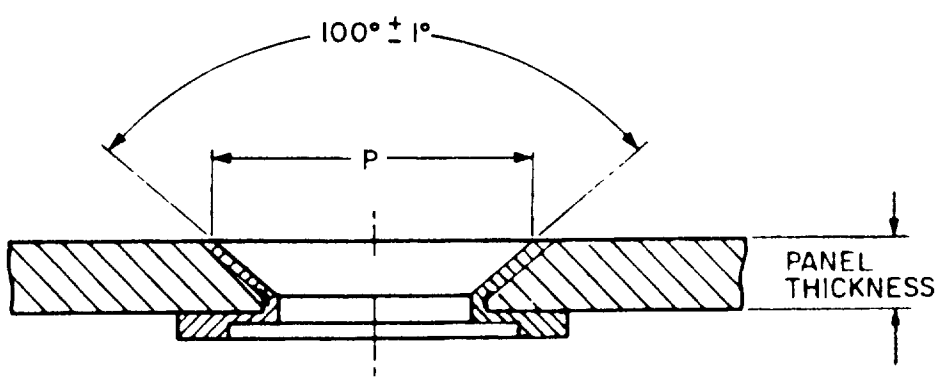


FIGURE 3. Installed grommet

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.

6. TABLE I. Grommet dimensions.

DIA DASH NO.	FOR FASTENER DIA	FOR FASTENER HEAD HEIGHT	A DIA		B DIA		C DIA		D DIA		E DIA	
			MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
4	.250	.060	.505	.485	.380	.372	.255	.250	.283	.280	.311	.307
5	.312	.060	.567	.547	.443	.434	.318	.313	.361	.358	.389	.386
6	.375	.060	.630	.610	.506	.496	.395	.390	.439	.436	.467	.463

7. TABLE II. Grommet dimensions and grips.

DIA DASH NO.	GRIP DASH NO.	F		K		H		M (REF)	PANEL THICKNESS		WEIGHT MAX LB/ 100	P REF
		MAX	MIN	MAX	MIN	MAX	MIN		MAX	MIN		
4	1 2 3 4 5	.034	.031	.045	.041	.120 .140 .160 .180 .200	.110 .130 .150 .170 .190	.020 .040 .060 .080 .100	.095 .115 .135 .155 .175	.075 .096 .116 .136 .156	.17 .20 .22 .25 .28	.409
5	1 2 3 4 5	.034	.031	.045	.041	.115 .135 .155 .175 .195	.105 .125 .145 .165 .185	.020 .040 .060 .080 .100	.095 .115 .135 .155 .175	.075 .096 .116 .136 .156	.21 .24 .28 .31 .35	.471
6	1 2 3 4 5	.034	.031	.045	.041	.110 .130 .150 .170 .190	.100 .120 .140 .160 .180	.020 .040 .060 .080 .100	.095 .115 .135 .155 .175	.075 .096 .116 .136 .156	.24 .28 .32 .36 .40	.534

8. TABLE III. Installation hole dimensions.

HOLE SIZE	R DIA		S DIA		T REF
	MAX	MIN	MAX	MIN	
.250	.450	.445	.316	.312	.060
.312	.512	.507	.394	.390	.060
.375	.575	.570	.472	.468	.060

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.

9. EXAMPLE OF A PART NUMBER

M85613/3 U 4 - 1

- 1 — Grip
- 4 — .250-inch fastener shank diameter
- U — Material: "U" for AISI 304 passivated; "-" for AISI 304 cadmium plated
- M85613/3 — Basic specification sheet number

10. ADMINISTRATIVE AND CONTRACTUAL PROVISIONS

10.1 This document takes precedence over acquisition documents specified herein.

10.2 Reference documents shall be of the issue in effect on date of invitation for bids.

Custodians:
Navy - AS
Air Force - 11
Army - AV

Preparing activity:
Navy - AS
(Project No. 5325-0230)

☆U S GOVERNMENT PRINTING OFFICE 1984 — 706-040/A2739

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.