MILITARY SPECIFICATION SHEET

NUT, SEALING, SELF-LOCKING, 250°F AND 450°F

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-N-85615.

REQUIREMENTS:

Qualification required.

This specification sheet is for design usage limitation.

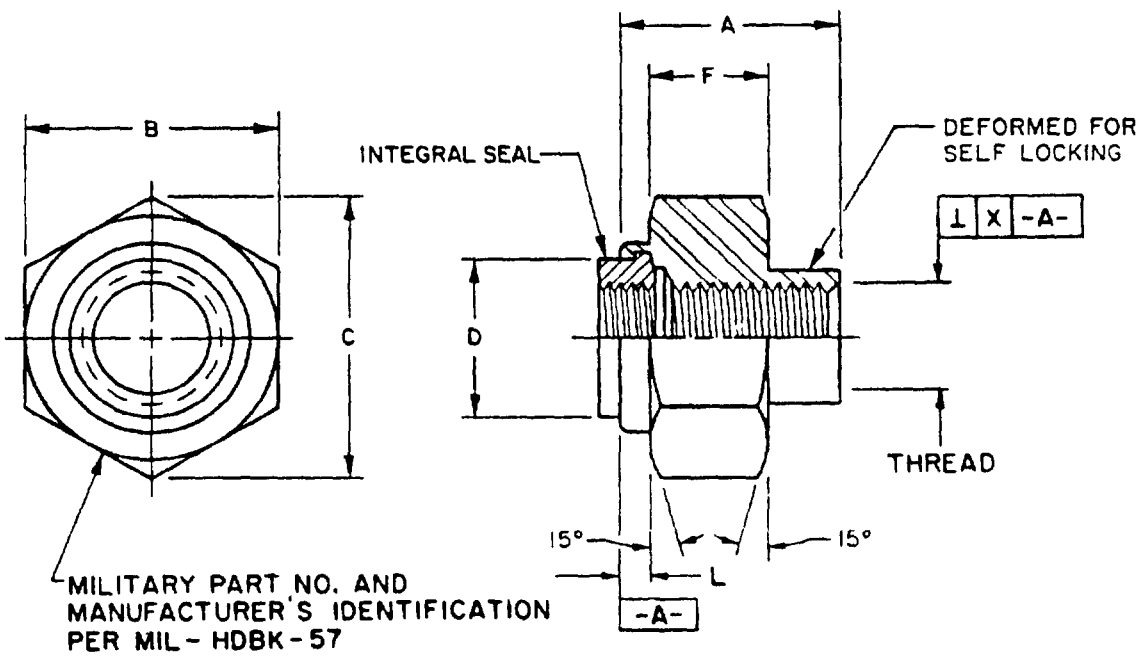


FIGURE 1. Self-sealing nut assembly.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.

TABLE I. Nut assembly dimensions.

Dash No.	Thread UNJF-3B	A Max	B	C Min	D Dia	F Min	Ultimate Axial Thread Strength Lb. Min.	Bearing Surface Squareness X Max	L Ref
3	.1900-32	.290	.376	.410	.210	.085	2,460	.006	.055
4	.2500-28	.330	.439	.482	.273	.116	4,580	.007	.062
5	.3125-24	.420	.502	.552	.336	.123	7,390	.008	.067
6	.3750-24	.460	.564	.622	.398	.153	11,450	.009	.092
8	.5000-20	.600	.752	.837	.531	.221	21,110	.010	.086

Material: Nut - Alloy steel

Seal - Polytetrafluoroethylene in accordance with ASTM D1710 or nylon in accordance with ASTM D4066.

Heat treatment: Nut maximum hardness Rc 43.

Finish: Cadmium plating in accordance with QQ-P-416, Type II, Class 2.

Lubricant: Dry film lubricant or cetyl alcohol in accordance with MIL-L-46010, Type I.

Example of a military Part or Identifying Number (PIN):

M85615/1 C 3 N

- N — Seal material (see Codes below)
- 3 — Size dash number
- C — Lubricant
- M85615/1 — Specification sheet number

Seal codes:

T = Polytetrafluoroethylene seal for use up to 450°F.
N = Nylon seal for use up to 250°F.

Lubricant codes:

C = Cetyl alcohol lubricant
L = Dry film lubricant
- = No lubricant

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in inches.

2. Threads in accordance with MIL-S-8879 after plating and before lubrication.

3. Upper threaded portion deformed to provide locking feature. Tool marks permissible in locking area.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review activities:
Army - AV, MI
Navy - OS, SH
DLA - IS

Preparing activity:
Navy - AS
(Project 5310-1645)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:13Z
Check the source to verify that this is the current version before use.