INCH-POUND

MIL-DTL-41819/12G
10 January 2018
SUPERSEDING
MIL-DTL-41819/12F
25 February 2013

# DETAIL SPECIFICATION SHEET

# RIBBON ATTACHMENT, ARROWHEAD

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-R-41819.

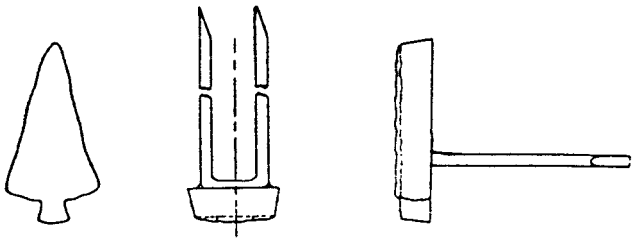

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: (-1, and -2) Red Brass, 85/15 (UNS Alloy No.C-230) or Gilding Metal 95/5 (UNS Alloy C-210)

FINISH: (-1 and -2) Cooper Flash (C-230 only) Oxidized, Relieved, Polished Highlights.

DIMENSIONS:
HEIGHT:
-1: 1/4 inch (REF)
-2: 1/8 inch (REF)
WIDTH:
-1: 1/8 inch (REF)
-2: 1/16 inch (REF)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:49Z
Check the source to verify that this is the current version before use.

THICKNESS (At thickest point):
-1: 0.047 inch ± .005 inch
-2: 0.031 inch ± .005 inch

ATTACHING DEVICE:
1. The attaching device shall be a staple type prong.

2. The prong shall be located on the reverse side of the ribbon attachment 5/32 inch ± 1/64 inch from the bottom for -1 and 3/32 inch ± 1/64 inch from the bottom for -2.

NOTES:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2018-086)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:49Z
Check the source to verify that this is the current version before use.