NOT MEASUREMENT SENSITIVE

MIL -DTL-41819/15D
30 September 1996
SUPERSEDING
MIL -R-41819/15C
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, LETTER “A”

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL -DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

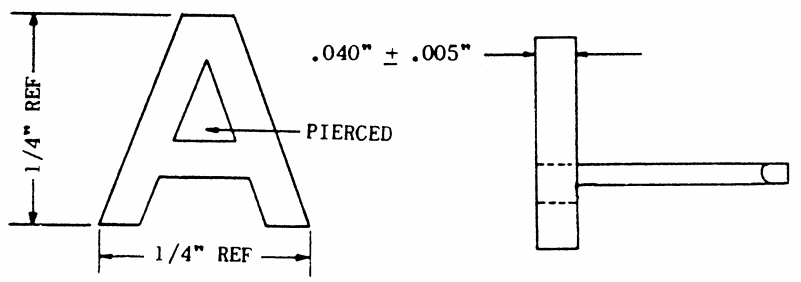

MATERIAL: Red Brass

FINISH: Oxidized

DIMENSIONS:
HEIGHT: 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm)
WIDTH: 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm)
THICKNESS (At Thickest Point): 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)

NOTES:
1. Ribbon attachment "A" shall be die cut.

2. Piercing shall be as indicated.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:50Z
Check the source to verify that this is the current version before use.

3. The attaching device shall be a staple type prong. The prong shall be centered on the reverse side of the ribbon attachment in the center of the bar on the "A".

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455 -0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:50Z
Check the source to verify that this is the current version before use.