INCH-POUND


MIL-DTL-41819/15E
25 February 2013
SUPERSEDING
MIL-DTL-41819/15D
30 September 1996

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, LETTER “A”

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-R-41819.

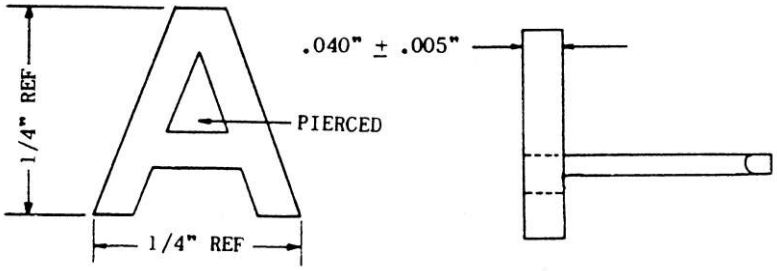

MATERIAL: Red Brass 85/15 (UNS Alloy No.C-230)

FINISH: Oxidized

DIMENSIONS:
HEIGHT: 1/4 inch ± 1/64 inch (REF)
WIDTH: 1/4 inch ± 1/64 inch (REF)
THICKNESS (At thickest point): 0.040 ± 0.005 inch

ATTACHMENT DEVICE:
1: The attaching device shall be a staple type prong.

2: The prong shall be centered on the reverse side of the ribbon attachment in the center of the bar on the "A".

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Ribbon attachment "A" shall be die cut.

3. Piercing shall be as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:50Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activities:
Coast Guard - CG1
DLA - CT

(Project No. 8455-2013-115)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:50Z
Check the source to verify that this is the current version before use.