NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/16D
30 September 1996
SUPERSEDING
MIL-R-41819/16C
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, FLEET MARINE FORCE COMBAT INSIGNIA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

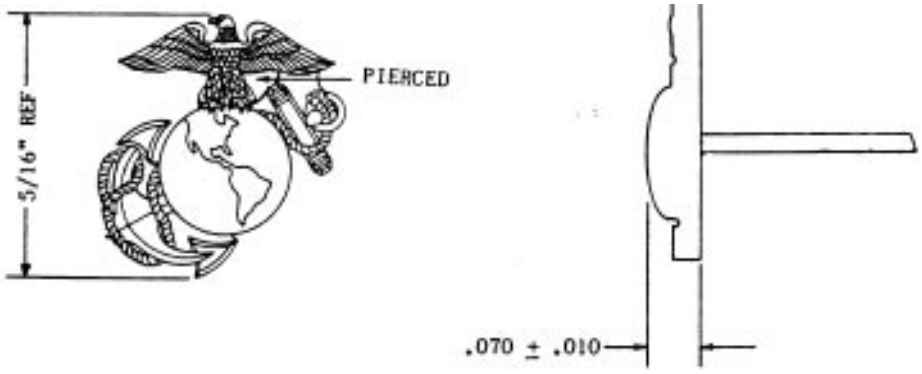

MATERIAL: Red Brass

FINISH: Oxidized

DIMENSIONS:
HEIGHT: 5/16 inch (0.79 cm) (REF)
WIDTH: 5/16 inch (0.79 cm) (REF)
THICKNESS (At Thickest Point): 0.070 inch ± 0.010 inch (0.178 cm ± 0.025 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The attaching device shall be a staple type prong. The prong shall be located on the horizontal center line of the reverse side of the ribbon attachment and shall be centered on the globe.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:50Z
Check the source to verify that this is the current version before use.