NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/17D
30 September 1996
SUPERSEDING
MIL-R-41819/17C
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, CLASP, ANTARCTICA SERVICE MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.




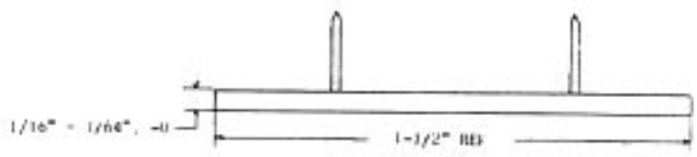

DASH NO.

| | REGULAR SIZE | | MINIATURE SIZE |
|---|---|---|---|
| -1: | 1ST AWARD, BRONZE | -4: | 1ST AWARD, BRONZE |
| -2: | 2ND AWARD, GOLD | -5: | 2ND AWARD, GOLD |
| 3: | 3RD AWARD, SILVER | -6: | 3RD AWARD, SILVER |

MATERIAL:
-1, -2, -4, -5: Red Brass or Gilding Metal
-3, -6: Red Brass or Nickel Silver

FINISH:
-1, -4: Copper Flash (Red Brass Only), Oxidized, Relieved, Matte Finish, Polished Highlights.
-2, -5: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-2, -5: Nickel Plated (Red Brass Only), Silver Plated, Oxidized, Relieved, Polished Highlights and shall match TIOH Metal Finish Chip Number 15.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:51Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

| | |
|---|---|
| HEIGHT (Overall): | |
| Regular Size: | 1/4 inch (0.64 cm) (REF) |
| Miniature Size: | 3/16 inch (0.48 cm) (REF) |
| WIDTH (Overall): | |
| Regular Size: | 1-1/2 inches (3.81 cm) (REF) |
| Miniature Size: | 3/4 inch (1.91 cm) (REF) |
| THICKNESS (Overall): | 0.063 inch + 0.005 inch - 0 (0.160 cm + 0.012 cm - 0) |

PRONG LENGTH (Miniature Size): 1/4 inch ± 1/32 inch (0.64 cm ± 0.08 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The attaching device shall be two prongs located on the reverse of the ribbon attachment. The prongs shall be located on the horizontal center line equidistant from each end and 3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm) apart for the regular size and 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) apart for the miniature size.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0863)


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:51Z
Check the source to verify that this is the current version before use.