NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/21G
30 September 1996
SUPERSEDING
MIL-R-41819/21F
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, NUMERALS, STRIKE FLIGHT, NAVY AND AIR MEDAL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

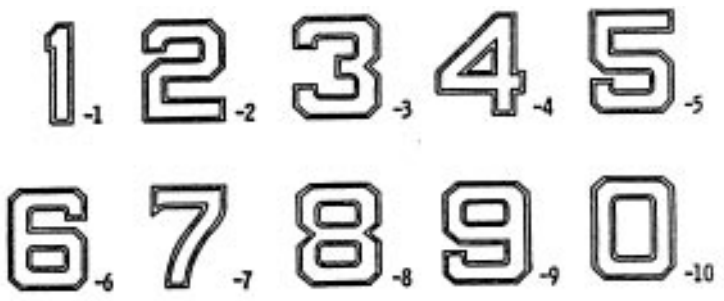

DASH NO.	NUMERAL
-1, -11:	1
-2, -12:	2
-3, -13:	3
-4, -14:	4
-5, -15:	5
-6, -16:	6
-7, -17:	7
-8, -18:	8
-9, -19:	9
-10, -20:	0

MATERIAL: Red Brass

FINISH:
-1 Thru -10: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Number 4.
-11 Thru -20: Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:52Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall): 3/16 inch (0.48 cm) REF
WIDTH (Overall):
-1, -11: 1/16 inch (0.16 cm) REF
-2 Thru -10, -12 Thru -20: 11/64 inch (0.44 cm) REF
THICKNESS (Thickest Point): 0.040 inch + 0.10 inch - 0 (0.102 cm + 0.025 cm - 0)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Except for numerals "4" and "0", the attaching device shall be a staple type prong located on the horizontal center line of the numeral as close as possible to the center of the numeral.

3. The attaching device for the numeral "4" shall be a staple type prong located at the intersection for the vertical center line of the numeral and the center of the horizontal bar in the numeral.

4. The attaching device for the numeral "0" shall have two prongs. One prong shall be located at each intersection of the horizontal center line of the numeral and the center of the vertical arms.

5. The numeral "2" and "4" need not be pierced. The remaining numerals shall be pierced.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:52Z
Check the source to verify that this is the current version before use.