INCH-POUND

MIL-DTL-41819/21J
10 January 2001
SUPERSEDING
MIL-DTL-41819/21H
27 October 1999

DETAIL SPECIFICATION SHEET

# RIBBON ATTACHMENTS: NUMERALS, ARMY AND MARINE CORPS; STRIKE/FLIGHT DEVICES, NAVY AND MARINE CORPS

Inactive for new design after 25 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.




| DASH NO. | | NUMERAL |
|---|---|---|
| -1, | -11 | 1 |
| -2 | -12 | 2 |
| -3 | -13 | 3 |
| -4 | -14 | 4 |
| -5 | -15 | 5 |
| -6 | -16 | 6 |
| -7 | -17 | 7 |
| -8 | -18 | 8 |
| -9 | -19 | 9 |
| -10 | -20 | 10 |

MATERIAL: Red Brass

FINISH:

-1 through -10: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.

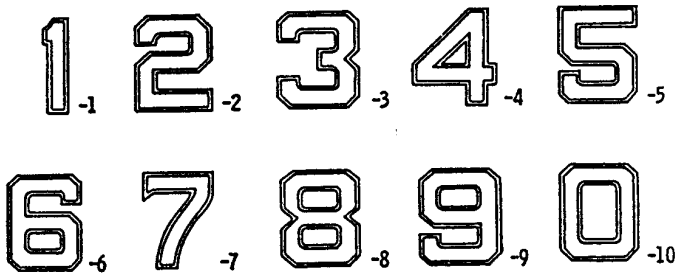

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:52Z
Check the source to verify that this is the current version before use.

-11 through -20: Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:

HEIGHT (overall): 3/16 inch (REF)
WIDTH (overall):
-1, -11: 1/16 inch (REF)
-2 through -10, -12 through -20: 11/64 inch (REF)
THICKNESS (at thickest point): 0.040 inch + 0.10 inch - 0

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Except for numerals "4" and "0", the attaching device shall be a staple type prong located on the horizontal center line of the numeral as close as possible to the vertical center.

3. The attaching device for the numeral "4" shall be a staple type prong located at the intersection for the vertical center line of the numeral and the center of the horizontal bar in the numeral.

4. The attaching device for the numeral "0" shall have two prongs. One prong shall be located at each intersection of the horizontal center line of the numeral and the center of the vertical arms.

5. The numerals "0" and "3" shall be pierced.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0037/003)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:52Z
Check the source to verify that this is the current version before use.