NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/8F
30 September 1996
SUPERSEDING
MIL-R-41819/8E
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, CLASP, GOOD CONDUCT MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

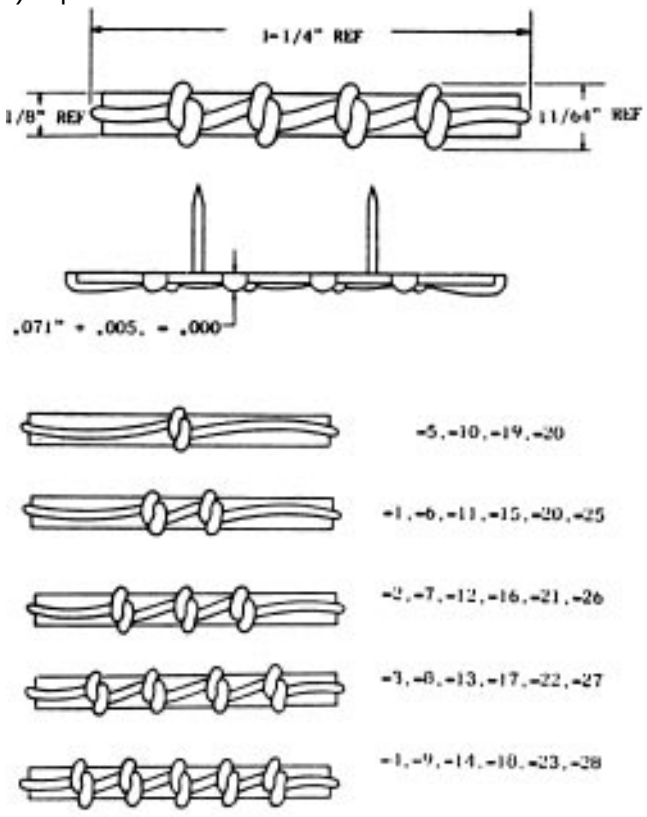

MATERIAL:
-1 thru -4, -15 thru -18: Red Brass or Gilding Metal
-5 thru -9, -19 thru -23: Red Brass or Nickel Silver
-10 thru -14, -24 thru -28: Red Brass

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:48Z
Check the source to verify that this is the current version before use.

DASH NO.	REGULAR SIZE	DASH NO.	MINIATURE SIZE
-1:	2ND AWARD, BRONZE	-15:	2ND AWARD, BRONZE
-2:	3RD AWARD, BRONZE	-16:	3RD AWARD, BRONZE
-3:	4TH AWARD, BRONZE	-17:	4TH AWARD, BRONZE
-4:	5TH AWARD, BRONZE	-18:	5TH AWARD, BRONZE
-5:	6TH AWARD, SILVER	-19:	6TH AWARD, SILVER
-6:	7TH AWARD, SILVER	-20:	7TH AWARD, SILVER
-7:	8TH AWARD, SILVER	-21:	8TH AWARD, SILVER
-8:	9TH AWARD, SILVER	-22:	9TH AWARD, SILVER
-9:	10TH AWARD, SILVER	-23:	10TH AWARD, SILVER
-10:	11TH AWARD, GOLD	-24:	11TH AWARD, GOLD
-11:	12TH AWARD, GOLD	-25:	12TH AWARD, GOLD
-12:	13TH AWARD, GOLD	-26:	13TH AWARD, GOLD
-13:	14TH AWARD, GOLD	-27:	14TH AWARD, GOLD
-14:	15TH AWARD, GOLD	-28:	15TH AWARD, GOLD

FINISH:

-1 thru -4, -15 thru -18: Copper Flash, (Red Brass Only), Oxidized, Relieved, Polished Highlights, Matte Finish.

-5 thru -9, -19 thru -23: Nickel Plated (Red Brass Only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

-10 thru -14, -24 thru -28: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

HEIGHT (At Knot):
Regular Size: 11/64 inch (0.44 cm) (REF)
Miniature Size: 11/128 inch (0.22 cm) (REF)

HEIGHT (At Ends):
Regular Size: 1/8 inch (0.32 cm) (REF)
Miniature Size: 1/16 inch (0.16 cm) (REF)

WIDTH (Overall):
Regular Size: 1-1/4 inches (3.18 cm) (REF)
Miniature Size: 5/8 inch (1.59 cm) (REF)

THICKNESS (Overall):
Regular Size: 0.071 inch + 0.005 inch - 0 (0.180 cm + 0.012 cm - 0)
Miniature Size: 0.050 inch + 0.005 inch - 0 (0.127 cm + 0.012 cm - 0)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The attaching device shall be a staple type prong centered on the reverse of the ribbon attachment. The staple type prong shall located on the horizontal center line equidistant from each end and 5/8 inch $\pm$ 1/32 inch (1.59 cm $\pm$ 0.08 cm) apart for the regular size and 3/8 inch $\pm$ 1/32 inch (0.95 cm $\pm$ 0.08 cm) apart for the miniature size.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:48Z
Check the source to verify that this is the current version before use.

Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:48Z
Check the source to verify that this is the current version before use.