INCH-POUND


MIL-DTL-41819/8J
14 November 2018
SUPERSEDING
MIL-DTL-41819/8H
26 February 2015


DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, CLASP, GOOD CONDUCT MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-R-41819.

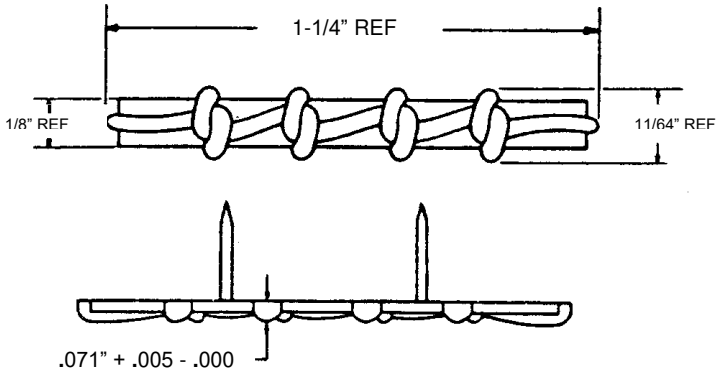

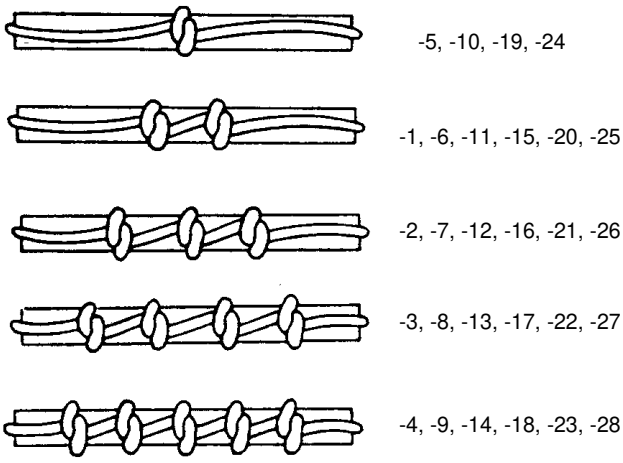

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:48Z
Check the source to verify that this is the current version before use.

DASH NUMBERS:

DASH NO.	REGULAR SIZE	DASH NO.	MINIATURE SIZE
-1:	2ND AWARD, BRONZE	-15:	2ND AWARD, BRONZE
-2:	3RD AWARD, BRONZE	-16:	3RD AWARD, BRONZE
-3:	4TH AWARD, BRONZE	-17:	4TH AWARD, BRONZE
-4:	5TH AWARD, BRONZE	-18:	5TH AWARD, BRONZE
-5:	6TH AWARD, SILVER	-19:	6TH AWARD, SILVER
-6:	7TH AWARD, SILVER	-20:	7TH AWARD, SILVER
-7:	8TH AWARD, SILVER	-21:	8TH AWARD, SILVER
-8:	9TH AWARD, SILVER	-22:	9TH AWARD, SILVER
-9:	10TH AWARD, SILVER	-23:	10TH AWARD, SILVER
-10:	11TH AWARD, GOLD	-24:	11TH AWARD, GOLD
-11:	12TH AWARD, GOLD	-25:	12TH AWARD, GOLD
-12:	13TH AWARD, GOLD	-26:	13TH AWARD, GOLD
-13:	14TH AWARD, GOLD	-27:	14TH AWARD, GOLD
-14:	15TH AWARD, GOLD	-28:	15TH AWARD, GOLD

MATERIAL:

-1 thru -4, -15 thru -18: Red Brass or Gilding Metal
-5 thru -9, -19 thru -23: Red Brass or Nickel Silver
-10 thru -14, -24 thru -28: Red Brass

FINISH:

-1 thru -4, -15 thru -18: Copper Flash, (Red Brass only), Oxidized, Relieved, Polished Highlights, Matte Finish.

-5 thru -9, -19 thru -23: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.

-10 thru -14, -24 thru -28: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

HEIGHT (at knot):
Regular Size: 11/64 inch (REF)
Miniature Size: 11/128 inch (REF)
HEIGHT (at ends):
Regular Size: 1/8 inch (REF)
Miniature Size: 1/16 inch (REF)
WIDTH (overall):
Regular Size: 1-1/4 inches (REF)
Miniature Size: 5/8 inch (REF)
THICKNESS (overall):
Regular Size: 0.071 inch + 0.005 inch - 0
Miniature Size: 0.050 inch + 0.005 inch - 0

ATTACHING DEVICE:

1: The attaching device shall be two prongs centered on the reverse of the ribbon attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:48Z
Check the source to verify that this is the current version before use.

2: The two prongs shall be located on the horizontal center line equidistant from each end and 5/8 inch ± 1/32 inch apart for the regular size and 3/8 inch ± 1/32 inch apart for the miniature size.

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
Coast Guard - CG1
DLA - CT

(Project No. 8455-2019-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:48Z
Check the source to verify that this is the current version before use.