NOT MEASUREMENT SENSITIVE


MIL-DTL-41819/8K
14 September 2023
SUPERSEDING
MIL-DTL-41819/8J
14 November 2018


DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, CLASP, GOOD CONDUCT MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-R-41819.

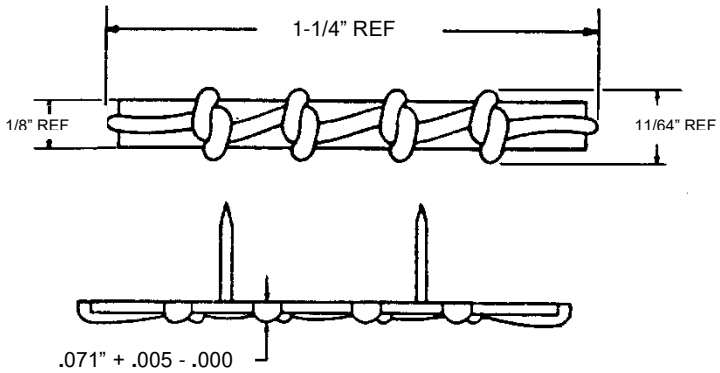

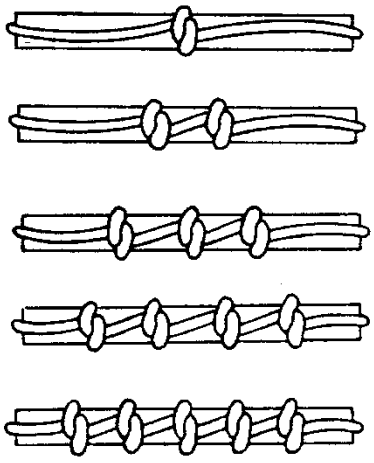

-5, -10, -19, -24

-1, -6, -11, -15, -20, -25

-2, -7, -12, -16, -21, -26

-3, -8, -13, -17, -22, -27

-4, -9, -14, -18, -23, -28

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:47Z
Check the source to verify that this is the current version before use.

DASH NUMBERS:

DASH NO.	REGULAR SIZE
-1:	2ND AWARD, BRONZE
-2:	3RD AWARD, BRONZE
-3:	4TH AWARD, BRONZE
-4:	5TH AWARD, BRONZE
-5:	6TH AWARD, SILVER
-6:	7TH AWARD, SILVER
-7:	8TH AWARD, SILVER
-8:	9TH AWARD, SILVER
-9:	10TH AWARD, SILVER
-10:	11TH AWARD, GOLD
-11:	12TH AWARD, GOLD
-12:	13TH AWARD, GOLD
-13:	14TH AWARD, GOLD
-14:	15TH AWARD, GOLD

DASH NO.	MINIATURE SIZE
-15:	2ND AWARD, BRONZE
-16:	3RD AWARD, BRONZE
-17:	4TH AWARD, BRONZE
-18:	5TH AWARD, BRONZE
-19:	6TH AWARD, SILVER
-20:	7TH AWARD, SILVER
-21:	8TH AWARD, SILVER
-22:	9TH AWARD, SILVER
-23:	10TH AWARD, SILVER
-24:	11TH AWARD, GOLD
-25:	12TH AWARD, GOLD
-26:	13TH AWARD, GOLD
-27:	14TH AWARD, GOLD
-28:	15TH AWARD, GOLD

MATERIAL:

-1 thru -4,	-15 thru -18:	Red Brass or Gilding Metal
-5 thru -9,	-19 thru -23:	Red Brass or Nickel Silver
-10 thru -14,	-24 thru -28:	Red Brass

FINISH:

-1 thru -4, -15 thru -18: Copper Flash, (Red Brass only), Oxidized, Relieved, Polished Highlights, Matte Finish.

-5 thru -9, -19 thru -23: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.

-10 thru -14, -24 thru -28: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

HEIGHT (at knot):
- Regular Size: 11/64 inch (REF)
- Miniature Size: 11/128 inch (REF)

HEIGHT (at ends):
- Regular Size: 1/8 inch (REF)
- Miniature Size: 1/16 inch (REF)

WIDTH (overall):
- Regular Size: 1-1/4 inches (REF)
- Miniature Size: 5/8 inch (REF)

THICKNESS (overall):
- Regular Size: 0.071 inch + 0.005 inch - 0
- Miniature Size: 0.050 inch + 0.005 inch - 0

ATTACHING DEVICE:

1: The attaching device shall be two prongs centered on the reverse of the ribbon attachment.

2: The two prongs shall be located on the horizontal center line equidistant from each end and 5/8 inch $\pm$ 1/32 inch apart for the regular size and 3/8 inch $\pm$ 1/32 inch apart for the miniature size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:47Z
Check the source to verify that this is the current version before use.

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2023-209)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:47Z
Check the source to verify that this is the current version before use.