MIL-C-9828A(USAF)
13 August 1963
Superseding
MIL-C-9828(USAF)
3 May 1957

MILITARY SPECIFICATION

CASE, FLAG, INTERMENT

1. SCOPE

1.1 This specification covers one type of case for use with the interment flag for presentation to the family of a deceased member of the Air Force.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-375	Plastic Film, Flexible, Vinyl Chloride
CCC-T-191	Textile Test Methods
PPP-B-636	Boxes, Fiberboard
PPP-T-495	Tubes, Mailing and Filing

Military

MIL-F-10884	Fasteners, Snap
MIL-I-25178	Insignia, U. S. Air Force Flight Clothing and Personal Equipment

STANDARDS

Federal

FED-STD No. 595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

FSC 8345

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

DRAWINGS

Air Force

63E22173 Case Flag Interment

(Note.- Miniature copy of referenced Drawing 63E22173 identified as Figure 2 is attached for information purposes only.)

(Copies of specifications, standards and drawings required by contractor in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified in the contract or order, and before production is commenced, one completely fabricated case, flag, interment, representative of items to be furnished, shall be submitted to the Contracting Officer for approval (see 6.2). Approval of the preproduction sample authorizes production. Such authorization does not relieve the contractor of the responsibility for compliance with all provisions of this specification.

3.2 MATERIALS

3.2.1 Vinyl film. The case shall be fabricated of colorless flexible vinyl film conforming to Type I, Class I of Specification L-P-375, except that the resistance to accelerated weathering exposure shall be 40 hours and the following characteristics need not apply: stiffness, extraction in soapy water, volatility and lacquer lifting. The vinyl shall be 0.0080 ± 0.0013 inches in thickness.

3.2.2 Fastener snap. The snap fastener shall conform to Style 2, Finish 3, 20 Line of Specification MIL-F-10884.

3.2.3 Reinforcement, snap fastener. The snap fastener reinforcements shall be of the same material specified in 3.2.1.

3.2.4 Insignia. An insignia conforming to Type II B, Size 20, Grade 2 of Specification MIL-I-25178(USAF), shall be screen printed on the under side of the face (front) sheet of the plastic material. The insignia shall be centered with the bottom of the insignia located seven (7) inches from the apex of the case. Added to and as an integral part of the insignia shall be the words "IN MEMORIUM".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

Each word will be capitalized using a 3/8 inch letter and the remaining letters shall be 1/4 inch letters. These words shall be located above the insignia proper with a 3/16 inch space visible between the lettering and the circular contour of the insignia. The complete insignia shall meet the weathering requirements of the basic film upon which it is applied.

3.2.4.1 Inks. The inks used in the screen printing shall be of the vinyl adhering type. The contractor shall furnish a certificate of compliance for the composition of the insignia inks.

3.2.4.1.1 Colors. The color shades of the insignia shall conform to Cable Nos. 15044 (blue), 17875 (white), 11136 (red), and 17043 (gold) of Federal Standard No. 595. The lettering shall conform in color to Cable No. 15044 (blue) of Federal Standard No. 595.

3.2.5 Instruction sheet. One instruction sheet (see Figure 1) Size 8 inches by 10½ inches and entitled "Use of the Flag," shall be included with each flag case by insertion into the case before packaging. The contractor will be responsible for the insertion of the instruction sheets (see 6.3).

3.3 Design and construction. The case flag interment shall conform to the design, shape and dimensions as shown in Drawing 62E22173.

3.3.1 Case. The case shall be fabricated of material specified in 3.2.1 and the front and back panels heat sealed (flat seam) along two sides using a 3/8 inch wide heat seal set in 1/4 inch from the edge. The top of the back panel shall be folded upon itself to the inside with the cut edge turned under not less than 1/16 inch to form a hem. The entire reinforcement fold shall be heat sealed and the finished width shall be 13/16 (±1/8) inch.

3.3.2 Reinforcement piece. A reinforcement piece of the basic film cut 1 (±1/8) inch square shall be heat sealed at the snap fastener stud assembly and the snap fastener button assembly locations as shown in the drawing. Each reinforcement piece shall consist of two plies of the basic film. Both reinforcement pieces for the stud assembly shall be heat sealed to the underneath side of the back panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

USE OF THE FLAG

1. This flag is issued on behalf of the United States Air Force to honor the memory of one who has served his country with honor.

2. When used to drape the casket, the flag should be placed as follows:


(a) Closed Casket. - When the flag is used to drape a closed casket, it should be so placed that the union (blue field) is at the head and over the left shoulder of the deceased.

(b) Half Couch (Open). - When the flag is used to drape a half-couch casket, it should be placed in three layers (10-inch folds) to cover the closed half of the casket in such a manner that the blue field will be the top fold, next to the open portion of the casket on the deceased's left.

(c) Full Couch (Open). - When the flag is used to drape a full couch casket, it should be folded in a triangular shape and placed in the center part of the head panel of the casket cap, just above the left shoulder of the deceased.

3. During a military commitment ceremony, the flag which was used to drape the casket is held waist high over the grave by the pallbearers and, immediately after the sounding of "Taps," is folded in accordance with the method below.

CORRECT METHOD OF FOLDING THE UNITED STATES FLAG

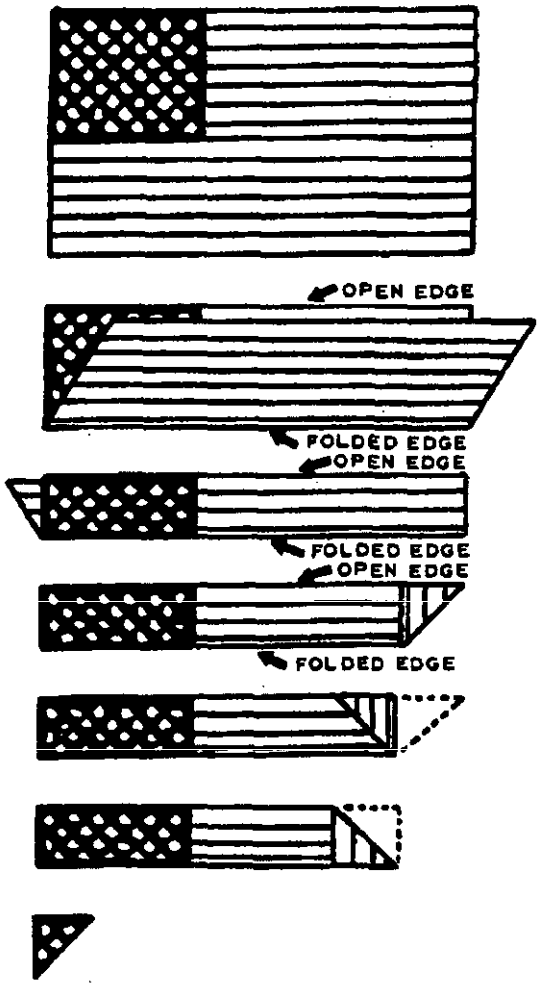

(a) Fold the lower striped section of the flag over the blue field.

(b) Folded edge is then folded over to meet the open edge.

(c) A triangular fold is then started by bringing the striped corner of the folded edge to the open edge.

(d) Outer point is then turned inward parallel with the open edge to form a second triangle.

(e) Triangular folding is continued until the entire length of the flag is folded in the triangular shape of a cocked hat with only the blue field visible.

After the triangular fold has been completed, the flag should be placed in the triangular plastic case provided and then presented to the next of kin or his designated representative.

May our country's flag be an everlasting symbol that our honored dead shall not have died in vain.

PREPARED BY THE UNITED STATES AIR FORCE

(Figure 1 – Instruction Sheet)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

TABLE I

Component and lot expressed in terms of	Characteristics	Rqmt para	Test Method	Rqmt Ind Unit	Appl to Lot Avg	No Det per Spl Unit	Results Reported as
Insignia applied with vinyl ink (10 Insignia)	Resistance to Weathering	3.2.4	Method 5670 CCC-T-191 (40 hours)	X	-	1	Excellent, Good, Fair or Poor

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

3.3.3 Snap fastener. The snap fastener parts shall be positioned as shown in the drawing. The snap fastener shall be attached through the heat sealed reinforcement pieces, with the stud and eyelet on the back panel and the button and socket on the front panel flap.

3.4 Workmanship. The case shall conform to the quality and grade of product established by this specification, and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utalize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Pre-acceptance inspection.

4.2.1 Preproduction inspection. When required, inspection and testing of the preproduction sample shall be made of a completely fabricated case, flag, interment for all provisions of this specification applicable to end product examination and tests.

4.3 Inspection for acceptance. Unless otherwise specified, inspection shall be in accordance with Military Standard MIL-STD-105.

4.3.1 Inspection of components.

4.3.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, testing shall be performed on components and materials listed in Table I for the test characteristics shown. The sample unit for resistance to weathering shall be one 4" x 6" piece of basic film, with insignia applied with vinyl ink. The inspection level shall be L-1 and the acceptable quality level (AQL) expressed in defects per hundred units shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

4.3.2 Certificate of compliance. Components and materials listed below may be accepted on the basis of a contractor's certificate of compliance for characteristics shown.

Component	Characteristic	Rqmt Para.
Snap fastener	Finish	3.2.2
Vinyl adhering ink	Composition	3.2.4.1

4.3.3 End item examination. The defects found during examination shall be classified in accordance with 4.3.3.1 and 4.3.3.2. The lots shall be inspected in accordance with 4.3.3.3. The sample unit for these examinations shall be one Case, Flag, Interment.

4.3.3.1 Examination of Case, Flag, Interment for visual characteristics.

Note: Defects designated with an asterisk (*) shall be classified as follows:

Major defect - When seriously affecting serviceability or appearance.

Minor defect - When affecting serviceability or appearance, but not seriously.

Examine	Defect	Major	Minor
Quality of plastic Material	Not type specified	X	
	Not uniformly colorless or not clear		X
	Finish not smooth dull matte on both sides		X
	Tear, cut, hole, crack or break	X	
	Deep gouge or scratch	*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	Minor
Quality of plastic material (continued)	Scuff, crease, blister, bubble, pimple or pit		X
	Any dirt, oil, foreign matter, spot, stain or other discoloration which requires a cleaning agent for removal		X
	Objectionable odor		X
Quality of insignia	Not the specified type	X	
	Tear, cut, hole, crack or break (decal type)	X	
	Does not coincide in color, legend or design with approved sample	*	
Snap fastener	Missing, loose, mismated or otherwise defective	*	
	Improperly clinched resulting in curring of the vinyl film	*	
	Any sharp burrs or metal slivers which may affect serviceability		X
	Stud not aligned with the socket causing a noticeable bulge or twist on the flap when snapped	*	
	Improperly finished		X
	Insecurely clinched		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	Minor
Instruction sheet	Missing, torn defaced or illegible	X	
	Wrong format, configuration incorrect, improperly worded, incorrect type, word misspelled, incorrect instruction sheet, wrong size, not affixed in the prescribed manner or otherwise incorrect	X	
Design and construction	Varies from specified design and construction or approved sample.		*
	Not triangular in shape		X
	Any characteristic not in accordance with specified requirements or approved sample.		*
	Front and back sections not joined by a 3/8 inch heat seal set in 1/4 inch along the sides of the pouch.	X	
Workmanship and assembly	Open seam	X	
	Seam not sealed as specified		*
	Seal not in proper location		*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	Minor
Workmanship and assembly (continued)	Any area of seal not continuous (or thin) resulting in weak or incomplete juncture.	*	
	Heat seal ends torn, rough or not trimmed		X
	Poor heat seal, resulting in inadequate fusion	X	
	Width of heat seal along sides not as specified		X
	Heat seal not set in from edge as specified		X
	Snap fastener missing	X	
	Snap fastener has sharp or rough edge which may damage the case or cause injury in handling		X
	Snap fastener has defective component, failing to serve intended purpose	*	
	Insignia or words "In Memorium" missing	X	
	Insignia or words "In Memorium" not applied by screen printing method.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	Minor
Workmanship and assembly (continued)	Insignia not applied to the underneath side of the front section of case		X
	Insignia colors not sharply defined, c.g., poor registration, colors intermixed, area of color missing, etc.	*	
	Insignia has wrong color combination or does not conform to approved sample	X	
	Insignia not centrally located or out of alignment		X
	Words "In Memorium" not properly located or spaced above the insignia		X
	Words "In Memorium" not specified color or shade or not old English art type		X
	Any part missing or misplaced	X	
	Any part not attached or assembled as specified	X	

4.3.3.2 Dimensional examination of Case, Flag, Interment. Any dimension that is not within the specified tolerances shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

4.3.3.3 AQLs and inspection levels. The inspection levels and acceptable quality levels (AQLs) expressed in defects per hundred units, shall be as follows:

	Inspection Level	AQL	
		Major	Total
For defects applicable to 4.3.3.1	II	2.5	10.0
For defects applicable to 4.3.3.2	L-6	One Class	4.0

4.3.4 Examination of preparation for delivery requirements. An examination shall be made to determine that applicable packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling
	Bulging or distortion of containers
Weight or content (exterior and interior)	Number of intermediate packages is more or less than required; gross/net weight exceeds requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

5.1.1 Levels A and C. Each case shall be placed flat and loosely rolled along the long dimensions to form a roll approximately 31¼ inches long by 2 inches in diameter. Each rolled case shall be inserted in a chipboard tube conforming to Specification PPP-T-495, Type I, Class 1, Style C.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Fifty (50) cases, packaged as specified, shall be packed in snug-fitting fiberboard shipping containers, constructed, closed and reinforced to conform to Type I or II, V3C or V3S, Style RSC of Specification PPP-B-636.

5.2.2 Level B. Fifty (50) cases, packaged as specified, shall be packed in snug-fitting fiberboard shipping containers, constructed and closed to conform to Type I or II, Class 1, Style RSC of Specification PPP-B-636. All flaps of the fiberboard shipping container shall be securely sealed with an adhesive commercially used for the specific product being packed, or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive.

5.2.3 Level C. Cases, packaged as specified, shall be packed in a manner to insure carrier acceptance and safe delivery at destination, at the lowest transportation rate for such supplies. The containers shall be in accordance with carriers' rules or regulations as applicable to the mode of transportation.

5.3 Marking. Interior packages and exterior shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

6. NOTES

6.1 Intended Use. The information contained in this specification is intended to furnish the data necessary to manufacture case, flag, interment to be produced for Air Force use only. The case is to be used in conjunction with flag, United States of America, Interment.

6.2 Ordering Data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Requirements for preproduction approval (see 3.1).

c. Inspection responsibility, methods and tests (see Section 4).

d. Selection of applicable level of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.


6.3 Instruction sheet. To obtain copies of the instruction sheet address the Commander, Middletown Air Materiel Area (MAAEPD), Olmsted Air Force Base, Pennsylvania.

6.4 Patent notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


GPO 803-748

MBL/iah
MANENA


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.

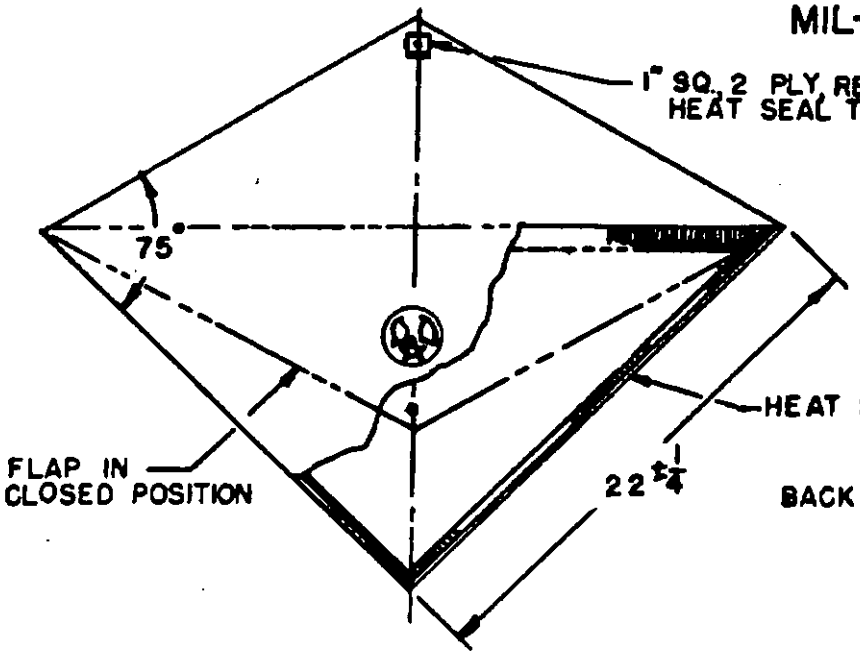

CASE ASSEMBLY

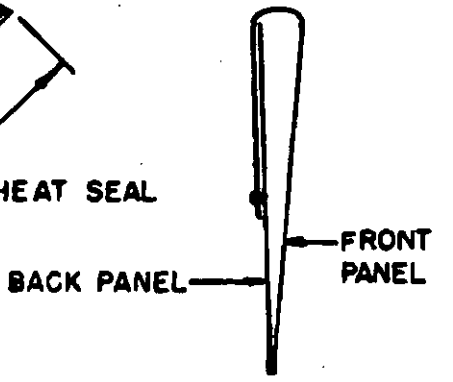

END VIEW SHOWING
CASE CLOSED

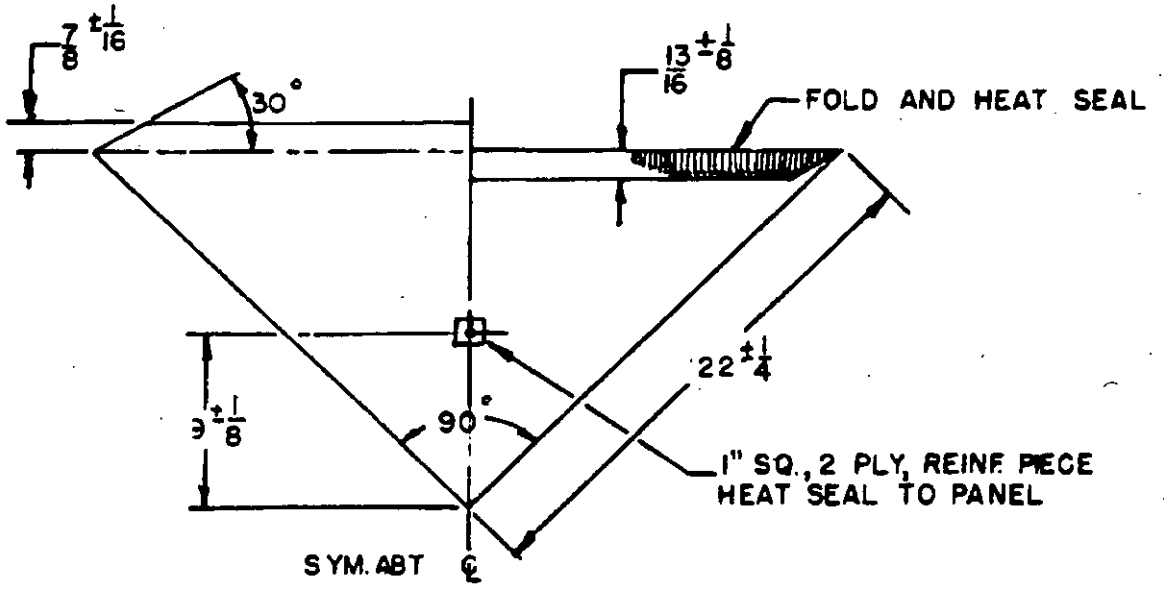

BACK PANEL

NOTES:

1. FASTENER STUD AND BUTTON STYLE 2, FIN. 3 OF SPEC. MIL-F-10884 WITH 2 PLY REINFORCEMENTS OF THE BASIC FILM HEAT SEALED TO UNDERNEATH SIDE OF PANELS.
2. ALL HEAT SEALS 3/8" WIDE AND SET 1/4" FROM EDGE.
3. FABRICATION TOLERANCES, ± 1/8" UNLESS OTHERWISE SPECIFIED.
4. FOR INSIGNIA LOCATION AND DETAILS, SEE PAR. 3.2.4 OF SPEC. MIL-C-9828.

THIS FIGURE IS A MINIATURE COPY OF AIR FORCE DRAWING NO. 63E22173, REVISION DATED , THIS COPY IS FOR INFORMATION; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE 2.

CASE, FLAG, INTERMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:05Z
Check the source to verify that this is the current version before use.