MIL-C-9851B (USAF)
10 February 1969
SUPERSEDING
MIL-C-9851A (USAF)
21 September 1959

MILITARY SPECIFICATION
CHECKOUT AND SERVICING SHEET
(Nonreparable Equipment)

1. SCOPE

1.1 This specification covers the requirements for preparation of a sheet of instructions for the checkout and servicing of components or equipment not designed to be disassembled and repaired. This specification shall be used when preparation of complete maintenance and overhaul instructions, and a parts breakdown manual for this type of component or equipment, are not required.

1.2 This specification shall not be used to prepare instructions that should be included in the applicable manual for the end item of equipment (aircraft, missile, vehicle, communication equipment, support equipment, etc).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-M-38789	Manuals, Technical: General Requirements for Preparation of
MIL-P-38790	Printing Production of Technical Manuals: General Requirements for

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preparation. The requirements of MIL-M-38784 and MIL-P-38790 are applicable.

3.2 Title page. An abbreviated title page shall be used. It shall contain the words CHECKOUT AND SERVICING SHEET. See figure 1, sheet 1.

3.3 Text. The instructions shall be presented as concisely as possible, beginning beneath the title block. A checkout and servicing sheet shall not exceed two pages. See figure 1, sheets 1 and 2. Instructions shall not reference other publications. Charts, tables, and diagrams shall be used where feasible to portray checkout procedures.

3.3.1 Test procedures. Brief and specific instructions for testing the equipment for serviceability shall be given. Test values and allowable tolerances shall be provided. Required test equipment (equivalent and alternates) shall be listed by model or type designation.

3.3.2 Cleaning. Any special cleaning shall be described. Government specifications for cleaning agents shall be cited. General cleaning shall not be provided.

3.3.3 Inspection. Procedures for visual inspection that can be performed without disassembly shall be given, such as for cracked glass, cracked casings, gaskets, seals, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:06Z
Check the source to verify that this is the current version before use.

3.3.4 Servicing and replacement. Instructions shall cover external adjustments, alignments, and replacement of easily accessible items, such as gaskets, seals, fittings, etc. Instructions for lubrication shall be provided, when applicable.

3.4 Illustrations. Illustrations shall be used only once and planned to the smallest practical scale. Flow and wiring diagrams shall be provided, as necessary.

4. QUALITY ASSURANCE PROVISIONS

4.1 The requirements of MIL-M-38784 and MIL-P-38790 are applicable.

5. PREPARATION FOR DELIVERY

5.1 The requirements of MIL-M-38784 and MIL-P-38790 are applicable.

6. NOTES

6.1 Intended use. The checkout and servicing sheets, prepared in accordance with this specification, are intended for use by field and shop maintenance personnel in checking out and servicing components and equipment which are not designed for disassembly and repair.

Custodian

Air Force -16

Review Activities:

Air Force - 01, 10, 70, 71, 80, 82, 84

Preparing Activity:

Air Force -16

Project NO. TMSS-F306

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:06Z
Check the source to verify that this is the current version before use.

TO 6A22-2-2

TECHNICAL MANUAL

CHECKOUT AND SERVICING SHEET

DROP TANK THERMISTOR

PART NO.

384324-005

(SIMMONDS PRECISION PRODUCTS INC.)

FO9603-67-A-0350

PUBLISHED UNDER AUTHORITY OF THE SECRETARY OF THE AIR FORCE

NOTICE: Reproduction for non-military use of the information or illustrations contained in this publication is not permitted without specific approval of the issuing service (NAVAIR or USAF).

27 MAY 1968

1. TEST PROCEDURES.

a. RESISTANCE TEST.

(1) Using an ohmmeter (Simpson 260 or equivalent), measure the resistance between the white and the brown leads. The resistance should be between 360 and 440 ohms.

(2) Measure the resistance between the blue and the brown leads. It should be between 650 and 1500 ohms.

NOTE

The resistance values are normal at 70° to 80°F (20° to 27°C) in still air. These values are not critical, and merely assure that the bead is intact and in the correct place.

b. FUNCTIONAL TEST.

(1) Connect the brown and blue wires of the sensing element assembly to a test circuit similar to that shown in figure 1.

(2) Apply power; adjust the potentiometer so that the milliammeter reads 100 MA. The voltage should be 1.3 to 2.2 volts in still air.

(3) Immerse drop tank thermistor in a container of solvent P-D-680 or equivalent up to the threads. The voltage should now be 4.7 to 7.0 volts.

NOTE

Functional test b. should only be applied to the brown and blue leads.

2. CLEANING. Slosh clean in trichloroethylene O-T-634.

CAUTION

Do not attempt to clean inside of sensing element assembly with any instrument or brush.

3. INSPECTION.

a. Inspect for stripped or damaged threads.

b. Inspect for damaged wires.

c. Check housing for dents or other physical damage.

4. SERVICING AND REPLACEMENT. None.

Figure 1. Example of Checkout and Servicing Sheet (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:06Z
Check the source to verify that this is the current version before use.

TO 6A22-2-2

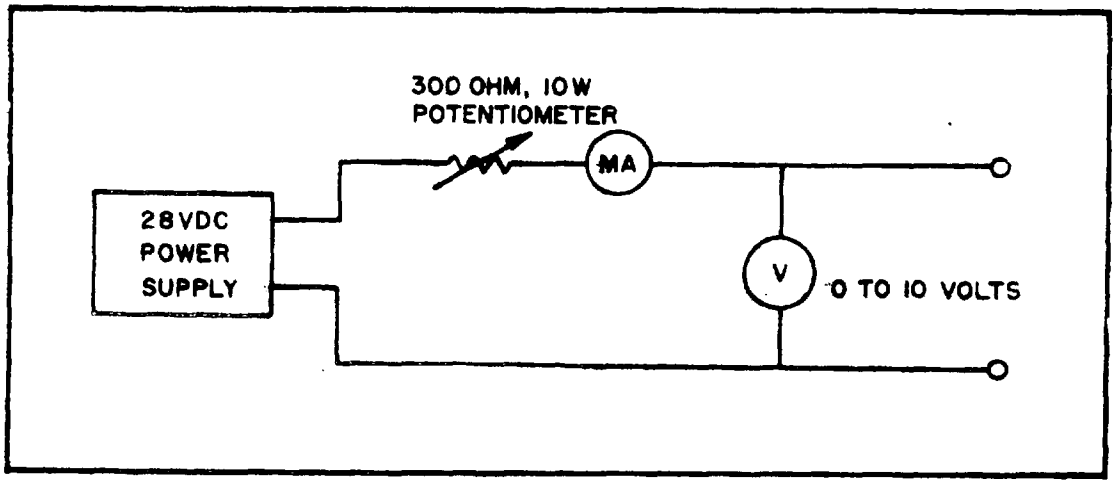


Figure 1. Test Circuit or Equivalent

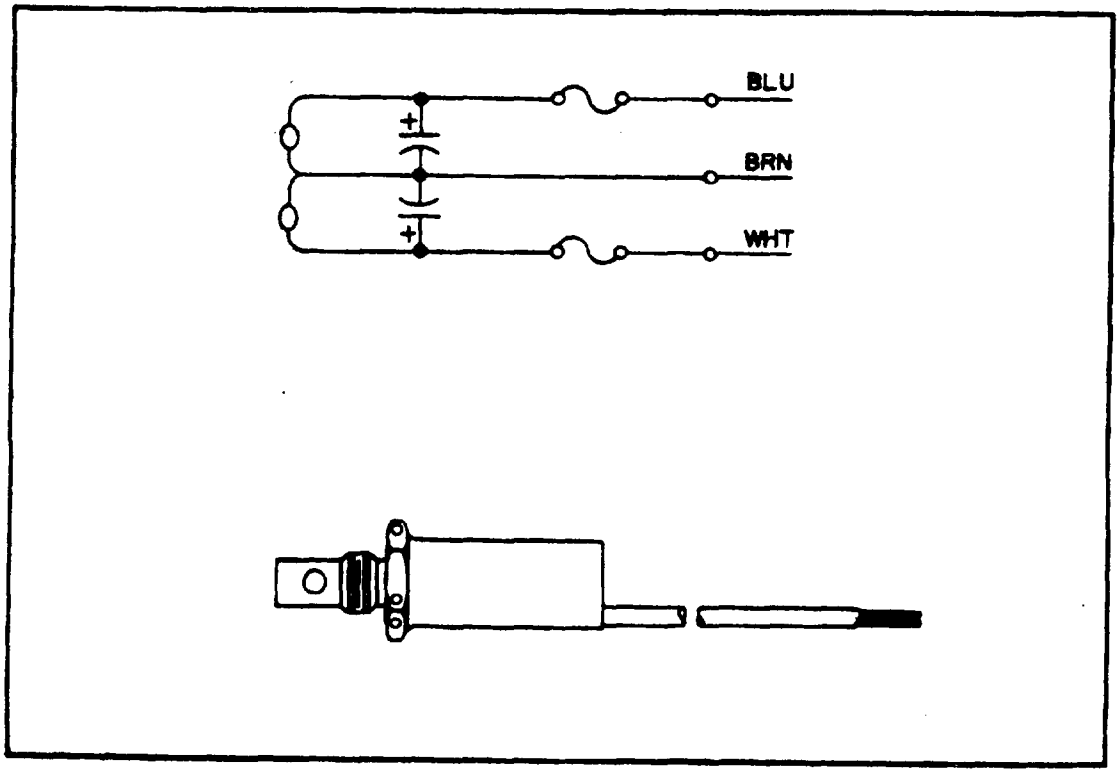


Figure 2. Drop Tank Thermistor and Schematic

Figure 1. Example of Checkout and Servicing Sheet (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:06Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION		
ORGANIZATION		CITY AND STATE
CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS (*Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity*)

SUBMITTED BY (*Printed or typed name and activity*)	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE. AF—WP—O—MAY 64 505

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:06Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

Commander
HQ AFLC (MCMSP)
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:06Z
Check the source to verify that this is the current version before use.