MIL-T-9560B(USAF)
AMENDMENT 2
21 DECEMBER 1983
SUPERSEDING
AMENDMENT 1
1 May 1969

MILITARY SPECIFICATION

TEST SET, RADIO FREQUENCY POWER AN/USM-68 ( )

This amendment forms a part of Military Specification MIL-T-9560B, dated 3 April 1968, and is approved for use by the Department of Air Force and is available for use by all Department and Agencies of the Department of Defense.

Add to bottom of Page 1:

"Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio ALC/MMEDO, Kelly AFB, Texas 78241 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter."

PAGE 1

*1.1, delete in its entirety and substitute the following:

"1.1 Scope. This specification covers one type of general purpose, ruggedized, test equipment for measuring radio frequency (rf) power, designated Test Set, Radio Frequency Power AN/USM-68 ( ), hereinafter referred to as 'the test set'."

*2.1, delete in its entirety and substitute the following 2.1 and 2.1.1:

"2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein."

*Under SPECIFICATIONS, Military, MIL-C-3432, delete title and substitute "Cable (Power and Special Purpose) and Wire Electrical (300 and 600 Volts)."

*MIL-C-3767, delete title and substitute "Connector, Plug and Receptacle, (Power, Bladed Types), General Specification for"

*Delete "MIL-T-4807 Tests, Vibration and Shock, Ground Electronic (General Requirements for)" and substitute "MIL-STD-810 Environmental Test Methods."

*Delete "MIL-D-1000 Drawings, Engineering and Associated Lists" and substitute "DOD-D-1000 Drawing, Engineering and Associated List."

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:00Z
Check the source to verify that this is the currentversion before use.

*Delete "MIL-T-21200 Test Equipment for Use with Electronic and Fire Control Systems, General Specification for" and substitute "MIL-T-28800 - Test Equipment for use with Electrical and Electronic Equipment, General Specification for."

PAGE 2

*Under STANDARD, Military, MIL-STD-461, change title to "Electromagnetic Emission and Susceptability Requirements for the Control of Electromagnetic Interference."

*MIL-STD-785, delete title and substitute "Reliability Program for Systems and Equipment Development and Production."

Under STANDARD, Military add:

"MIL-STD-794 Parts and Equipment, Procedures for Packaging and Packing of."

*Delete parenthetical source paragraph and substitute the following:

"(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)"

*Add the following new paragraph 2.1.2 and industry standard:

"2.1.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951-82 Packaging, Commercial

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)"

*Add the following new paragraph 2.1.3:

"2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence."

PAGE 3

*3.3, line 1, delete "MIL-T-21200" and substitute "MIL-T-28800."

PAGE 4

*3.3.1.3, line 3, delete "MIL-T-21200" and substitute "MIL-T-28800."

*3.3.4, line 3, delete "MIL-D-1000" and substitute "DOD-D-1000."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:00Z
Check the source to verify that this is the current version before use.

PAGE 7

3.7.2.1, line 1: Following "The Bolometer" insert "Mount."

3.7.3, line 2: Following "Bolometer" insert "Mount."

3.7.3, line 4: Following "Bolometer" insert "Mount."

3.7.3, line 6: Following "hour" add the following new sentence: "The Bolometer Element shall be marked with 'LOW-PWR'."

3.7.3g: Delete and substitute:

"g. Peak pulse power 2 watts (Pav = 1 mw)."

3.7.3h: Delete and substitute:

"h. Energy per second (erg/sec) 10,000."

3.7.4, line 2: Following "Bolometer" insert "Mount."

3.7.4, line 4: Following "Bolometer" insert "Mount."

3.7.4, line 5: Following "hour" add the following new sentence: "The Bolometer Element shall be marked with 'HI-PWR'."

3.7.4e: Delete and substitute:

"e. PRF 100 PPS"

PAGE 8

Figure 1: Delete and substitute new Figure 1.

PAGE 9

3.7.4g: Delete and substitute:

"g. Peak pulse power 200 watts (Pav - 100 mw)"

3.7.4h: Delete and substitute:

"h. Energy 1 X 10^6 engs/sec"

*3.7.9, line 3, delete "MIL-T-21200" and substitute "MIL-T-28800."

PAGE 11

*4.1, line 2 and line 4, delete "supplier" and substitute "contractor."

PAGE 24

*4.5.12, line 2, delete "MIL-T-21200" and substitute "MIL-T-28800."

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:00Z
Check the source to verify that this is the current version before use.

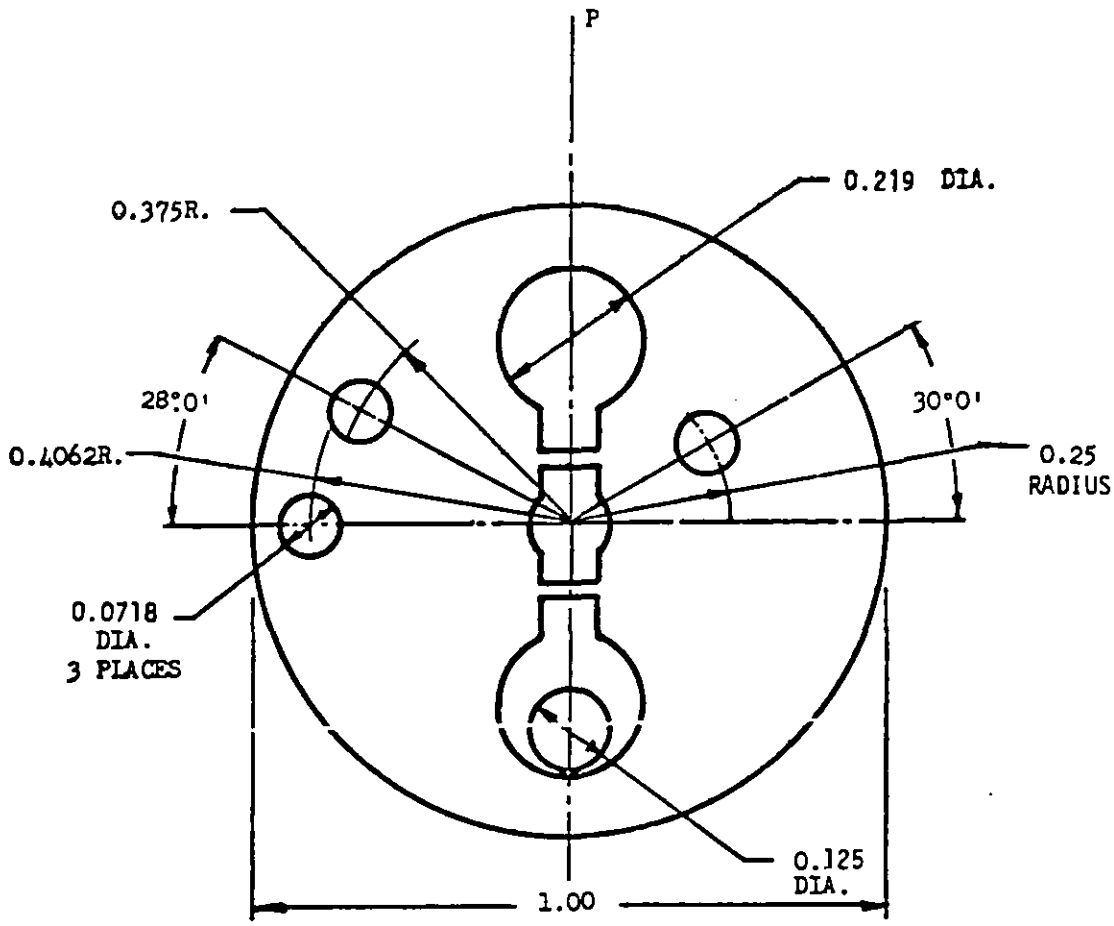


FIGURE 1. Bolometer element common design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:00Z
Check the source to verify that this is the current version before use.

4.5.13, line 2, delete "MIL-T-4807" and substitute "MIL-STD-810."

*Delete paragraph 5 through 5.2.2 and substitute the following new paragraph 5 through 5.2.2.

*"5. PACKAGING

*5.1 Preservation. Preservation shall be level A, C or industrial as specified (see 6.2).

*5.1.1 Level A.

*5.1.1.1 Cleaning. Test set shall be cleaned in accordance with MIL-P-116, process C-1.

*5.1.1.2 Drying. Test set shall be dried in accordance with MIL-P-116.

*5.1.1.3 Preservative applications. Preservatives shall not be used.

*5.1.1.4 Unit packs. Unless otherwise specified in the contract or order, the test set shall be preserved and packaged in accordance with MIL-P-116, method IID. The combination case shall be used as the unit container and overboxed in a snug fitting container comforming to grade W-5C, PPP-B-636. The desiccant, in quantities determined by formula II of MIL-P-116, shall be secured inside the combination case in a manner that will not cause damage to the unit.

*5.1.2 Level C. Test sets shall be individually preserved and packaged in a manner which will afford adequate protection against corrosion, deterioration and physical damage during shipment from supply source to the receiving activity. Level C preservation for test sets shall conform to the MIL-STD-794 requirements of this level,

OR

*5.1.2 Industrial. The industrial preservation of the test sets shall be in accordance with the requirements of ASTM D 3951.

*5.2 Packing. Packing shall be level A, B, C or industrial as specified (see 6.2).

*5.2.1 Level A. Test sets preserved and packaged as specified in 5.1.1 shall be packed in shipping containers conforming to PPP-B-601, boxes, wood, cleated plywood, overseas type. The gross weight of each PPP-B-601 container shall not exceed 200 pounds. Where practicable, exterior shipping containers shall be of uniform shape and size and of minimum cube and tare. Closure and strapping shall be in accordance with the appendix of PPP-B-601.

*5.2.2 Level B. The packaged test sets shall be packed in fiberboard containers conforming to PPP-B-636, class domestic, style optional, special requirements. Closures shall be in accordance with the appendix thereto."

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:00Z
Check the source to verify that this is the currentversion before use.

*5.2.3, delete in its entirety and substitute the following:

*"5.2.3 Level C. The level C packing for test sets shall conform to the MIL-STD-794 requirements for this level.

OR

*Industrial. The test sets shall be packed in accordance with the requirements of ASTM D 3951."

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Air Force - 99

Preparing activity:
Air Force - 82

(Project 6625-F818)

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:00Z
Check the source to verify that this is the currentversion before use.