The documentation and process conversion measures necessary to comply with this revision shall be completed by 12 December 2018.

INCH-POUND

MIL-PRF-19500/476G
12 September 2018
SUPERSEDING
MIL-PRF-19500/476F
13 December 2013

PERFORMANCE SPECIFICATION SHEET

* TRANSISTOR, FIELD EFFECT, P-CHANNEL, SILICON,
TYPES 2N5114 THROUGH 2N5116, JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

* 1.1 Scope. This specification covers the performance requirements for P-channel, junction, silicon field-effect transistors. Three levels of product assurance (JAN, JANTX, and JANTXV) are provided for each encapsulated device.

* 1.2 Package outlines. The device package outlines are as follows: similar to TO-18 in accordance with figure 1 and surface mount UB in accordance with figure 2 for all encapsulated device types.

1.3 Maximum ratings. T_A = +25°C, unless otherwise specified.

P_T (1) T_A = +25°C	V_{GS} (2)	V_{DS}	V_{DG} (2)	I_G	T_{STG}
W	V dc	V dc	V dc	mA dc	°C
0.500	30	30	30	50	-65 to +200

(1) Derate linearly 3.0 mW/°C for T_A = +25°C.
(2) Symmetrical geometry allows operation of those units with source/drain leads interchanged.

1.4 Primary electrical characteristics.

Limits	I_{DSS} (1)			$V_{DS(on)}$		
	V_{DS} = -18 V dc V_{GS} = 0	V_{DS} = -15 V dc V_{GS} = 0	V_{DS} = -15 V dc V_{GS} = 0	I_D = -15 mA dc V_{GS} = 0	I_D = -7 mA dc V_{GS} = 0	I_D = -3 mA dc V_{GS} = 0
	2N5114 2N5114UB	2N5115 2N5115UB	2N5116 2N5116UB	2N5114 2N5114UB	2N5115 2N5115UB	2N5116 2N5116UB
	mA dc	mA dc	mA dc	V dc	V dc	V dc
Min	-30	-15	-5.0			
Max	-90	-60	-25	-1.3	-0.8	-0.6

See notes on next page.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics - Continued.

Limits	$V_{GS(off)}$			$r_{ds(on)2}$		
	V_{DS} = 15 V dc I_D = -1.0 nA dc			V_{GS} = 0, I_D = 0 f = 1 kHz		
	2N5114 2N5114UB	2N5115 2N5115UB	2N5116 2N5116UB	2N5114 2N5114UB	2N5115 2N5115UB	2N5116 2N5116UB
	V dc	V dc	V dc	Ω	Ω	Ω
Min	5	3	1			
Max	10	6	4	75	100	175

(1) For T_A > +25°C, derate linearly 1.67 mW/°C one section, 2.67 mW/°C both sections.

* 1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

* 1.5.1 JAN certification mark and quality level for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: “JAN”, “JANTX”, and "JANTXV".

* 1.5.2 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

* 1.5.2.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".


* 1.5.2.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet are as follows: "5114", "5115", and "5116".

* 1.5.2.3 Suffix letters. No suffix letter indicates the transistor is similar to a TO-18 in accordance with figure 1. The suffix letters "UB" indicates that the transistor is a surface mount package in accordance with figure 2.

* 1.5.3 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.


Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	
CH	.170	.210	4.32	5.33	
HD	.209	.230	5.31	5.84	
LC	.100 TP		2.54 TP		6
LD	.016	.021	0.41	0.53	7,8
LL	.500	.750	12.7	19.05	7,8
LU	.016	.019	0.41	0.48	7,8
L_1		.050		1.27	7,8
L_2	.250		6.35		7,8
Q		.030		0.76	5
TL	.028	.048	0.71	1.22	3,4
TW	.036	.046	0.91	1.17	
r		.010		0.25	10
α	45° TP		45° TP		6

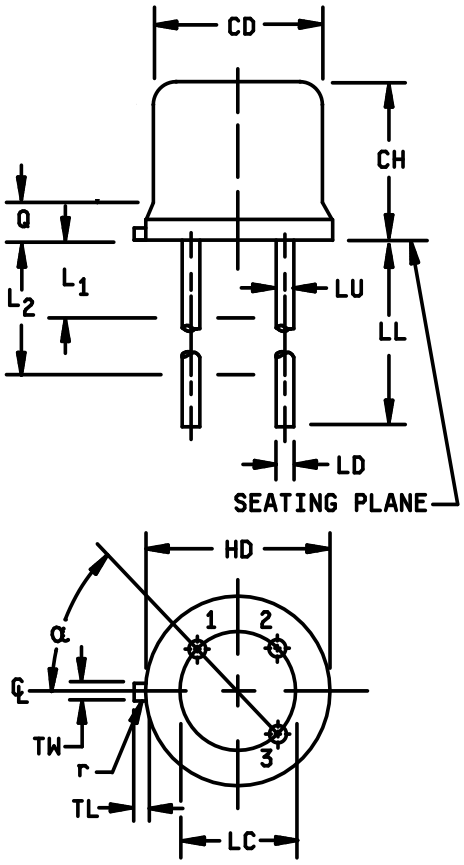


NOTES:
1. Dimension are in inches.
2. Millimeters are given for general information only.
3. Beyond r (radius) maximum, TL shall be held for a minimum length of .011 (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
7. Dimension LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum. Diameter is uncontrolled in L_1 and beyond LL minimum.
8. All three leads.
9. The gate shall be electrically connected to the case.
10. Dimension r (radius) applies to both inside corners of tab.
11. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
12. Lead 1 = source, lead 2 = gate, lead 3 = drain.

FIGURE 1. Physical dimensions (similar to TO-18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

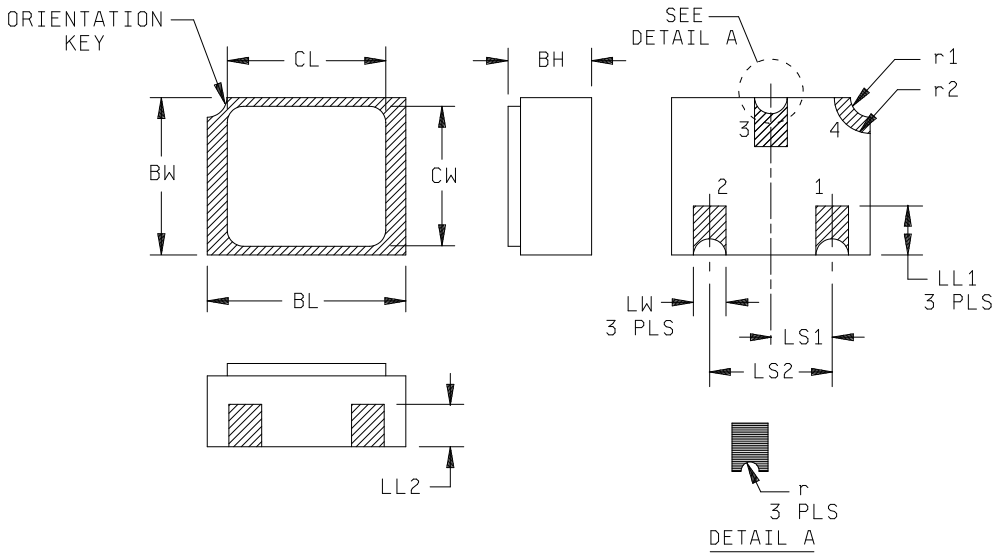

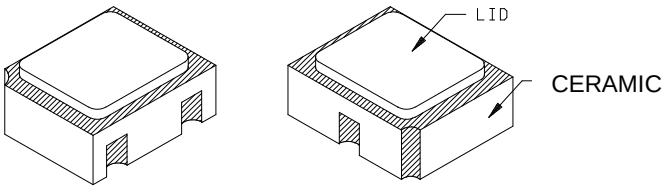

Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
BH	.046	.056	1.17	1.42	
BL	.115	.128	2.92	3.25	
BW	.085	.108	2.16	2.74	
CL		.128		3.25	
CW		.108		2.74	
LL1	.022	.038	0.56	0.96	
LL2	.017	.035	0.43	0.89	
LS1	.036	.040	0.91	1.02	
LS2	.071	.079	1.81	2.01	
LW	.016	.024	0.41	0.61	
r		.008		.203	
r1		.012		.305	
r2		.022		.559	

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Hatched areas on package denote metallized areas (tungsten with gold plating 60 micro inches min over 80 micro inches min nickel.
4. Pad 1 = drain, Pad 2 = source, Pad 3 = gate, Pad 4 = shielding connected to the lid.

FIGURE 2. Physical dimensions, surface mount (UB version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at http://quicksearch.dla.mil/).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figures 1 (similar to TO-18) and 2 (UB, surface mount) herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500, except for the UB suffix package. Marking on the UB package shall consist of an abbreviated part number, the date code, and the manufacturers symbol or logo. The prefixes JAN, JANTX, and JANTXV can be abbreviated as J, JX, and JV respectively. The "2N" prefix and the "UB" suffix can also be omitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

* 3.6 Electrostatic discharge sensitive (ESDS). The devices covered by this specification sheet have been classified as ESDS. The devices shall be handled in accordance with the ESD program established to comply with the requirements of MIL-PRF-19500 to avoid damage due to the accumulation of static charge. The following handling practices shall be followed:

a. Devices shall be handled on benches with conductive handling devices.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent, if practical.

g. Care shall be exercised, during test and troubleshooting, to apply not more than maximum rated voltage to any lead.

h. Gate must be terminated to source, $R \leq 100$ kΩ, whenever bias voltage is to be applied drain to source.

3.7 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.8 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.9 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4 VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table E-IV of MIL-PRF-19500	Measurement
	JANTX and JANTXV levels
9 and 10	Not applicable
11	$I_{D(off)1}$, $r_{ds(on)1}$
12	See 4.3.1
13	Subgroup 2 of table I herein; $\Delta I_{D(off)1}$ = ±0.5 nA dc or ±100 percent of initial value, whichever is greater. $\Delta r_{ds(on)1}$ = ±20 percent of initial value.

4.3.1 Power burn-in. Power burn-in conditions are in accordance with method 1039 of MIL-STD-750, condition A and as follows: T_A = +150°C; V_{GS} = 24 V dc; V_{DS} = 0.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

* 4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and 4.4.2.1 herein.

* 4.4.2.1 Quality levels JAN, JANTX and JANTXV, table E-VIB of MIL-PRF-19500.

Subgroup	Method	Condition
B3	1027	V_{GS} = 24 V dc; T_A = +125°C; V_{DS} = 0.
B6	1032	T_A = +175°C.

* 4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and as follows.

Subgroup	Method	Condition
C2	1056	Thermal shock: Test condition C, time at temperature extremes = 15 minutes minimum.
C2	2036	Lead fatigue: Test condition E (not applicable to UB suffix devices.)
C6	1026	V_{GS} = 24 V dc; T_A = +125°C; V_{DS} = 0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

* 4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Gate to source breakdown voltage	3401	Bias condition C; I_G = 1.0 µA dc; V_{DS} = 0	$V_{(BR)GSS}$	30		V dc
* Gate reverse current	3411	Bias condition C; V_{GS} = 20 V dc; V_{DS} = 0	I_{GSS1}		500	pA dc
Drain cutoff current	3413	Bias condition A	$I_{D(off)1}$			
2N5114, 2N5114UB		V_{DS} = -15 V dc; V_{GS} = 12 V dc			-500	pA dc
2N5115, 2N5115UB		V_{DS} = -15 V dc; V_{GS} = 7.0 V dc			-500	pA dc
2N5116, 2N5116UB		V_{DS} = -15 V dc; V_{GS} = 5.0 V dc			-500	pA dc
Zero-gate-voltage drain current	3413	Bias condition C; V_{DS} to be pulsed see 4.5.1	I_{DSS}			
2N5114, 2N5114UB		V_{DS} = -18 V dc; V_{GS} = 0		-30	-90	mA dc
2N5115, 2N5115UB		V_{DS} = -15 V dc; V_{GS} = 0		-15	-60	mA dc
2N5116, 2N5116UB		V_{DS} = -15 V dc; V_{GS} = 0		-5.0	-25	mA dc
Drain to source on voltage	3405	Bias condition B	$V_{DS(on)}$			
2N5114, 2N5114UB		I_D = -15 mA dc; V_{GS} = 0			-1.3	V dc
2N5115, 2N5115UB		I_D = -7.0 mA dc; V_{GS} = 0			-0.8	V dc
2N5116, 2N5116UB		I_D = -3.0 mA dc; V_{GS} = 0			-0.6	V dc
Gate to source cutoff voltage	3403		$V_{GS(off)}$			
2N5114, 2N5114UB		V_{DS} = -15 V dc; I_D = -1.0 nA dc		5.0	10	V dc
2N5115, 2N5115UB		V_{DS} = -15 V dc; I_D = -1.0 nA dc		3.0	6.0	V dc
2N5116, 2N5116UB		V_{DS} = -15 V dc; I_D = -1.0 nA dc		1.0	4.0	V dc
Small-signal drain to source on resistance	3423	V_{GS} = 0; I_D = -1 mA dc	$r_{ds(on)1}$			
2N5114, 2N5114UB					75	Ω
2N5115, 2N5115UB					100	Ω
2N5116, 2N5116UB					175	Ω
Small-signal drain to source on resistance	3423	V_{GS} = 0; I_D = 0; f = 1 kHz	$r_{ds(on)2}$			
2N5114, 2N5114UB					75	Ω
2N5115, 2N5115UB					100	Ω
2N5116, 2N5116UB					175	Ω

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High temperature operation:		T_A = +150°C				
* Gate reverse current	3411	Bias condition C, V_{GS} = 20 V dc; V_{DS} = 0	I_{GSS2}		1.0	µA dc
Drain cutoff current	3413	Bias condition A;	$I_{D(off)2}$			
2N5114, 2N5114UB		V_{GS} = 12 V dc; V_{DS} = -15 V dc			-1.0	µA dc
2N5115, 2N5115UB		V_{GS} = 7.0 V dc; V_{DS} = -15 V dc			-1.0	µA dc
2N5116, 2N5116UB		V_{GS} = 5.0 V dc; V_{DS} = -15 V dc			-1.0	µA dc
Subgroup 4						
Small-signal common-source short-circuit input capacitance	3431	V_{DS} = -15 V dc; V_{GS} = 0 f = 1 MHz	C_{iss}			
2N5114, 2N5114UB					25	pF
2N5115, 2N5115UB					25	pF
2N5116, 2N5116UB					27	pF
Small-signal common-source short-circuit reverse transfer capacitance	3433		C_{rss}			
2N5114, 2N5114UB		V_{DS} = 0; V_{GS} = 12 V dc				
2N5115, 2N5115UB		V_{DS} = 0; V_{GS} = 7.0 V dc			7.0	pF
2N5116, 2N5116UB		V_{DS} = 0; V_{GS} = 5.0 V dc			7.0	pF
					7.0	pF
Turn-on delay time	3459	See figure 3	$t_{d(on)}$			
2N5114, 2N5114UB					6	ns
2N5115, 2N5115UB					10	ns
2N5116, 2N5116UB					25	ns
Rise time	3459	See figure 3	t_r			
2N5114, 2N5114UB					10	ns
2N5115, 2N5115UB					20	ns
2N5116, 2N5116UB					35	ns
Turn-off delay time	3459	See figure 3	$t_{d(off)}$			
2N5114, 2N5114UB					6	ns
2N5115, 2N5115UB					8	ns
2N5116, 2N5116UB					20	ns

See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 4 - Continued			t_f			
Fall time	3459	See figure 3				
2N5114, 2N5114UB					15	ns
2N5115, 2N5115UB					30	ns
2N5116, 2N5116UB					60	ns
Subgroups 5 and 6						
Not applicable						


1/ For sampling plan, see MIL-PRF-19500.

TABLE II. Group E inspection (all quality levels) for qualification or re-qualification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			45 devices c = 0
Temperature cycling	1051	-55°C to +150°C, 500 cycles	
Hermetic seal	1071		
Fine leak			
Gross leak			
Electrical measurements		See table I, subgroup 2	
Subgroup 2 1/			45 devices c = 0
Blocking life	1048	1,000 hours minimum, T_A = +150°C, V_{DG} or V_{GS} = 80 percent of rated.	
Electrical measurements		See table I, subgroup 2	
Subgroups 4 and 5			
Not applicable			

1/ A separate sample for each test shall be pulled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

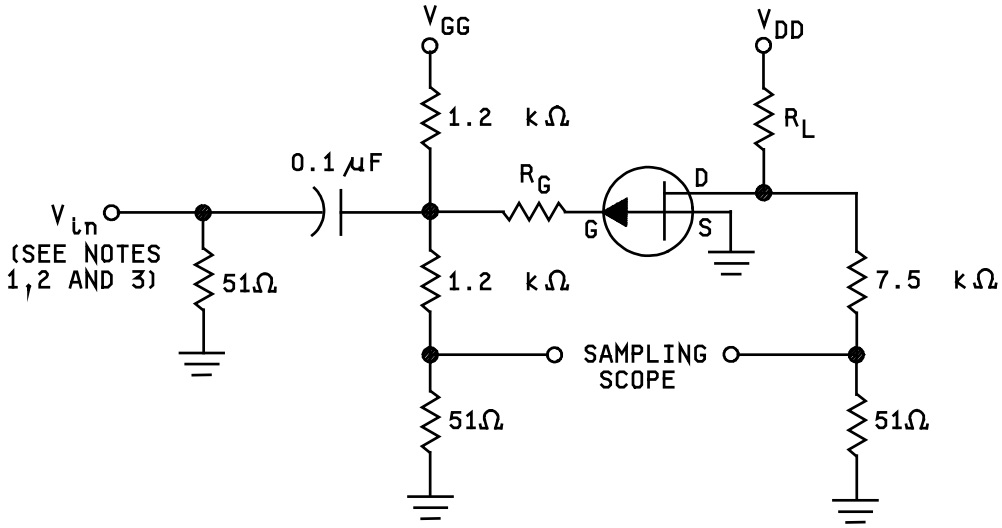

TEST CIRCUIT

Test conditions and component value					
Type	V_{DD}	V_{GG}	R_L	R_G	$I_{D(ON)}$ (1)
	V dc	V dc	ohms	ohms	μA dc
2N5114, 2N5114UB	-10	20	430	100	-15
2N5115, 2N5115UB	-6.0	12	910	220	-7.0
2N5116, 2N5116UB	-6.0	8.0	2,000	390	-3.0

(1) Nominal value; exact value varies slightly with transistor parameters.

NOTES:
1. The input waveform has the following characteristics: tp = 100 ns; $t_r \leq 1$ ns; $t_f \leq 1$ ns; duty cycle ≈ 2 percent. It is supplied by a generator with Z_{out} = 50 ohms.
2. Resistor tolerance is ± 10 percent.
3. Voltage limits for the V_{in} voltage (input switching levels) are as follows:
   2N5114, 2N5114UB V_{in}. = 11 V dc (from 0 v to -11 V dc signal level).
   2N5115, 2N5115UB V_{in}. = 7 V dc (from 0 v to -7 V dc signal level).
   2N5116, 2N5116UB V_{in}. = 5 V dc (from 0 v to -5 V dc signal level).

FIGURE 3. Switching time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.


b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

* d. The complete PIN, see 1.5 and 6.4.

* 6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at http://qpldocs.dla.mil.

* 6.4 PIN construction example.

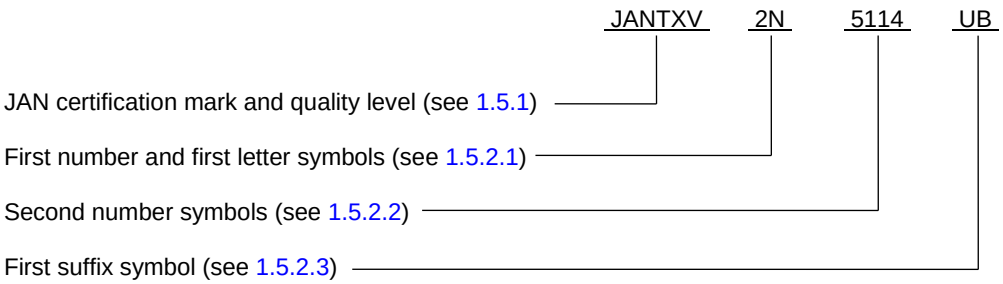

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.

* 6.5 List of PINs. The following is a list of possible PINs available on this specification sheet.

PINs for types 2N5114	PINs for types 2N5115	PINs for types 2N5116
JAN2N5114	JAN2N5115	JAN2N5116
JAN2N5114UB	JAN2N5115UB	JAN2N5116UB
JANTX2N5114	JANTX2N5115	JANTX2N5116
JANTX2N5114UB	JANTX2N5115UB	JANTX2N5116UB
JANTXV2N5114	JANTXV2N5115	JANTXV2N5116
JANTXV2N5114UB	JANTXV2N5115UB	JANTXV2N5116UB

* 6.6 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil or by facsimile (614) 692-6939 or DSN 850-6939.

6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Army - MI
Air Force - 19

Preparing activity:
DLA - CC

(Project 5961-2018-085)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:19Z
Check the source to verify that this is the current version before use.