The documentation and process conversion measures necessary to comply with this revision shall be completed by 24 February 2014.

INCH–POUND

MIL–PRF–19500/523D
w/AMENDMENT 1
23 November 2013
SUPERSEDING
MIL–PRF–19500/523C
29 December 2012

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER DARLINGTON
TYPES 2N6383, 2N6384, AND 2N6385, JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL–PRF–19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN silicon, power Darlington transistors. Three levels of product assurance are provided for each device type as specified in MIL–PRF–19500.

1.2 Physical dimensions. The device package style is TO–204AA (formerly TO–3) in accordance with figure 1.

1.3 Maximum ratings. Unless otherwise specified, $T_A$ = +25°C.

| Types | $P_T$ | | $R_{\theta JC}$ max | $V_{CBO}$ and $V_{CEO}$ | $V_{EBO}$ | $I_B$ | $I_C$ | $T_J$ and $T_{STG}$ |
|---|---|---|---|---|---|---|---|---|
| | $T_A$ = +25°C (1) | $T_C$ = +25°C (2) | | | | | | |
| | W | W | °C/W | V dc | V dc | A dc | A dc | °C |
| 2N6383 | 6.0 | 100 | 1.75 | 40 | 5.0 | 0.25 | 10 | –55 to +175 |
| 2N6384 | 6.0 | 100 | 1.75 | 60 | 5.0 | 0.25 | 10 | –55 to +175 |
| 2N6385 | 6.0 | 100 | 1.75 | 80 | 5.0 | 0.25 | 10 | –55 to +175 |

(1) Derate linearly 34.2 mW/°C above $T_A$ > +25°C.
(2) Derate linearly 571 mW/°C above $T_C$ > +25°C.

Comments, suggestions, or questions on this document should be addressed DLA Land and Maritime ATTN: VAC, P.O. Box 3990, Columbus, OH 43218–3990, or emailed to semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, $T_C$ = +25°C.

| Limit | $h_{FE1}$ (1)<br>$V_{CE}$ = 3.0 V dc<br>$I_C$ = 5.0 A dc | $V_{CE(sat)1}$ (1)<br>$I_C$ = 5.0 A dc<br>$I_B$ = 10 mA dc | $V_{CE(sat)2}$ (1)<br>$I_C$ = 10 A dc<br>$I_B$ = 0.1 A dc | $V_{BE(ON)1}$ (1)<br>$V_{CE}$ = 3.0 V dc<br>$I_C$ = 5.0 A dc | $C_{obo}$<br>$V_{CB}$ = 10 V dc<br>$I_E$ = 0<br>100 KHz < f < 1 MHz |
|---|---|---|---|---|---|
| | | V dc | V dc | V dc | pF |
| Minimum | 1,000 | | | | |
| Maximum | 20,000 | 2.0 | 3.0 | 2.8 | 200 |

| Limit | $\|h_{fe}\|$<br>$V_{CE}$ = 5.0 V dc<br>$I_C$ = 1.0 A dc<br>f = 1 MHz | Pulse response (2)<br>$V_{CC}$ = 30 V dc<br>$I_{CC}$ = 5.0 A dc, $I_{B1}$ = 20 mA dc | |
|---|---|---|---|
| | | $t_{on}$ | $t_{off}$ |
| | | µS | µS |
| Minimum | 20 | | |
| Maximum | 300 | 2.5 | 10.0 |

(1) Pulsed (see 4.5.1).
(2) See figure 2 for pulse response circuits.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL–PRF–19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL–STD–750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at http://quicksearch.dla.mil or https://assist.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

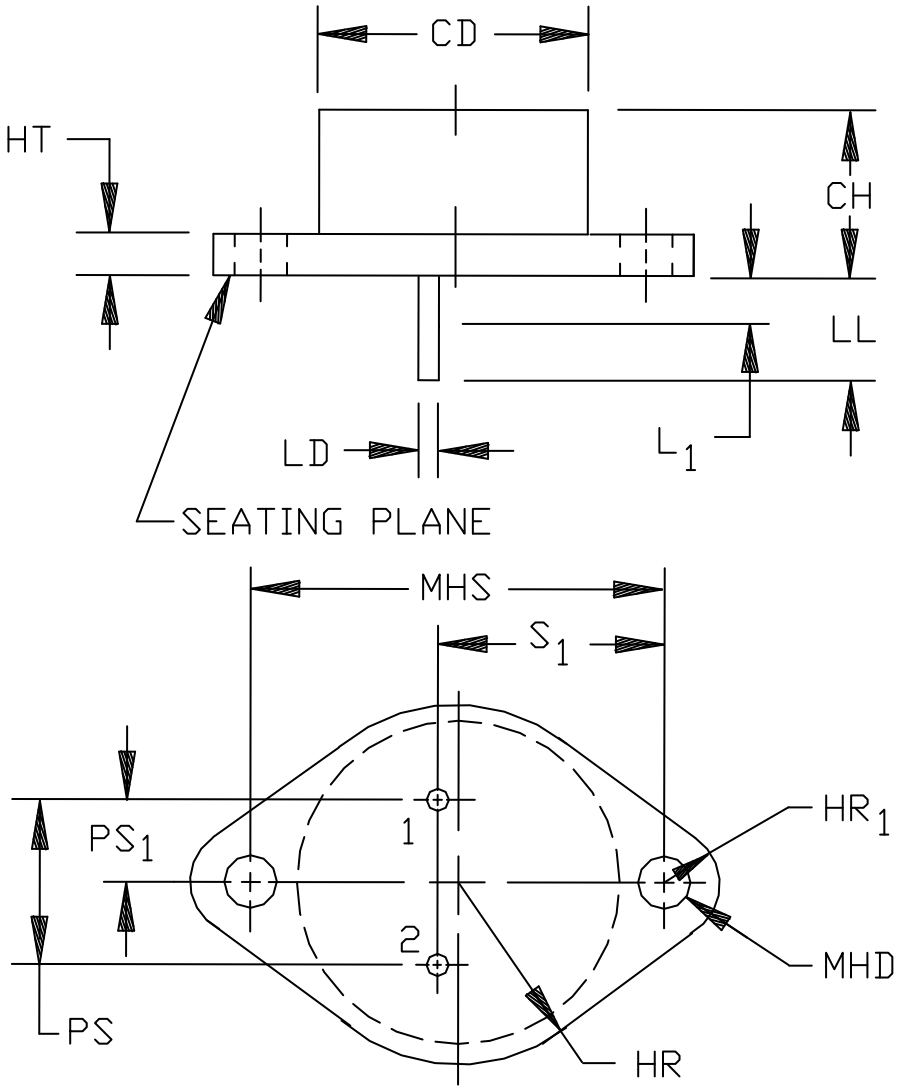



FIGURE 1. Physical dimensions (TO–204AA, formerly TO–3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

| Symbol | Dimensions | | | | Notes |
|---|---|---|---|---|---|
| | Inches | | Millimeters | | |
| | Min | Max | Min | Max | |
| CD | | .875 | | 22.23 | 5 |
| CH | .250 | .450 | 6.35 | 11.43 | |
| HR | .495 | .525 | 12.57 | 13.34 | 6 |
| $HR_1$ | .131 | .188 | 3.33 | 4.78 | 6 |
| HT | .050 | .135 | 1.27 | 3.43 | |
| LD | .038 | .043 | 0.97 | 1.09 | 7, 8, 9 |
| LL | .312 | .500 | 7.92 | 12.7 | |
| $L_1$ | | .050 | | 1.27 | |
| MHD | .151 | .161 | 3.84 | 4.09 | 10 |
| MHS | 1.177 | 1.197 | 29.90 | 30.40 | |
| PS | .420 | .440 | 10.67 | 11.18 | 8 |
| $PS_1$ | .205 | .225 | 5.21 | 5.72 | 7, 8 |
| $S_1$ | .655 | .675 | 16.64 | 17.15 | 7, 8 |

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Terminal 1 is the emitter and terminal 2 is the base. The collector shall be electrically connected to the case.
3. The seating plane of the header shall be flat within .001 inch (0.03 mm) concave to .004 inch (0.10 mm) convex inside a .930 inch (23.62 mm) diameter circle on the center of the header and flat within .001 inch (0.03 mm) concave to .006 inch (0.15 mm) convex overall.
4. Mounting holes (MHD) shall be deburred on the seating plane side.
5. Body contour is optional within zone defined by dimension CD.
6. Applies to all sides (HR) or both ends ($HR_1$).
7. Applies to both terminals.
8. Measurement for this dimension shall be taken at points .050 inch (1.27 mm) to .055 inch (1.40 mm) below the seating plane. When gauge is not used, measurement shall be made at seating plane.
9. Lead diameter shall not exceed twice dimension LD within dimension $L_1$.
10. Applies to both holes.
11. In accordance with ASME Y14.5M, diameters are equivalent to $\phi$x symbology.

FIGURE 1. Physical dimensions (TO–204AA, formerly TO–3) – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL–PRF–19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL–PRF–19500 and as follows:

$I_M$ – The measurement current applied to forward bias the junction for measurement of $V_{BE}$.
$I_H$ – The collector current applied to the device under test during the heating period.
$t_H$ – The duration of the applied heating power pulse.
$t_{SW}$ – Sample window time during which final $V_{BE}$ measurement is made.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL–PRF–19500 and on figure 1 herein.

3.4.1 Lead finish. The lead finish shall be solderable in accordance with MIL–PRF–19500, MIL–STD–750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Polarity. The identification of terminals of the device package shall be as shown on figure 1. Terminal 1 shall be connected to the emitter, terminal 2 shall be connected to the base, and the collector shall be electrically connected to the case.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.7 Marking. Marking shall be in accordance with MIL–PRF–19500.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL–PRF–19500, and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table E–IV of MIL–PRF–19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (see table E–IV of MIL–PRF–19500) | Measurement |
|---|---|
| | JANTX and JANTXV levels only |
| 3c (1) | Thermal impedance, see 4.3.1 |
| 11 | $I_{CEX1}$ and $h_{FE1}$ |
| 12 | See 4.3.2 |
| 13 | See table I, subgroup 2 herein.<br>$\Delta I_{CEX1}$ = 100 percent of initial value or 10 μA dc, whichever is greater.<br>$\Delta h_{FE1}$ = ±25 percent of initial value. |

(1) Thermal impedance shall be performed anytime after temperature cycling (screen 3a) and does not need to be repeated in screening requirements.

4.3.1 Thermal impedance. The thermal impedance measurements shall be performed in accordance with test method 3131 of MIL–STD–750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{SW}$, $t_{MD}$ (and $V_H$ where appropriate). The thermal impedance limit used in screen 3c and table I, subgroup 2 herein shall be set statistically by the supplier. See table II, subgroup 4 (group E) herein.

4.3.2 Power burn-in conditions. The power burn-in conditions shall be as follows: $T_J$ = +162.5°C ±12.5°C. The following details shall apply:

a. $V_{CB}$ = 30 V dc for device type 2N6383.

b. $V_{CB}$ = 40 V dc for device type 2N6384.

c. $V_{CB}$ = 60 V dc for device type 2N6385.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL–PRF–19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E–V of MIL–PRF–19500 and table I herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E–VIB (JAN, JANTX, and JANTXV) of MIL–PRF–19500 and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

| Subgroup | Method | Conditions |
|---|---|---|
| B3 | 1037 | Intermittent operation life, for solder die attach: $V_{CB} \geq 10$ V dc, $T_A \leq +35°C$. |
| B3 | 1027 | Steady state life, 340 hours, for eutectic die attach: $V_{CB} \geq 10$ V dc, $T_A \leq +35°C$ adjust $P_T$ to achieve $T_J$ = +150°C minimum. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E–VII of MIL–PRF–19500 and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

| Subgroup | Method | Conditions |
|---|---|---|
| C2 | 2036 | Test condition A; weight = 10 pounds (4.54 Kg); time = 15 s. |
| C5 | 3131 | Thermal resistance, see 4.3.1, $R_{\theta JC(max)}$ = 1.75°C/W. |
| C6 | 1037 | Intermittent operation life, for solder die attach: $V_{CB} \geq 10$ V dc, $T_A \leq +35°C$. |
| C6 | 1026 | Steady state life, for eutectic die attach: $V_{CB} \geq 10$ V dc, $T_A \leq +35°C$ adjust $P_T$ to achieve $T_J = +150°C$ minimum. |

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in appendix E, table E–IX of MIL–PRF–19500 and as specified in table II herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse response measurements. Conditions for pulse response measurement shall be as specified in section 4 of MIL–STD–750.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL–STD–750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance 2/ | 3131 | See 4.3.1 | $Z_{\theta JX}$ | | | °C/W |
| Breakdown voltage collector to emitter | 3011 | Bias condition D, $I_C$ = 200 mA dc, pulsed (see 4.5.1) | $V_{(BR)CEO}$ | | | |
| 2N6383 | | | | 40 | | V dc |
| 2N6384 | | | | 60 | | V dc |
| 2N6385 | | | | 80 | | V dc |
| Breakdown voltage collector to emitter | 3011 | Bias condition B, $I_C$ = 200 mA dc, $R_{BB}$ = 100Ω, pulsed (see 4.5.1) | $V_{(BR)CER}$ | | | |
| 2N6383 | | | | 40 | | V dc |
| 2N6384 | | | | 60 | | V dc |
| 2N6385 | | | | 80 | | V dc |
| Collector to emitter cutoff current | 3041 | Bias condition D | $I_{CEO}$ | | 1.0 | mA |
| 2N6383 | | $V_{CE}$ = 40 V dc | | | | |
| 2N6384 | | $V_{CE}$ = 60 V dc | | | | |
| 2N6385 | | $V_{CE}$ = 80 V dc | | | | |
| Emitter to base cutoff current | 3061 | Bias condition D, $V_{EB}$ = 5.0 V dc | $I_{EBO}$ | | 5.0 | mA |
| Collector to emitter cutoff current | 3041 | Bias condition A, $V_{BE}$ = 1.5 V dc | $I_{CEX1}$ | | 100 | µA dc |
| 2N6383 | | $V_{CE}$ = 40 V dc | | | | |
| 2N6384 | | $V_{CE}$ = 60 V dc | | | | |
| 2N6385 | | $V_{CE}$ = 80 V dc | | | | |
| Collector to base cutoff current | 3036 | Bias condition D | $I_{CBO1}$ | | 1.0 | mA dc |
| 2N6383 | | $V_{CE}$ = 40 V dc | | | | |
| 2N6384 | | $V_{CE}$ = 60 V dc | | | | |
| 2N6385 | | $V_{CE}$ = 80 V dc | | | | |
| Base emitter voltage (unsaturated) | 3066 | Test condition B $V_{CE}$ = 3.0 V dc, $I_C$ = 5.0 A dc | $V_{BE(on)1}$ | | 2.8 | V dc |
| Base emitter voltage (unsaturated) | 3066 | Test condition B $V_{CE}$ = 3.0 V dc, $I_C$ = 10 A dc pulsed (see 4.5.1) | $V_{BE(on)2}$ | | 4.5 | V dc |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

| Inspection 1/ | MIL–STD–750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 2 – Continued. | | | | | | |
| Saturation voltage and resistance | 3071 | $I_C$ = 5.0 A dc, $I_B$ = 10 mA dc, pulsed (see 4.5.1) | $V_{CE(sat)1}$ | | 2.0 | V dc |
| Saturation voltage and resistance | 3071 | $I_C$ = 10 A dc, $I_B$ = 0.1 A dc, pulsed (see 4.5.1) | $V_{CE(sat)2}$ | | 3.0 | V dc |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 3 V dc, $I_C$ = 5 A dc; pulsed (see 4.5.1) | $h_{FE1}$ | 1,000 | 20,000 | |
| Forward current transfer ratio | 3076 | $V_{CE}$ = 3.0 V dc, $I_C$ = 10 A dc, pulsed (see 4.5.1) | $h_{FE2}$ | 100 | | |
| Subgroup 3 | | | | | | |
| High temperature operation: | | $T_A$ = +150°C | | | | |
| Collector to emitter cutoff current | 3041 | Bias condition A, $V_{BE}$ = 1.5 V dc | $I_{CEX2}$ | | 3.0 | mA dc |
| 2N6383 | | $V_{CE}$ = 40 V dc | | | | |
| 2N6384 | | $V_{CE}$ = 60 V dc | | | | |
| 2N6385 | | $V_{CE}$ = 80 V dc | | | | |
| Low temperature operation: | | $T_A$ = –55°C | | | | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 3.0 V dc, $I_C$ = 5.0 A dc, pulsed (see 4.5.1) | $h_{FE3}$ | 200 | | |
| Subgroup 4 | | | | | | |
| Pulse response | 3251 | Test condition A, except test circuit and pulse requirements in accordance with figure 2 | | | | |
| Turn-on time | | $V_{CC}$ = 30 V dc, $I_C$ = 5.0 A dc, $I_{B1}$ = 20 mA dc | $t_{on}$ | | 2.5 | µs |
| Turn-off time | | $V_{CC}$ = 30 V dc, $I_C$ = 5.0 A dc, $I_{B1}$ = – $I_{B2}$ = 20 mA dc | $t_{off}$ | | 10 | µs |
| Magnitude of small-signal short-circuit forward-current transfer ratio | 3306 | $V_{CE}$ = 5 V dc; $I_C$ = 1 A dc f = 1.0 MHz | $\|h_{fe}\|$ | 20 | 300 | |
| Open-circuit output capacitance | 3236 | $V_{CB}$ = 10 V dc; $I_E$ = 0 100 kHz ≤ f ≤ 1 MHz | $C_{obo}$ | | 200 | pF |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

| Inspection 1/ | MIL–STD–750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 5 | | | | | | |
| Safe operating area (continuous dc) | 3051 | $T_C$ = +25°C; t = 1.0 s, 1 cycle<br>See figure 3 | | | | |
| Test 1 | | | | | | |
| (All device types) | | $V_{CE}$ = 10 V dc; $I_C$ = 10 A dc | | | | |
| Test 2 | | | | | | |
| (All device types) | | $V_{CE}$ = 30 V dc; $I_C$ = 3.33 A dc | | | | |
| Test 3 | | | | | | |
| 2N6383<br>2N6384<br>2N6385 | | $V_{CE}$ = 40 V dc, $I_C$ = 1.5 A dc<br>$V_{CE}$ = 60 V dc, $I_C$ = 0.4 A dc<br>$V_{CE}$ = 80 V dc, $I_C$ = 0.16 A dc | | | | |
| Electrical measurements | | See of table I, subgroup 2 herein | | | | |
| Safe operating area (switching) | 3053 | Load condition C (unclamped inductive load), see figure 4.<br>$T_C$ = 25°C, duty cycle ≤ 10 percent<br>$R_S$ = 0.1Ω | | | | |
| Test 1 | | $t_p$ approximately 1 ms (vary to obtain $I_C$);<br>$R_{BB1}$ = 1 kΩ; $V_{BB1}$ = 10 V dc;<br>$R_{BB2}$ = ∞; $V_{BB2}$ = 0 V;<br>$V_{CC}$ = 30 V dc; $I_C$ = 10 A dc;<br>$R_L$ ≤ 0.5 Ω; L = 1 mH at 10 A dc | | | | |
| Electrical measurements | | See subgroup 2 of this table | | | | |
| Test 2 | | $t_p$ approximately 1 ms (vary to obtain $I_C$);<br>$R_{BB1}$ = 10 KΩ; $V_{BB1}$ = 10 V dc;<br>$R_{BB2}$ = ∞; $V_{BB2}$ = 0 V;<br>$V_{CC}$ = 30 V dc; $I_C$ = 0.2 A dc;<br>L = 100 mH at 0.2 A dc; $R_L$ ≤ 0.5 Ω | | | | |
| Electrical measurements | | See of table I, subgroup 2 herein | | | | |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

| Inspection 1/ | MIL–STD–750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 5 – Continued. | | | | | | |
| Safe operating area (switching) | 3053 | Load condition B (clamped inductive load) see figure 5<br>$T_A$ = +25°C, $t_r + t_f \leq 1.0$ µs,<br>duty cycle ≤ 10 percent; $t_p$ = 5 ms (vary to obtain $I_C$) $R_s$ = 0.1 Ω;<br>$V_{CC}$ = 10 V dc; $I_C$ = 10 A dc | | | | |
| 2N6383 | | Clamp voltage = 40 V dc | | | | |
| 2N6384 | | Clamp voltage = 60 V dc | | | | |
| 2N6385 | | Clamp voltage = 80 V dc | | | | |
| | | Device fails if clamp voltage is not reached | | | | |
| Electrical measurements | | See of table I, subgroup 2 herein | | | | |

1/ For sampling plan see MIL–PRF–19500.
2/ This test required for the following end-point measurements only:
Group B, subgroups 2 and 3 (JAN, JANTX, and JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroups 1 and 2.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) – for qualification and re-qualification only.

| Inspection | MIL–STD–750 | | Sample plan |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices; c = 0 |
| Temperature cycling (air to air) | 1051 | Test condition G, 500 cycles. | |
| Hermetic seal<br>Fine leak<br>Gross leak | 1071 | | |
| Electrical measurements | | See of table I, subgroup 2 herein. | |
| Subgroup 2 | | | 45 devices; c = 0 |
| Blocking life | 1048 | Test temperature = +125°C; $V_{CB}$ = 80 percent of rated voltage; T = 1,000 hours. | |
| Electrical measurements | | See of table I, subgroup 2 herein. | |
| Subgroup 4 | | | Sample size N/A |
| Thermal impedance curves | | See MIL–PRF–19500. | |
| Subgroup 8 | | | 45 devices; c = 0 |
| Reverse voltage leakage stability | 1033 | Condition A. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

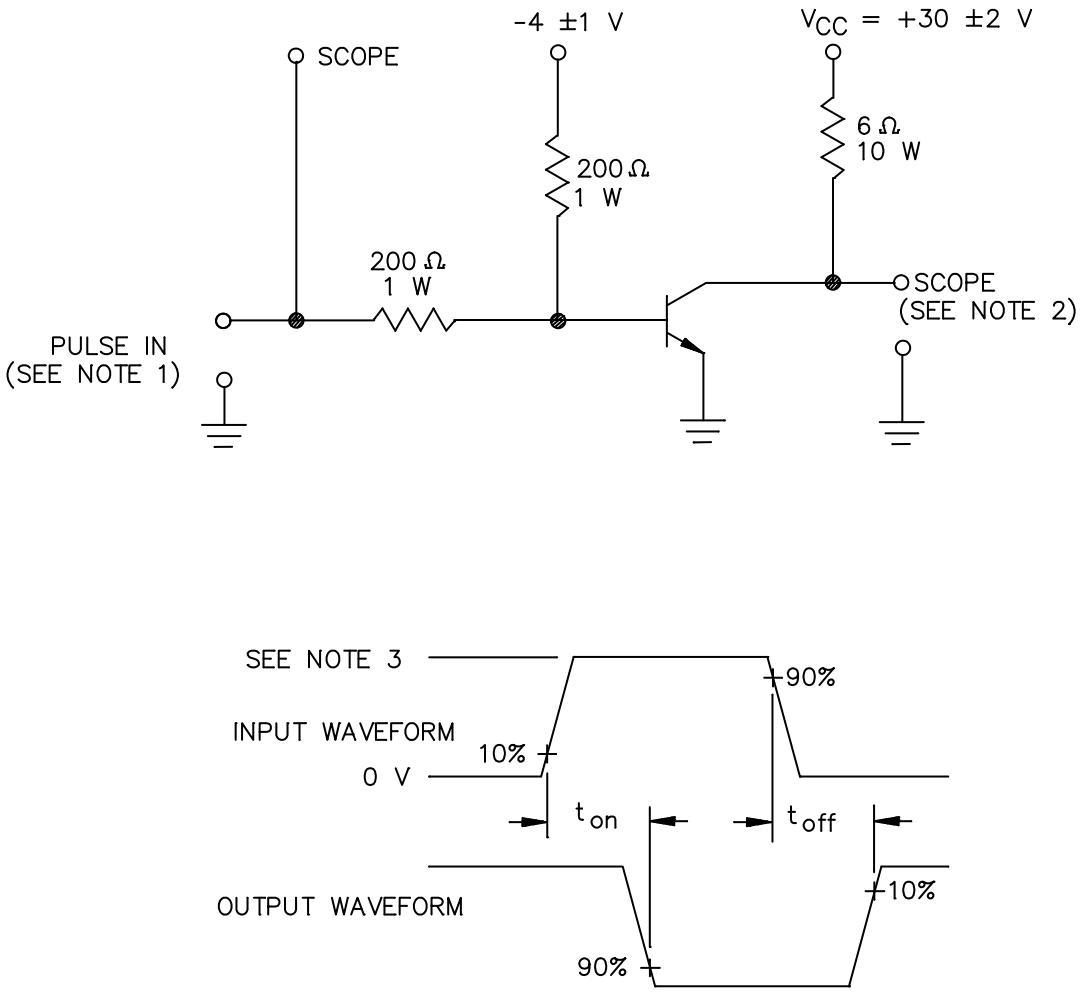


NOTES:

1. The rise time ($t_r$) and fall time ($t_f$) of the applied pulse shall be each < 20 nanoseconds; duty cycle < 2 percent, generator source impedance shall be 50 Ω; pulse width = 20 μs.
2. Output sampling oscilloscope: $Z_{IN}$ > 100 kΩ; $C_{IN}$ < 50 pF; rise time < 2 nanoseconds.
3. Pulse In shall be 10 V maximum.

FIGURE 2. Pulse response test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

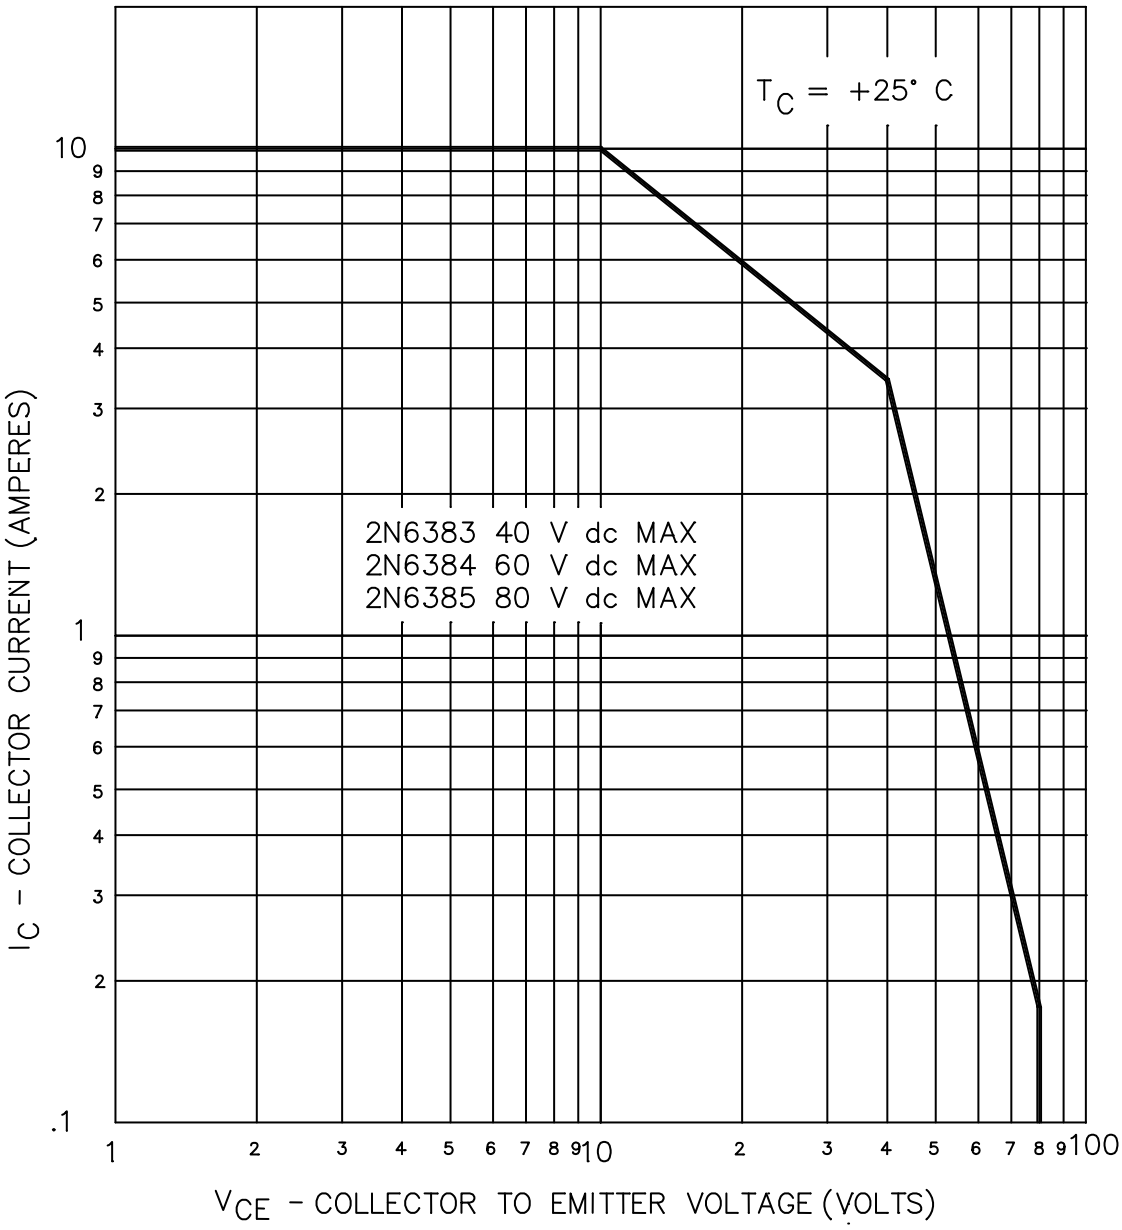



FIGURE 3. Maximum safe operating graph (continuous dc).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.


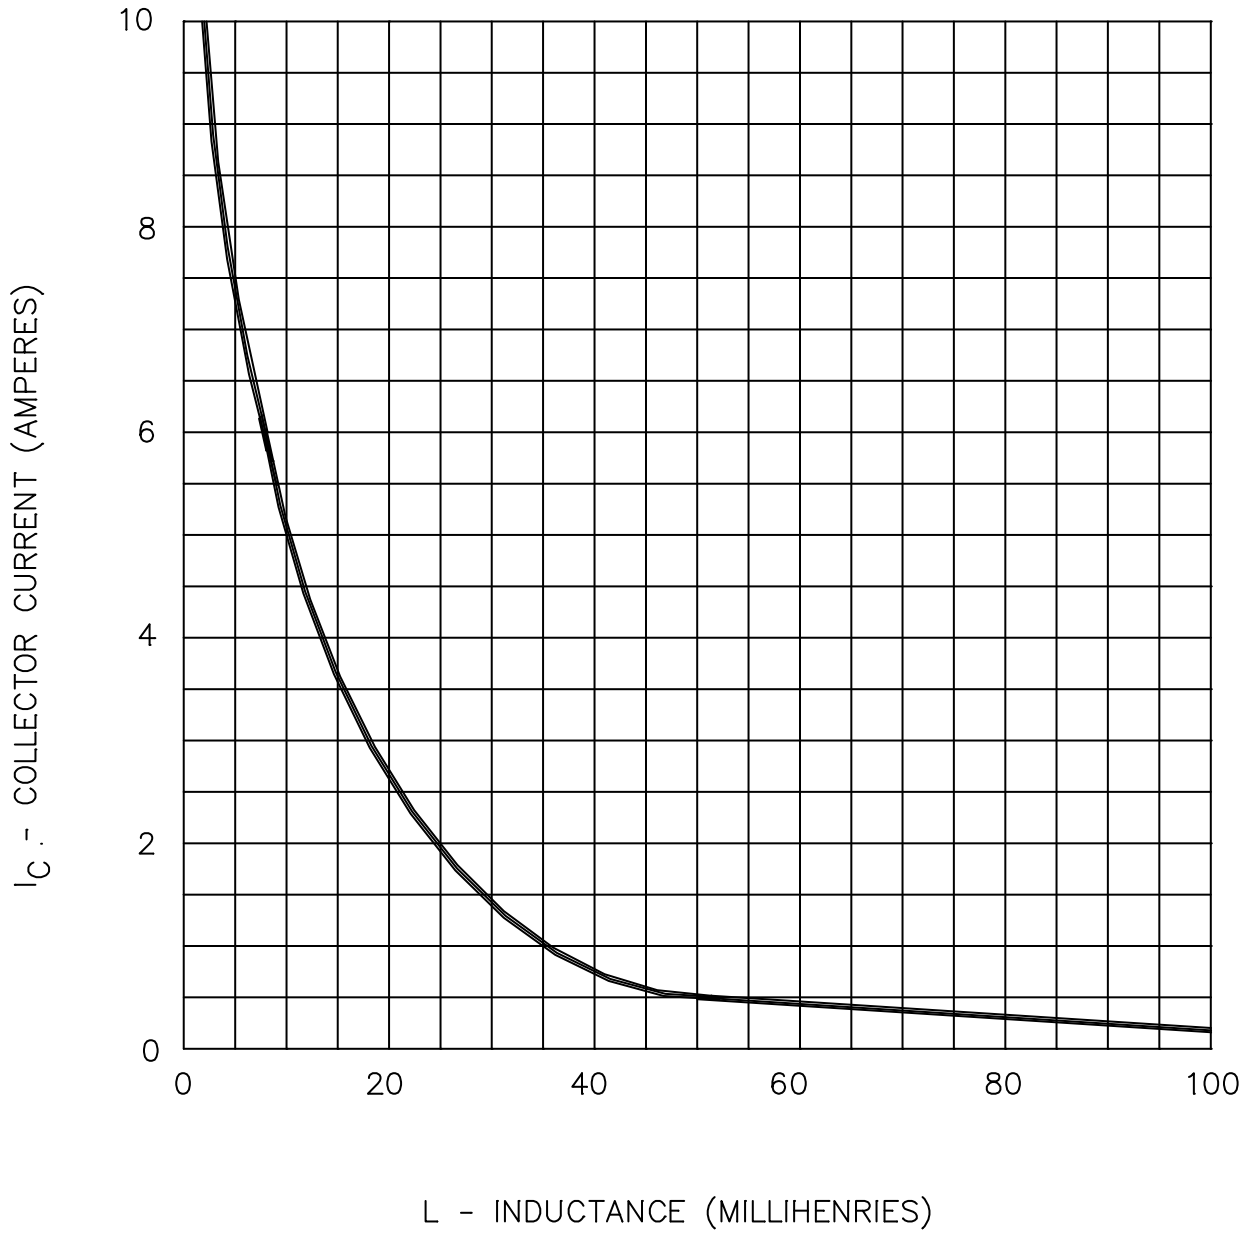



FIGURE 4. Safe operating area for switching between saturation and cutoff (unclamped inductive load).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

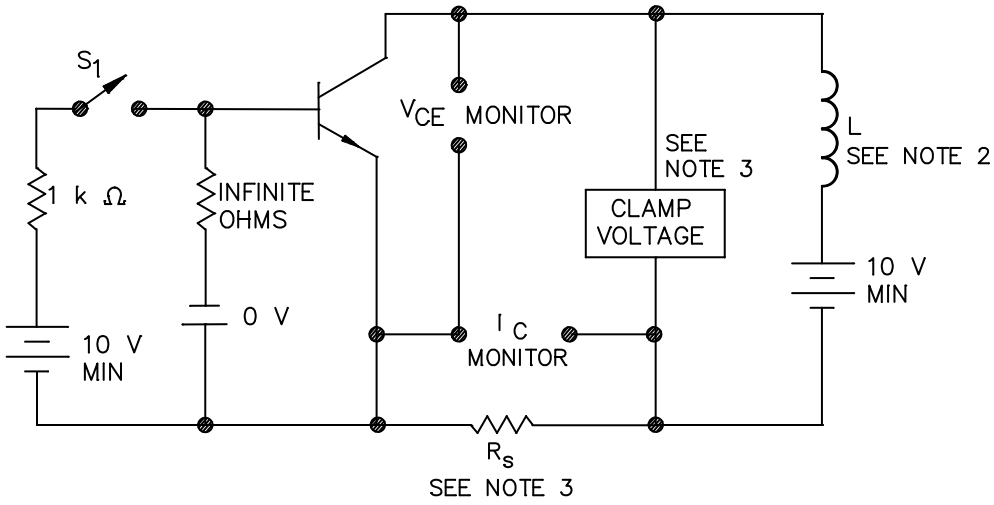


NOTES:
1. Either a clamping circuit or clamping diode may be used.
2. The coil used shall provide a minimum inductance of 1 mH at 10 A with a max dc resistance of 0.1 ohm.
3. $R_S \leq 0.1$ ohm. 12 W, 1 percent tolerance max (noninductive).
4. With switch $S_1$ closed, set the specified test conditions.
5. Open $S_1$. Device fails if clamp voltage is not reached and maintained until the current returns to zero.
6. Perform specified end point tests.

FIGURE 5. Clamped inductive sweep test circuit.

## 5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL–PRF–19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete Part or Identifying Number (PIN), see section 1.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

6.4 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army – CR
Navy – EC
Air Force – 85
NASA – NA
DLA – CC

Review activities:
Army – AV, MI

Preparing activity:
DLA – CC

(Project 5961–2013–042)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:45Z
Check the source to verify that this is the current version before use.