The documentation and process conversion measures necessary to comply with this revision shall be completed by 30 November 1999.

INCH-POUND

MIL-PRF-19500/585A
30 August 1999
SUPERSEDING
MIL-S-19500/585
12 April 1990

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, ULTRA-FAST RECOVERY,
HIGH VOLTAGE, POWER RECTIFIER,
1N6620 THROUGH 1N6625 AND U-SUFFIX VERSIONS
JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for a silicon, high voltage, ultra-fast recovery, semiconductor power rectifier diode. Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figures 1 (similar to D0-41) and 2 (surface mount).

1.3 Maximum ratings. See columns 1 trough 9.

Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6	Col. 7	Col. 8	Col. 9
Device type	V_{RWM} V_R V_{RSM}	$I_{F(AV)1}$ at T_L = +55°C L = .375" (9.52 mm)	$I_{F(AV)2}$	I_{FSM} at t_p = 8.3 ms	Barometric pressure	1/ t_{rr} at I_F = 0.5 A I_R = 1.0 A I_{REC} = 0.25 A	T_{STG}	T_{OP}
	V pk V dc V pk	2/, 3/, 4/ A	2/, 5/, 6/ A	A pk	mm Hg	ns	°C	°C
1N6620 and U	200	2.0	1.2	20	8	30	-65 to +200	-65 to +175
1N6621 and U	400	2.0	1.2	20	8	30	-65 to +200	-65 to +175
1N6622 and U	600	2.0	1.2	20	8	30	-65 to +200	-65 to +175
1N6623 and U	800	1.5	1.0	20	33	50	-65 to +200	-65 to +175
1N6624 and U	900	1.5	1.0	20	33	50	-65 to +200	-65 to +175
1N6625 and U	1000	1.5	1.0	15	33	60	-65 to +200	-65 to +175

1/ The reverse recovery time (method 3473, condition A, of MIL-STD-750) at T_J = +125°C shall not exceed three times the +25°C limit.
2/ Average current with a 50 percent duty cycle square wave including reverse voltage amplitude equal to the magnitude of the full rated V_{RWM}.
3/ Derate linearly 0.8 percent/°C for T_L > +55°C.
4/ These rated currents apply to U suffix types when the maximum temperature of the end caps (mounting surface) is +110°C; derate linearly 1.5 percent/°C above +110°C.
5/ Derate linearly 0.67 percent/°C for T_A > +25°C.
6/ This I_O rating is independent of heat sinking, special mounting, or forced air across the body or leads of the device.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. See columns 10 through 18. Unless otherwise specified, T_A = +25°C.

Col. 10	Col. 11	Col. 12	Col. 13	Col. 14	Col. 15	Col. 16	Col. 17	Col. 18
Device type	I_{R1} at T_J = +25°C	I_{R2} at T_J = +150°C	$I_{RM(REC)}$ at 2 A, 100 A/µs	C_T at V_R = 10 V	$R_{\theta JL}$ at L = 0.375"	V_{FM1} at I_F = Col. 3	V_{FM2} at I_F = Col. 4	$R_{\theta JEC}$
	µA	µA	A pk	pF	°C/W	V	°C	°C/W
1N6620 and U	0.5	150	3.5	10	38	1.60	1.40	20
1N6621 and U	0.5	150	3.5	10	38	1.60	1.40	20
1N6622 and U	0.5	150	3.5	10	38	1.60	1.40	20
1N6623 and U	0.5	150	4.2	10	38	1.80	1.55	20
1N6624 and U	0.5	150	4.2	10	38	1.80	1.55	20
1N6625 and U	1.0	200	5.0	10	38	1.95	1.75	20

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (NPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.


3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows:

V_{FRM} ..... Forward recovery voltage.
T_{CVF} ..... Temperature coefficient of forward voltage.
$I_{RM(REC)}$ ..... Peak reverse recovery current.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and herein.

3.3.1 Diode construction. These devices shall be constructed utilizing non-cavity double plug construction with high temperature metallurgical bonding between both sides of the silicon die and terminal pins (see MIL-PRF-19500). Metallurgical bond shall be in accordance with the requirements of category I in MIL-PRF-19500. U version devices shall be structurally identical to the non-surface mount devices except for lead terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

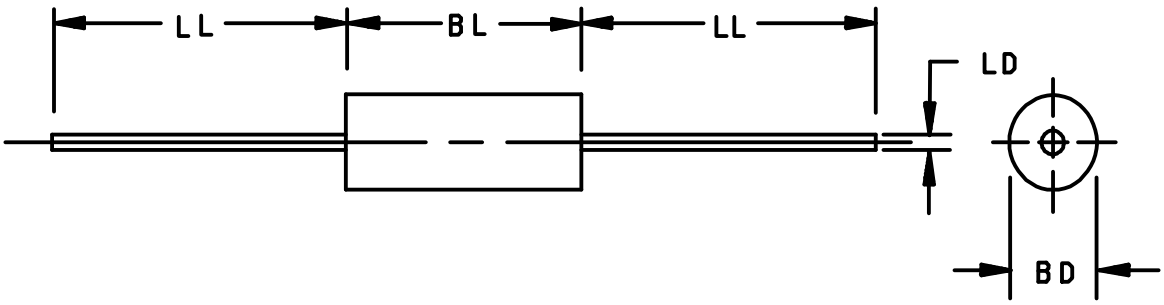


Ltr.	Dimensions				Notes
	1N6620 through 1N6625				
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	.065	.085	1.65	2.16	4
BL	.125	.250	3.18	6.35	3
LD	.027	.032	0.69	0.81	3
LL	.700	1.30	17.78	33.02	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimension BL shall include the sections of the lead over which the diameter is uncontrolled. This uncontrolled area is defined as the zone between the edge of the diode body and extending .050 inch (1.27 mm) onto the leads.
4. Dimension BD shall be measured at the largest diameter.
5. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions (similar to T0-41).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

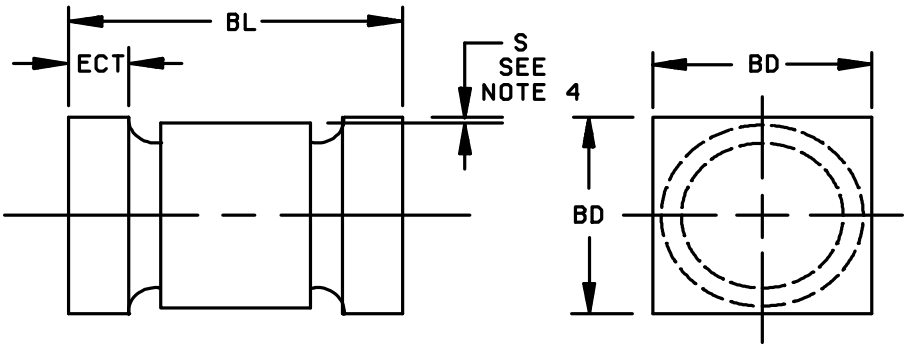

Ltr.	Dimensions				Notes
	1N6620U through 1N6625U				
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	.091	.103	2.31	2.62	
BL	.168	.200	4.27	5.08	
ECT	.019	.028	0.48	0.71	
S	.003		0.08		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 2. Physical dimensions of surface mount.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

3.3.2 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein.

3.4 Marking. Devices shall be marked as specified in MIL-PRF-19500.

3.4.2 Marking for U devices. For U version devices only, all marking may be omitted from the device except for the cathode marking. All marking which is omitted from the body of the device shall appear on the label of the initial container.

3.5 Polarity. The polarity of all types shall be indicated with a contrasting color band to denote the cathode end. Alternatively, for U suffix devices, a minimum of three contrasting color dots spaced around the periphery on the cathode end or a color dot on the face of the end tab may be used.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.3 Screening (JANS, JANTX, AND JANTXV levels only). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
1/	Thermal impedance (see 4.5.6)	Thermal impedance (see 4.5.6)
9	I_{R1} and V_{FM1}	Not applicable
11	I_{R1} and V_{FM1}; ΔI_{R1} = 100 percent of initial reading or ±100 nA dc (±200 nA dc for 1N6625), whichever is greater. ΔV_{FM1} = ± 0.05 V dc.	I_{R1} and V_{FM1}
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein; ΔI_{R1} = 100 percent of initial reading or ±100 nA dc (±200 nA dc for 1N6625), whichever is greater. ΔV_{FM1} = ± 0.05 V dc. Scope-display evaluation (see 4.5.3).	Subgroup 2 of table I herein; ΔI_{R1} = 100 percent of initial reading or ±100 nA dc (±200 nA dc for 1N6625), whichever is greater. ΔV_{FM1} = ± 0.05 V dc. Scope-display evaluation (see 4.5.3).

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: MIL-STD-750, method 1038, condition B, T_A = Room ambient as defined in MIL-STD-750, I_O = the average of half-sine rectified (where nominal I_{Fpk} = 3.14 x I_O), $I_{F(av)2}$ (see 1.3), f = 50-60 Hz, V_{RWM} = rated (see 1.3).

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in tables VIa (JANS) and VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraphs 4.4.2.1 and 4.4.2.2 herein. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
3	1056	Condition A, T_{low} = 0°C, T_{high} = +100°C, 10 cycles.
3	4066	I_{FSM} = rated (see 1.3); 10 surges of 8.3 ms each at 1 minute intervals, superimposed on I_O = 0, V_{RSM} = 0
4	1037	T_A = +25°C, I_O = (see 4.3.1); V_R = (see 1.3, column 2), t_{on} = t_{off} = 3 minutes minimum, 2,000 cycles.
5	1027	T_A = +25°C, no heat sink, I_F = 1.5 x (1.3,column 4 minimum); Adjust T_A or I_F to achieve T_J = +275°C, +0, -35°C, t = 96 hours.
6	3101	See 4.5.4, $R_{\theta JL}$ = column 15 of 1.4 herein, $R_{\theta JEC}$ = column 18 of 1.4 herein.

4.4.2.2 Group B inspection, table VIb (JAN, JANTX, and JANTXV of MIL-PRF-19500).

Subgroup	Method	Condition
2	4066	I_{FSM} = rated (see 1.3); 10 surges of 8.3 ms each at 1 minute intervals, superimposed on I_O = 0, V_{RSM} = 0
3	1027	T_A = +25°C, IO = (see 4.3.1); VRM = (see 1.3, column 2), t = 340 hours
6	1032	T_A = +175°C, t = 340 hours.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein.

Subgroup	Method	Condition
2	2036	NOTE: Not applicable for U suffix types. Tension: condition A, 12 pounds
3		Not applicable.
6	1026	I_O = (see 4.3.1), V_{RWM} = column 2 of 1.3 herein

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Life tests. These tests shall be conducted with a half-sine waveform of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall be neither greater than 180 degrees, nor less than 150 degrees.

4.5.2.1 Mounting conditions. The diodes shall be suspended by the leads with at least 6 inches of number 22 or smaller wire between each lead and the power source. The connecting wires may be soldered to the leads, or MS27491-20 contacts may be used. Other clips may be used provided they have equal or less mass than the MS27491-20 contact. No forced air shall be permitted and the diodes shall be shielded from drafts.

4.5.2.2 Alternate mounting conditions. At the option of the manufacturer, other clips or heat sink mounting configurations may be utilized provided that I_O is adjusted such that the junction temperature of each diode is maintained at least +120°C above the specified ambient temperature of +25°C.

4.5.3 Scope display evaluation. The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 10 to 50 µA/division and 50 to 200 V/division. Reverse current over the knee shall be at least 50 µA and less than 500 µA peak. Any discontinuity below actual breakdown or dynamic instability of the trace shall be cause for rejection of that device. See MIL-STD-750, method 4023.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

4.5.4 Thermal resistance. Thermal resistance shall be measured in accordance with method 3101 of MIL-STD-750. The reference point shall be the lead temperature at .375 inch (9.52 mm) from the body of the device, and shall be held between +25°C and +85°C for 1N6620 through 1N6625. The reference point shall be the end caps for 1N6620U through 1N6625U. The measuring current, I_M shall be 1.00 mA dc for 1N6620 through 1N6625 and U suffix versions. Thermal resistance values shall be in accordance with 1.4 (columns 15 and 18).

4.5.5 Reverse recovery time.

4.5.5.1 Low current reverse recovery time. The low current reverse recovery time shall be measured in-the circuit of figure 3 or equivalent. The recovery condition shall be 0.5 A forward current to 1.0 A reverse current. The reverse recovery time is defined as the time the rectifier begins to conduct in the reverse direction (crosses I = zero) until the reverse current decays to -0.25 A. The point of contact on the leads shall be no less than .375 inch (9.52 min) from the diode body.

4.5.5.2 High current reverse recovery time. The high current reverse recovery time shall be measured in the circuit of figure 4 or equivalent. A pulse of forward current for the DUT is provided through S_1 and controlled by V_3 s the input pulse V_1. The duration of pulse, t_1, should be sufficient to fully establish the stored charge associated with the specified I_F; it is suggested to be between 10 and 30 microseconds. The reverse voltage to the DUT is applied through S_2 at a rate determined by the rise time, t_2 and magnitude of the input pulse, V_2, which is applied slightly before the end of t_1. The negative supply, V_4, is to be specified. It should be sufficiently low to prevent the peak voltage, $V_{RM(REC)}$, from exceeding the rated reverse voltage, V_{RWM} , of the device under test. For most repeatable measurement, 30 V is recommended.

4.5.6 Thermal impedance. Thermal impedance $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, method 3101. The maximum limit for $Z_{\theta JX}$ in screening (table IV of MIL-PRF-19500) shall be derived by each vendor by means of statistical techniques and applied in screening of all subsequent lots. This limit shall not exceed the group A, subgroup 2 limit. The following conditions shall apply:

I_H = 5 A minimum.
t_H = 10 ms.
I_M = 10 mA.
t_{MD} = 100 µs maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection .

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical Examination	2071					
Subgroup 2						
Thermal impedance	3101	see 4.5.6	$Z_{\theta JX}$		4.5	°C/W
Forward voltage	4011	I_{FM} = column 3 (peak); pulsed (see 4.5.1)	V_{FM1}		col 16	V
Forward voltage	4011	I_{FM} = column 4 (peak); pulsed (see 4.5.1)	V_{FM2}		col 17	V
Reverse current leakage	4016	V_{RM} = column 2 (peak); pulsed (see 4.5.1)	I_{R1}		col 11	µA
Breakdown voltage	4021	I_R = 50 µA dc; pulsed (see 4.5.1)	$V_{(BR)1}$	110% of col 2		V
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current leakage	4016	V_{RM} = column 2 (peak); pulsed (see 4.5.1)	I_{R2}		col 12	µA
Low-temperature operation:		T_A = -65°C				
Forward voltage	4011	I_{FM3} = 50 percent of column 3 (peak); pulsed (see 4.5.1)	V_{FM3}		110% of col 16	V
Breakdown voltage	4021	I_R = 50 µA dc; pulsed (see 4.5.1)	V_{BR2}	col 2		V
Subgroup 4						
Forward recovery voltage	4026	I_F = 0.5 A, t_r = 12 ns	V_{FRM}			V
1N6620, 1N6620U					12	
1N6621, 1N6621U					12	
1N6622, 1N6622U					12	
1N6623, 1N6623U					18	
1N6624, 1N6624U					18	
1N6625, 1N6625U					30	
Capacitance	4001	V_R = 10 V, f = 0.1 to 1 MHz.	C_T			pF
1N6620, 1N6620U					10	
1N6621, 1N6621U					10	
1N6622, 1N6622U					10	
1N6623, 1N6623U					10	
1N6624, 1N6624U					10	
1N6625, 1N6625U					10	
Reverse recovery time	4031	See 4.5.5.1	t_{rr1}			ns
1N6620, 1N6620U					30	
1N6621, 1N6621U					30	
1N6622, 1N6622U					30	
1N6623, 1N6623U					50	
1N6624, 1N6624U					50	
1N6625, 1N6625U					60	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection .

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Reverse recovery time	4031	See 4.5.5.2, I_F = 2A, di/dt = 100 A/µs	t_{rr2}			ns
1N6620, 1N6620U					45	
1N6621, 1N6621U					45	
1N6622, 1N6622U					45	
1N6623, 1N6623U					60	
1N6624, 1N6624U					60	
1N6625, 1N6625U					80	
Peak recovery current	----	See figure 4	$I_{RM(REC)}$			A
1N6620, 1N6620U					3.5	
1N6621, 1N6621U					3.5	
1N6622, 1N6622U					3.5	
1N6623, 1N6623U					4.2	
1N6624, 1N6624U					4.2	
1N6625, 1N6625U					5.0	
Subgroup 5, 6, 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			22 devices c = 0
Thermal shock (glass strain)	1056	2000 cycles	
Hermetic seal gross leak	1071		
Electrical measurement		See table I, group A, subgroup 2.	
Subgroup 2			22 devices c = 0
Blocking life	1048	T_A = +150°C; t = 1,000 hours +65, -0 hours; DC = 80 - 85 percent rated V_R	
Electrical measurement		See table I, group A, subgroup 2.	
Subgroup 3			3 devices c = 0
DPA	2101	Photos of cross sections shall be submitted in the qualification report. Vendor shall retain duplicate photos. The photo shall be of sufficient size to provide a 1.5 inch (38.10) minimum view of the entire die to plug interfaces. The section may be stained to enhance the junction area and die to plug interface.	
Subgroup 4			22 devices c = 0
Thermal resistance, junction to lead	3101	limits: 38°C/W, See 4.5.4	
Thermal resistance, junction to end caps	3101	limits: 20°C/W, See 4.5.4	
Subgroup 5			22 devices c = 0
Barometric Pressure (reduced) 1/	1001	1N6620 through 1N6622 at 8 mm Hg 1N6623 through 1N6625 at 33 mm Hg	
Subgroup 6, & 7			
Not applicable			

1/ Also applies to U suffix versions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.


TABLE III, groups B and C delta measurements

Step	Inspection	MIL-STD-750		Symbol	Limit	Unit
		Method	Conditions			
1	Forward voltage change	4011	Duty cycle ≤ 2 percent (pulsed); t_p = 8.3 ms (max)	ΔV_F	±50 mV change from initial reading.	
2	Reverse current 1N6620 through 1N6625 and U suffix versions	4016	V_{RM} = column 2	ΔI_R	 +1 Max	 µA

1/ The delta measurements for group B, table VIa (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 5, see table III herein, steps 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

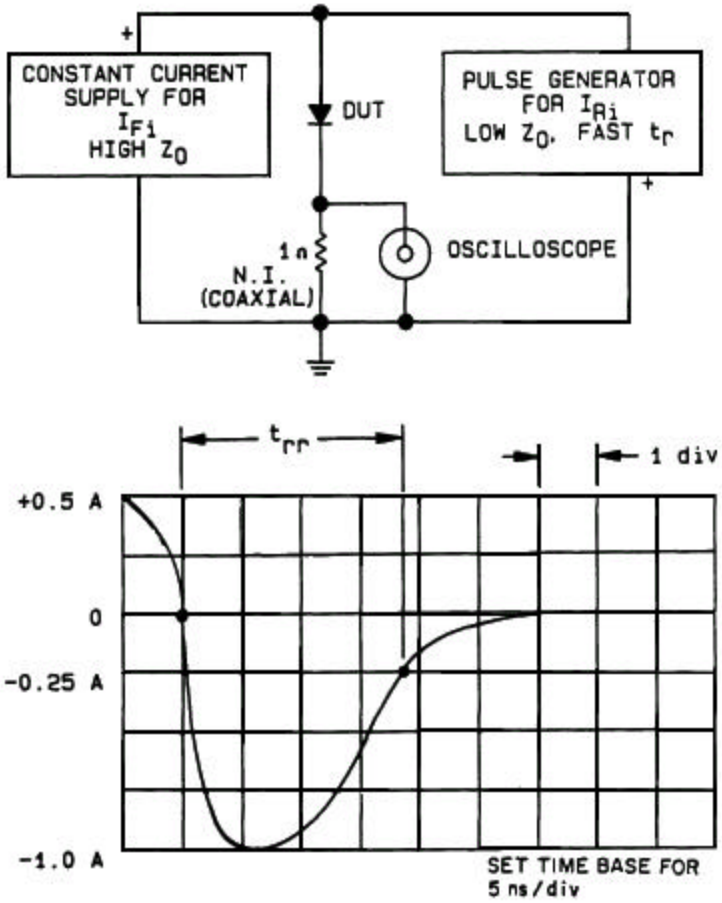


NOTES:

1. Oscilloscope: Rise time ≤3 ns; input impedance = 1MΩ, 22 pF.
2. Pulse generator: Rise time ≤ 8 ns; source impedance = 10 Ω.

FIGURE 3. Reverse recovery time test circuit and characteristic waveform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

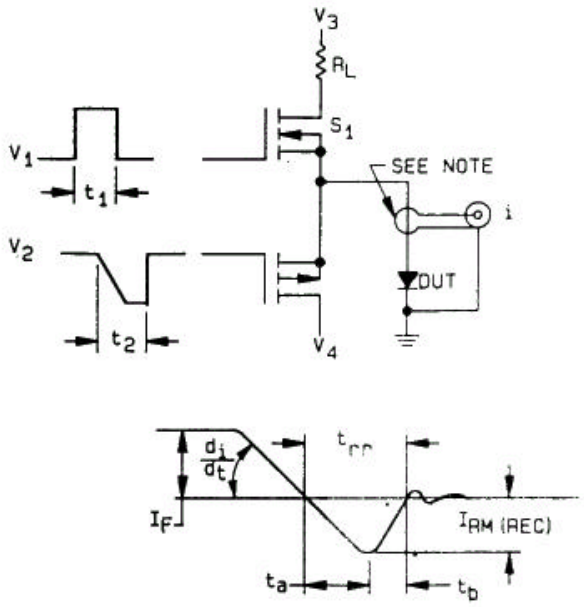

NOTE: Current sensing transformer; alternatively a low inductance resistor may be used, from cathode to ground, for current versus time measurements.

FIGURE 4. High current reverse recovery test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation.

b. Lead finish as specified (see 3.3.2).

c. Product assurance level, type designator.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 13, 19

Preparing activity:
DLA - CC

(Project 5961-1912)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/585A	**2. DOCUMENT DATE (YYMMDD)** **99/08/30**

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, DIODE, SILICON, ULTRA-FAST RECOVERY, HIGH VOLTAGE, POWER RECTIFIER, 1N6620 THROUGH 1N6625 AND U-SUFFIX VERSIONS JAN, JANTX, JANTXV, AND JANS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510 DSN 850-0510 FAX 614-692-6939 EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus ATTN: DSCC-VAC Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC -LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvior, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

DD FORM 1426, FEB 99 (EG) PREVIOUS EDITIONS ARE OBSOLETE WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:42Z
Check the source to verify that this is the current version before use.