MILITARY STANDARD


MIL-STD-1320-1606
(NAVY)
18 NOVEMBER 1988


SUPERSEDING
MIL-STD-1320-1608 (NAVY)
26 MAY 1982

TRUCKLOADING
MINE, UNDERWATER, MK 60 MOD 0
IN SKID, MK 24 MOD 0

SKID DATA

LENGTH	159 INCHES
WIDTH	50 INCHES
HEIGHT	36-3/4 INCHES
CUBE	101.4 CU FT
GROSS WEIGHT	SEE TABLE I
HAZARD CLASSIFICATION	SEE TABLE I

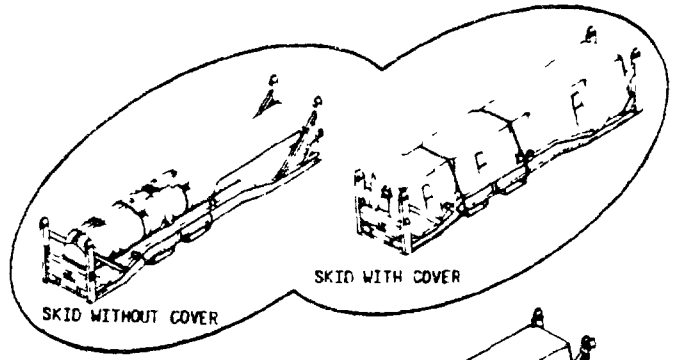

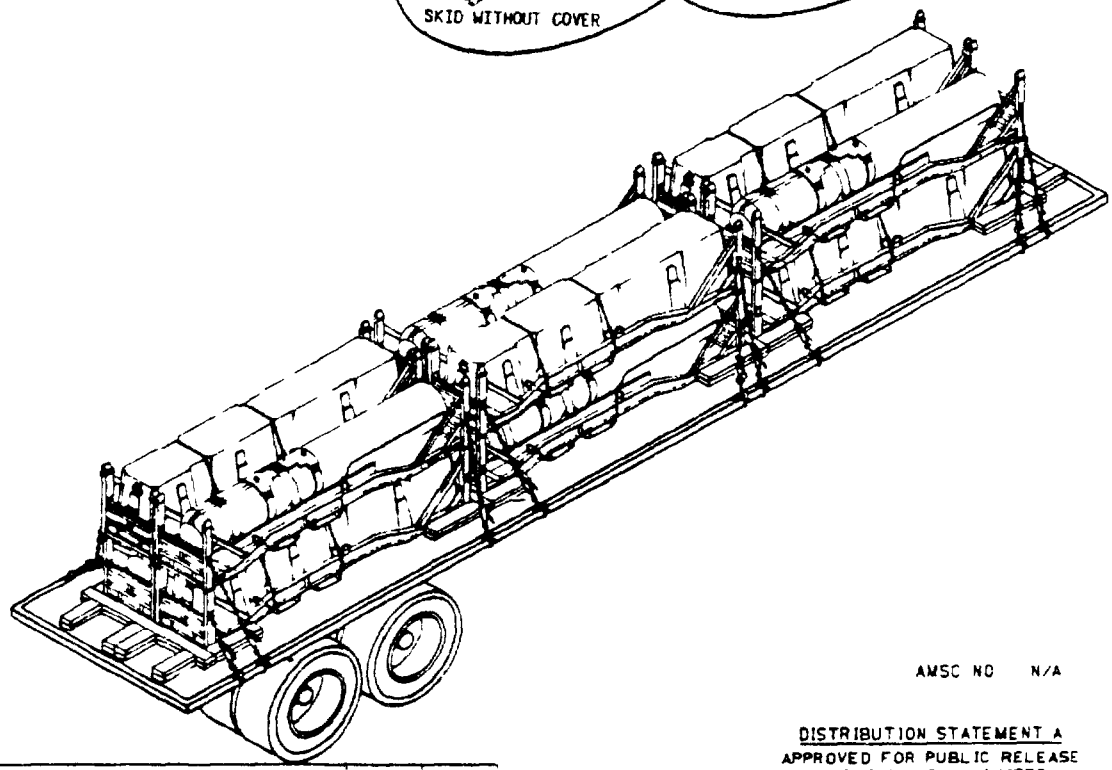

AMSC NO N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED

REV LTR	REVISION DESCRIPTION	DATE	TDA APPROVAL	SYSCOM
C	REDUCED LOAD			
B	ADDED 35 FT GOV'T TRAILER			
A	RELOCATED CHAINS			

NOTES
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE TDA — WPNSTA EARLE — 11-15-88 DATE

SIGNATURE SEA 3152 — BY DIRECTION — 11-15-88 DATE

ORIGINATOR — DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE MK 60 MOD 0 UNDERWATER MINE WHEN THE MINE IS IN THE MK 24 MOD 0 SKID

2 PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 45 FT FLATBED TRAILERS UNLESS OTHERWISE NOTED DO NOT USE TRAILERS WITH METAL FLOORS

3 STEEL STRAP USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320

4 CHAINS FITTINGS AND LOAD BINDERS SHALL MEET THE REQUIREMENTS OF THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 AND APPLIED AS SHOWN ON PAGES 4 OR 6 OF THIS DOCUMENT FOR ONE-HIGH AND TWO-HIGH SKIDS.

WARNING

CHAINS AND STRAPS SHALL NOT BE USED INTERCHANGEABLY
ALWAYS USE CHAIN WHERE THE MIL-STD CALLS FOR CHAIN AND
STRAP WHERE THE MIL-STD CALLS FOR STRAP

5 A STACK OF FOUR MINES CAN ALSO BE TIED DOWN TO THE TRAILER WITH TWO SETS OF 3/8 CHAIN AND ONE 2 X .050 STEEL STRAP LOCATED AS SHOWN ON PAGE 4 A STACK OF THREE OR LESS MINES IS TIED DOWN WITH TWO SETS OF 3/8 CHAIN (NO STRAP)

6 PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626 THE CHAINS FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH GOUGING, BENT LINKS WEAR AND ANY OTHER NOTICEABLE DEFECTS THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO 22 OF DD FORM 626 ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER

7 LOCATE FORWARD STACK BLOCKING FROM FRONT OF TRAILER OR WITH BACKUP CLEAT AGAINST BUILT-IN BULKHEAD

8 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

9 AFTER BLOCKING AND TIE DOWNS HAVE BEEN INSPECTED, ATTACH THE SHIPPING DOCUMENTS TO DUNNAGE IN AN ACCESSIBLE AREA AND ATTACH "EXPLOSIVES A" PLACARD TO BOTH SIDES FRONT AND REAR OF TRAILER (THE "SHIPPING" CONFIGURATION DOES NOT REQUIRE PLACARDS)

10 UNLESS OTHERWISE SPECIFIED ALL MATERIALS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.

11 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320

TABLE I


DODIC/NALC	DESCRIPTION	GROSS WEIGHT	FTL WT (LBS)	DOT HAZARD CLASS
U961 U962 U966 U967	CONFIGURATION A	3,181	38 172	EXPLOSIVE A
U963 U965	SHIPPING CONFIGURATION	2 303	41,454	NONE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

TL 463 P TRAILER (FLATBED)
A' CONFIGURATION AND MIXED LOAD

NOTE

TARPAULINS AND PROTECTOR BOARD ASSEMBLIES OMITTED FOR CLARITY
TARPAULINS MAY BE LASHED WITH ROPE OR WEB STRAPPING

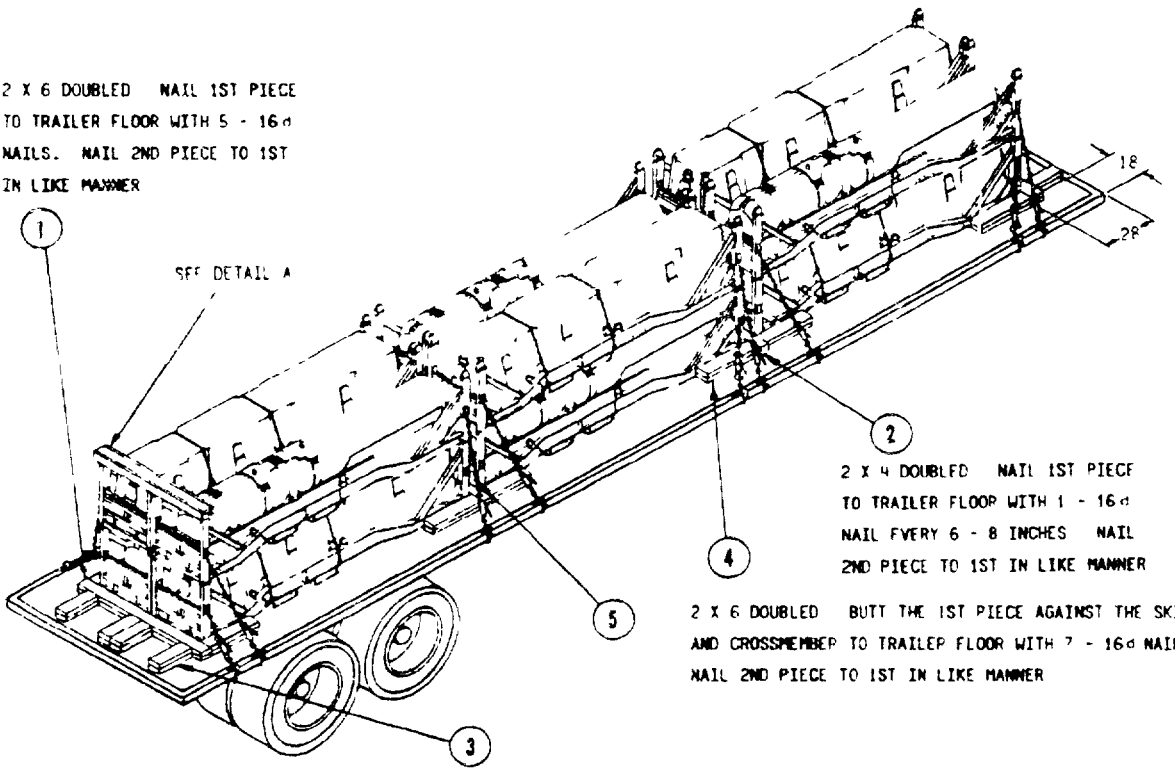


2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR WITH 5 - 16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 4 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR WITH 1 - 16d NAIL EVERY 6 - 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 6 DOUBLED BUTT THE 1ST PIECE AGAINST THE SKID AND CROSSMEMBER TO TRAILER FLOOR WITH 7 - 16d NAILS NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR WITH 1 - 16d NAIL EVERY 6 - 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

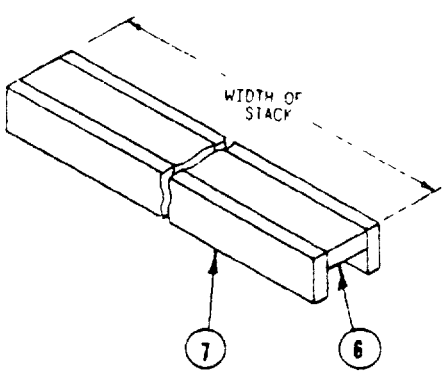

NAIL ITEM 7 TO THE SIDES OF ITEM 6 WITH 5 16d NAILS

DETAIL A

FOR ASSEMBLY

* 2" X .050 STRAPPING CAN BE USED IN PLACE OF CHAIN AND LOAD BINDERS WHEN PLACED OVER THE SKID CHANNELS AND UNDER THE RIME ON THE TOP SKID SEE NOTE 4

** PROTECTOR ASSEMBLY CAN BE REPLACED WITH SUITABLE WRAP TO PREVENT TARPAULIN PUNCTURE

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
12**	7	VERTICAL PROTECTOR	WOOD, DETAIL A	2 X 4 X 60
6**	6	HORIZONTAL PROTECTOR	WOOD DETAIL A	2 X 4 X 60
9*	5	CHAIN & LOAD BINDER	NOTE 4	5/16 OR 3/8
24	4	COMBO SLEEPER	WOOD, NOTE 10	2 X 6 X 24
16	3	BACKUP CLEAT	WOOD NOTE 10	2 X 6 X 18
4	2	INTERNAL CROSSMEMBER	WOOD NOTE 10	2 X 4 X 72
4	1	CROSSMEMBER	WOOD NOTE 10	2 X 6 X 72

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

LTL "A" CONFIGURATION AND MIXED LOAD

A WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD (LTL) QUANTITIES OF MINES (LESS THAN THE FTL QUANTITIES DESIGNATED IN TABLE I) SELECT FROM TABLES II OR III THE CORRECT LOAD PATTERN TO BE USED FOR THE NUMBER OF MINES TO BE SHIPPED

B POSITION THE MINES ON THE TRAILER AS SHOWN IN THE LOAD PATTERN (WEIGHT END OF MINE MUST BE ORIENTED AS SHOWN BY THE ARROWS IN TABLES II AND III

C USE TWO CHAIN AND LOAD BINDERS FOR STACKS OF TWO OR LESS


D USE 40 INCH CROSSMEMBERS FOR STACKS 1 WIDE

E USE TWO BACKUP CLEATS FOR SINGLE STACKS

F ALWAYS BUTT COMBO SLEEPERS AGAINST BOTH THE CROSSMEMBERS AND THE SKID


45 FT TRAILERS

TABLE II

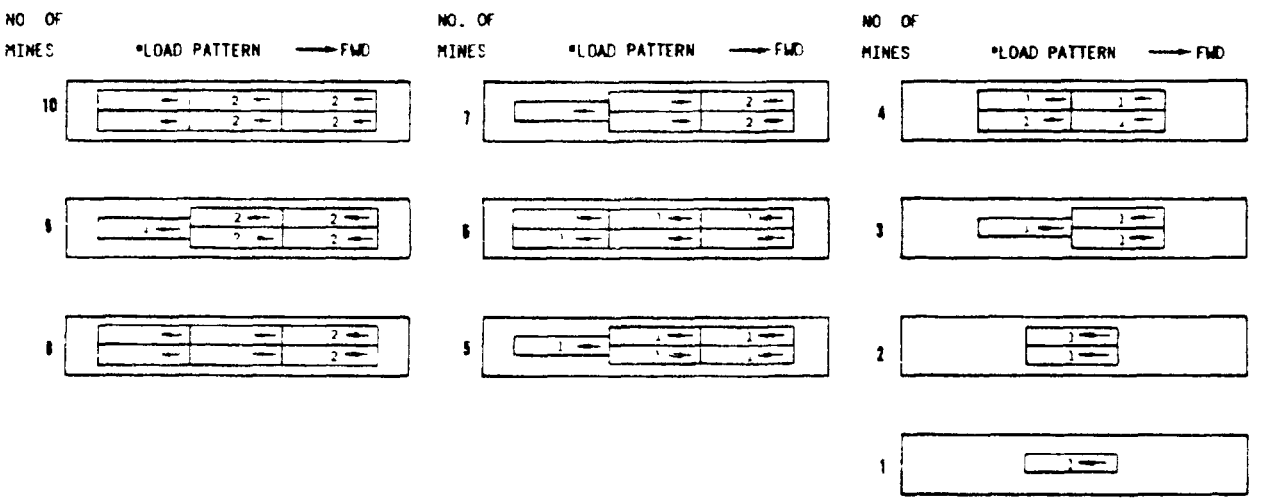

35 - 44 FT TRAILERS

TABLE III

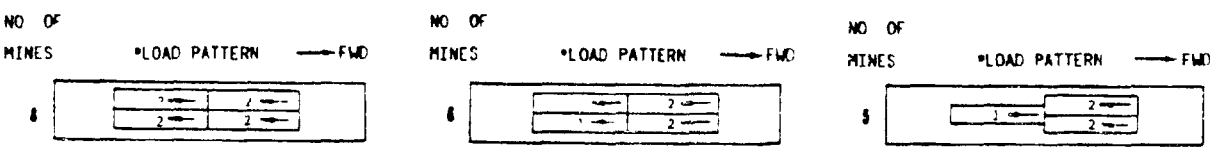


* LOAD PATTERN IS FLOOR PLAN FOR THE LOAD. THE NUMBER IN THE BLOCKS IS THE STACKING HEIGHT OF THE MINES. THE ARROW INDICATES THE WEIGHT END OF THE MINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

FTL 45 FT TRAILER (FLATBED)
SHIPPING CONFIGURATION

NOTE

TARPAULINS AND PROTECTOR BOARD ASSEMBLIES OMITTED FOR CLARITY TARPAULINS MAY BE LASHED WITH ROPE OR WEB STRAPPING

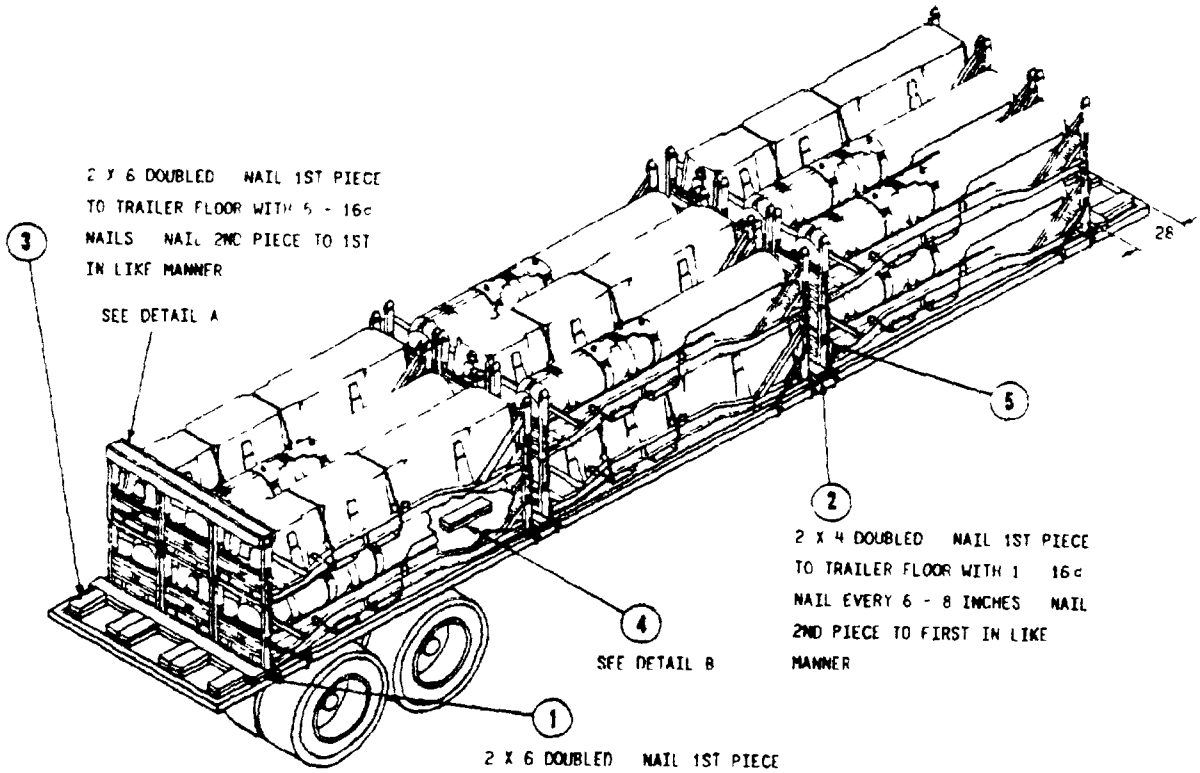


* 2" X .050 STRAPPING CAN BE USED IN PLACE OF THE CHAIN AND LOAD BINDERS WHEN PLACED OVER THE SKID CHANNELS AND UNDER THE RIME ON THE TOP SKID SEE NOTE 4

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
12	7	VERTICAL PROTECTOR	WOOD DETAIL A	2 X 4 X 90
6	6	HORIZONTAL PROTECTOR	WOOD DETAIL A	2 X 4 X 90
9*	5	CHAIN & LOAD BINDER	NOTE 4	5/16 OR 3/8
24	4	INTERNAL SLEEPER	WOOD, NOTE 10	2 X 6 X 24
24	3	BACKUP CLEAT	WOOD NOTE 10	2 X 6 X 18
4	2	INTERNAL CROSSMEMBER	WOOD NOTE 10	2 X 4 X 96
4	1	CROSSMEMBER	WOOD NOTE 10	2 X 6 X 96

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

LTL

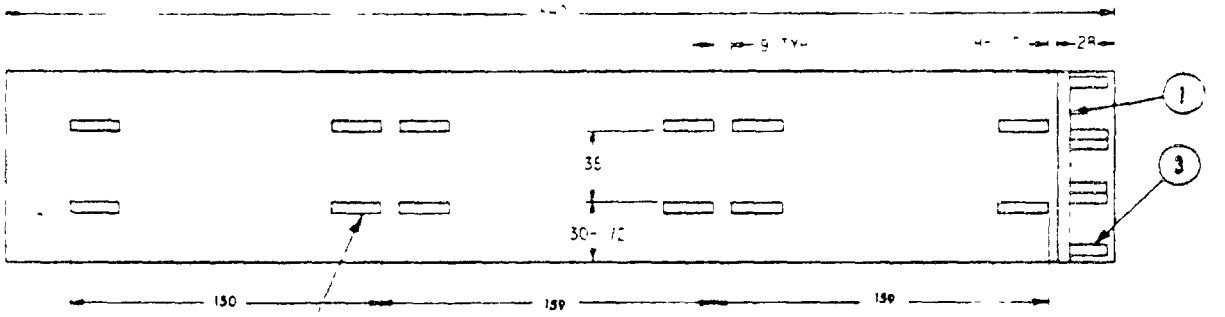

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR WITH 7 - 16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER

FWD

DETAIL B

PREPOSITION BLOCKING

A WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD (LTL) QUANTITIES OF MINES SELECT FROM TABLE IV THE CORRECT LOAD PATTERN FOR THE NUMBER OF MINES TO BE SHIPPED

B POSITION THE MINES ON THE TRAILER AS SHOWN IN THE LOAD PATTERN (WEIGHT END OF MINE MUST BE ORIENTED AS SHOWN BY THE ARROWS IN TABLE IV)


C USE TWO CHAIN AND LOAD BINDERS FOR STACKS OF FOUR OR LESS

D FOR STACKS TWO CONTAINERS WIDE BLOCK PER "A" CONFIGURATION LOAD

NOTE

EACH STACK MUST HAVE EITHER INTERNAL SLEEPERS OR EXTERNAL COMBO SLEEPERS.

TABLE IV

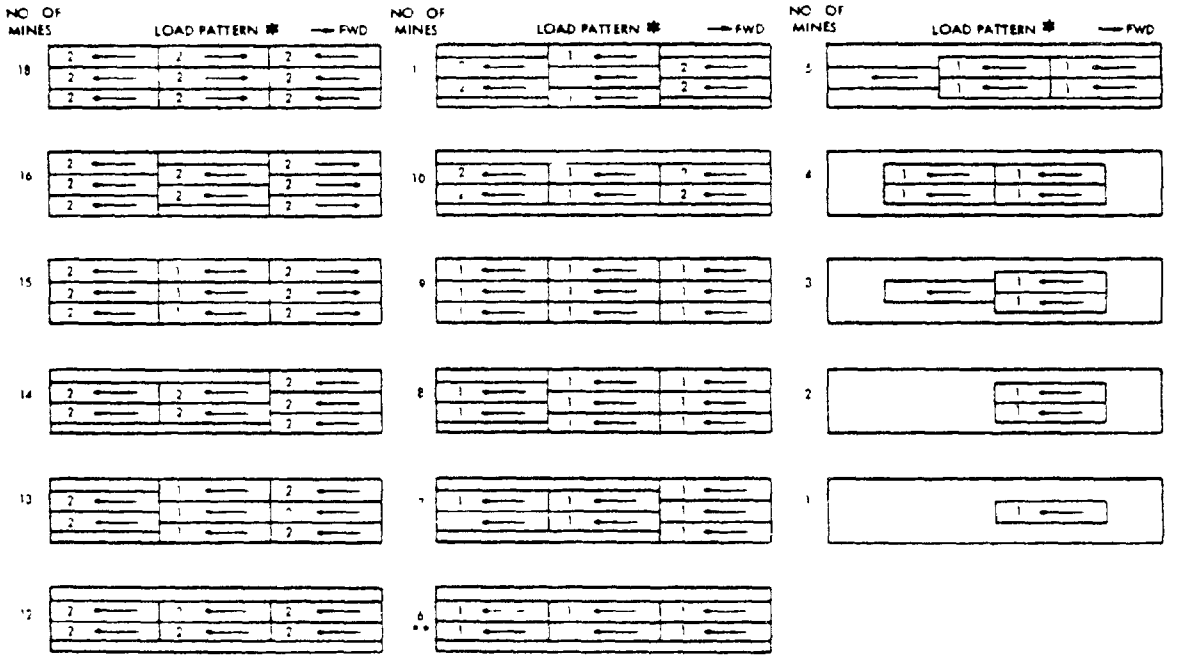

* LOAD PATTERN IS FLOOR PLAN FOR THE LOAD THE NUMBER IN THE BLOCKS IS THE STACKING HEIGHT OF THE MINES THE ARROW INDICATES THE WEIGHT END OF THE MINE

** USE 2 STACKS, 3 WIDE FOR 35 FT TRAILERS

REVIEWING ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO 8140-N799)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities, or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-1320-160C - Truckloading of Mine, U/W, MK 60 Mod 0 in Skid MK 24

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426

REPLACES EDITION OF 1 JAN 64 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle
Code 804 - M. Shelly
Colts Neck, New Jersey 07722-5000

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.