MILITARY STANDARD

MIL-STD-1320-184B (NAVY)

TRUCKLOADING


TORPEDO, MK 48 EXERCISE SHAPES IN CONTAINER MK 481 MODS 0 & 1

2 OCTOBER 1985

SUPERSEDING
MIL-STD-1320-184A(NAVY)
10 FEBRUARY 1981

CONTAINER DATA

DIMENSIONS	MOD 0	MOD 1
LENGTH	246	249
WIDTH	28	29 3/4
HEIGHT	34 5/8	34
STACKING HEIGHT	33	32 3/8
GROSS WEIGHT (APPROX)	3350 LBS.	3465 LBS.
TARE WEIGHT (APPROX)	1050 LBS.	1165 LBS.
CUBE	138.0 CU FT	145.8 CU FT
DOT HAZARD CLASSIFICATION	NONE (INERT)	

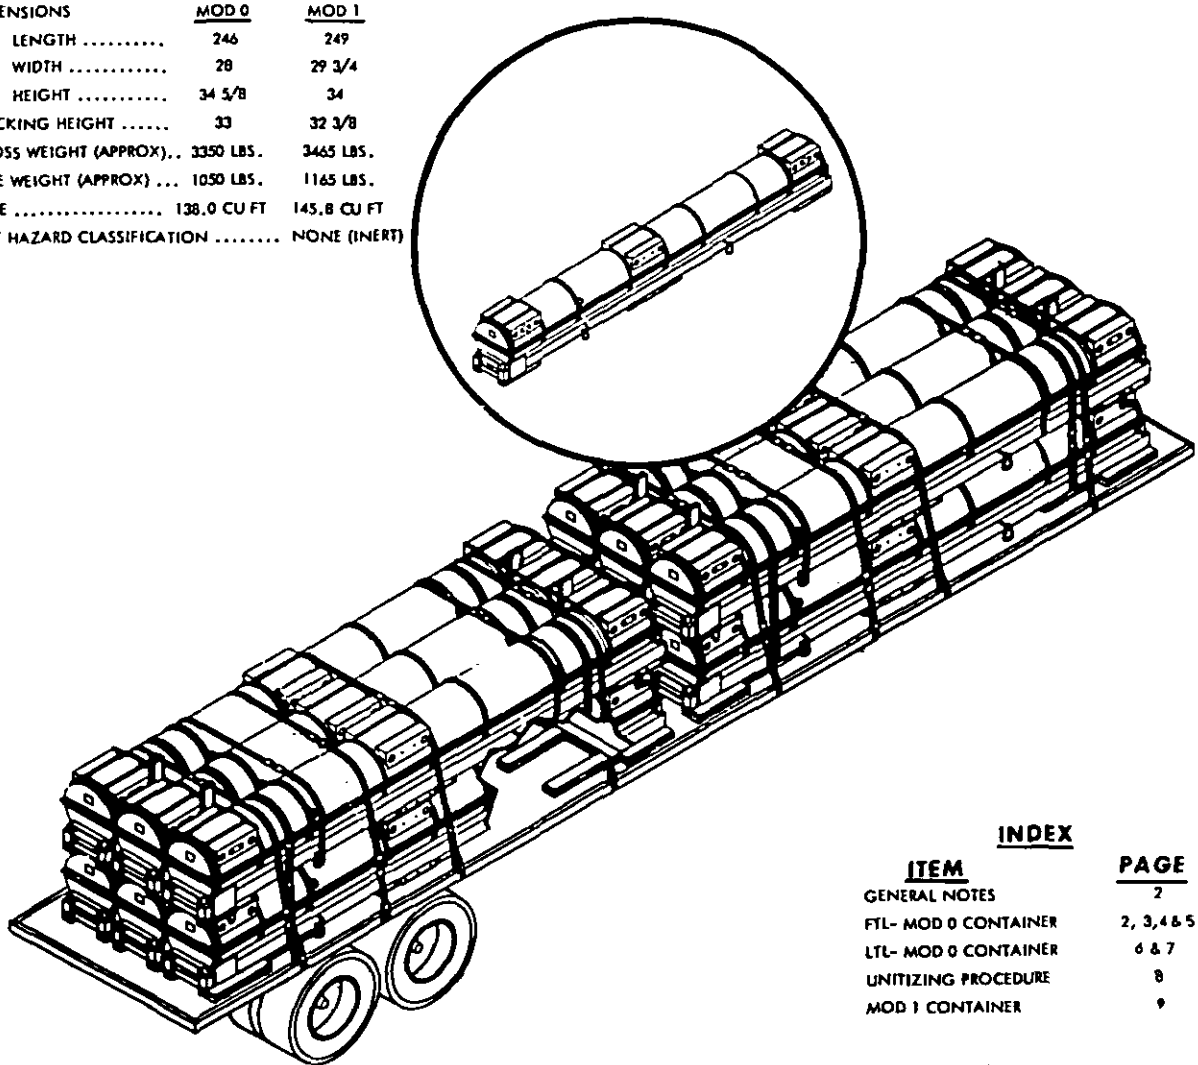

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL- MOD 0 CONTAINER	2, 3,4&5
LTL- MOD 0 CONTAINER	6 & 7
UNITIZING PROCEDURE	8
MOD 1 CONTAINER	9

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINER LOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	APPROVAL	
			TDA	SYSCOM
B	ADDED ONE HIGH LOAD FOR 4-6 CONTAINERS	10/85		
A	ADDED ADDITIONAL TIEDOWNS AND SEPARATOR	10/85		

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

M. J. Gray NWHC 2/6/81
TECHNICAL DIRECTION AGENT (TDA) DATE

J. E. Kelly 2/6/81
SEASYSCOM DIRECTION DATE

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

ORIGINATOR W. Gabrin 2 FEB 81
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THE DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE MK 48 TORPEDO TORPEDO EXERCISE SHAPES WHEN THE SHAPES ARE IN THE MK 481 MOD 0 AND 1 CONTAINER.
2. PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR FLATBED TRAILERS 27 FT OR LONGER. DO NOT USE TRAILERS WITH NONNAILABLE FLOORS.
3. STACKED CONTAINERS MUST BE UNITIZED. FOR UNITIZING INSTRUCTIONS REFER TO PAGE 8. WHEN A STACK OF CONTAINERS IS TWO HIGH, THE TOP LAYER SHALL BE SECURED TOGETHER WITH TWO 1 1/4 X .035 CROSS STRAPS. THESE STRAPS ENCIRCLE THE TOP CONTAINERS SECURING THEM TOGETHER.


WARNING

TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING UNITIZED CONTAINERS. THE UNITIZING OF THE CONTAINERS IS AUTHORIZED AS A PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES. MOVEMENT OF THE UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE.

4. IS SUITABLE CAPACITY HANDLING EQUIPMENT IS NOT AVAILABLE FOR MOVING UNITIZED TWO HIGH CONTAINERS (TOTAL WEIGHT 7000 LBS.) IT WILL BE NECESSARY TO UNITIZE THE CONTAINERS IN PLACE.
5. CHAINS AND STRAPS MAY BE USED INTERCHANGEABLY FOR TIEDOWNS ON A 1 TO 1 BASIS. WHEN USING CHAIN, LADING SHALL BE PROTECTED FROM DAMAGE BY THE CHAIN LINKS.
6. CHAINS, FITTINGS AND LOADBINDERS USED AS TIEDOWNS SHALL MEET THE REQUIREMENTS OF THE BASIS TRUCKLOADING DOCUMENT MIL-STD-1320 AND APPLIED AS SPECIFIED IN THE BASIC DOCUMENT AND PAGE 4 OF THIS DOCUMENT.
7. STEEL STRAP USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL MEET THE REQUIREMENTS OF THE BASIC TRUCKLOADING DOCUMENT MIL-STD-1020 AND APPLIED AS SPECIFIED IN THE BASIC DOCUMENT AND PAGE 3 OF THIS DOCUMENT.
8. STACKS OF 5 OR 6 CONTAINERS SHALL HAVE 4 TIEDOWNS. A STACK OF 4 CONTAINERS SHALL HAVE 3 TIEDOWNS AND STACKS OF 3 OR LESS CONTAINERS SHALL HAVE 2 TIEDOWNS.
9. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVORD OP 2165 AND REPORTED ON DD FORM 626. THE CHAINS, FITTINGS, AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOADBINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OF LOADBINDER.
10. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR_TRAILER WILL NOT EXCEED THESE LIMITATIONS.
11. UNLESS OTHERWISE SPECIFIED ALL MATERIAL SHALL BE AS SPECIFIED IN THE GENERAL DOCUMENT MIL-STD-1320.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING MILITARY STANDARD 1320.


FTL 44/45/48 FT FLATBED TRAILERS (MK 481 MOD 0 CONTAINERS)

1. 44 FT, 45 FT AND 48 FT FLATBED TRAILERS ARE CONSIDERED SPECIAL EQUIPMENT AND ARE NOT ALWAYS GENERALLY AVAILABLE.
2. WHEN 44, 45 AND 48 FT TRAILERS ARE NOT AVAILABLE, SHIPMENT MAY BE MADE ON SHORTER TRAILERS. (SEE PAGE 5).

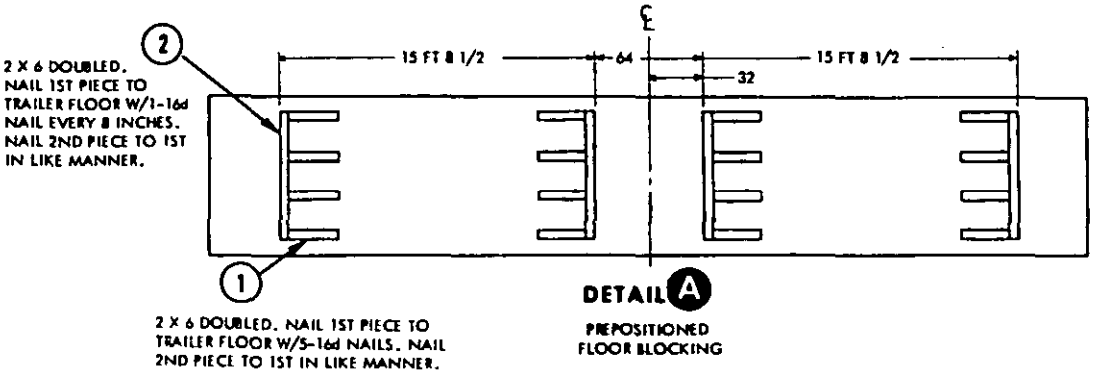

DETAIL A
PREPOSITIONED FLOOR BLOCKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

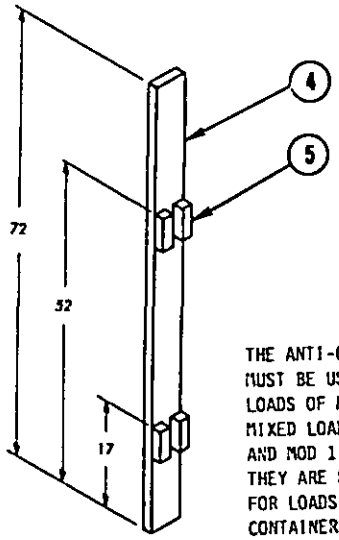

THE ANTI-CHAFING FRAME MUST BE USED WITH ALL LOADS OF MOD 0 AND WITH MIXED LOADS OF MOD 0 AND MOD 1 CONTAINERS. THEY ARE NOT REQUIRED FOR LOADS OF MOD 1 CONTAINERS ONLY.


DETAIL B

ANTI-CHAFING FRAME

4 REQUIRED

NOTE

THIS FTL ILLUSTRATES THE USE OF 2 X .050 STRAPS AS TIEDOWNS. CHAINS ARE AN AUTHORIZED ALTERNATE AND SHOULD BE APPLIED AS SHOWN ON PAGE 4.

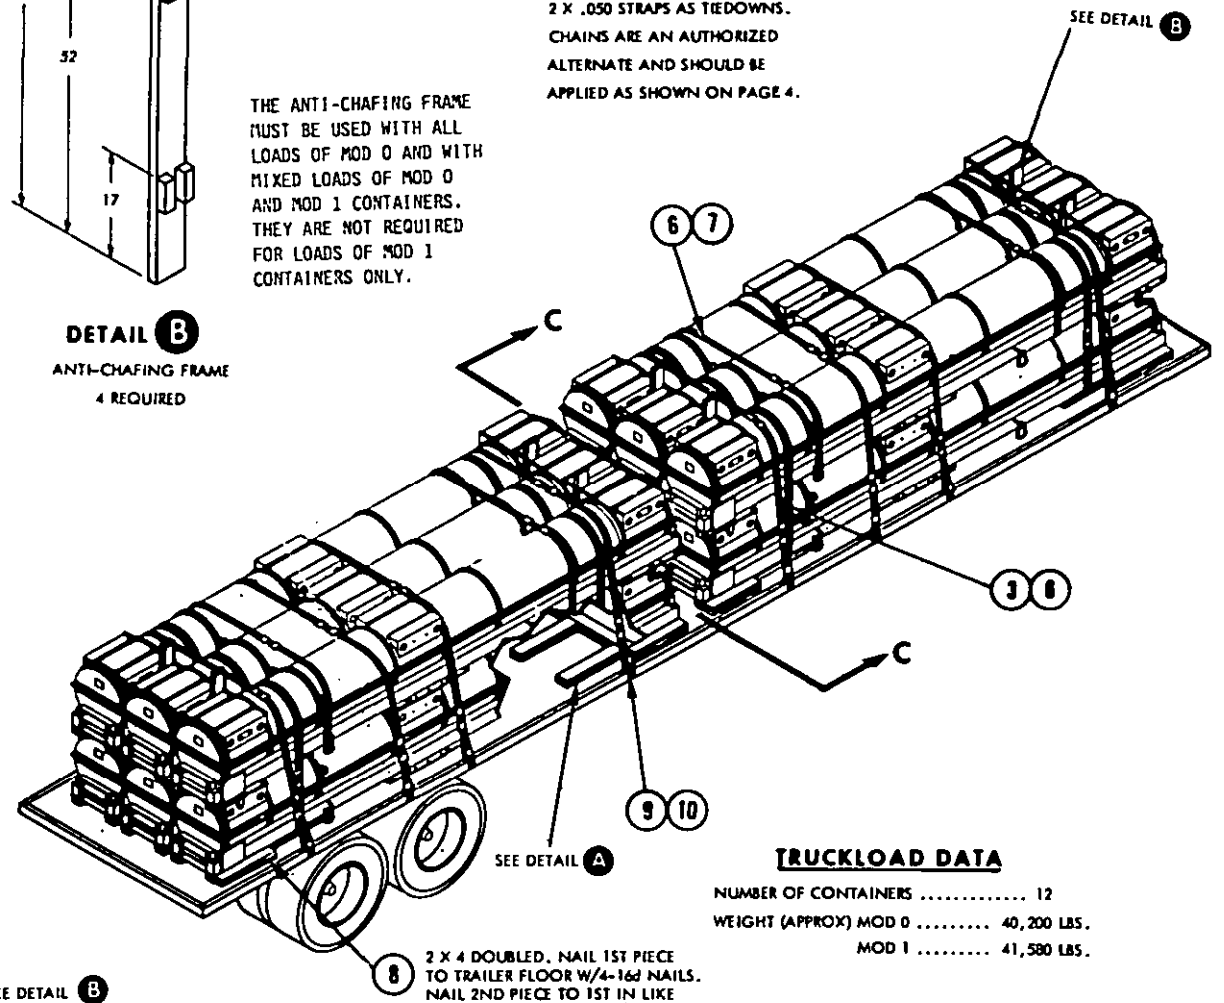


2 X 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/4-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. SEE DETAIL M

TRUCKLOAD DATA

NUMBER OF CONTAINERS 12

WEIGHT (APPROX) MOD 0 ..... 40,200 LBS.

MOD 1 ..... 41,580 LBS.

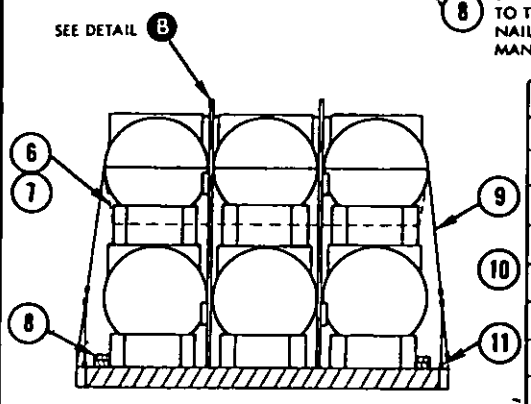


SECTION C-C

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
11	STAKE POCKET PAD (STRAPPING)	2 X .050 X 18	16	-	-	-
10	SEAL	FOR 2" STRAP	64	-	-	-
9	TIEDOWN STRAP	2 X .050 X 28 FT	8	SEE GENERAL NOTES 5 & 7		
8	SLEEPER	2 X 4 X 28	16	SEE DETAIL M		
7	CROSS STRAP	1 1/4 X .035 X 23FT	4	-	-	-
6	SEAL	FOR 1 1/4 STRAP	32	-	-	-
5	CLEAT	2 X 2 X 6	32	SEE 4	-	-
4	UPRIGHT	1 X 6 X 72	8	5	3/JOINT	10d CLINCHED
3	UNITIZING STRAP	1 1/4 X .035 X 18FT	12	-	-	-
2	CROSSMEMBER	2 X 6 X 79	8	SEE DETAIL A		
1	BACKUP CLEAT	2 X 6 X 30	32	SEE DETAIL A		

LIST OF MATERIALS & NAILING DATA

FTL 44/45/48 FT FLATBED TRAILER (MOD 0 CONTAINER)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

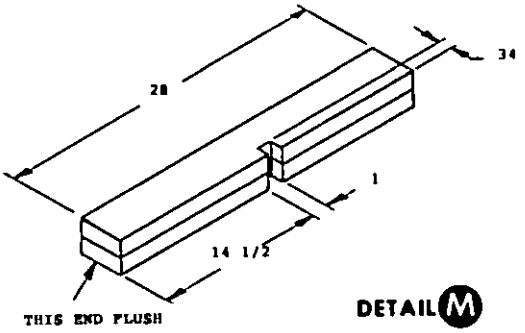


DETAIL M

DOUBLE, NOTCHED SLEEPER
2 X 4 X 28

NOTE: THIS SLEEPER ASSEMBLY IS REQUIRED FOR MOD 0 CONTAINERS BUT ALSO FITS MOD 1 CONTAINERS. SHIPMENTS OF MOD 1 CONTAINERS AS BOTTOM LAYER DO NOT REQUIRE NOTCHED SLEEPERS WHILE OTHER DIMENSIONS ARE UNCHANGED.

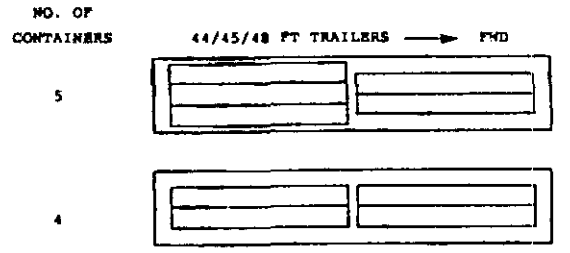


PREFERRED LTL FOR 6, 5, OR 4 CONTAINERS REQUIRES 44/45/48 FOOT TRAILER

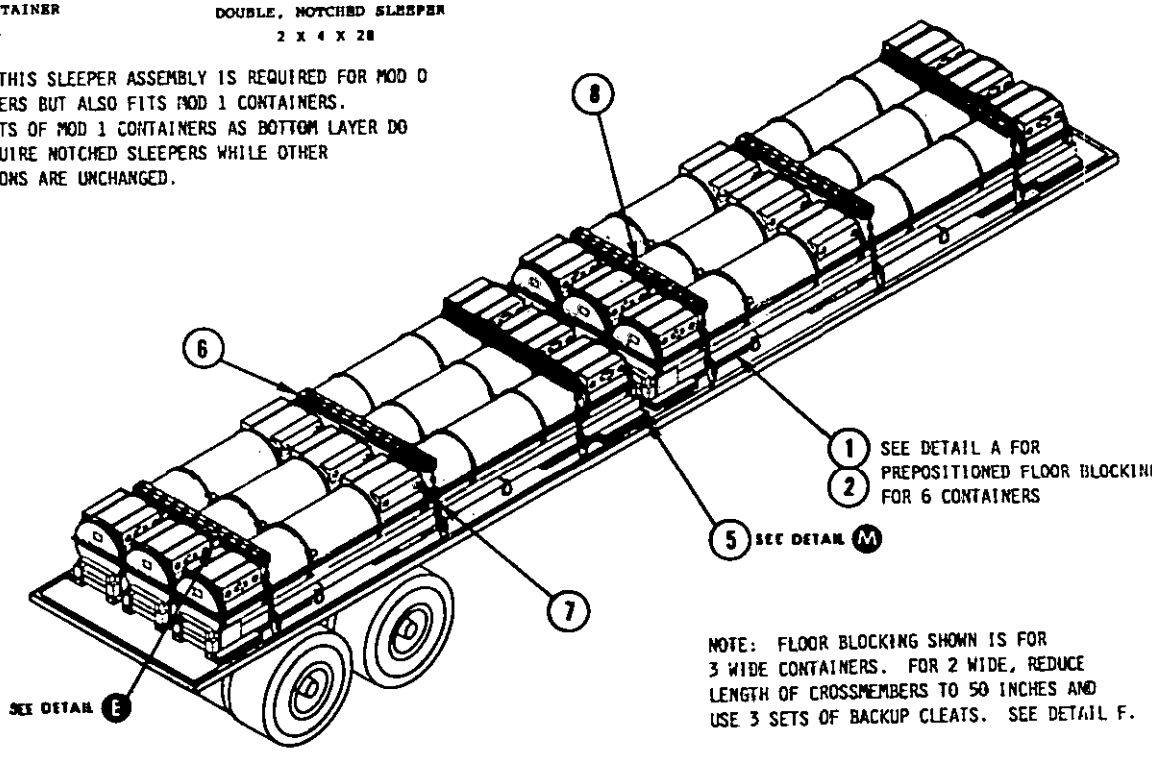

NOTE: FLOOR BLOCKING SHOWN IS FOR 3 WIDE CONTAINERS. FOR 2 WIDE, REDUCE LENGTH OF CROSSMEMBERS TO 50 INCHES AND USE 3 SETS OF BACKUP CLEATS. SEE DETAIL F.

TRUCK LOAD DATA

NO. OF CONTAINERS 6
WEIGHT (MOD 0) ..... 20,100 LBS
WEIGHT (MOD 1) ..... 20,790 LBS

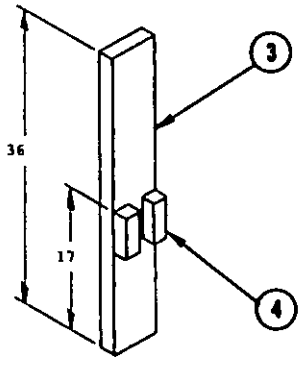


ANTI-CHAFTING FRAME
8 REQUIRED

DETAIL E

ITEM NO.	DESCRIPTION	DIMENSIONS	NO. REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
8	NAILS	20d	12	6	THROUGH CHAIN LINK AND CLINCHED	
7	CHAIN	5/16 OR 3/8	4	SEE GENERAL NOTES		
6	PROTECTOR BOARD	2 X 6 X 73	8	SEE FIELD NOTE		
5	SLEEPER	2 X 4 X 28	16	SEE DETAIL M		
4	CLEAT	2 X 2 X 6	16	SEE 3		
3	UPRIGHT	1 X 6 X 36	8	4	3/JOINT	6d
2	CROSSMEMBER	2 X 6 X 79	8	SEE FIELD NOTE		
1	BACKUP CLEAT	2 X 6 X 30	32	SEE FIELD NOTE		

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

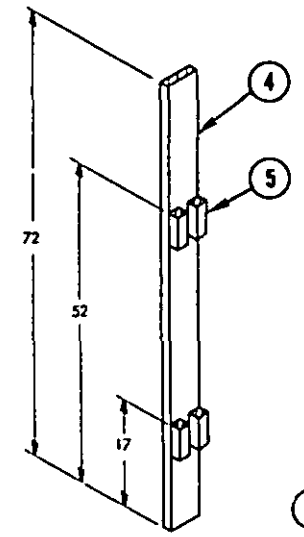


DETAIL D

ANTI-CHAFING FRAME
4 REQUIRED


NOTE

THIS FTL SHOWS THE PROPER APPLICATION OF CHAINS AND LOAD BINDERS. TWO INCH STRAP IS AN AUTHORIZED ALTERNATE AND SHOULD BE APPLIED AS SHOWN ON PAGE 3.

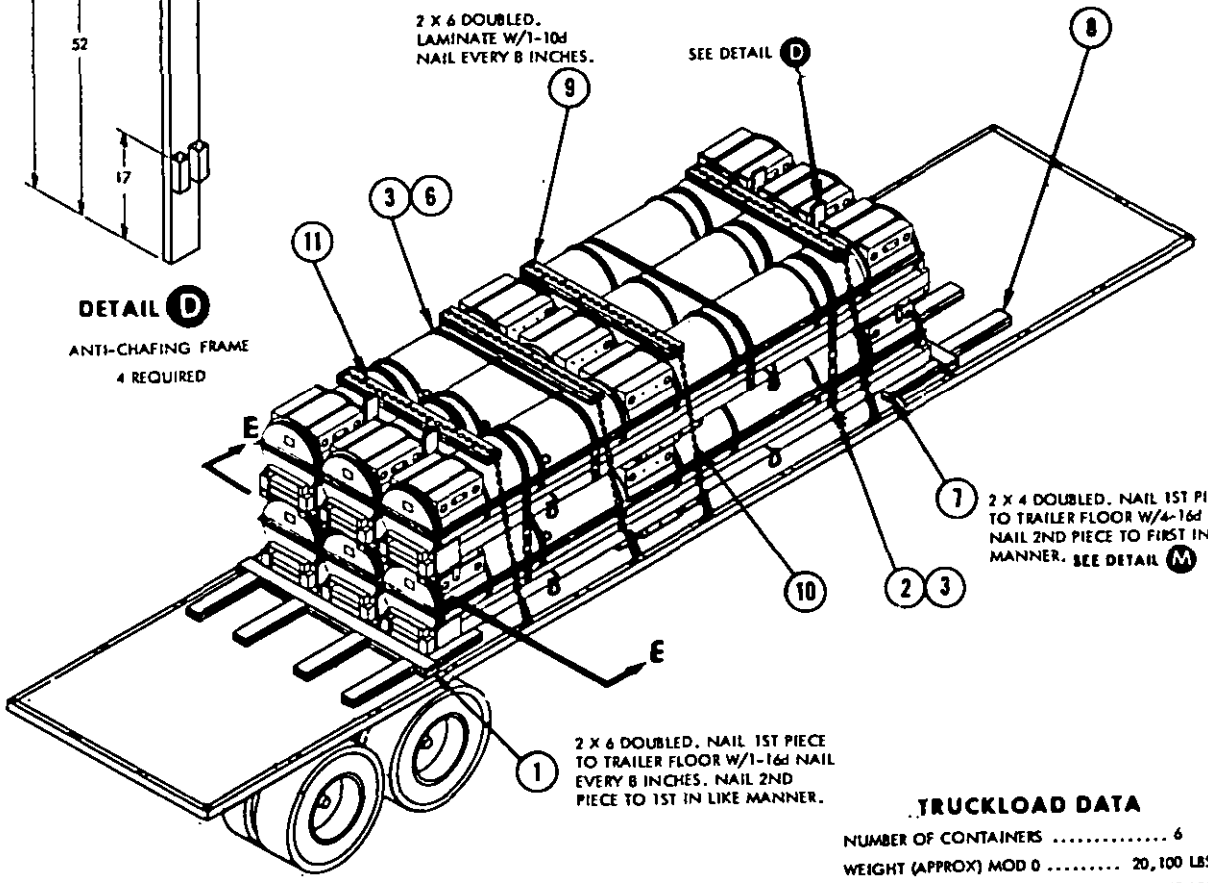

TRUCKLOAD DATA

NUMBER OF CONTAINERS 6
WEIGHT (APPROX) MOD 0 ..... 20,100 LBS.
MOD 1 ..... 20,790 LBS.

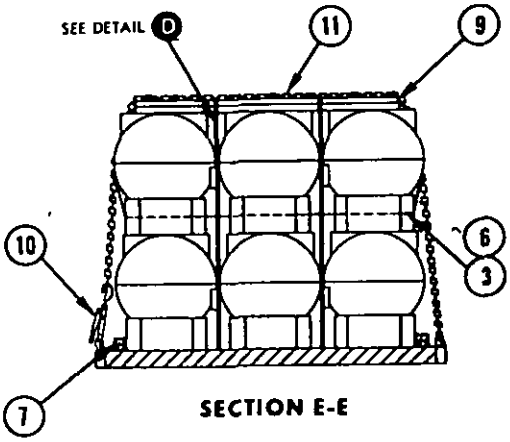

SECTION E-E

PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
11	NAILS	20d	12	9	THROUGH CHAIN LINK & CLINCHED	
10	CHAIN & LOAD BINDER	5/16 OR 3/8	4	SEE GENERAL NOTES 5, 6 & 8		
9	PROTECTOR BOARD	2 X 6 X 73	8	SEE FIELD NOTE		
8	END CLEAT	2 X 6 X 30	16	SEE FIELD NOTE		
7	SLEEPER	2 X 4 X 28	8	SEE DETAIL M		
6	CROSS STRAP	1 1/4 X .035 X 23 FT	2	-	-	-
5	CLEAT	2 X 2 X 6	16	SEE 4	-	-
4	UPRIGHT	1 X 6 X 72	4	5	3/JOINT	6d
3	SEAL	FOR 1 1/4 STRAP	16	-	-	-
2	UNITIZING STRAP	1 1/4 X .035 X 18 FT	6	-	-	-
1	CROSS MEMBER	2 X 6 X 90	4	SEE FIELD NOTE		





LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil - Downloaded: 2026-03-23 12:43:08
Check the source to verify that this is the current version before use.

LTL ALL LENGTH TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP 7 TO 11 TORPEDO SHAPES, SELECT THE CORRECT LOAD PATTERN FROM TABLE I. A MINIMUM 44/45 FT LENGTH TRAILER IS REQUIRED.

TABLE I





NO. OF CONTAINERS	LOAD PATTERN△ FWD →	NO. OF CONTAINERS	LOAD PATTERN△ FWD →	NO. OF CONTAINERS	LOAD PATTERN△ FWD →
11		9		7	
10		8			

△NUMBER IN LOAD PATTERN BLOCK INDICATES NUMBER OF CONTAINERS IN A LAYER.

2. WHEN REQUIRED TO SHIP 6 TORPEDO SHAPES, USE THE PROCEDURES SHOWN ON PAGE 4. IF 44 FT OR LONGER TRAILERS ARE NOT ABAILABLE, USE PROCEDURE SHOWN ON PAGE 5.

3. WHEN REQUIRED TO SHIP 5 OR 4 TORPEDO SHAPES, SELECT THE CORRECT LOAD PATTERN FROM PAGE 4. IF 44 FT OR LONGER TRAILERS ARE NOT AVAILABLE USE CORRECT LOAD PATTERN BELOW. FOR SHIPPING 3 OR FEWER CONTAINERS USE THE LOAD PATTERNS SHOWN BELOW. A 27 FOOT MINIMUM LENGTH TRAILER IS REQUIRED. USE THE BASIC PROCEDURES SHOWN ON PAGES 4, 5, AND 7.


TABLE II

NO. OF CONTAINERS	LOAD PATTERN△ FWD →	NO. OF CONTAINERS	LOAD PATTERN△ FWD →	NO. OF CONTAINERS	LOAD PATTERN△ FWD →
5		3		1	
4		2			

△NUMBER IN LOAD PATTERN BLOCK INDICATES NUMBER OF CONTAINERS IN A LAYER


4. BLOCK, BRACE AND TIEDOWN LTL LOADS USING THE APPLICABLE PRINCIPLES SHOWN ON PAGES 3, 4, 5 AND 7. SEE GENERAL NOTE 8 FOR THE QUANTITY OF THE TIEBOWNS TO BE USED.

5. THE FILLER ASSEMBLY (DETAIL J, PAGE 8) SHALL BE USED IN STACKS IN PLACE OF AN OMITTED CONTAINER. (SEE LOAD PATTERN FOR 5, 9 AND 11 CONTAINERS). THE ASSEMBLY SHALL BE STRAPPED TO THE CONTAINER IT RESTS ON SIMILAR TO THE UNITIZING PROCEDURE SHOWN ON PAGE 8.

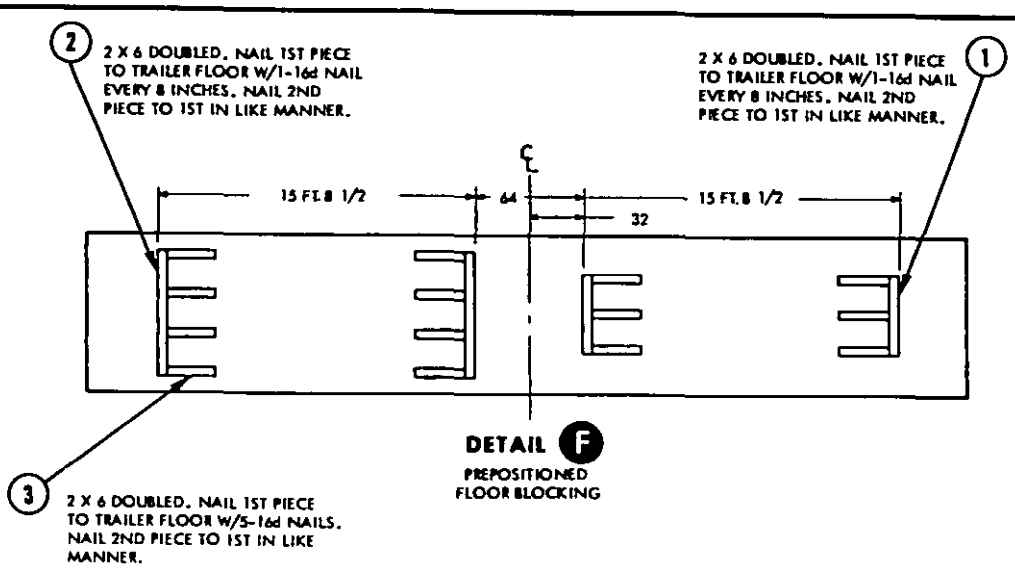

DETAIL F
PREPOSITIONED FLOOR BLOCKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

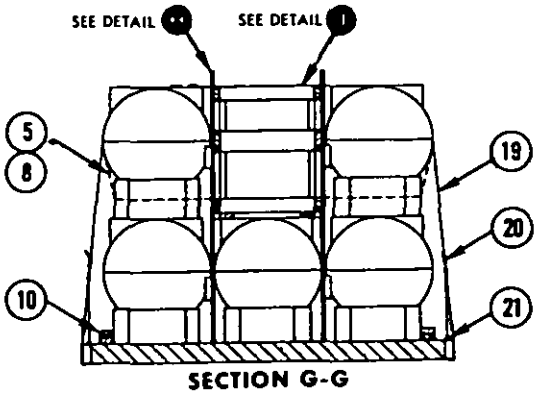


SECTION G-G

TRUCKLOAD DATA


NUMBER OF CONTAINERS 9
WEIGHT (APPROX) MOD 0 ..... 30,150 LBS.
MOD 1 ..... 31,185 LBS.

NOTE

THIS LTL ILLUSTRATES THE USE OF 2 X .050 STRAPS AS TIEDOWNS. CHAINS ARE AN AUTHORIZED ALTERNATE AND SHOULD BE APPLIED AS SHOWN ON PAGE 4.

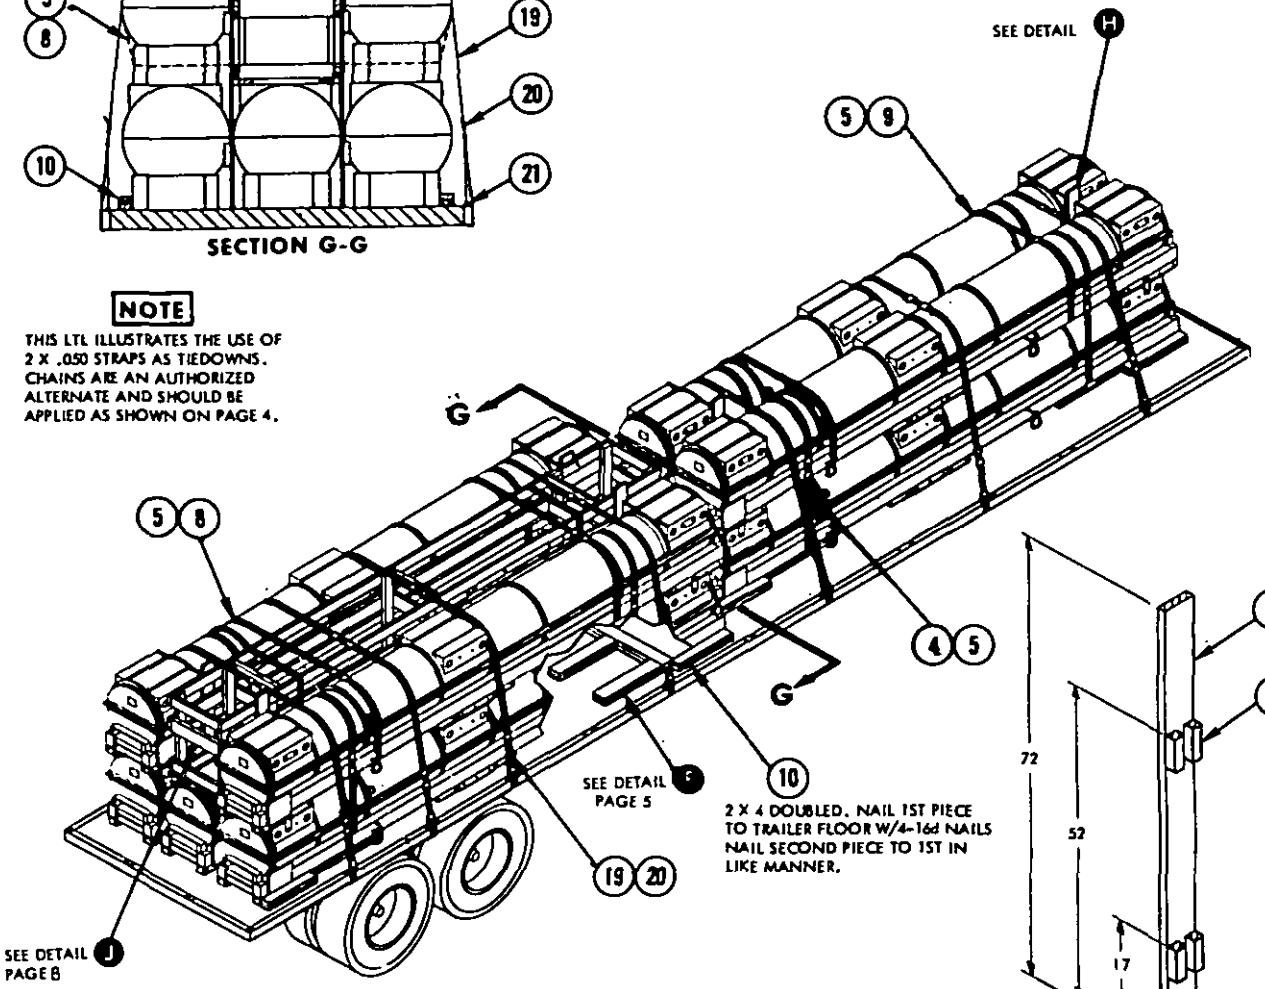

2 X 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/4-16d NAILS NAIL SECOND PIECE TO 1ST IN LIKE MANNER.

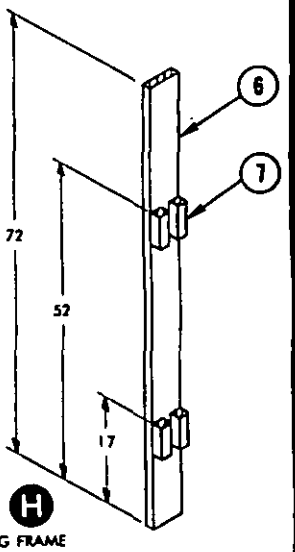

DETAIL H

ANTI-CHAFING FRAME

6 REQUIRED


PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQ'D	NAIL TO	NUMBER NAILS	SIZE
21	STAKE POCKET PAD. (STRAPPING)	2 X .050 X 18	34	-	-	-
20	SEAL	FOR 2" STRAP	56	-	-	-
19	TIE-DOWN STRAP	2 X .050 X 28 FT	7	SEE GENERAL NOTES 5 & 7		
18	SUPPORT BRACE	2 X 4 X 23 1/2	2	SEE 14	-	-
17	SUPPORT	2 X 4 X 23	4	12, 18	2/JOINT	16d
16	BUFFER PIECE	1 X 6 X 14 FT	2	15	1/FT	10d
15	LONGITUDINAL	2 X 6 X 19 FT 4	2	13	3/JOINT	16d
14	LONGITUDINAL	2 X 4 X 19 FT 4	4	18 12	2/JOINT 1/JOINT	16d 16d
13	CROSS BRACE	2 X 6 X 23 1/2	5	11	3/JOINT	16d
12	HORIZONTAL	2 X 4 X 23 1/2	10	11	2/JOINT	16d

LIST OF MATERIALS AND NAILING DATA

PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQ'D	NAIL TO	NUMBER NAILS	SIZE
11	VERTICAL	2 X 4 X 33	10	14, 15	2/JOINT	10d
10	SLEEPER	2 X 4 X 28	16	SEE DETAIL M		
9	CROSS STRAP	1 1/4 X .035 X 18 FT	2	-	-	-
8	CROSS STRAP	1 1/4 X .035 X 23 FT	2	-	-	-
7	CLEAT	2 X 2 X 6	24	SEE 6	-	-
6	UPRIGHT	1 X 6 X 72	6	7	3/JOINT	6d
5	SEAL	FOR 1 1/4 STRAP	28	-	-	-
4	UNITIZING STRAP	1 1/4 X .035 X 18 FT	10	-	-	-
3	BACKUP CLEAT	2 X 6 X 30	28	SEE DETAIL A		
2	CROSS MEMBER	2 X 6 X 79	4	SEE DETAIL A		
1	CROSS MEMBER	2 X 6 X 50	4	SEE DETAIL A		

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil - Downloaded: 2026-01-28T20:19Z
Check the source to verify that this is the current version before use.

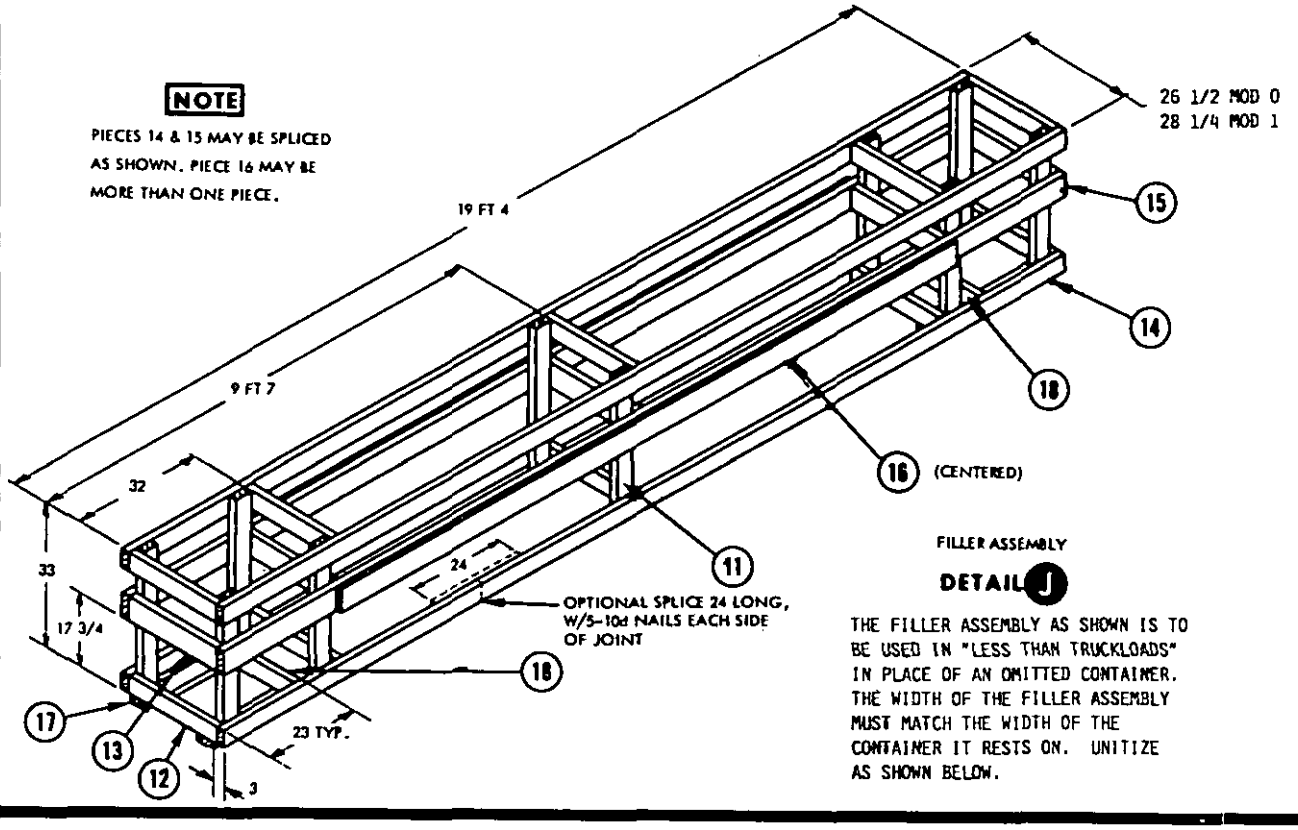


FILLER ASSEMBLY

DETAIL J

THE FILLER ASSEMBLY AS SHOWN IS TO BE USED IN "LESS THAN TRUCKLOADS" IN PLACE OF AN OMITTED CONTAINER. THE WIDTH OF THE FILLER ASSEMBLY MUST MATCH THE WIDTH OF THE CONTAINER IT RESTS ON. UNITIZE AS SHOWN BELOW.

UNITIZING

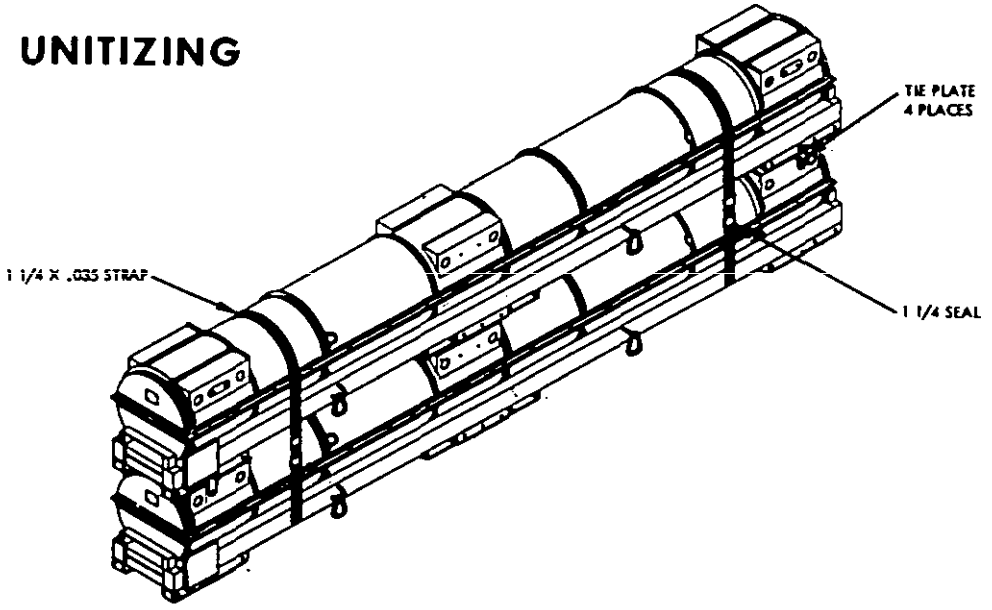


CONTAINER UNITIZING PROCEDURE:

1. STACK TWO CONTAINERS USING A FORKLIFT TRUCK.
2. BE CERTAIN THAT THE NESTING FEATURES AND BEARING SURFACES ARE PROPERLY POSITIONED TO PREVENT SHIFTING IN LATERAL AND LONGITUDINAL DIRECTIONS.
3. FASTEN TIE PLATES IN POSITION ON CONTAINERS. (MOD 0 CONTAINER ONLY).
4. SECURE BOTTOM CONTAINER TO TOP CONTAINER WITH TWO 1 1/4 X .035 STEEL STRAPS POSITIONED AS INDICATED ABOVE.
5. AFTER TENSIONING STRAPS, SEAL WITH ONE 1 1/4 DOUBLE NOTCHED SEAL.
6. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE OR ON THE TRAILER IF A STACK OF TWO CANNOT BE UNLOADED AS A UNIT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.


INSTRUCTIONS FOR LOADING MK 481 MOD 1 CONTAINERS

1. THE MK 481 MOD 1 CONTAINERS SHALL BE LOADED USING THE SAME PROCEDURES AS FOR THE MK 481 MOD 0 WITH THE FOLLOWING EXCEPTIONS:
   a. THE ANTI-CHAFING FRAMES BETWEEN CONTAINERS *ARE NOT REQUIRED*.
   b. WHEN A STACK OF MOD 1 CONTAINERS IS THREE WIDE IT MAY NOT BE POSSIBLE TO NAIL THE SLEEPERS (PIECE 8, PAGE 3 OR PIECE 5, PAGE 4) TO THE TRAILER FLOOR BECAUSE OF THE TRAILER DESIGN. WHEN THIS HAPPENS SUBSTITUTE THE METHOD SHOWN BELOW FOR EACH SLEEPER THAT CANNOT BE NAILED TO THE TRAILER FLOOR.
2. STUB STAKE IS SIZED TO FIT THE STAKE POCKET AND CUT TO EXTEND APPROXIMATELY 9 INCHES ABOVE TRAILER FLOOR AND 3 INCHES BELOW STAKE POCKET. DRIVE ONE 20d NAIL BELOW STAKE POCKET ALLOWING ONE INCH TO PROTRUDE TO PREVENT STAKE WORKING OUT OF PLACE.
3. THICKNESS OF FILLER SHALL BE SUFFICIENT TO FILL SPACE BETWEEN STAKE AND CONTAINER SKIDS. IT MAY BE COMPOSED OF ONE OR MORE PIECES. WHEN TWO OR MORE PIECES ARE USED, THEY SHALL BE LAMINATED TOGETHER.

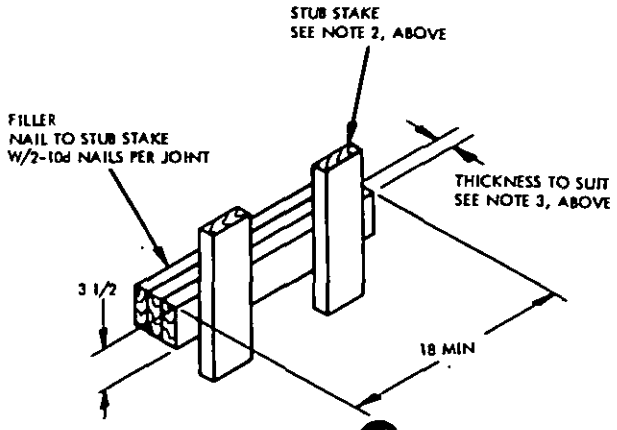


DETAIL K

STUB STAKE AND FILLER ASSEMBLY
SIDE BLOCKING METHOD

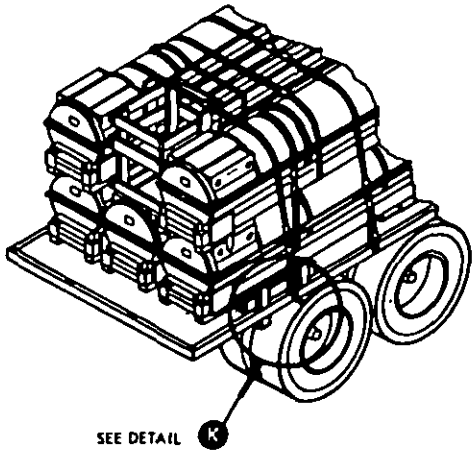

SHIPPING REQUIREMENTS MAY ARISE WHEN SHIPPING TWO CONTAINERS TO SEPARATE THE CONTAINERS BY A SUFFICIENT AMOUNT TO PERMIT ACCESS TO THE CONTAINER LATCHES. THE TWO CONTAINERS SHOULD BE LOADED AS SHOWN IN TABLE I USING THE PROTECTOR BOARD/SEPARATOR, DETAIL L, BETWEEN CONTAINERS. LOCATE THE SEPARATORS APPROXIMATELY 28 INCHES FROM EACH END OF THE STACK WITH THE DOUBLED 2 x 6 LAYING ACROSS THE TOPS OF THE CONTAINERS. POSITION TIEDOWNS OVER THE DOUBLED 2 x 6.

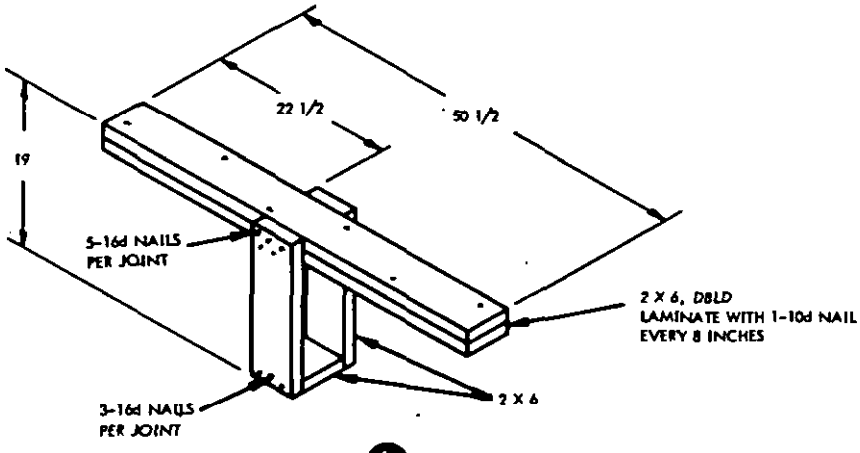

DETAIL L

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Weapons Station Earle (NWHC)
ATTN: Code 803 - S. Paquette
Colts Neck, NJ 07722

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.