MILITARY STANDARD

MIL-STD-1320-187B (NAVY)


18 MARCH 1982

SUPERSEDING
MIL-STD-1320-187A (NAVY)
30 MAY 1980

TRUCKLOADING

MINE, UNDERWATER MK 52 AND MODS CONFIGURATION B, C AND D IN CRATE, UNDERWATER MINE MK 52 AND MODS DOMESTIC AND UNDERWAY REPLENISHMENT UNIT LOADS

UNIT LOAD DATA	D.U.L. MIL-STD-1322-715	U.L.U.R. MIL-STD-1323-208
LENGTH	66 1/4	66 1/4
WIDTH	49 3/4	49 3/4
HEIGHT	29 1/4	28 1/2
CUBE	55.8 CU. FT.	54.3 CU. FT.
GROSS WEIGHT	TABLE IV	TABLE IV
DOT HAZARD CLASSIFICATION	EXPLOSIVES A	EXPLOSIVES A

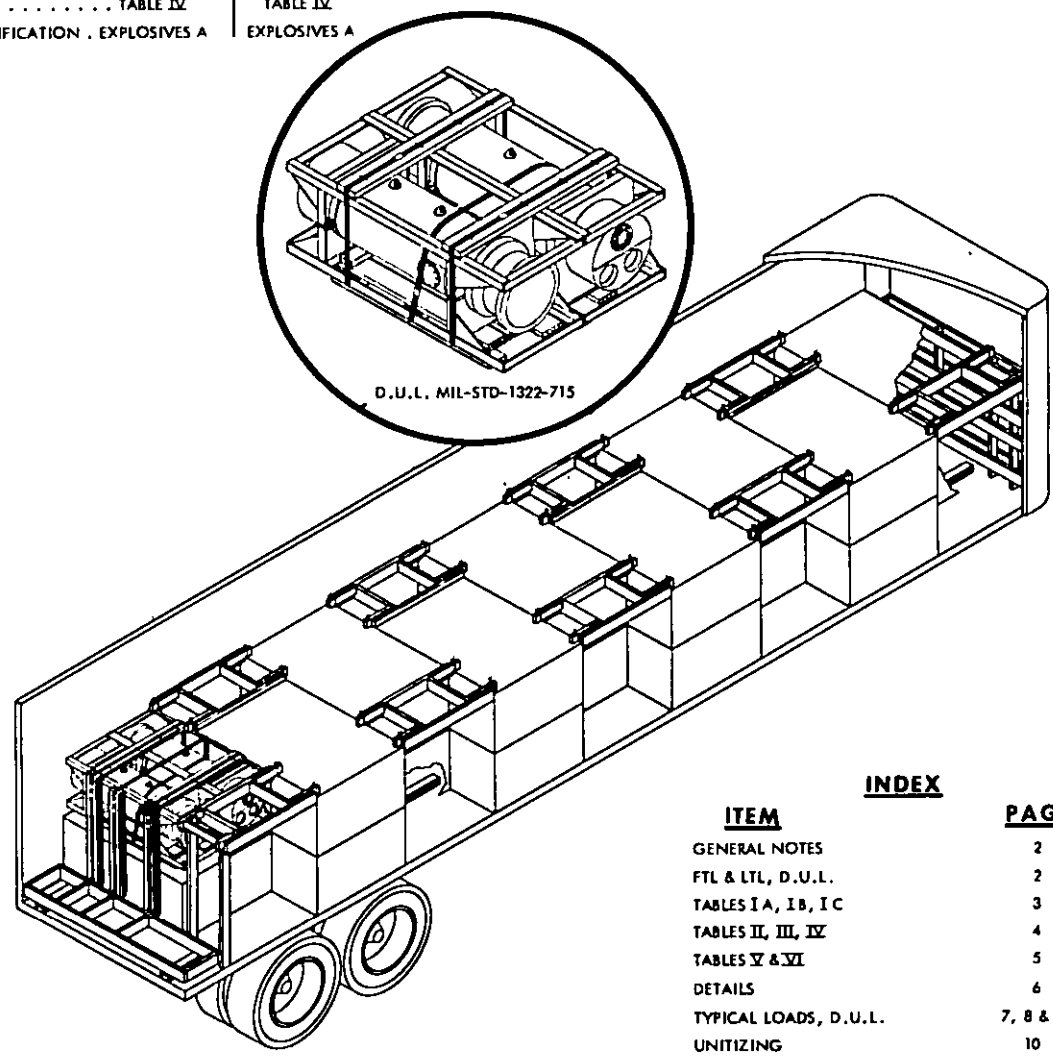

D.U.L. MIL-STD-1322-715

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL & LTL, D.U.L.	2
TABLES I A, I B, I C	3
TABLES II, III, IV	4
TABLES V & VI	5
DETAILS	6
TYPICAL LOADS, D.U.L.	7, 8 & 9
UNITIZING	10

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING, MILITARY STANDARDS REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

W. S. Gray NWHC 3/12/82
TECHNICAL DIRECTION AGENT (TDA) DATE

J. E. Kelly 3/3/82
SEASYSCOM BY DIRECTION DATE

ORIGINATOR 1 MARCH 1982
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:46Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING DOMESTIC UNIT LOADS AND UNIT LOADS FOR UNDERWAY REPLENISHMENT OF THE UNDERWATER MINE MK 52 AND MODS IN THE CRATE, UNDERWATER MINE MINE MK 52 AND MODS. THE UNIT LOAD SHALL BE IN ACCORDANCE WITH MIL-STD-1322-715 OR MIL-STD-1323-208.
2. THE PROCEDURES AND PRACTICES HEREIN ARE INTENDED FOR 40, 42, 44 AND 45 FOOT VAN TYPE TRAILERS WITH NAILABLE AND NON-NAILABLE FLOORS. TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). TRACTORS SHOULD HAVE SLIDING 5TH WHEEL PLATES.
3. THE LENGTH OF THE STRUT (PIECE 5 OF DETAIL C, PAGE 5) SHALL BE OF SUFFICIENT LENGTH TO PERMIT THE REAR BLOCKING ASSEMBLY TO FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED. DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING BY THIS METHOD.
4. THE LENGTH OF THE STRUT (PIECE 8 OF DETAIL D, PAGE 5) SHALL BE OF SUFFICIENT LENGTH TO CAUSE THE SWAY BRACE TO FILL THE VOID BETWEEN THE LADING AND THE SIDE WALL OF THE TRAILER. TWIST TIE THE SWAY BRACE ASSEMBLY TO THE TOP OF THE MINE CRATE (4 PLACES) WITH 16 GAUGE SOFT ANNEALED IRON WIRE.

NOTE

WHEN END OF SWAY BRACE ASSEMBLY IS NOT SUPPORTED BY A MINE CRATE CONSTRUCT SUPPORT LEGS AS SHOWN IN SECTION E-E OR SECTION F-F. TWIST TIE LEGS TO LOWER MINE CRATE.

5. DUE TO THE OVERHANG OF THE MINE CRATES ON THE PALLET, SLEEPER SHOULD BE PREPOSITIONED PRIOR TO POSITIONING THE UNIT LOAD.

NOTE

USE THE CORRECT DIMENSION SHOWN IN THE DRAWING FOR THE UNIT LOAD BEING LOADED.

6. WHEN TRAILERS HAVE NON-NAILABLE FLOORS AND SLEEPERS CAN NOT BE USED TO CONTROL LATERAL MOTION, USE THE SWAY BRACE (DETAIL D, PAGE 5) FOR THE FIRST LAYER IN THE SAME MANNER AS THEY ARE INSTALLED FOR THE SECOND LAYER.
7. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA, CLOSE AND SEAL TRAILER DOORS AND ATTACH "EXPLOSIVE A" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
9. UNLESS OTHERWISE SPECIFIED MATERIAL SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.
10. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.

FTL & LTL 40, 42, 44 & 45 FT. TRAILERS (VAN) DOMESTIC UNIT LOAD (D.U.L.)

WARNING

THIS STANDARD PROVIDES FOR INCREASED LOADINGS WHICH PRODUCE HEAVIER GROSS TANDEM AXLE WEIGHTS AND GROSS VEHICLE WEIGHTS. THE INCREASED WEIGHTS ARE NOT AUTHORIZED IN ALL 50 STATES.

1. TABLES I, II AND III PROVIDE THE CORRECT LOAD PATTERN NUMBER TO BE USED WHEN SHIPPING THE UNDERWATER MINE MK 52 AND MODS. TO USE THESE TABLES:
   - A. DETERMINE THE DODIC/NALC NUMBER OF THE MINE BEING SHIPPED.
   - B. SELECT THE TABLE LISTING THAT NUMBER.
   - C. DETERMINE THE TYPE OF TRACTOR-TRAILER (LIGHTWEIGHT OR STANDARD WEIGHT) TO BE LOADED.

NOTE

LIGHTWEIGHT TRACTOR-TRAILER - TARE WEIGHT OF TRAILER TANDEM AXLES 6,800 LBS. MAXIMUM AND DRIVE TANDEM AXLES 10,500 LBS. MAXIMUM.

STANDARD WEIGHT TRACTOR-TRAILER - TARE WEIGHT OF TRAILER TANDEM AXLES 7,800 LBS. MAXIMUM AND DRIVE TANDEM AXLES 11,500 LBS MAXIMUM. THE ABOVE MAXIMUM WEIGHTS MAY BE ADJUSTED UPWARDS WHEN EXPERIENCE INDICATES THAT THE WEIGHT RESTRICTIONS CAN BE MET.

   - D. DETERMINE IF THE ROUTING IS THROUGH STATES PERMITTING 32,000 LBS. OR 34,000 LBS. ON TANDEM AXLES.
   - E. USING THE COLUMN FOR THE LENGTH OF THE TRAILER BEING LOADED, FIND THE LOAD PATTERN NUMBER FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED.
2. TABLE V PROVIDES THE PRESCRIBED LOAD PATTERNS. AFTER DETERMINING THE CORRECT LOAD PATTERN NUMBER (SEE NOTE 1 ABOVE) FIND THE CORRECT LOAD PATTERN TO USE OPPOSITE THE LOAD PATTERN NUMBER.
3. BLOCK AND BRACE ALL LOAD PATTERNS SHOWN IN TABLE V USING THE PRINCIPLES SHOWN ON PAGES 6 AND 7. WHEN SHIPPING LESS THAN A FULL SINGLE LAYER, FOLLOW THE PRINCIPLES SHOWN ON PAGE 8.
4. WHEN A TRUCKLOAD HAS A PARTIAL SECOND LAYER, THE UNIT LOADS IN THE SECOND LAYER SHALL BE STRAPPED TO THE BOTTOM UNIT LOAD WHERE THE LOAD PATTERN CHANGES FROM TWO LAYERS HIGH TO ONE LAYER HIGH. TWO HIGH UNIT LOADS AT THE REAR OF THE TRAILER SHALL ALSO BE STRAPPED TOGETHER. SEE UNITIZING PROCEDURE, PAGE 9, FOR INSTRUCTIONS. THE STIFFENERS SHALL BE TOWARDS THE SINGLE LAYER OR WHEN AT THE REAR OF THE LOAD TOWARDS THE TRAILER DOORS.

NOTE

STIFFENERS SHALL BE ON BOTH SIDES OF THE STRAPPED UNIT LOADS WHEN USING LOAD PATTERN NUMBERS 9, 15, AND 25.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

TABLE IA

UNDERWATER MINE MK 52 & MODS
DODIC/NALC NUMBER UB07

NO. OF UNIT LOADS	LOAD PATTERN NUMBER											
	LIGHT WEIGHT TRACTOR-TRAILER						STANDARD WEIGHT TRACTOR-TRAILER					
	MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.			MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.		
	TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45	40	42	44/45	40	42	44/45
18	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
17	2	2	18A	NA	NA	NA	NA	NA	NA	NA	NA	NA
16	3	11	20	NA	11	20	3	11	20	NA	NA	NA
15	4	4	21	4	4	21	4	4	21	4	NA	21
14	5	5	22	5	5	22	5	5	22	5	5	22
13	6	12	23	6	12	23	6	12	23	6	12	23
12	7	13	24	7	13	24	7	13	24	7	13	24
11	8	14	25	8	14	25	8	14	25	8	14	25
10	9	15	26	9	15	26	9	15	26	9	15	26
9	10	10	*	10	10	*	10	10	*	10	10	*

TABLE IB

UNDERWATER MINE MK52 & MODS
DODIC/NALC NUMBER UB39

NO. OF UNIT LOADS	LOAD PATTERN NUMBER											
	LIGHT WEIGHT TRACTOR TRAILER						STANDARD WEIGHT TRACTOR/TRAILER					
	MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.			MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.		
	TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45	40	42	44/45	40	42	44/45
18	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
17	2	2	18A	NA	NA	NA	2	NA	NA	NA	NA	NA
16	3	11	20	NA	NA	20	3	11	20	NA	NA	NA
15	4	4	21	4	4	21	4	4	21	4	9A	21
14	5	5	22	5	5	22	5	5	22	5	5	22
13	6	12	23	6	12	23	6	12	23	6	12	23
12	7	13	24	7	13	24	7	13	24	7	13	24
11	8	14	25	8	14	25	8	14	25	8	14	25
10	9	15	26	9	15	26	9	15	26	9	15	26
9	10	10	*	10	10	*	10	10	*	10	10	*

TABLE IC

UNDERWATER MINE, MK 52 & MODS
DODIC/NALC NUMBER UB91, AND UB46

NO. OF UNIT LOADS	LOAD PATTERN NUMBER											
	LIGHT WEIGHT TRACTOR TRAILER						STANDARD WEIGHT TRACTOR TRAILER					
	MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.			MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.		
	TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45	40	42	44/45	40	42	44/45
18	NA	NA	18	NA	NA	NA	NA	NA	NA	NA	NA	NA
17	2	2	18A	NA	NA	NA	2	NA	NA	NA	NA	NA
16	3	11	20	3	NA	20	3	11	20	NA	NA	NA
15	4	4	21	4	4	21	4	4	21	4	4	21
14	5	5	22	5	5	22	5	5	22	5	5	22
13	6	12	23	6	12	23	6	12	23	6	12	23
12	7	13	24	7	13	24	7	13	24	7	13	24
11	8	14	25	8	14	25	8	14	25	8	14	25
10	9	15	26	9	15	26	9	15	26	9	15	26
9	10	10	*	10	10	*	10	10	*	10	10	*

* WHEN LOADING THIS QUANTITY OR LESS USE A SINGLE ROW PATTERN BLOCKED AND BRACED USING THE PRINCIPLES SHOWN ON PAGE 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

TABLE II

UNDERWATER MINE, MK 52 & MODS
DODIC/NALC NUMBERS
U775, U792, U808, U823,
U840 AND U847

NO. OF UNIT LOADS	LOAD PATTERN NUMBER											
	LIGHTWEIGHT TRACTOR-TRAILER						STANDARD WEIGHT TRACTOR-TRAILER					
	MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.			MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.		
	TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45	40	42	44/45	40	42	44/45
18	1	NA	18	NA	NA	NA	NA	NA	NA	NA	NA	NA
17	2	2	19	NA	NA	NA	2	2	19	NA	NA	NA
16	3	11	20	3	11	20	3	11	20	3	11	20
15	4	4	21	4	4	21	4	4	21	4	4	21
14	5	5	22	5	5	22	5	5	22	5	5	22
13	6	12	23	6	12	23	6	12	23	6	12	23
12	7	13	24	7	13	24	7	13	24	7	13	24
11	8	14	25	8	14	25	8	14	25	8	14	25
10	9	15	26	9	15	26	9	15	26	9	15	26
9	10	10	*	10	10	*	10	10	*	10	10	*
8	*	*	*	*	*	*	*	*	*	*	*	*

TABLE III

UNDERWATER MINE, MK 52 & MODS
DODIC/NALC NUMBERS
U776, U793, U809, U824, AND U841

NO. OF UNIT LOADS	LOAD PATTERN NUMBER											
	LIGHTWEIGHT TRACTOR-TRAILER						STANDARD WEIGHT TRACTOR-TRAILER					
	MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.			MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.		
	TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45	40	42	44/45	40	42	44/45
19	NA	NA	17	NA	NA	NA	NA	NA	NA	NA	NA	NA
18	1	NA	18	NA	NA	NA	1	NA	18	NA	NA	NA
17	2	2	19	2	2	19	2	2	19	2	2	19
16	3	11	20	3	11	20	3	11	20	3	11	20
15	4	4	21	4	4	21	4	4	21	4	4	21
14	5	5	22	5	5	22	5	5	22	5	5	22
13	6	12	23	6	12	23	6	12	23	6	12	23
12	7	13	24	7	13	24	7	13	24	7	13	24
11	8	14	25	8	14	25	8	14	25	8	14	25
10	9	15	26	9	15	26	9	15	26	9	15	26
9	10	10	*	10	10	*	10	10	*	10	10	*
8	*	*	*	*	*	*	*	*	*	*	*	*

TABLE IV

UNDERWATER MINE, MK 52 & MODS
DODIC/NALC NUMBERS
U777, U825, AND U848

NO. OF UNIT LOADS	LOAD PATTERN NUMBER											
	LIGHTWEIGHT TRACTOR-TRAILER						STANDARD WEIGHT TRACTOR-TRAILER					
	MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.			MAX. AXLE WT. 34,000 LBS.			MAX. AXLE WT. 32,000 LBS.		
	TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45	40	42	44/45	40	42	44/45
20	NA	NA	16	NA	NA	NA	NA	NA	NA	NA	NA	NA
19	NA	NA	17	NA	NA	NA	NA	NA	NA	NA	NA	NA
18	1	NA	18	1	NA	18	1	NA	NA	NA	NA	NA
17	2	2	19	2	2	19	2	2	19	2	2	19
16	3	11	20	3	11	20	3	11	20	3	11	20
15	4	4	21	4	4	21	4	4	21	4	4	21
14	5	5	22	5	5	22	5	5	22	5	5	22
13	6	12	23	6	12	23	6	12	23	6	12	23
12	7	13	24	7	13	24	7	13	24	7	13	24
11	8	14	25	8	14	25	8	14	25	8	14	25
10	9	15	26	9	15	26	9	15	26	9	15	26
9	10	10	*	10	10	*	10	10	*	10	10	*
8	*	*	*	*	*	*	*	*	*	*	*	*

* WHEN LOADING THIS QUANTITY OR LESS USE A SINGLE ROW PATTERN BLOCKED AND BRACED USING THE PRINCIPLES SHOWN ON PAGE 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.


TABLE V

UNIT LOAD DATA

DODIC/ NALC NO.	MINE MK 52 MOD	CONFIGU-RATION	GROSS WT. (APPROX) LBS. Δ		
			CRATED MINE	D.U.L. MIL-STD-1322-715	U.L.U.R. MIL-STD-1323-208
U775	1	B	1244	2606	2608
U776	1	C	1192	2502	2504
U777	1	D	1128	2374	2376
U791	2	B	1304	2726	2728
U792	2	C	1242	2602	2604
U793	2	D	1170	2458	2460
U807	3	B	1353	2824	2826
U808	3	C	1278	2674	2676
U809	3	D	1202	2522	2524
U823	4	B	1272	2662	2664
U824	4	C	1210	2538	2540
U825	4	D	1150	2418	2420
U839	5	B	1314	2746	2748
U840	5	C	1252	2622	2624
U841	5	D	1196	2510	2512
U846	6	B	1299	2716	2718
U847	6	C	1237	2592	2594
U848	6	D	1167	2452	2454


Δ DO NOT USE FOR SHIPPING PURPOSES.

TABLE VI

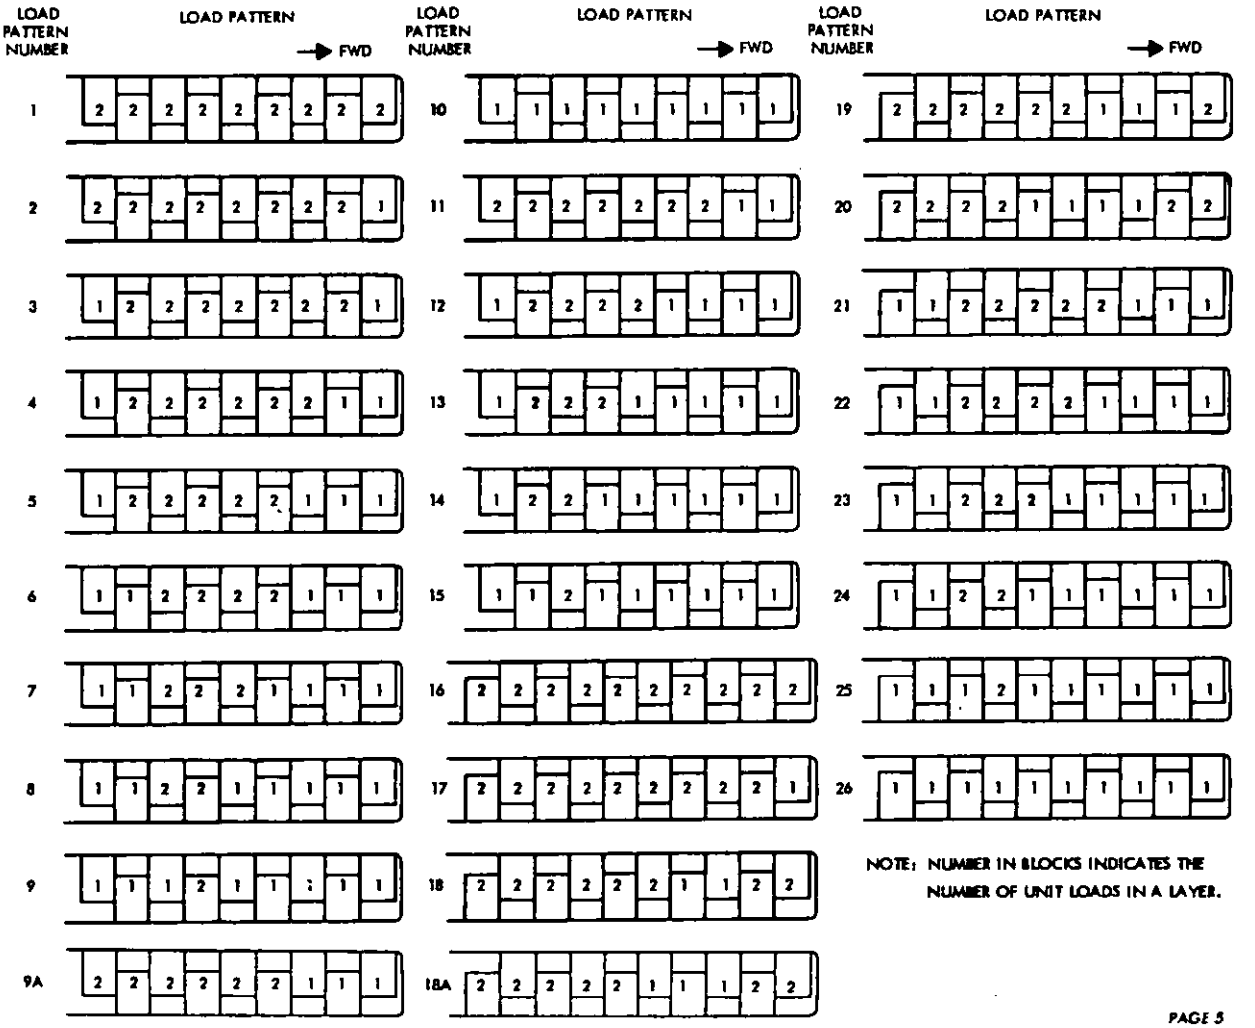


NOTE: NUMBER IN BLOCKS INDICATES THE NUMBER OF UNIT LOADS IN A LAYER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

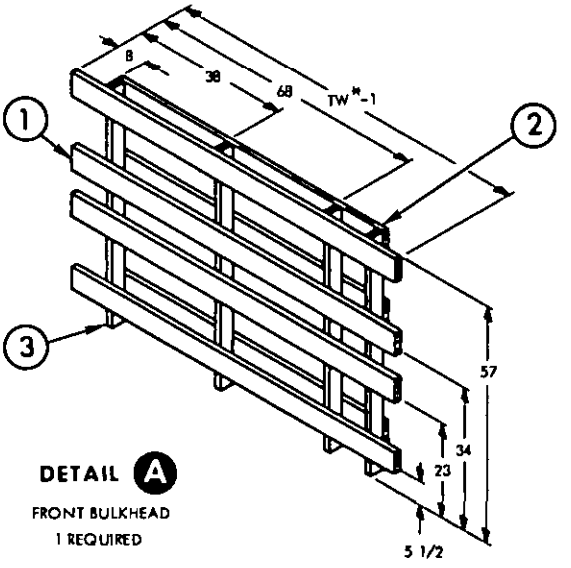


DETAIL A

FRONT BULKHEAD
1 REQUIRED

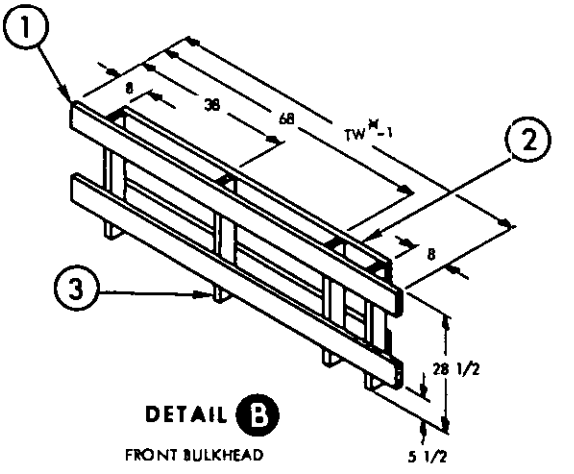


DETAIL B

FRONT BULKHEAD
1 REQUIRED

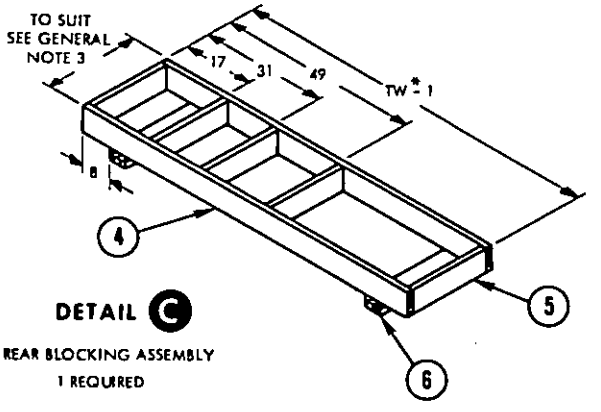

DETAIL C

REAR BLOCKING ASSEMBLY
1 REQUIRED

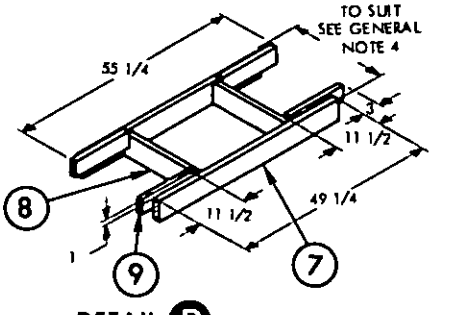



DETAIL D

SWAY BRACE

* TW = TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

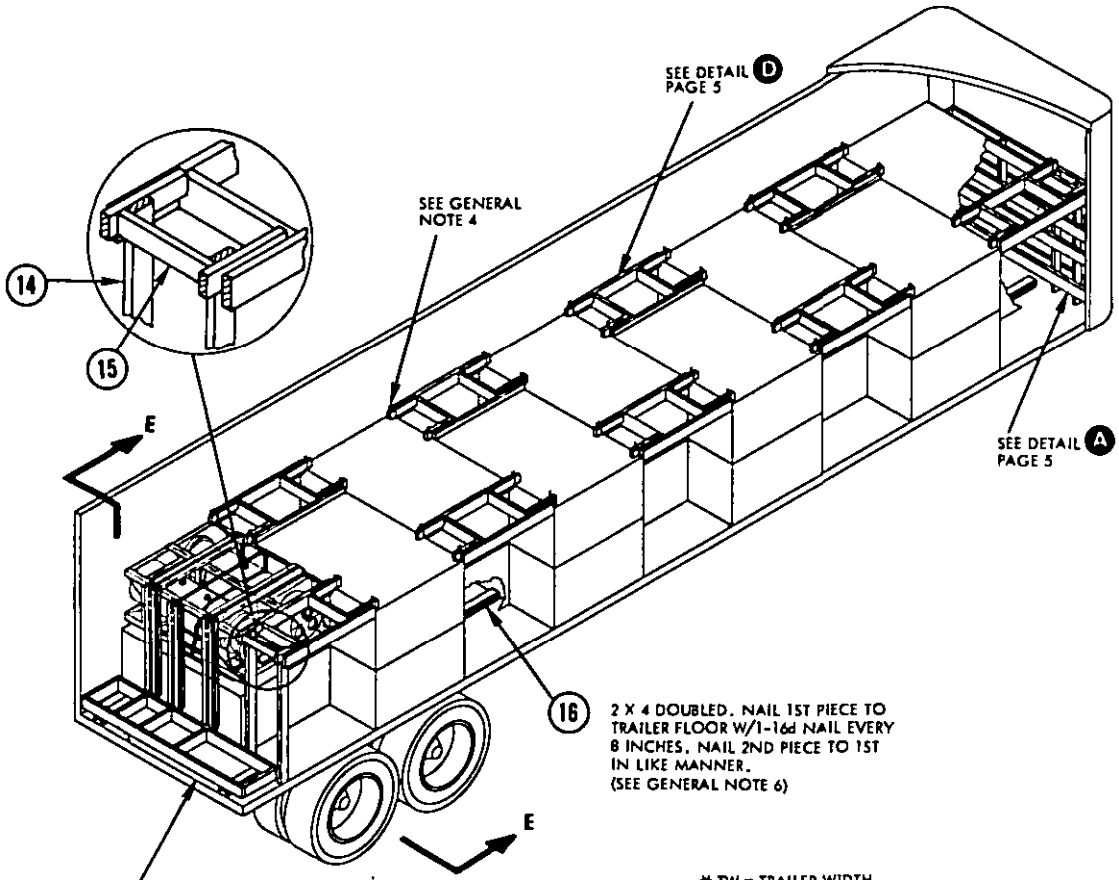

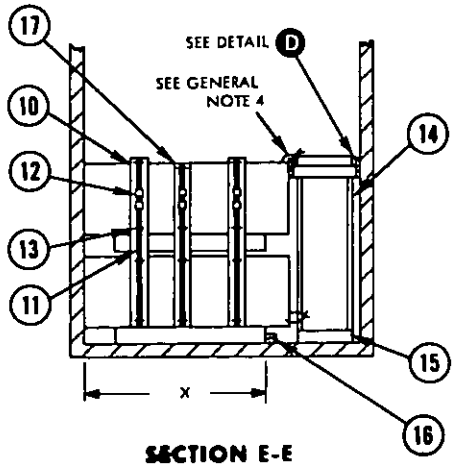

SECTION E-E


X DIMENSION (APPROX)
D.U.L. - 57 1/2
U.L.U.R. - 55 1/2


* TW = TRAILER WIDTH

* * PC. 9 OF DETAIL D & PC. 4 OF DETAIL C

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
	LIST OF MATERIALS & NAILING DATA					
17	STIFFENER	2 X 6 X 53 D.U.L. 2 X 6 X 52 1/4 U.L.U.R.	2	DBL LAMINATE	5	10d
16	SLEEPER	2 X 4 X 48	18	SEE FIELD NOTE		
15	CROSS PIECE	2 X 4 X TO SUIT	2	14	2/JOINT	16d
14	SUPPORT LEG	2 X 4 X 60 1/2 D.U.L. 2 X 4 X 59 U.L.U.R.	2	* *	2/JOINT	16d CLINCHED
13	STAPLE	FOR 1 1/4 STRAP	12	-	-	-
12	SEAL	FOR 1 1/4 STRAP	6	-	-	-
11	STEEL STRAP	1 1/4 X .035 X 19 FT 6	3	-	-	-
10	STIFFENER	2 X 6 X 54 1/2 D.U.L. 2 X 6 X 53 3/4 U.L.U.R.	4	DBL LAMINATE	5	10d
9	SUPPORT	2 X 4 X 14 1/2	36	7	3	16d CLINCHED
8	STRUT	2 X 6 TO SUIT	18	SEE 7	-	-
7	LONGITUDINAL	2 X 6 X 49 1/4	18	8	3/JOINT	16d
6	SUPPORT	2 X 4 TO SUIT	4	4 6	2/JOINT 3/JOINT	10d 10d
5	STRUT	2 X 6 TO SUIT	5	SEE 4	-	-
4	CROSSMEMBER	2 X 6 X TW*-1	2	5	3	16d
3	VERTICAL	2 X 4 X 57	4	SEE 1 & 2	-	-
2	FWD CROSSMEMBER	2 X 6 TO SUIT	4	3	3	12d
1	AFT CROSSMEMBER	2 X 6 X TW*-1	4	3	3	12d

Source: https://assist.dla.mil -- Downloaded: 2026-10-29T20:48Z
Check the source to verify that this is the current version before use.

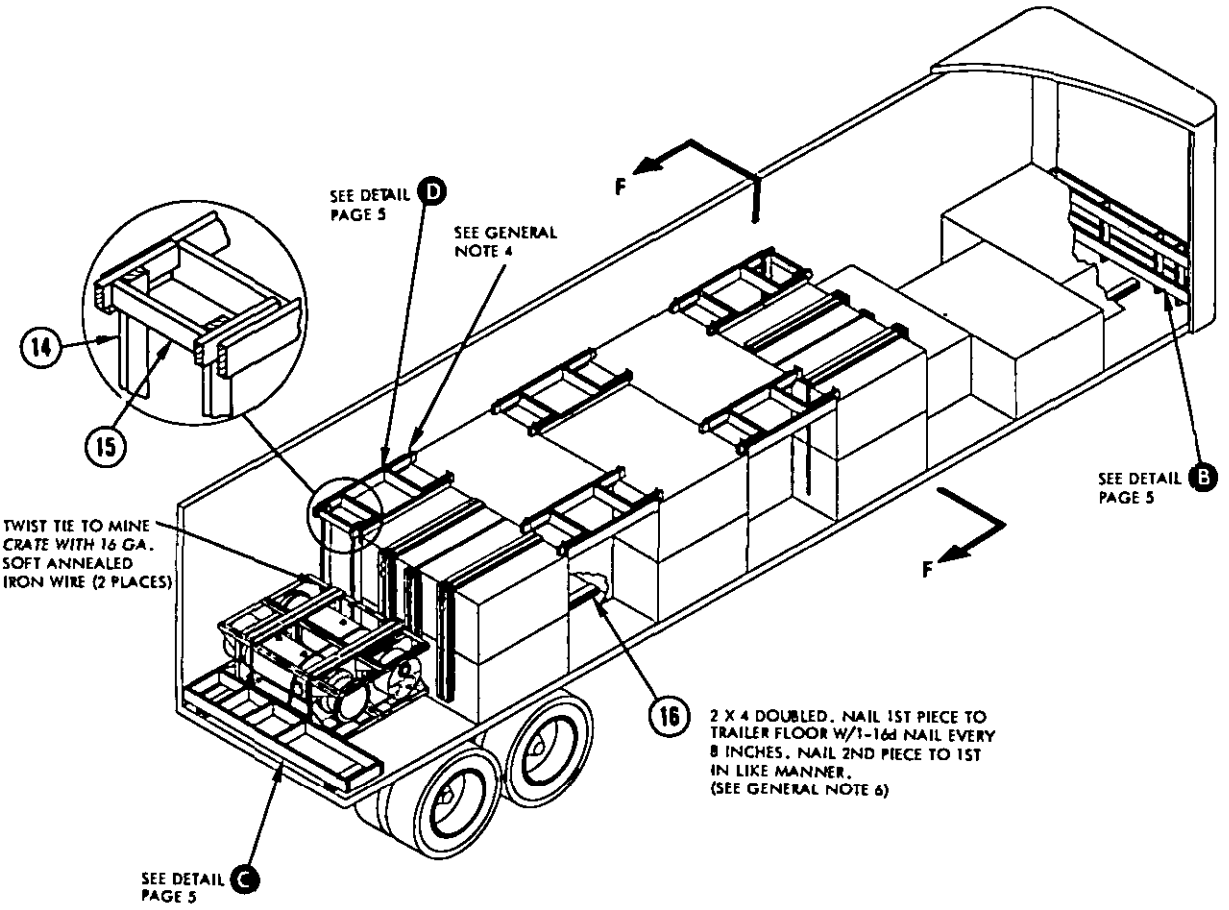

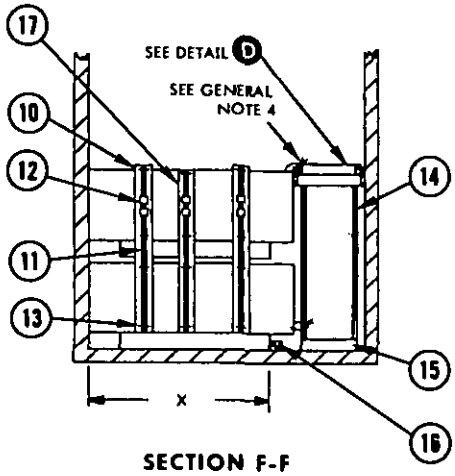

SECTION F-F

X DIMENSION (APPROX)

D.U.L. - 57 1/2
U.L.U.R. - 55 1/2


* TW = TRAILER WIDTH

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
17	STIFFENER	2 X 6 X 53 D.U.L. 2 X 6 X 52 1/4 U.L.U.R.	4	DBL LAMINATE	5	10d
16	SLEEPER	2 X 4 X 48	18	SEE FIELD NOTE		
15	CROSS PIECE	2 X 4 TO SUIT	2	14	2/JOINT	16d
14	SUPPORT LEG	2 X 4 X 60 1/2 D.U.L. 2 X 4 X 59 U.L.U.R.	4	PC 9 DETAIL D	2/JOINT	16d
13	STAPLE	FOR 1 1/4 STRAP	24	-	-	-
12	SEAL	FOR 1 1/4 STRAP	12	-	-	-
11	STEEL STRAP	1 1/4 X .035 X 19 FT 6	6	-	-	-
10	STIFFENER	2 X 6 X 54 1/2 D.U.L. 2 X 6 X 53 3/4 U.L.U.R.	8	DBL LAMINATE	5	10d
9	SUPPORT	2 X 4 X 14 1/2	20	7	3	16d CLINCHED
8	STRUT	2 X 6 TO SUIT	10	SEE 7	-	-
7	LONGITUDINAL	2 X 6 X 49 1/2	10	8	3/JOINT	16d
6	SUPPORT	2 X 4 TO SUIT	4	4	2/JOINT	10d
				6	3/JOINT	10d
5	STRUT	2 X 6 TO SUIT	5	SEE 4	-	-
4	CROSSMEMBER	2 X 6 X TW* -1	2	5	3	16d
3	VERTICAL	2 X 4 X 28 1/2	4	SEE 1 & 2	-	-
2	FWD CROSSMEMBER	2 X 6 TO SUIT	2	3	3	12d
1	AFT CROSSMEMBER	2 X 6 X TW* -1	2	3	3	12d

LIST OF MATERIALS & NAILING DATA

40/42 FT VAN TRAILER W/14 D.U.L.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

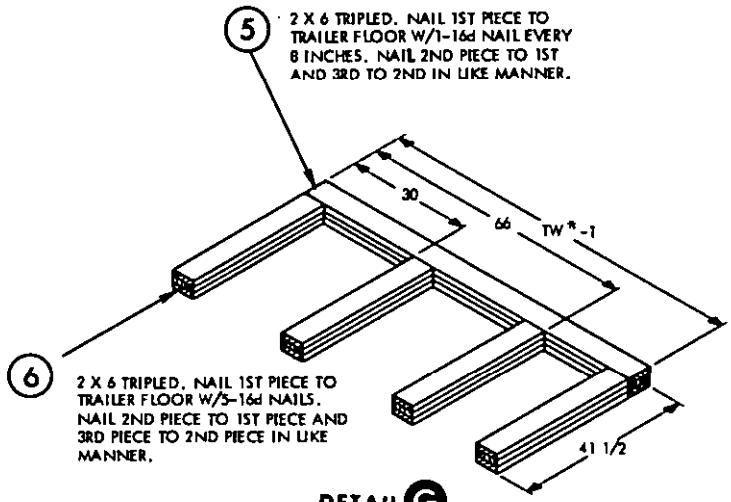


NOTE


DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS

DETAIL G

REAR BLOCKING

1 REQUIRED

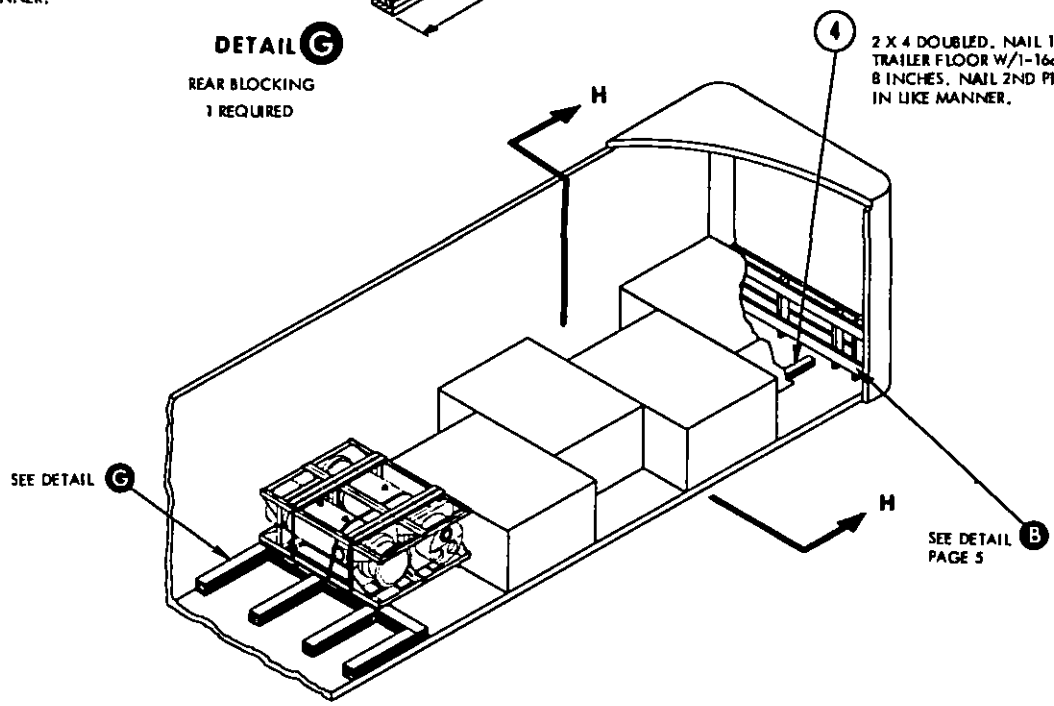



SECTION H-H

X DIMENSION (APPROX)

D.U.L. - 57 1/2

U.L.U.R. - 55 1/2

*TW = TRAILER WIDTH


PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
6	BACKUP CLEAT	2 X 6 X 30	12	SEE DETAIL G		
5	CROSSMEMBER	2 X 6 X TW*-1	3	SEE DETAIL G		
4	SLEEPER	2 X 4 X 48	10	SEE FIELD NOTE		
3	VERTICAL	2 X 4 X 28 1/2	4	SEE 1 & 2	–	–
2	FWD HORIZONTAL	2 X 6 TO SUIT	2	3	3	12d
1	AFT HORIZONTAL	2 X 6 X TW*-1	2	3	3	12d

LIST OF MATERIALS & NAILING DATA

TYPICAL PARTIAL SINGLE LAYER , D.U.L.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T23:46Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

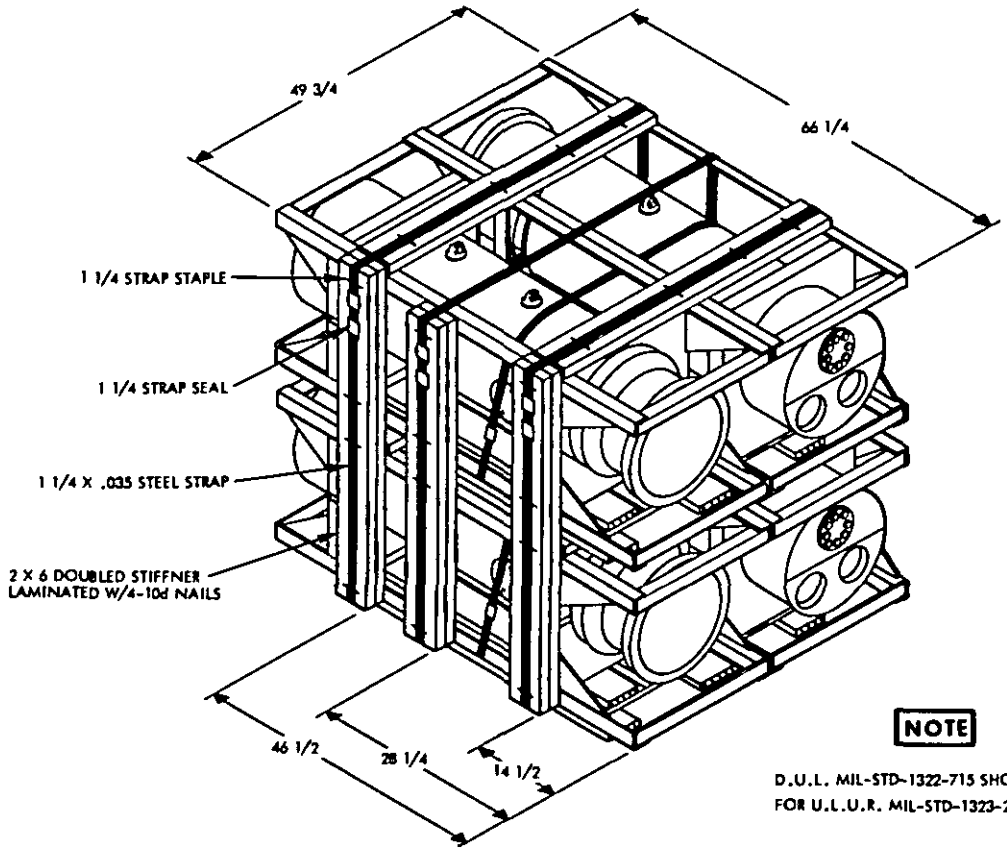

NOTE

D.U.L. MIL-STD-1322-715 SHOWN. VALID FOR U.L.U.R. MIL-STD-1323-208.

1. WHEN REQUIRED BY THIS MIL-STD, THE TWO HIGH STACKED UNIT LOADS SHALL BE UNITIZED.

   NOTE

   WHEN LOADING A TRAILER WITH A SINGLE STACK OF TWO HIGH UNIT LOADS, THE STIFFENERS SHALL BE AT BOTH SIDES OF THE UNITIZED LOADS.

2. THE 2 X 6 DOUBLED STIFFENERS SHALL EXTEND FROM THE BOTTOM CRATE TO THE TOP OF THE UNIT LOAD AS SHOWN.
3. THE 1 1/4 X .035 STEEL STRAPS POSITIONED AS SHOWN, ENCIRCLE THE STACKED UNIT LOADS PASSING OVER THE TOP OF THE UPPER UNIT LOAD AND UNDER THE PALLET DECK OF THE LOWER UNIT LOAD.
4. TENSION STRAPS AND SEAL WITH TWO DOUBLE CRIMPED SEALS OR ONE DOUBLE NOTCHED SEAL. SECURE EACH STRAP TO THE STIFFENERS WITH FOUR 1 1/4 INCH STRAP STAPLES.

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N479)

Source: https://assist.dla.mil -- Downloaded: 2026-0-23T23:46Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1982-605-034/4918

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Weapons Station Earle
Naval Weapons Handling Center (803)
Colts Neck, NJ 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-187B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:46Z
Check the source to verify that this is the current version before use.