MILITARY STANDARD

MIL-STD-1320-192 (NAVY)


TRUCKLOADING


20 MARCH 1978

GUIDANCE SECTION, GUIDED MISSILE (HARPOON) AN/DSQ-28 IN CONTAINER MK 619 MOD 0

CONTAINER DATA

LENGTH 52
WIDTH 23 5/8
HEIGHT 25 3/4
GROSS WT (APPROX.) ..... 414 LBS.
CUBE ..... 25.3 CU. FT.
DWG NO. ..... DL 2645306
DOT HAZARD CLASSIFICATION ..... INERT

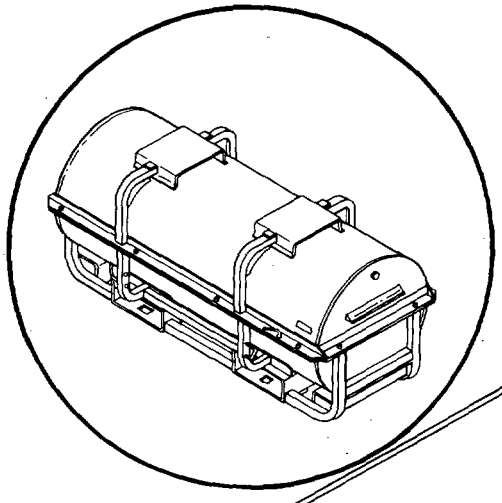

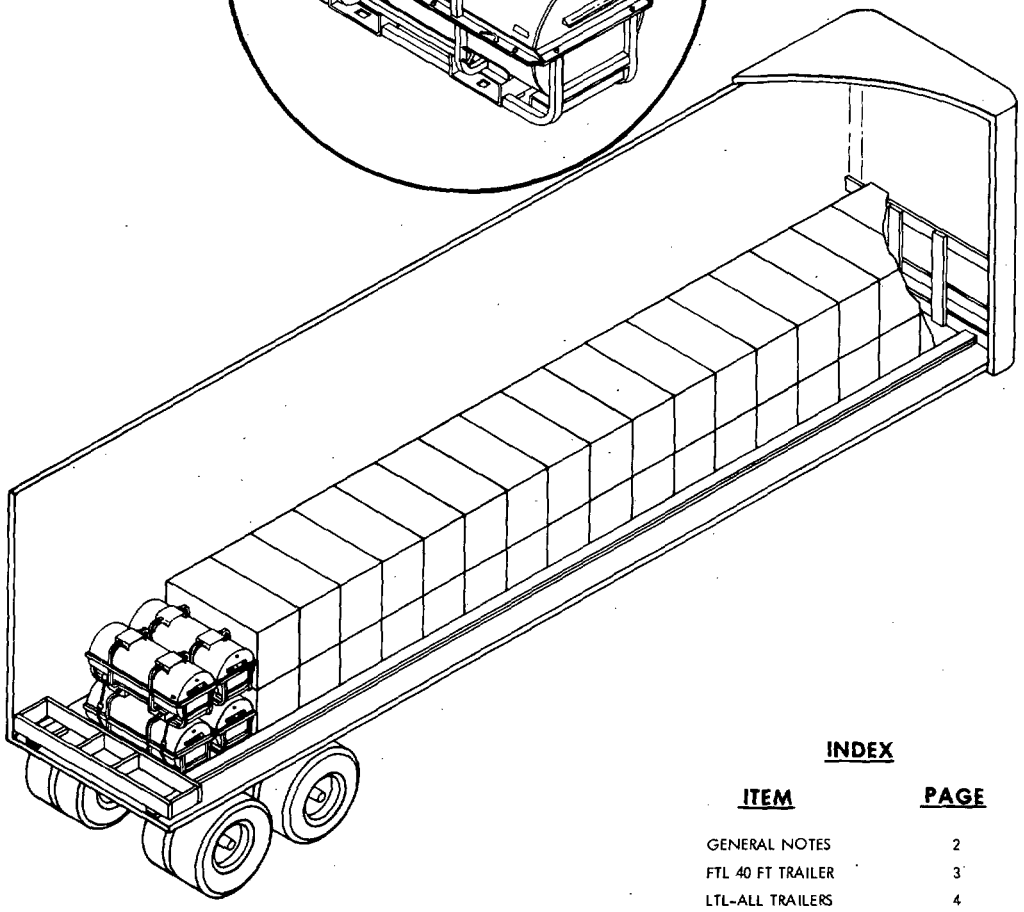

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER	3
LTL-ALL TRAILERS	4
STACKING & STRAPPING	5

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED FOR HIGHWAY SHIPMENT ONLY

M.S. Gruen NWHC 3/16/78
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE SEASYSCOM, BY DIRECTION DATE

ORIGINATOR 10 MAR 1978
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-0-23123:46Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE HARPOON GUIDED MISSILE GUIDANCE SECTION AN/DSQ-28 WHEN IN THE CONTAINER MK 619 MOD 0.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44 AND 45 FT. VAN TRAILERS WITH NAILABLE OR NON-NAILABLE FLOORS. ALL TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER).
3. THE CONTAINERS, WHEN STACKED TWO HIGH, SHALL BE STRAPPED TOGETHER IN UNITS OF FOUR AS SHOWN ON PAGE 5. IF REQUIRED BY THE LENGTH OF THE TRAILER, TWO CONTAINERS MAY BE STACKED (ONE ON TOP OF THE OTHER) AND STRAPPED TOGETHER. DO NOT PLACE THIS UNIT OF TWO AT THE REAR OF THE LOAD. IT SHALL BE LOCATED A MINIMUM OF TWO UNITS FORWARD OF THE REAR OF THE UNITS STRAPPED IN FOURS.
4. THE REAR BLOCKING ASSEMBLY, DETAIL B, SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED.

WARNING

DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING BY THIS METHOD.


5. WHEN A TRAILER HAS NON-NAILABLE FLOORS AND SLEEPERS CANNOT BE NAILED TO THE FLOOR, SUBSTITUTE FILLER ASSEMBLY, DETAIL C, FOR THE SLEEPERS. THE FILLER ASSEMBLYS SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER WALLS. ONE -HALF INCH SLACK IS PERMITTED.
6. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
7. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL TRAILER DOORS.
8. APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER, MM-L-751; NAILS, FF-N-105, TYPE II STYLE 10, COMMON BRIGHT; STRAPPING, QQ-S-781, TYPE I, HEAVY DUTY, FINISH A, B OR C.
9. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

FTL 40, 42, 44 & 45 FT TRAILERS (VAN)

1. A FULL TRUCKLOAD FOR A 40 FT TRAILER IS 38 CONTAINERS AND IS SHOWN ON PAGE 3. A FULL TRUCKLOAD FOR OTHER LENGTH TRAILERS IS:


TRAILER LENGTH	NO. OF CONTAINERS	TRUCKLOAD WT (APPROX.)
42	40	16,560
44	42	17,388
45	44	18,216

BLOCK AND BRACE ALL TRAILERS USING THE PRINCIPLES SHOWN ON PAGE 3. SEE GENERAL NOTE 3.

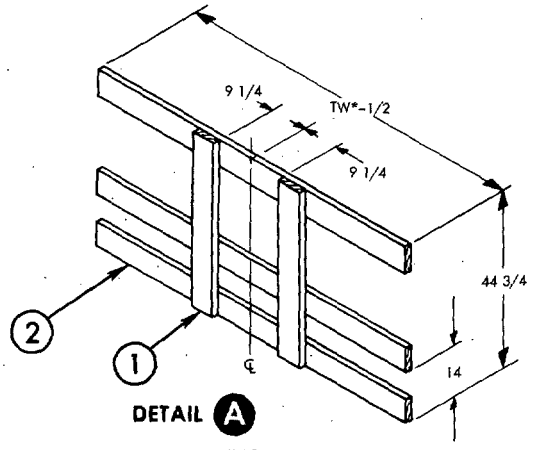

DETAIL A

FRONT BULKHEAD
(1 REQUIRED)

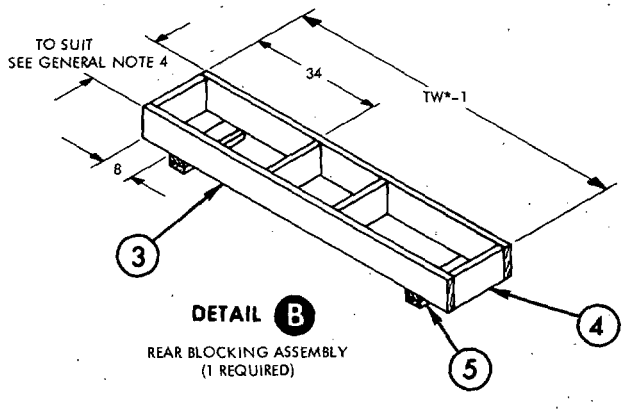


DETAIL B

REAR BLOCKING ASSEMBLY
(1 REQUIRED)

*TW = TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T20:48Z
Check the source to verify that this is the current version before use.

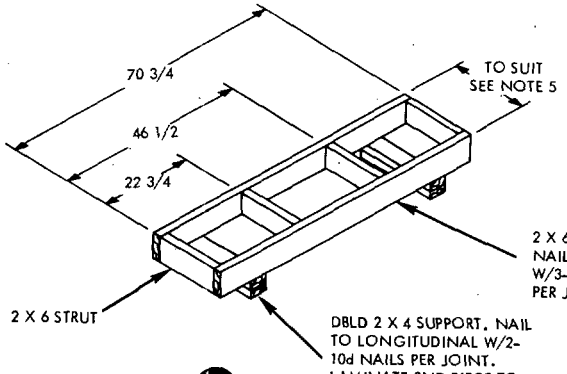


DETAIL C

FILLER ASSEMBLY
(FOR TRAILERS WITH NON-NAILABLE FLOORS)


NOTE

THIS FTL CONSISTS OF 9 STACKS OF 4 CONTAINERS STRAPPED TOGETHER AND 1 STACK OF 2 CONTAINERS STRAPPED TOGETHER. SEE GENERAL NOTE 3.

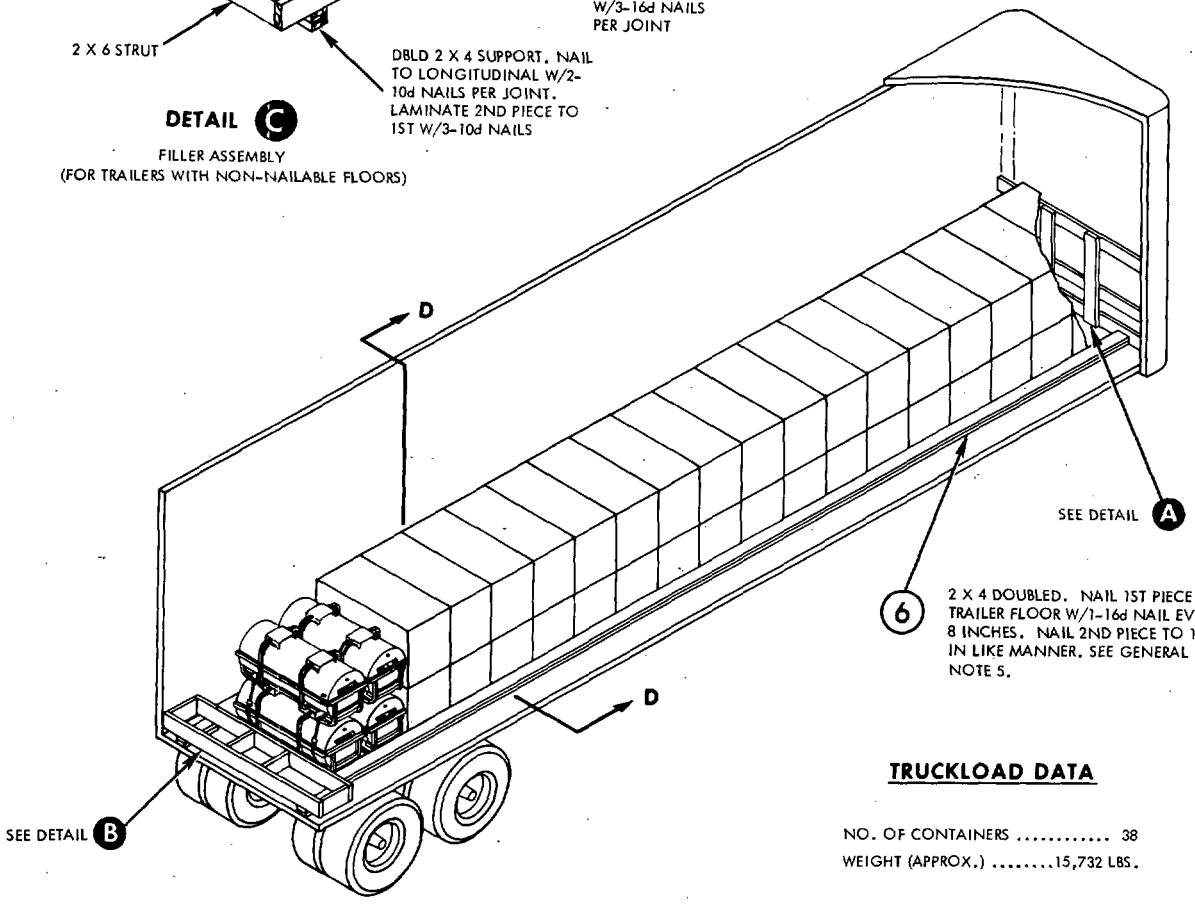

TRUCKLOAD DATA

NO. OF CONTAINERS 38
WEIGHT (APPROX.) .....15,732 LBS.

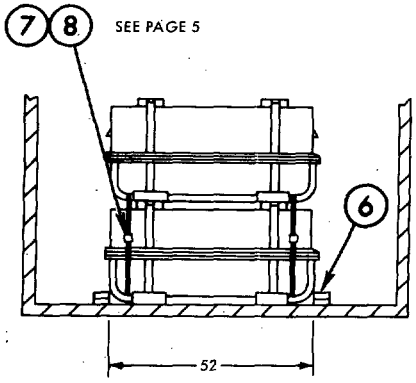

SECTION D-D

*TW = TRAILER WIDTH

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
8	STRAP SEAL	FOR 3/4 STRAP	11	-	-	-
7	STEEL STRAP	3/4 X .035 X 13 FT	22	-	-	-
6	SLEEPER	2 X 4 X RANDOM LENGTHS	150 FT	SEE FIELD NOTE		
5	SUPPORT	2 X 4 TO SUIT	4	3 5	2/JOINT 3/PIECE	10d 10d
4	STRUT	2 X 8 TO SUIT	4	SEE 3	-	-
3	HORIZONTAL	2 X 8 X TW* - 1	2	4	4/JOINT	16d
2	HORIZONTAL	2 X 6 X TW* - 1/2	3	SEE 1	-	-
1	VERTICAL	2 X 6 X 44 3/4	2	2	4/JOINT	10d

LIST OF MATERIALS & NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.


LTL ALL LENGTH TRAILERS (VAN)

1. WHEN REQUIRED TO SHIP LESS THAN TRUCKLOAD, DECREASE THE NUMBER OF CONTAINERS IN THE SECOND LAYER STARTING AT THE REAR OF THE LOAD AND WORKING FORWARD. BLOCK AND BRACE USING THE PRINCIPLES SHOWN ON PAGE 3.
2. WHEN THE SECOND LAYER HAS BEEN REMOVED, DECREASE THE NUMBER OF CONTAINERS STARTING AT THE REAR OF THE LOAD AND WORKING FORWARD. BLOCK AND BRACE AS SHOWN FOR THE LTL BELOW.

WARNING

DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS WHEN BLOCKING BY THIS METHOD. TRAILERS MUST HAVE NAILABLE FLOORS.

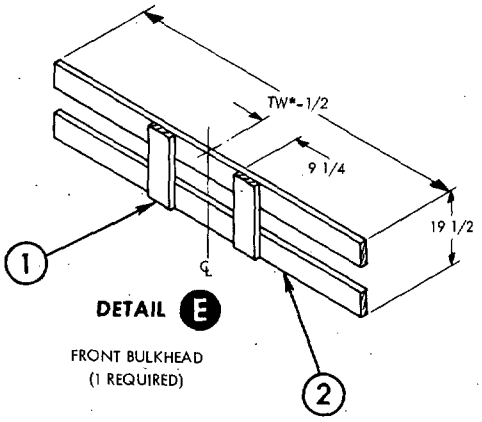

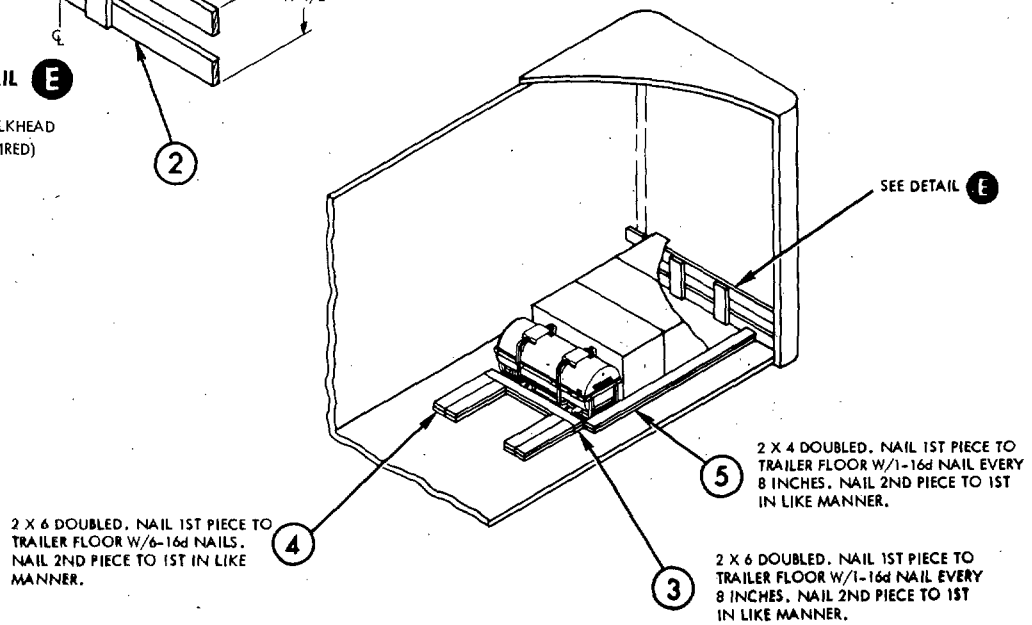

*TW = TRAILER WIDTH


PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
5	SLEEPER	2 X 4 X 27 FT. (RANDOM LENGTHS)	-	SEE FIELD NOTE		
4	BACKUP CLEAT	2 X 6 X 30	8	SEE FIELD NOTE		
3	CROSSMEMBER	2 X 6 X 52	2	SEE FIELD NOTE		
2	HORIZONTAL	2 X 6 X TW*-1/2	2	SEE 1	-	-
1	VERTICAL	2 X 6 X 19 1/2	2	2	4/JOINT	10d

LIST OF MATERIALS & NAILING DATA

TYPICAL LTL (VAN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

STACKING AND STRAPPING FOR TRUCKLOADING ONLY

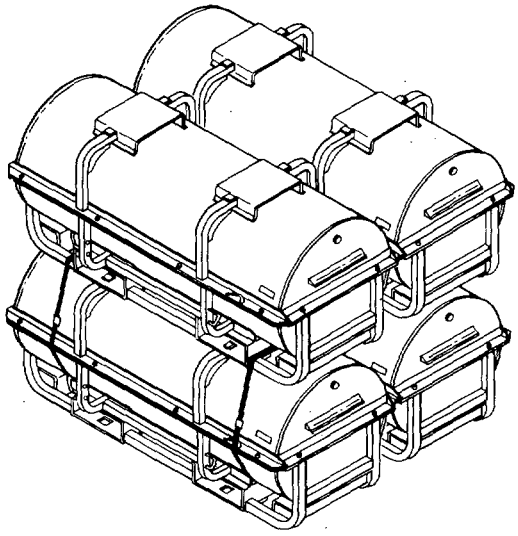

TO EXPEDITE TRUCKLOADING HANDLING AND LOADING OPERATIONS AND TO ASSURE THAT THE STACKING FEATURES REMAIN ENGAGED, FOUR CONTAINERS SHALL BE STACKED AND STRAPPED TOGETHER IN ACCORDANCE WITH THE FOLLOWING PROCEDURE.

1. POSITION BOTTOM CONTAINERS SIDE BY SIDE WITH THE FORE AND AFT ENDS IN THE SAME DIRECTION.
2. POSITION THE TOP CONTAINERS ON THE BOTTOM CONTAINERS WITH THE FORE AND AFT ENDS IN THE SAME DIRECTION AS THE BOTTOM CONTAINERS.

CAUTION

ALL STACKING FEATURES MUST BE IN ALIGNMENT.

3. POSITION TWO 3/4 X .035 X 13 FT. STEEL STRAPS UNDER THE BODY OF THE BOTTOM TWO CONTAINERS AND OVER THE SKIDS OF THE TOP TWO CONTAINERS AS SHOWN.
4. TENSION AND SEAL WITH ONE DOUBLE NOTCHED 3/4 IN. SEAL (OR TWO DOUBLE CRIMPED 3/4 IN. SEALS).

WARNING

STRAPPING SHALL BE REMOVED FROM CONTAINERS AFTER UNLOADING THE TRAILER.

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N353)

☆U.S. GOVERNMENT PRINTING OFFICE: 1978 - 703-122/1337
Source: https://assist.dla.mil - Downloaded: 2026-02-07T23:46Z
Check the source to verify that this is the current version before use.