MILITARY STANDARD

TRUCKLOADING

MIL-STD-1320-207E

(NAVY)

10 MARCH 1993

SUPERSEDING MIL-STD-1320-207D
20 NOVEMBER 1991


GUIDED MISSILE U/RGM-109 (TOMAHAWK) IN SHIPPING AND STORAGE CONTAINER CNU-308/E

CONTAINER DATA

	TYPE I	TYPE II
DIMENSIONS		
LENGTH	264 5/8	266 5/8
WIDTH	33 7/8	33 7/8
HEIGHT	34 5/8	34 5/8
CUBE	179.6 CU FT	181.0 CU FT
WEIGHT (LBS)	△ 6,000 (APPROX)	"
WEIGHT EMPTY	1,705 LBS	

△ DO NOT USE FOR SHIPPING WEIGHT

FOR HAZARD CLASSIFICATION SEE SWO20-AC-SAF-010

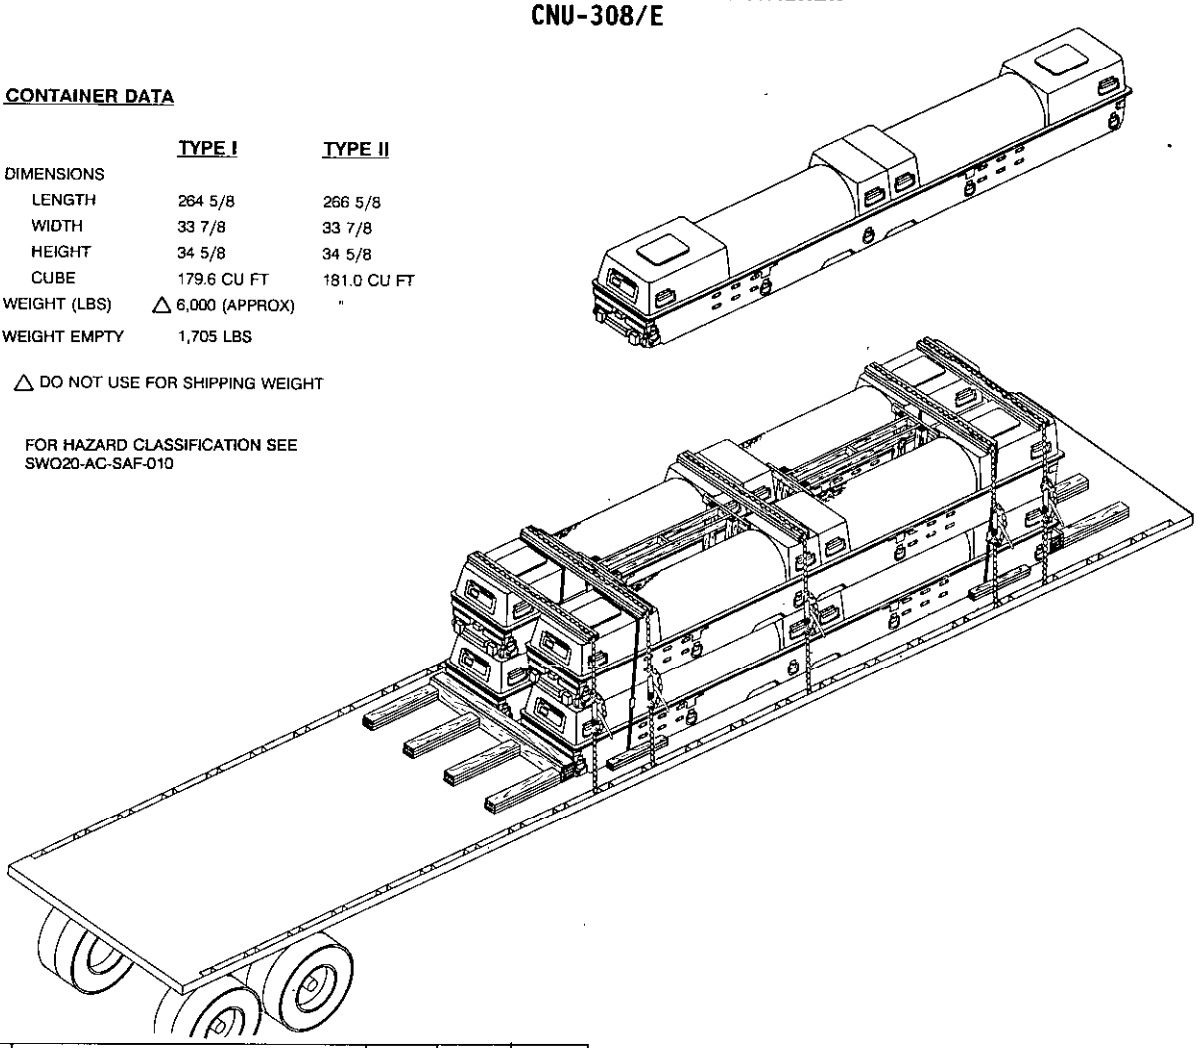

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
E	UPDATED & ADDED SH 10 & 11	3-10-93	EL	[illegible]
D	UPDATED DOCUMENT TO CURRENT STANDARDS. ADDED SHEETS 8 & 9.	11-25-91	EC	[illegible]
C	SEPARATED STACKS	4-24-86	MSG	JEK
B	CHANGED FLOOR BLOCKING	5-20-85	MSG	JEK
A	ADDED SPECIAL LTL, SEE PAGES 4-5	11-4-82	MSG	JEK
			APPROVAL	

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

M.S. Bray — SIGNATURE — TDA, WPNSTA EARLE — 5/13/81 DATE

J.E. Kelly — SIGNATURE — AIRSYSCOM BY DIRECTION — 5/14/81 DATE

ORIGINATOR L.L. Caruso — 5/19/81 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23123:47Z
Check the source to verify that this is the current version before use.

GENERAL NOTES:


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE GUIDED MISSILE U/RGM-109 (TOMAHAWK) IN THE SHIPPING AND STORAGE CONTAINER CNU-308/E.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 28 FT OR LONGER FLATBED TRAILERS. DO NOT USE TRAILERS WITH ALL METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY), EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. WHEN CONTAINERS ARE STACKED TWO HIGH, THE CONTAINERS SHALL BE STRAPPED TOGETHER USING 1 1/4 X .035 STEEL STRAPPING, ITEM 11, AS SHOWN ON PAGE 3. THE STRAPS PASS OVER THE TOP OF THE UPPER CONTAINER AND UNDER THE BOTTOM CONTAINER FORMING A UNIT LOAD OF TWO CONTAINERS. CONTAINERS SHALL BE HANDLED ONE AT A TIME AND STRAPPED TOGETHER AFTER BEING POSITIONED ON THE TRAILER. STRAPPING WILL BE PREPOSITIONED AS NECESSARY.
7. STACKS OF FOUR CONTAINERS SHALL HAVE 5 TIEDOWNS. STACKS OF TWO CONTAINERS SHALL HAVE 3 TIEDOWNS. STACKS OF ONE CONTAINER SHALL HAVE 2 TIEDOWNS. STACKS OF THREE CONTAINERS ARE NOT ALLOWED.
8. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIEDOWNS WHEN USING STEEL STRAPPING. THE STRAPS SHALL BE SECURED TO THE PROTECTOR BOARD USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
9. THE MAXIMUM NUMBER OF CONTAINERS THAT CAN BE LOADED ONTO A TRAILER IS

   28 FT THRU 45 FT TRAILERS 1, 2, OR 4 CONTAINERS (SEE PAGES 4, 6 & 7)

   48 FT TRAILER 1-6 CONTAINERS (SEE PAGES 6, 7, 8, 10 & 11)


   48 FT TRAILER 8 EMPTY CONTAINERS (SEE PAGE 8)
10. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR, AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
11. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
12. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
13. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIEDOWNS AND THE PROTECTOR BOARDS.
14. AFTER THE TARPAULINS ARE IN PLACE, ATTACH THE PROPER EXPLOSIVES PLACARDS TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER, AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
15. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
16. IN ORDER TO MINIMIZE THE MAXIMUM CREDIBLE EVENT (MCE) TO ONE WARHEAD IN THE EVENT OF WARHEAD DETONATION, ORIENT THE CONTAINERS AS SHOWN ON PAGE 11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

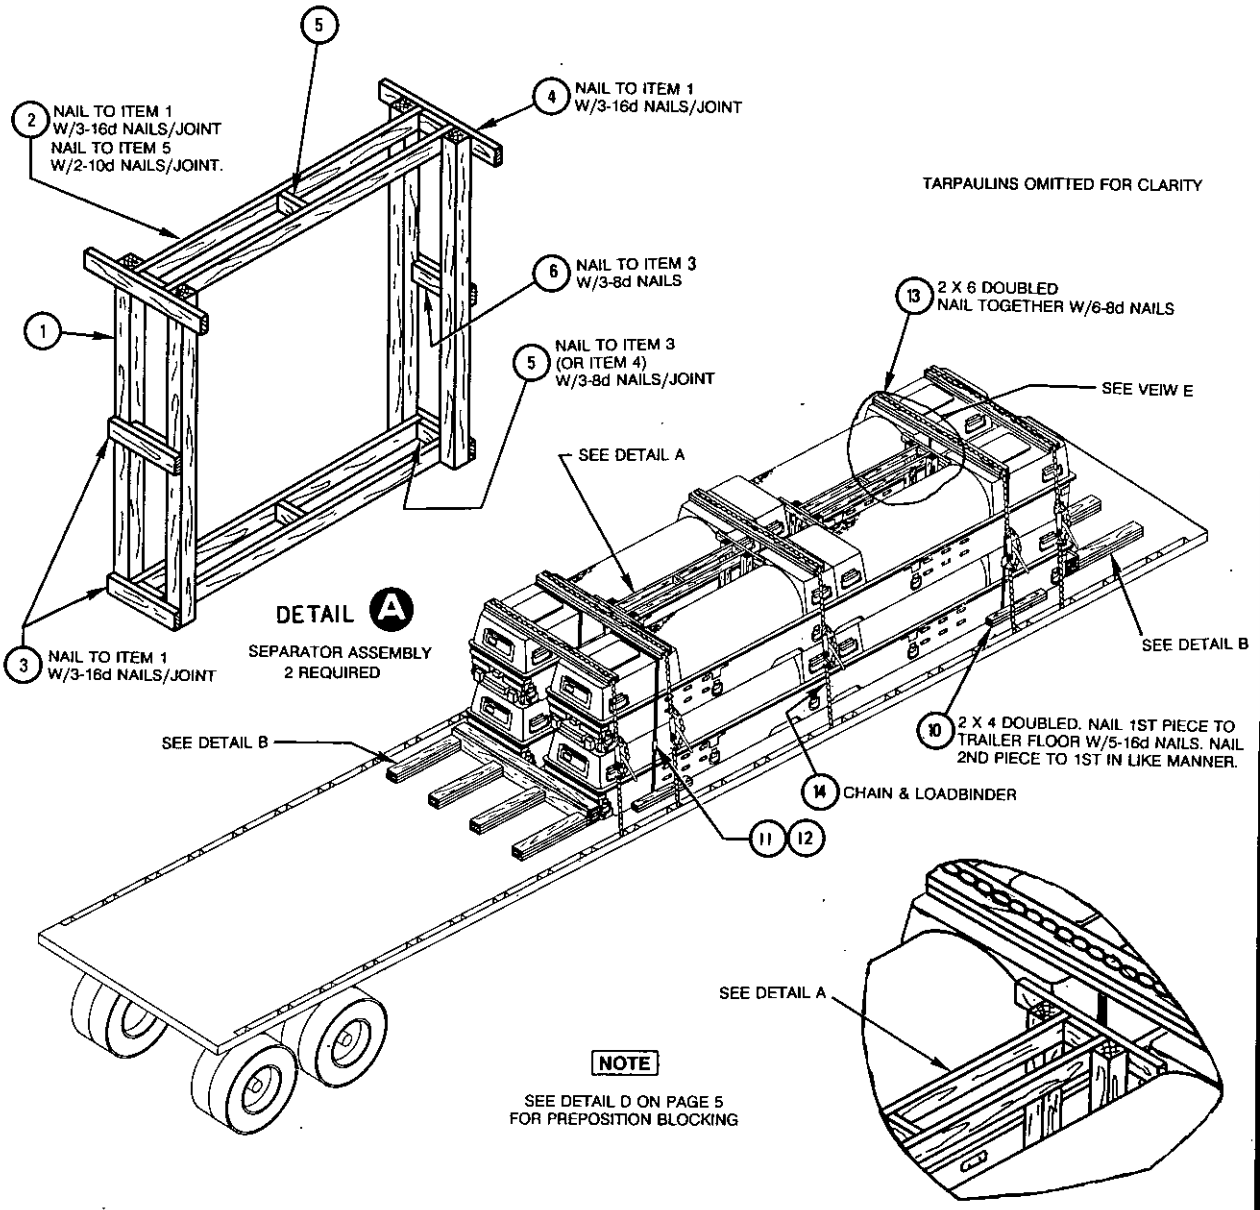

VIEW E

TO SHOW POSITIONING OF SEPARATOR ASSEMBLIES

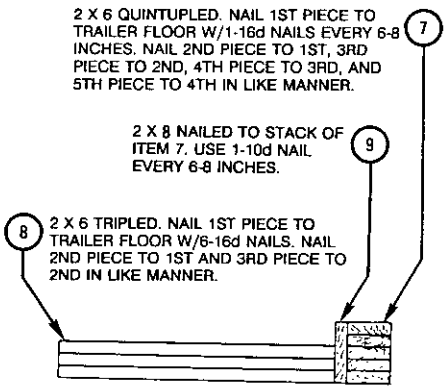

DETAIL B

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
5	14	CHAIN & LOADBINDER	STEEL	5/16 OR 3/8
10	13	PROTECTOR BOARD	WOOD	2 X 6 X 85 1/2
4	12	SEAL	STEEL	1 1/4
4	11	UNITIZING STRAP	STEEL	1 1/4 X .035 X 16 FT
16	10	SLEEPER	WOOD	2 X 4 X 24
2	9	FACE BOARD	WOOD	2 X 8 X 88 1/2
24	8	BACKUP CLEAT	WOOD	2 X 6 X 36
10	7	CROSSMEMBER	WOOD	2 X 6 X 88 1/2
2	6	KICKER, MIDDLE	WOOD	2 X 4 X 9
6	5	KICKER	WOOD	2 X 4 X 6
2	4	TOP BRACE	WOOD	2 X 4 X 28
4	3	SWAY BRACE	WOOD	2 X 4 X 16
4	2	STRINGER	WOOD	2 X 4 X 69
4	1	VERTICAL POST	WOOD	4 X 4 X 68


LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

LTL (28 FT THRU 48 FT TRAILERS)

1 TWO CONTAINERS ARE LOADED AS SHOWN USING THE PROTECTOR BOARD ASSEMBLY SHOWN IN DETAIL C. OTHER PROCEDURES ARE THE SAME AS WITH FULL TRUCLOADS EXCEPT FOR STACKING, UNITIZING STRAPS, AND THE USE OF DETAIL A SEPARATOR ASSEMBLY.


2 A SINGLE CONTAINER IS CENTERED, BLOCKED AND BRACED, AND TIED DOWN TO THE TRAILER AS SHOWN ON PAGE 6.

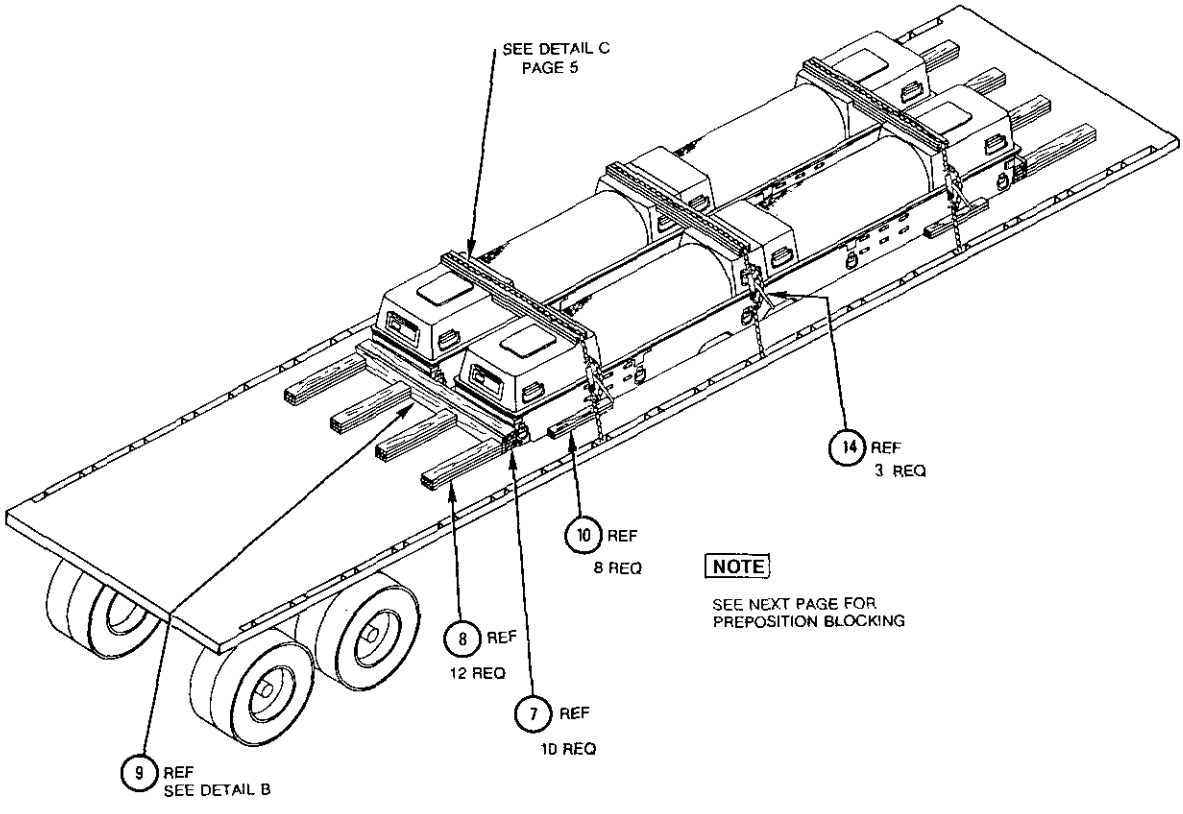

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
8	16	KICKERS	WOOD	2 X 4 X 14
2	15	SEPARATOR	WOOD	2 X 6 X 20 1/2


LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

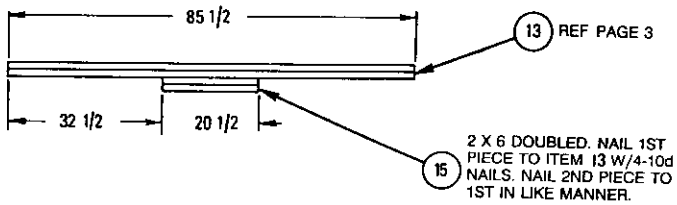

DETAIL C

PROTECTOR BOARD/SEPARATOR ASSEMBLY

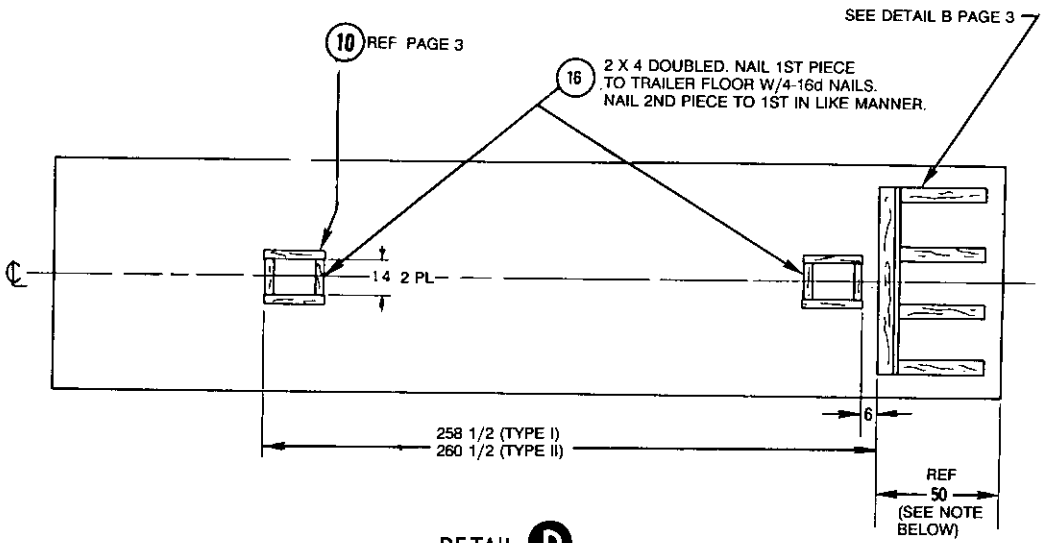

DETAIL D

PREPOSITION BLOCKING


NOTE

FOR TRAILERS NOT LONG ENOUGH TO ACCOMMODATE ONE STACK OF CONTAINERS WITH FORWARD & AFT BLOCKING SHOWN IN DETAIL B, USE THE FORWARD BULKHEAD BLOCKING ARRANGEMENT SHOWN ON PAGE 9 IN LIEU OF DETAIL B. DETAIL B WILL STILL BE USED AS THE REAR BLOCKING ASSEMBLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23123:47Z
Check the source to verify that this is the current version before use.

LTL FOR SINGLE CONTAINER

28 FT THRU 48 FT TRAILERS

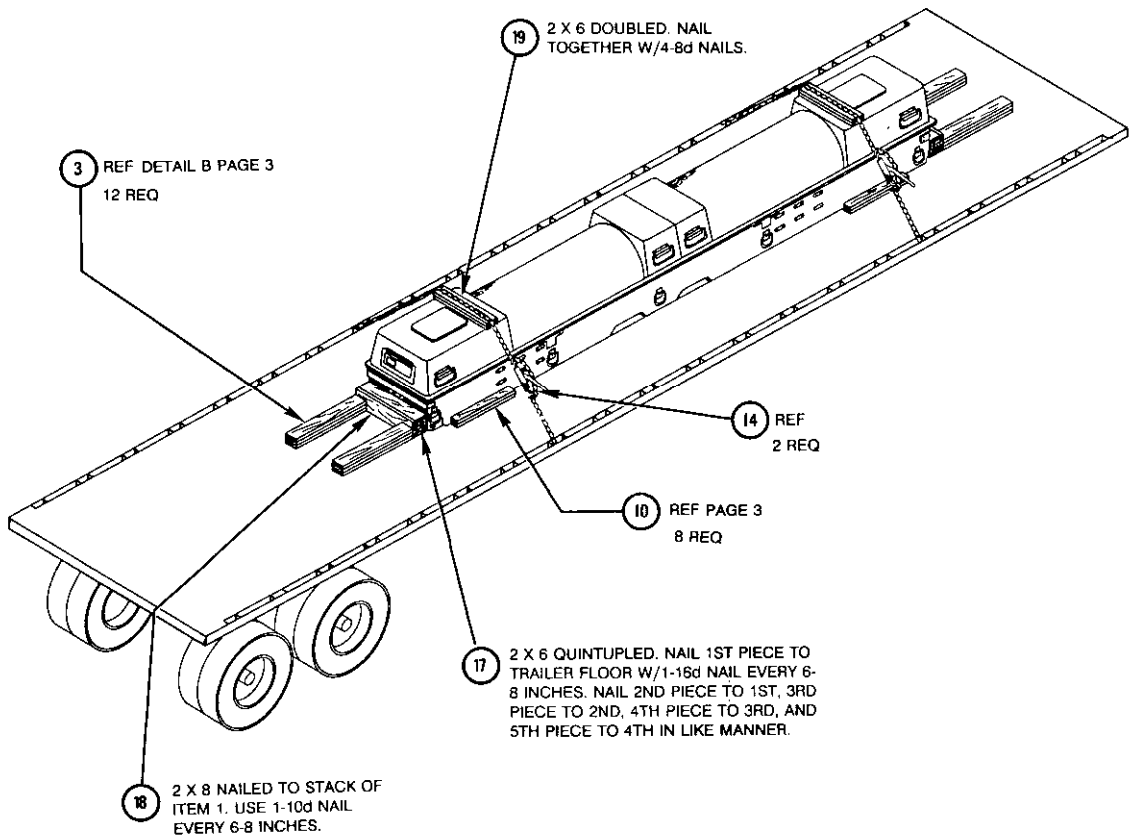


REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	19	PROTECTOR BOARD	WOOD	2 X 6 X 32
2	18	FACE BOARD	WOOD	2 X 8 X 30
10	17	CROSSMEMBER	WOOD	2 X 6 X 30

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

ALTERNATE * FTL AND LTL

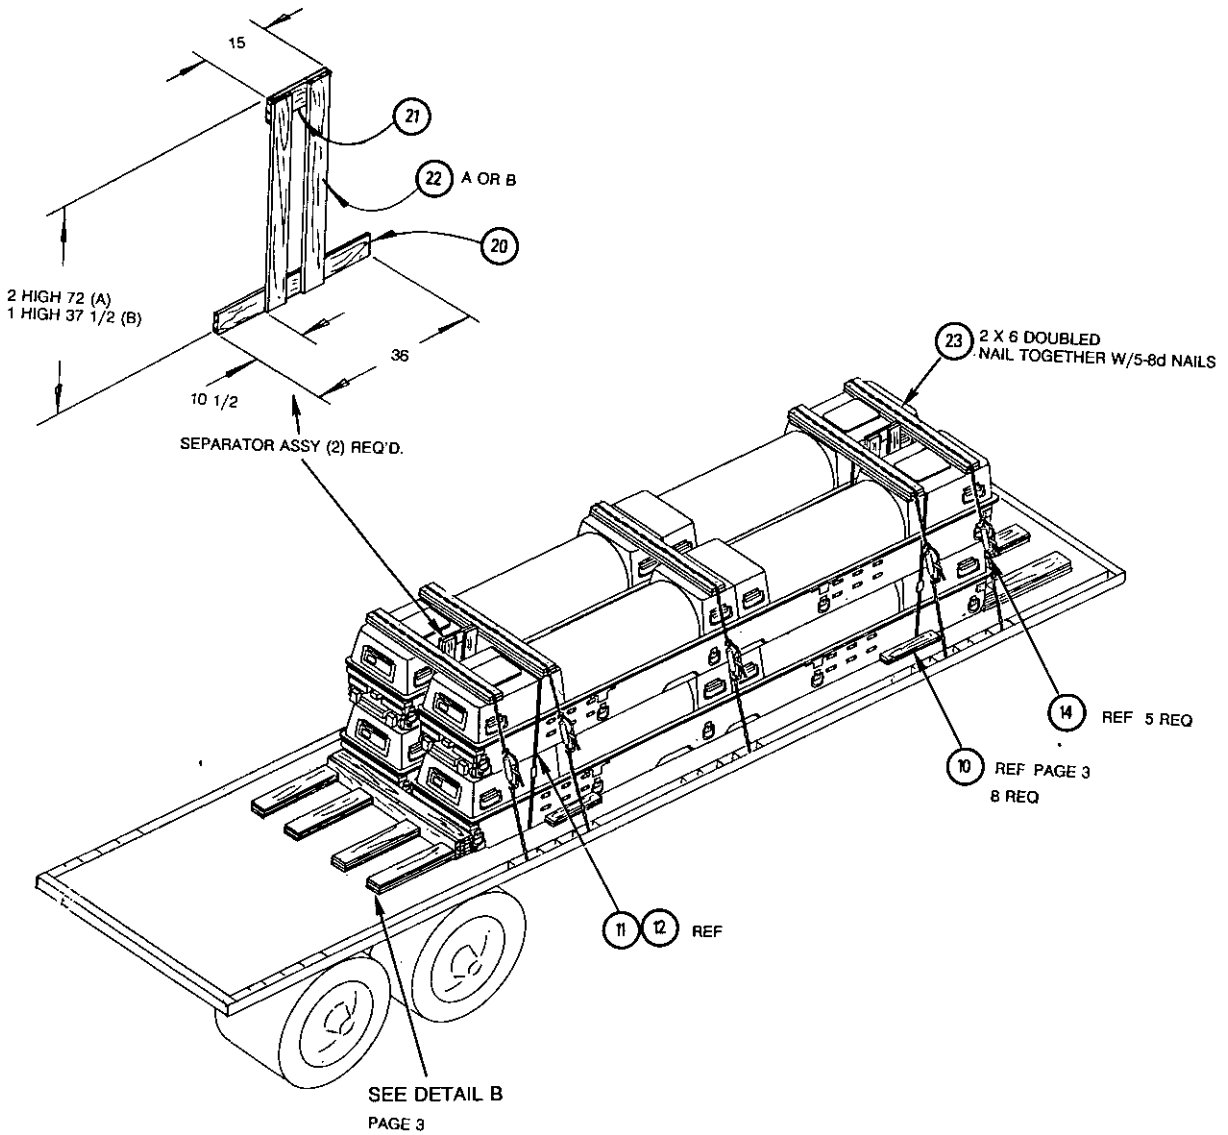

TRUCKLOAD DATA

NUMBER OF CONTAINERS.....2 OR 4

NOTE

THESE TRUCKLOADS ARE VERY STABLE BUT REQUIRE HIGH CAPACITY HANDLING EQUIPMENT TO LOAD AND UNLOAD CONTAINERS IN THE MIDDLE OF THE TRAILER. WHEN ONLY STANDARD 6,000 LB CAPACITY MHE IS AVAILABLE, USE THE FTL AND LTL SHOWN ON PAGES 3 AND 4. DO NOT PUSH CONTAINERS WITH FORKLIFT TINES.

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
10	23	PROTECTOR BOARD	WOOD	2 X 6 X 67
4	22	VERTICAL (1 HIGH) VERTICAL (2 HIGH)	WOOD WOOD	2 X 6 X 37 1/2 2 X 6 X 72
2	21	HORIZONTAL	WOOD	1 X 4 X 15
2	20	HORIZONTAL	WOOD	1 X 4 X 36

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.


ALT. FTL ON 48FT TRAILER WITH BULK HEAD

A. (6) "LOADED CONTAINERS AS SHOWN IN VIEW.


B. (8) " UNLOADED" CONTAINERS NOT SHOWN. SEE NOTES 3 & 4.

FIELD NOTES:

1. THE FTL SHOWN IS FOR 6 LOADED CONTAINERS WITH A COMBINED WEIGHT OF 36,000 LBS.
2. EXCEPT AS SHOWN OR DEPICTED, ALL BLOCKING, BRACING & TIE DOWNS TO REMAIN THE SAME AS SHOWN ON PAGES 3, 4, 5 & 6.
3. THE SHIPPING OF 8 EMPTY CONTAINERS MUST BE RESTRICTED TO "EMPTY "CONTAINERS OR CONTAINERS WITH EXPENDED "INERT" CANISTERS OR CAPSULES.
4. TO SHIP 8 CONTAINERS (SEE NOTE 3). ADD TWO MORE CONTAINERS TO VIEW SHOWN AND REMAIN WITH SAME BLOCKING AND BRACING AS SHOWN FOR 4 CONTAINERS. THE TWO INNER PROTECTOR BOARDS & TIE DOWNS, MARKED "X", MAY BE USED IN LIEU OF 5.

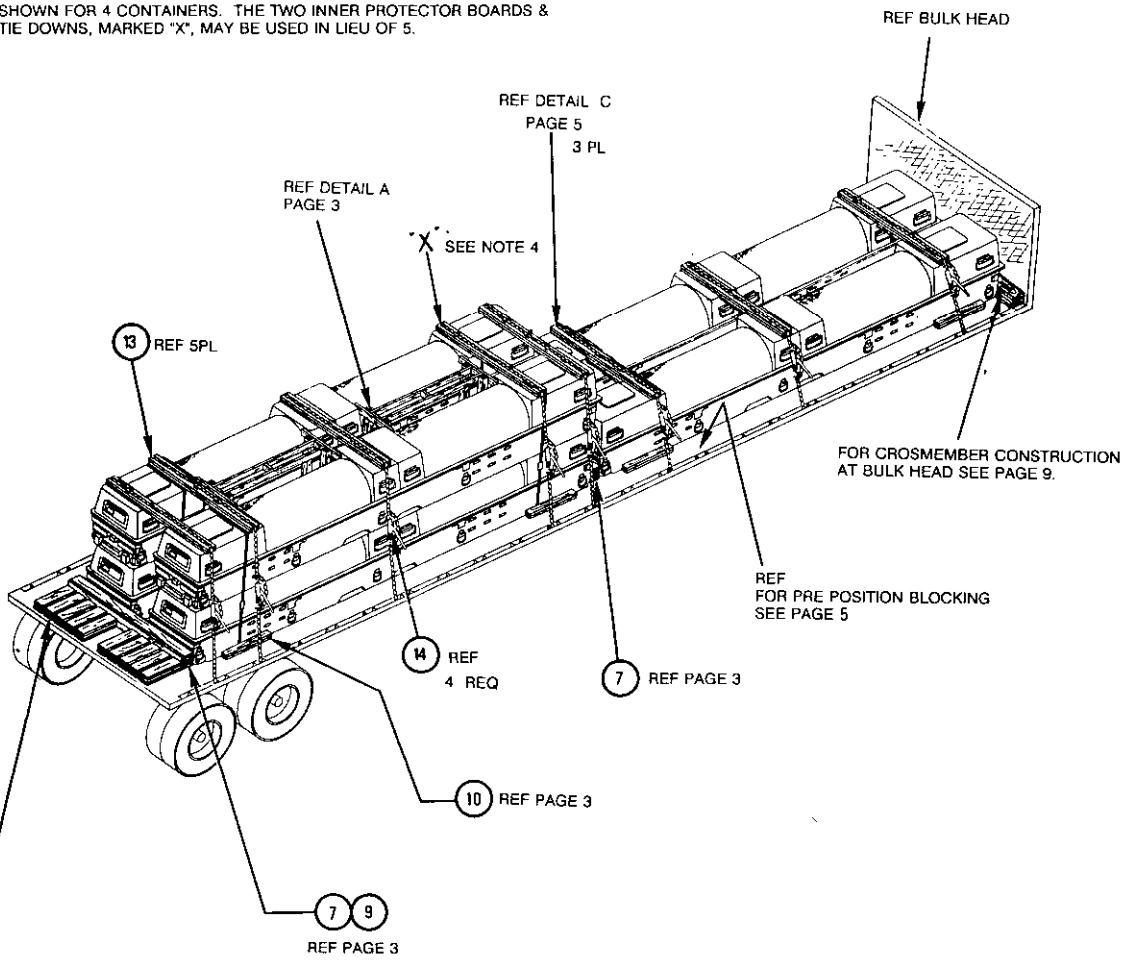


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

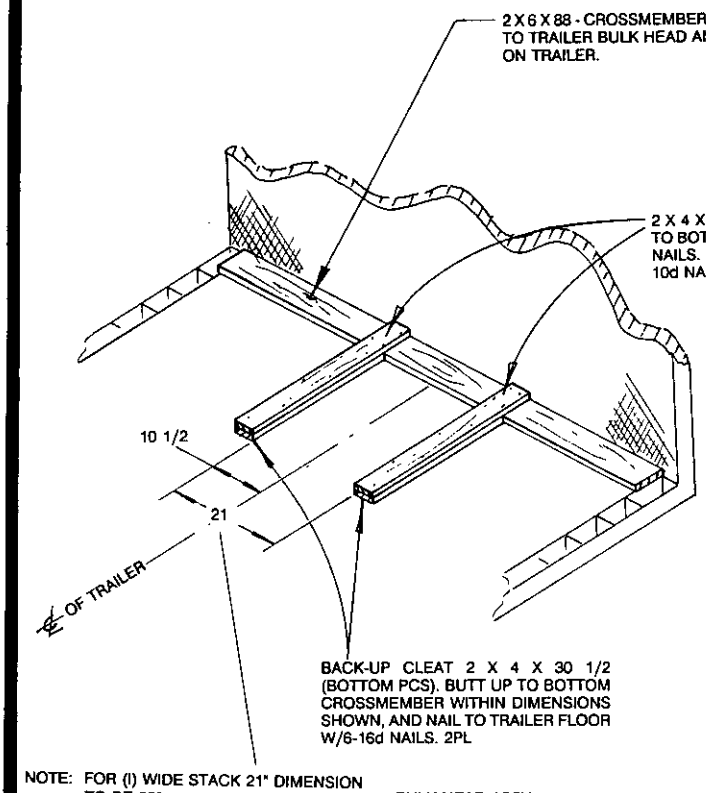

NOTE: FOR (I) WIDE STACK 21" DIMENSION TO BE 58"

BULK HEAD ASSY.

STEP 1

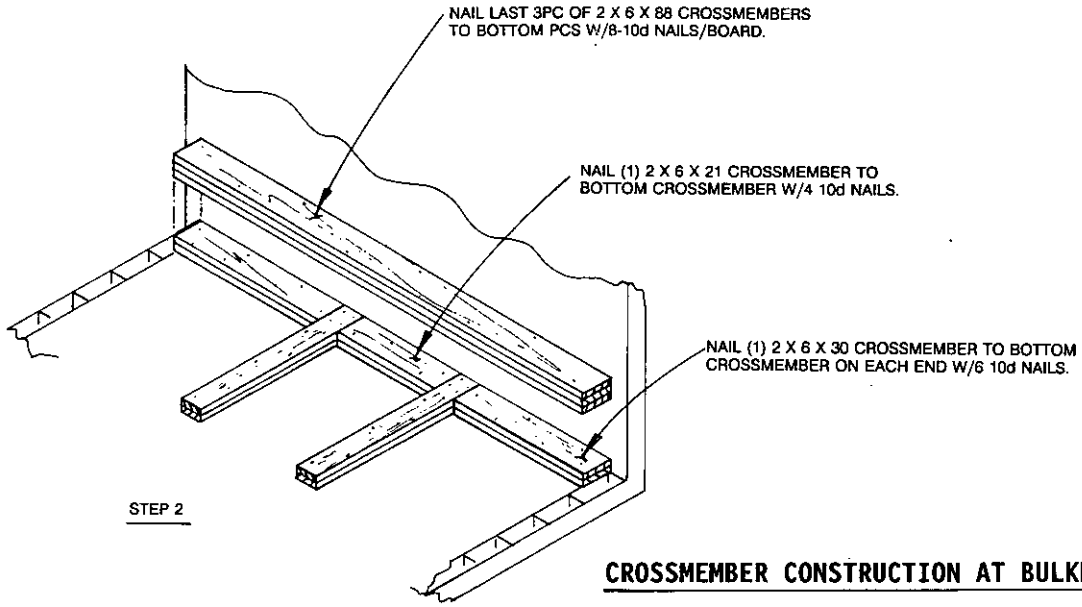

STEP 2


CROSSMEMBER CONSTRUCTION AT BULKHEAD END

(TO BE USED WHEN STEEL PLATE AT BOTTOM OF BULKHEAD PREVENTS NAILING)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23123:47Z
Check the source to verify that this is the current version before use.

LTL (FOR 3 CONTAINERS)


48 FT TRAILER

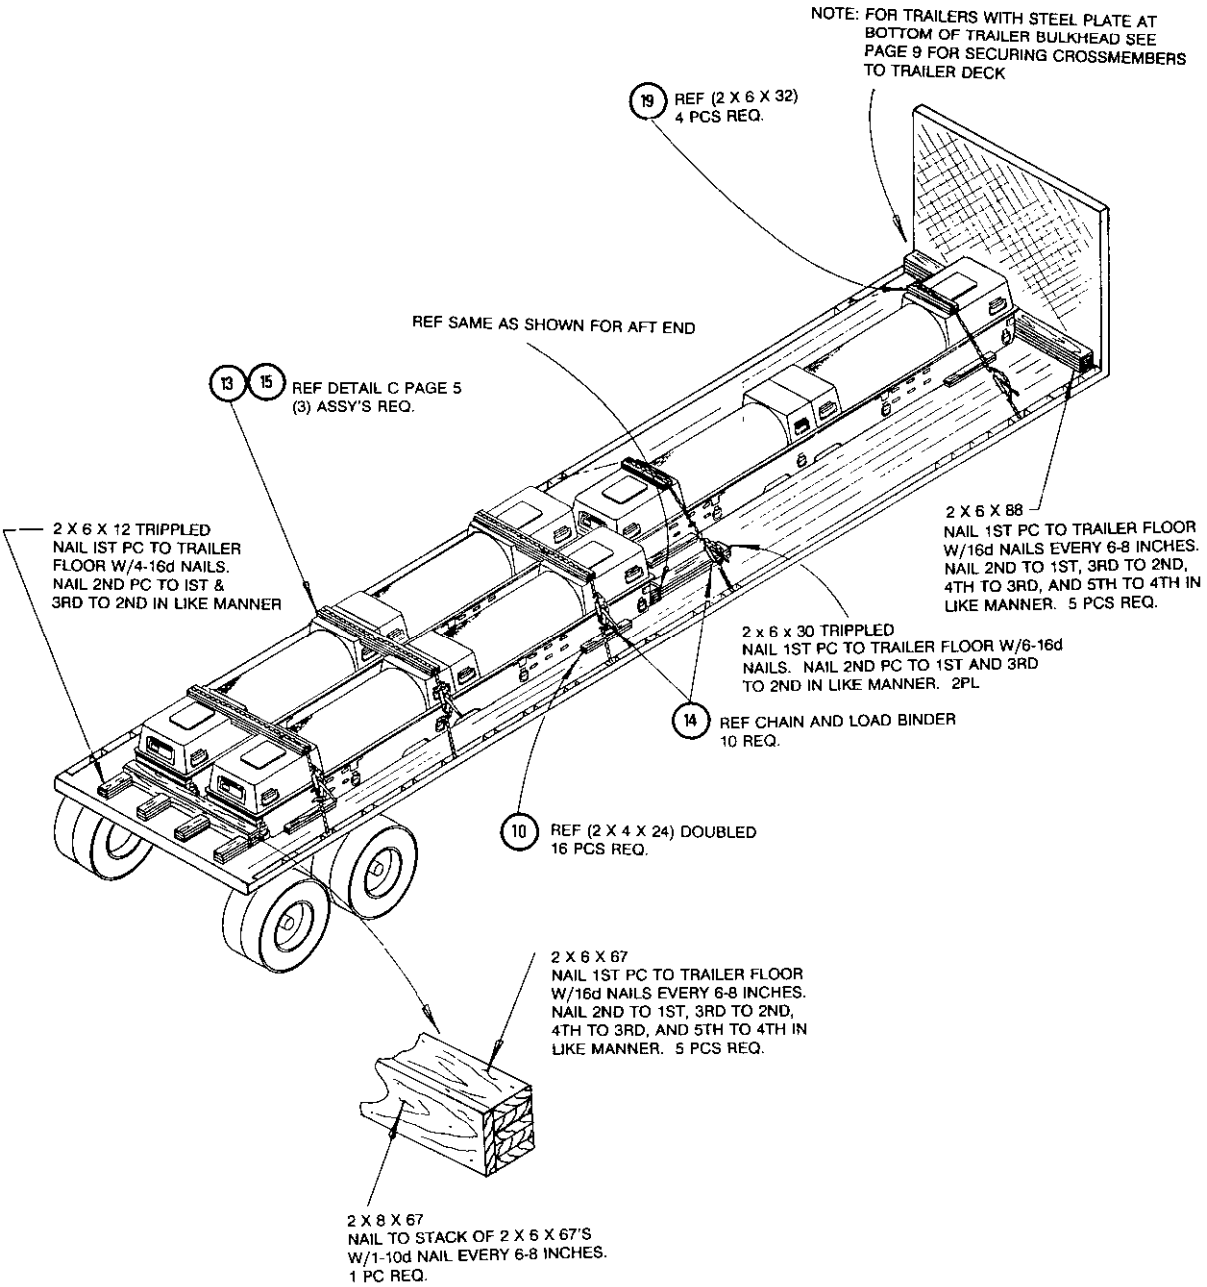


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

LTL (FOR 5 CONTAINERS)

48 FT TRAILER

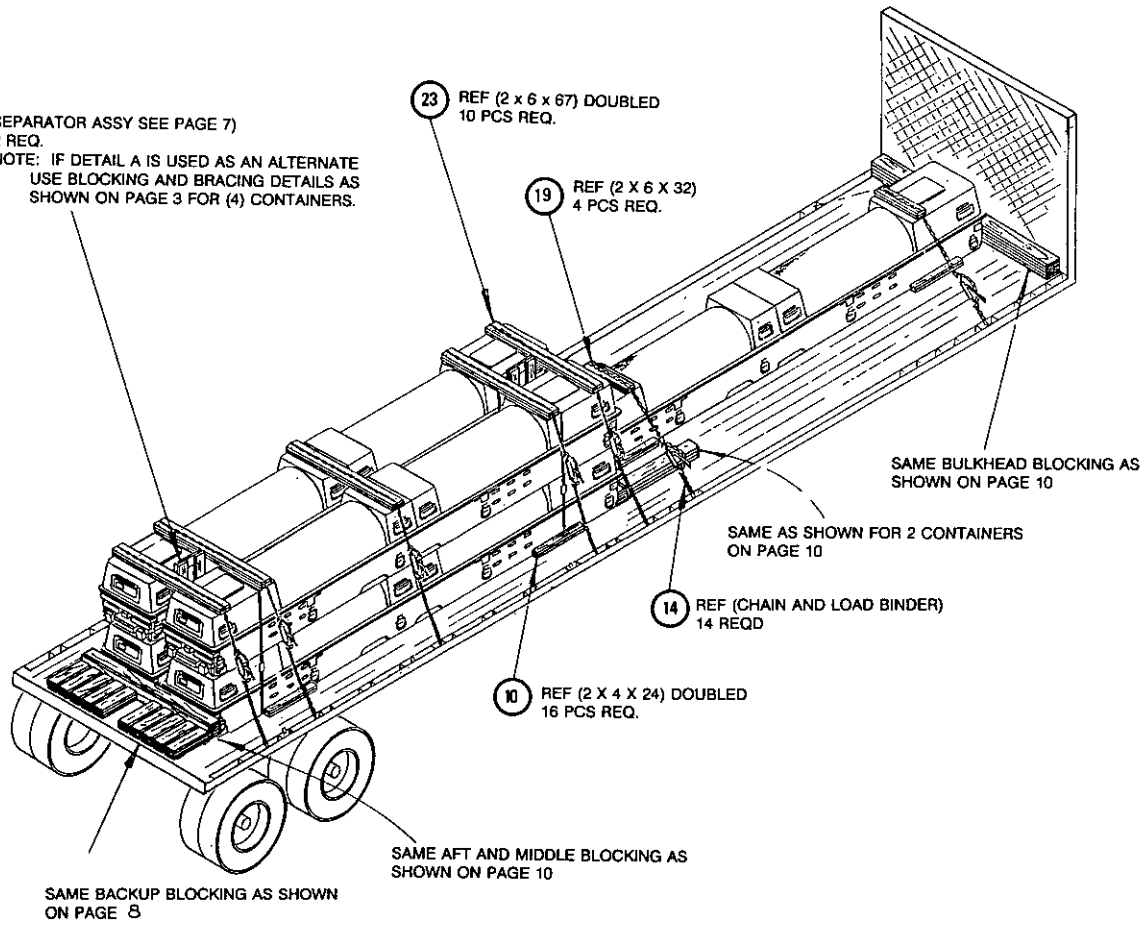

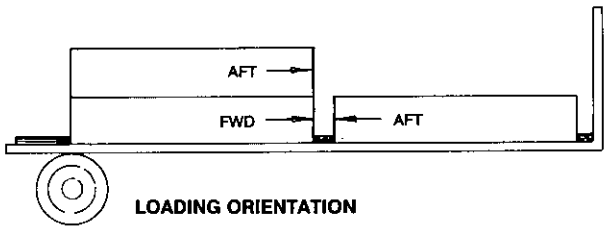

LOADING ORIENTATION

WHEN STACKING TWO HIGH OR WHEN LOADING END TO END, CONTAINERS SHALL BE STACKED IN THE ORIENTATION SHOWN (FWD TO AFT). CONTAINERS SIDE BY SIDE SHALL BE ORIENTATED IN THE SAME DIRECTION (FWD TO FWD).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.