MILITARY STANDARD

MIL-STD-1320-225
(NAVY)
15 APRIL 1987


TRUCKLOADING AMRAAM, AIM-120A IN CONTAINER, CNU-415/E

CONTAINER DATA:

MISSILES PER CONTAINER..... 4
DIMENSIONS..... 157.38 L X 36 W X 19.88 O.H.

UNIT LOAD DATA:


CONTAINERS PER UNIT LOAD..... 2
UNIT LOAD DIMENSIONS..... 157.38 L X 36 W X 38.67 H
GROSS WEIGHT OF UNIT LOAD..... 3,860 LBS△
CUBE..... 126.8 CU FT
△DO NOT USE FOR SHIPPING WEIGHT

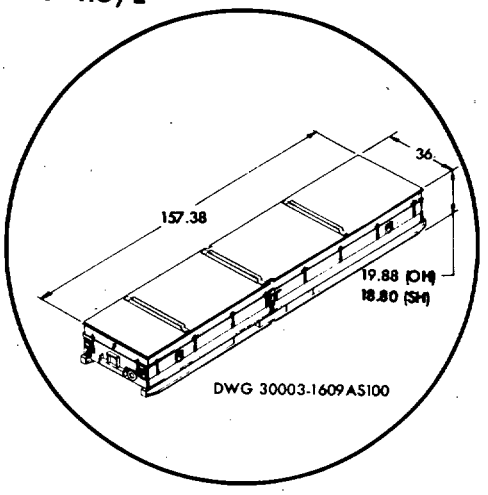

DWG 30003-1609AS100

HAZARD CLASSIFICATION
DOT.....CLASS A
CG.....CLASS X-C

AMSC NO. - N/A

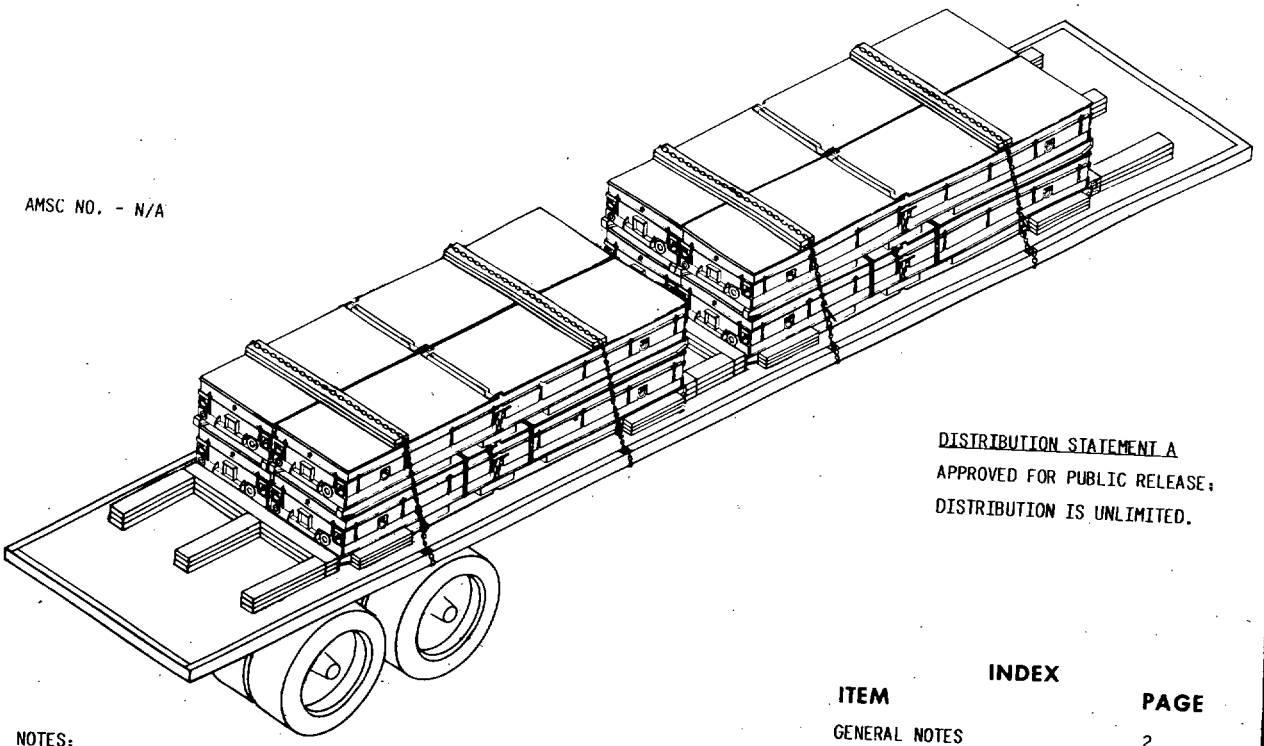

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	2 & 3
LTL TRAILER	4 & 5
UNITIZING	6

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

M.S. Gray WPNSTAEARLE 4/16/87
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly WPNSTA EARLE 4/15/87
SIGNATURE AIRSYSCOM BY DIRECTION DATE


ORIGINATOR Charles McBride 4/15/87 DATE
NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING AMRAAM, AIM-120 IN SHIPPING AND STORAGE CONTAINER, CNU-415/E. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT AND LONGER FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE TO ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS, SEE DETAIL B, SHALL BE USED UNDER THE TIEDOWNS. INSTALL A PROTECTOR ASSEMBLY OVER EACH OF THE OUTBOARD STACKING CHANNELS. WHEN USING STEEL STRAPPING, THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2 INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10 NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION, REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING AND TIEDOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT WATERPROOF TARPAULINS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH "EXPLOSIVES A" PLACARDS TO BOTH SIDES, FRONT AND BACK OF THE TRAILER (WHEN APPLICABLE) AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.

FTL 40 FT AND LONGER TRAILER (FLATBED)

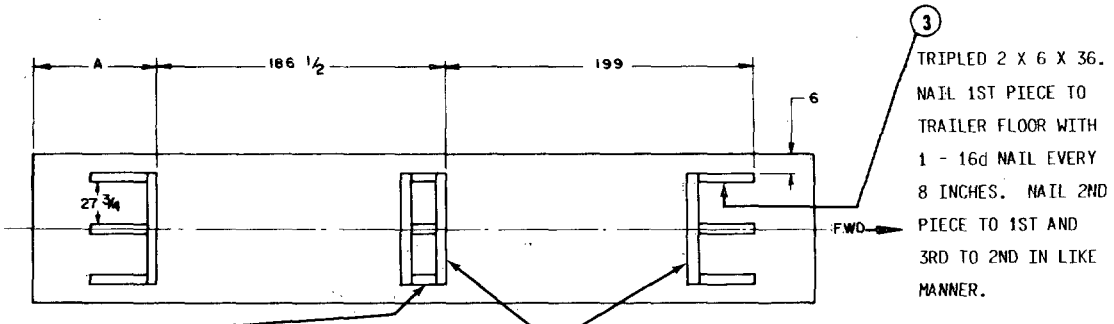

TRAILER LENGTH	DIMENSION A
40 FT	68 INCHES
42 FT	80 INCHES
44 FT	92 INCHES
45 FT	98 INCHES

DETAIL A


PREPOSITIONED FLOOR BLOCKING FOR 40 FT OR LONGER TRAILER.

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T20:48Z
Check the source to verify that this is the current version before use.

FTL NOTES

1. INSTALL PRE-POSITIONED BLOCKING AS SHOWN IN DETAIL A, PAGE 2.
2. LOAD TWO UNIT LOADS, ONE FORWARD AND ONE AFT ON SAME SIDE. POSITION UNIT LOADS 11-3/4 INCHES FROM EDGE OF TRAILER (FOR 96 INCH WIDE TRAILERS, INCREASE WIDTH ALLOWANCE BY 3 INCHES FOR 102 INCH WIDE TRAILERS).
3. INSTALL TRIPLED SLEEPERS, ITEM 4, AS SHOWN BELOW.
4. INSTALL PLYWOOD SEPARATORS, DETAIL C, ITEMS 5 AND 6, AGAINST INBOARD SIDE OF CONTAINERS.
5. INSTALL TWO MORE UNIT LOADS UP AGAINST SEPARATORS.
6. NAIL TRIPLED SLEEPERS ON OUTBOARD SIDE OF THESE CONTAINERS.
7. INSTALL PROTECTOR ASSEMBLIES, SEE DETAIL B, AND TIEDOWN.

NOTE: FLOOR BLOCKING MUST BE TRIPLED.

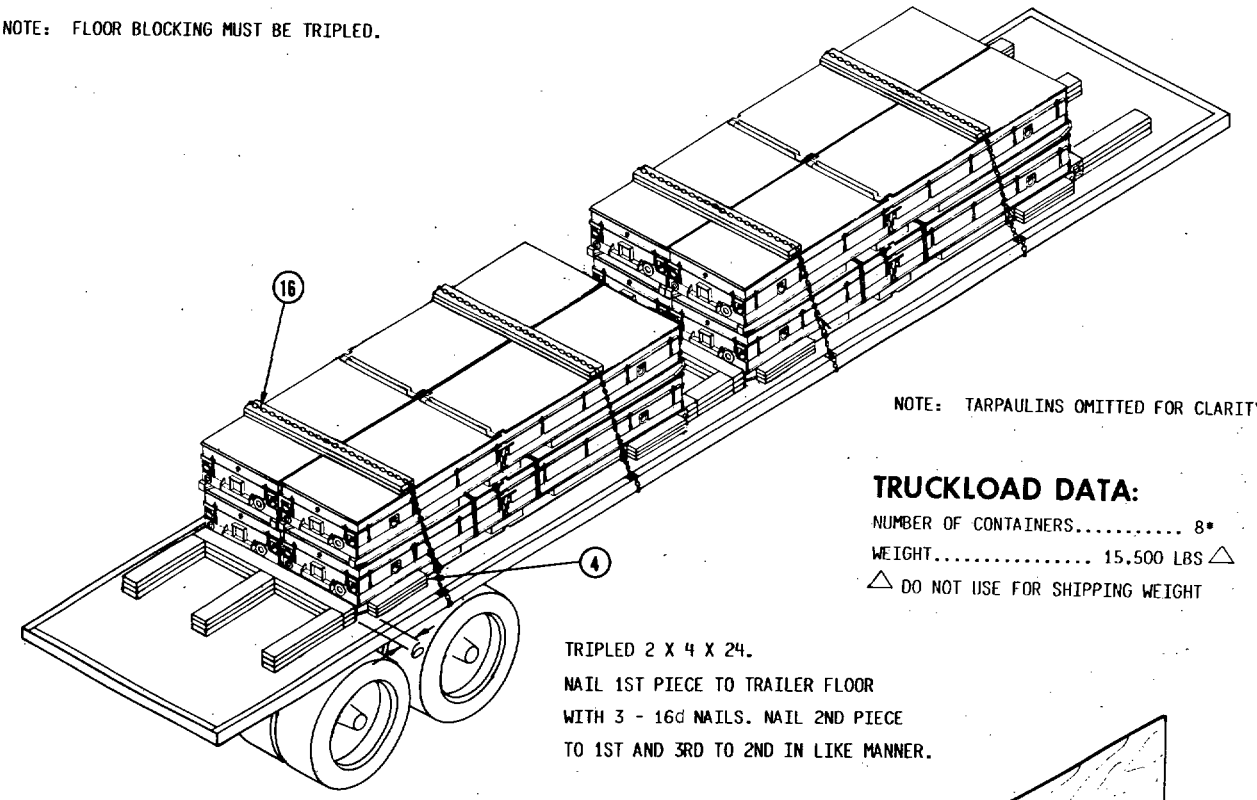


NOTE: TARPAULINS OMITTED FOR CLARITY.

TRUCKLOAD DATA:


NUMBER OF CONTAINERS..... 8*
WEIGHT..... 15,500 LBS △
△ DO NOT USE FOR SHIPPING WEIGHT

TRIPLED 2 X 4 X 24.
NAIL 1ST PIECE TO TRAILER FLOOR WITH 3 - 16d NAILS. NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER.

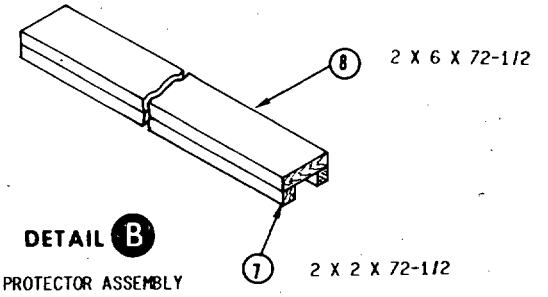

DETAIL B
PROTECTOR ASSEMBLY

NAIL PIECE 7 TO PIECE 8 WITH 1 - 8d NAIL EVERY 8 INCHES (STAGGERED)

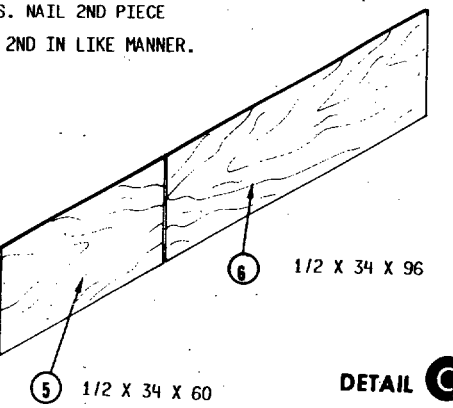

DETAIL C
SEPARATORS


* TWELVE CONTAINERS (3 HIGH) MAY BE SHIPPED IF HIGH VALUE LOSS/RISK FACTORS ARE CONSIDERED BY APPROPRIATE AUTHORITY.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 40 FT AND LONGER TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I.
2. POSITION CONTAINERS ON THE TRAILER AS SHOWN IN TABLE I, BLOCK AND TIEDOWN USING THE PRINCIPLES SHOWN ON PAGES 3, 4 AND 5 AND THE GENERAL DOCUMENT MIL-STD-1320 (NAVY).
3. THE LTL PLAN SHOWN ON PAGE 4 IS THE LESS-THAN-TRUCKLOAD FOR THE QUANTITY OF CONTAINERS SHOWN. THIS DOES NOT LIMIT SHIPMENTS TO THIS QUANTITY, SINCE LTL SHIPMENTS MAY CONSIST OF A LESSER OR GREATER NUMBER OF CONTAINERS.
4. WHEN SHIPPING FEWER THAN 6 CONTAINERS MINIMIZE THE LOAD HEIGHT BY SHIPPING CONTAINERS ONE HIGH.


TABLE I

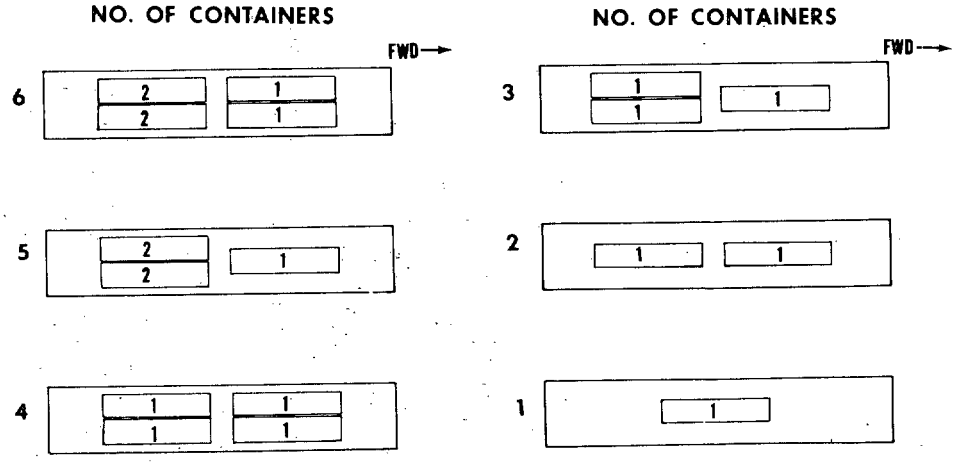

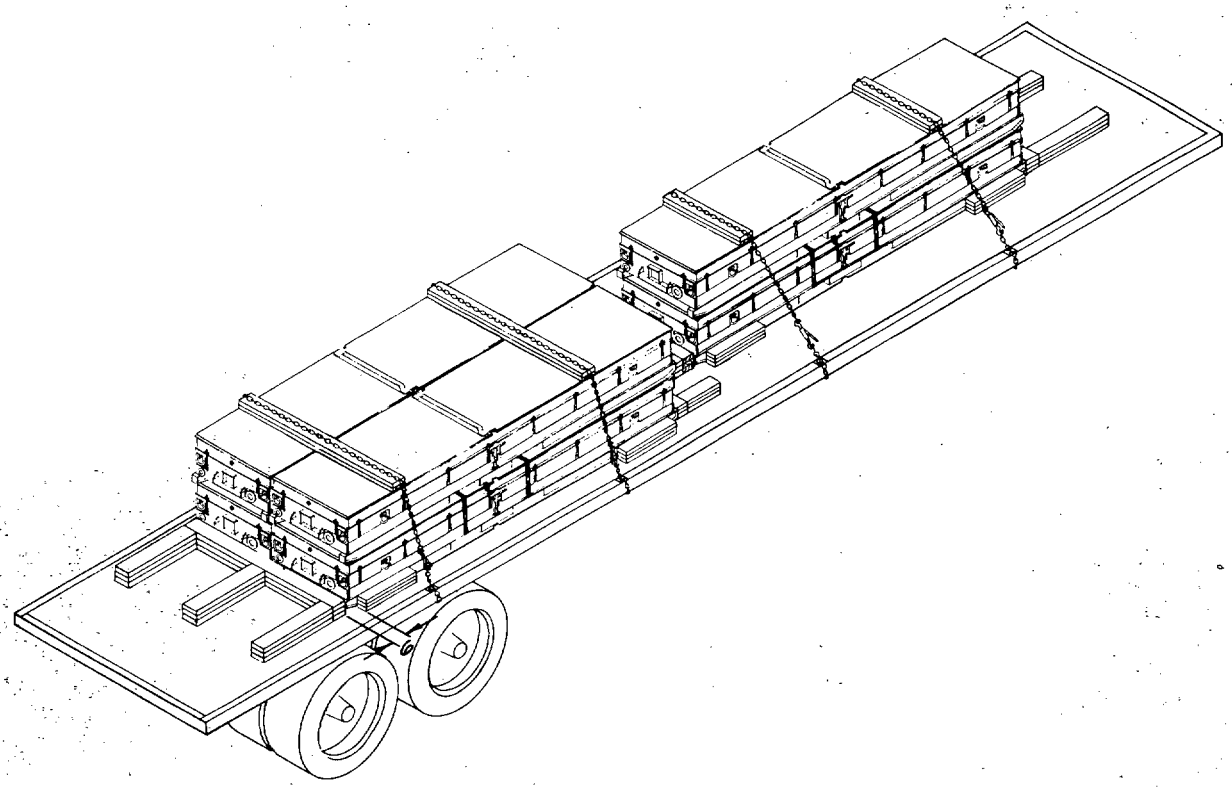


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL DETAILS

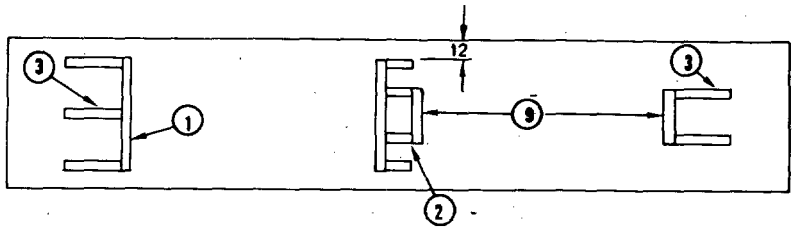


PREPOSITIONED BLOCKING

TRIPLED 2 X 6 X 36

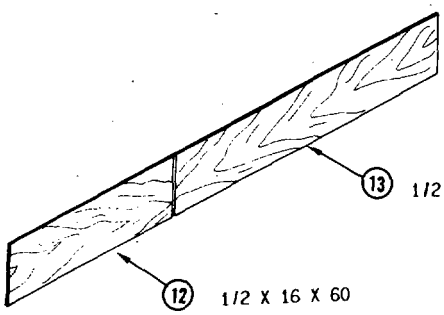

SEPARATOR FOR ONE HIGH CONTAINERS

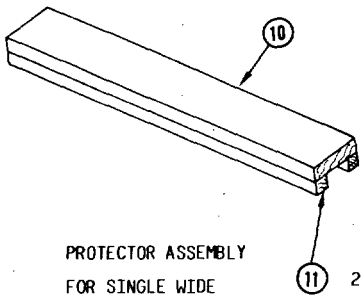

PROTECTOR ASSEMBLY FOR SINGLE WIDE CONTAINER

NAIL PIECE 11 TO PIECE 10 WITH 1 - 8d NAIL EVERY 8 INCHES (STAGGERED.)

NOTES:


1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1320 (NAVY).
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	16	CHAIN AND LOAD BINDER	SEE NOTE 1	
2 PER U.L.	15	UNITIZING SEAL	SEE NOTE 1	1-1/4
2 PER U.L.	14	UNITIZING STRAPPING	SEE NOTES 1 & 2	1-1/4 X .035 X 10 FT 6
AS REQ'D	13	LTL LONG SEPARATOR	PLYWOOD	1/2 X 16 X 96
AS REQ'D	12	LTL SHORT SEPARATOR	PLYWOOD	1/2 X 16 X 60
4 AS SHOWN	11	LTL PROTECTOR CLEAT	SEE NOTE 1	2 X 2 X 36
2 AS SHOWN	10	LTL PROTECTOR BOARD	SEE NOTE 1	2 X 6 X 36
6 AS SHOWN	9	LTL CROSSMEMBER	SEE NOTE 1	2 X 6 X 36
4	8	PROTECTOR BOARD	SEE NOTE 1	2 X 6 X 72-1/2
8	7	PROTECTOR CLEAT	SEE NOTE 1	2 X 2 X 72-1/2
2	6	LONG SEPARATOR	PLYWOOD	1/2 X 34 X 96
2	5	SHORT SEPARATOR	PLYWOOD	1/2 X 34 X 60
24	4	SLEEPERS	SEE NOTE 1	2 x 4 x 24
18	3	FORE AND AFT BACKUP CLEATS	SEE NOTE 1	2 X 6 X 36
9	2	MIDDLE BACKUP CLEAT	SEE NOTE 1	2 X 6 X 18
12	1	CROSSMEMBER	SEE NOTE 1	2 x 6 x 72

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

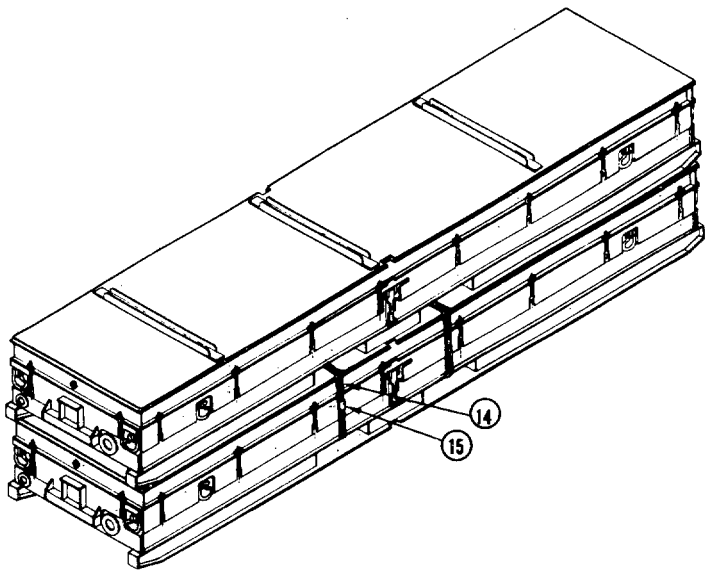

1. USING A FORK TRUCK, STACK TWO (2) CONTAINERS TOGETHER AS SHOWN ABOVE. BE SURE TO ALIGN STACKING FEATURES.
2. STRAP THE TOP CONTAINER TO THE BOTTOM CONTAINER WITH TWO (2) 1-1/4 X .035 STEEL STRAPS. THE STRAPS ARE THREADED THROUGH THE FORK POCKETS OF THE BOTTOM CONTAINER THEN BROUGHT UP AND THREADED THROUGH THE UPPER FORK POCKETS. TENSION AND DOUBLE NOTCH SEAL WITH ONE SEAL PER STRAP.
3. UNITIZING IS FOR SHIPPING CONVENIENCE ONLY. SINGLE CONTAINERS MAY BE SHIPPED AS SHOWN ON PAGE 4. UNIT LOADS MAY BE DE-UNITIZED IF QUANTITIES TO BE SHIPPED REQUIRE.

DE-UNITIZING PROCEDURE

CUT AND REMOVE STRAPPING

REVIEW ACTIVITY:
NAVY-AS, OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N688)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T23:48Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-036/72821