MILITARY STANDARD

MIL-STD-1320-261 (NAVY)

29 JULY 1991

TRUCKLOADING

HELLFIRE MISSILE, AGM 114

IN CONTAINER SHIPPING AND STORAGE, CNU-448/E


UNIT LOAD FOR UNDERWAY REPLENISHMENT


UNIT LOAD DATA

UNIT LOAD DOCUMENT	MIL-STD-1323-334
DIMENSIONS	76 L X 43 7/8 W X 36 H
GROSS WEIGHT	1174 LBS Δ
CUBE	69.5 CU FT

Δ DO NOT USE FOR SHIPPING WEIGHT

FOR HAZARD CLASIFICATIONS SEE NAVSEA OP 7135

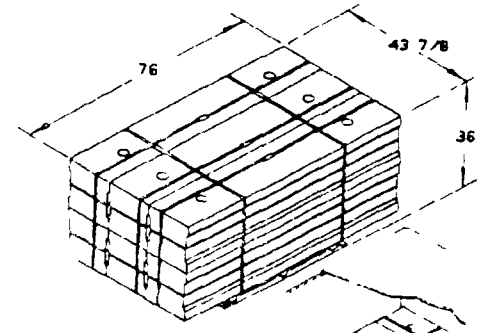

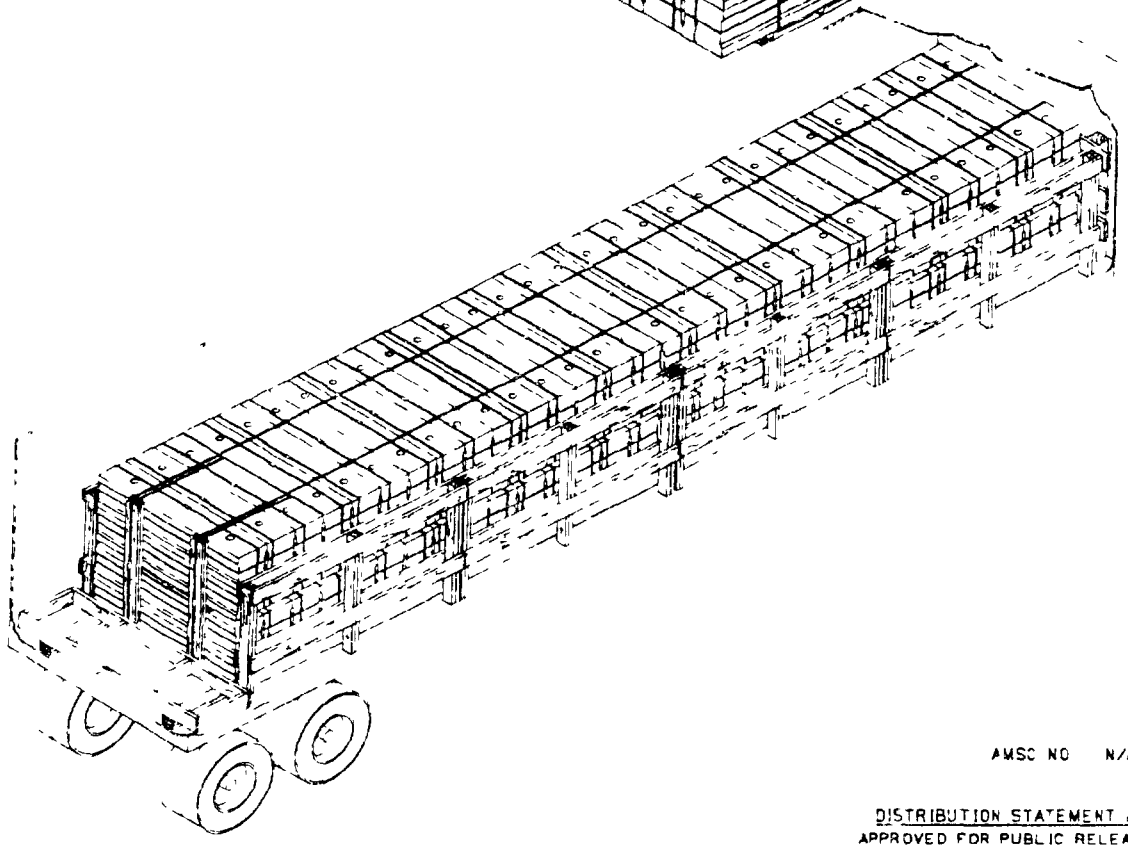

AMSC NO N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED

NOTES

1 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY

SIGNATURE TDA, SYSCOM OR DESIGNATED REP 7/29/91 DATE

SIGNATURE APPROVED BY DIRECTOR DATE

ORIGINATOR 7/29/91 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING UNIT LOADS FOR U.S. NAVY REPLENISHMENT OF HELLFIRE MISSILE AGM 114 IN CONTAINER SHIPPING AND STOWAGE CNU-448/E WHEN PALLETIZED IN ACCORDANCE WITH MIL-STD-1323-334 (NAVY)
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT THROUGH 48 FT VAN TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED AS REQUIRED TO STAY WITHIN THE AXLE LOAD LIMITS OF THE STATES TO BE TRAVERSED TRAILERS WITH NAILABLE FLOORS ARE REQUIRED TRAILERS WITH NON-NAILABLE FLOORS SHALL NOT BE USED
3. TO PREVENT LONGITUDINAL MOVEMENT OF THE UNIT LOADS IN THE SECOND LAYER THE LOADS SHALL BE UNITIZED (SEE DETAIL J) WHERE THE PATTERN CHANGES FROM TWO LAYERS HIGH TO ONE LAYER HIGH THE STIFFENERS SHALL FACE THE SINGLE LAYER SIDE
4. SIDE FRAME ASSEMBLIES DETAILS B OR D SHALL BE POSITIONED IN THE TRAILER AND TOENAILED TO THE FLOOR WITH TWO 16d NAILS PER JOINT TO PREVENT LONGITUDINAL MOVEMENT THESE SIDE FRAME ASSEMBLIES ARE SUITABLE FOR USE IN VAN TRAILERS WITH 96 INCH OUTSIDE WIDTH FOR WIDER TRAILERS ADD ADDITIONAL LAYERS OF HORIZONTAL BOARDS ITEMS 6 OR 10 TO FILL THE ADDITIONAL INSIDE WIDTH OF THE TRAILER
5. REAR BLOCKING SHALL BE USED BETWEEN REAR END OF LADING AND THE TRAILER DOORS AS FOLLOWS
   SPACE BETWEEN LADING IS LESS THAN 12 INCHES USE DETAIL K
   SPACE BETWEEN LADING AND DOORS IS 12 TO 36 INCHES USE DETAIL C
   SPACE BETWEEN LADING AND DOORS IS GREATER THAN 36 INCHES USE DETAIL E OR F
6. WHEN LOADING ONLY ONE LAYER OF UNIT LOADS USE FRONT BULKHEAD SHOWN IN DETAIL G
7. SINGLE LAYER UNIT LOADS SHALL ALWAYS BE TO THE REAR OF DOUBLE STACKED UNIT LOADS
8. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER STEEL STRAPPING STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS
10. AFTER THE BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA CLOSE AND SEAL TRAILER DOORS AND ATTACH APPLICABLE HAZARDOUS MATERIALS PLACARDS TO BOTH SIDES FRONT AND BACK OF THE TRAILER
1. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)

FIL 40 FT THROUGH 48 FT TRAILER (VAN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

NOTE: THIS FTL PLAN SHOWN BELOW IS A FULL TRUCKLOAD PLAN FOR A 40 FT TRAILER (20 UNIT LOADS). IT DOES NOT LIMIT FTL SHIPMENTS TO THE QUANTITIES OF UNIT LOADS OR TRAILER LENGTHS SHOWN. SEE PAGE 4 FOR VARIOUS LOADING PLANS

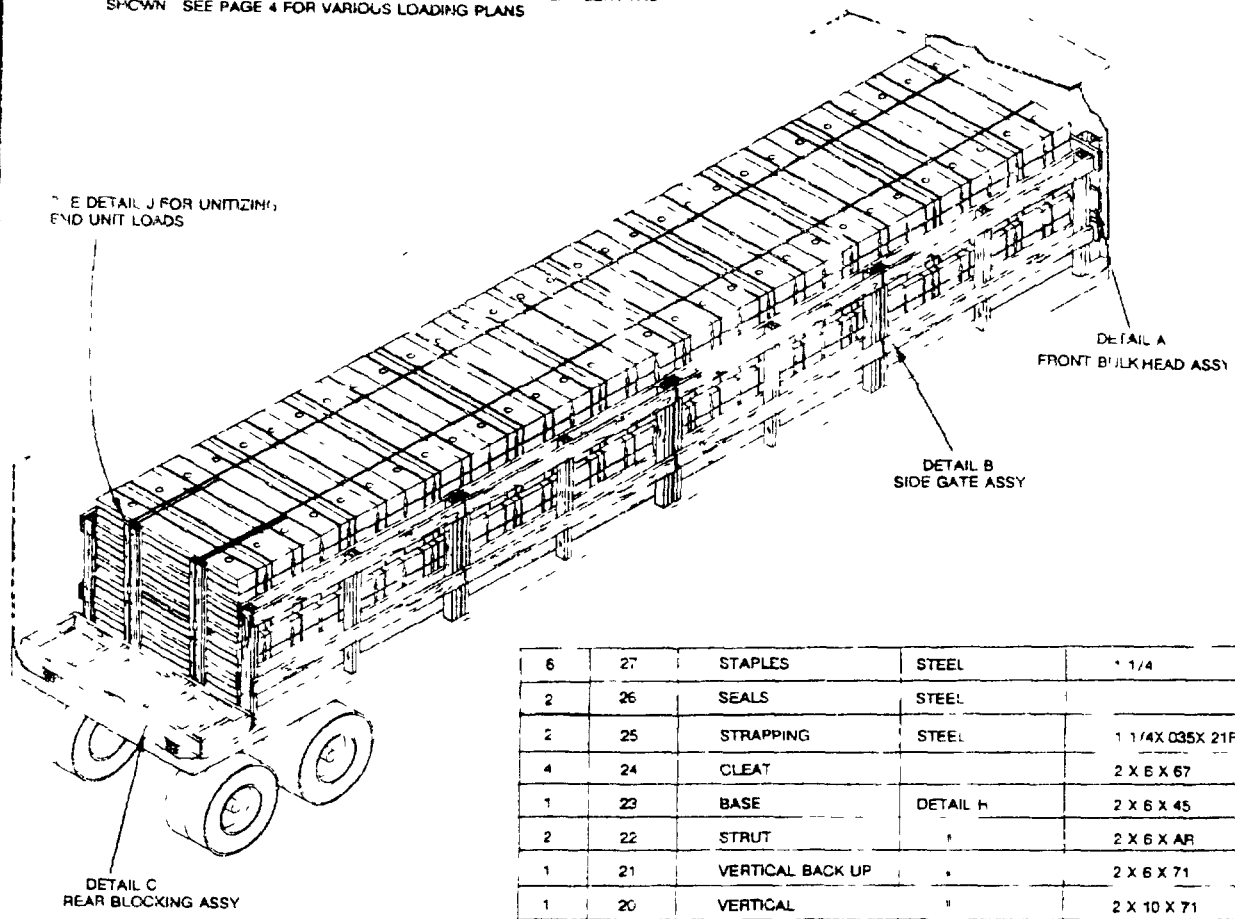

ITEM	QTY	DESCRIPTION	MATERIAL	SIZE
27	6	STAPLES	STEEL	1 1/4
26	2	SEALS	STEEL	
25	2	STRAPPING	STEEL	1 1/4X 035X 21FT
24	4	CLEAT		2 X 6 X 67
23	1	BASE	DETAIL H	2 X 6 X 45
22	2	STRUT	"	2 X 6 X AR
21	1	VERTICAL BACK UP	"	2 X 6 X 71
20	1	VERTICAL	"	2 X 10 X 71
19	4	BACK UP CLEAT (LTL)	"	2 X 6 X 30
18	2	HORIZ SUPPORT	DETAIL G	2 X 6 X TW 1
17	6	VERTICAL	"	2 X 4 X 40
16	2	HORIZ SUPPORT	"	2 X 6 X 79
15	4	SLEEPER	DETAIL F	2 X 6 X 41
14	2	STRUT	DETAIL E	2 X 6 AR
13	1	BASE	"	2 X 6 X 32
12	1	VERTICAL	"	2 X 6 X 35
11	1	VERTICAL	"	2 X 10 X 35
10	5	HORIZ	DETAIL D	2 X 6 X 66
9	4	BRACE	DETAIL C	2 X 6 X AR
8	2	HORIZ	"	2 X 6 TW 1
7	6	BASE	"	2 X 4 X AR
6	5	HORIZ SUPPORT	DETAIL B	2 X 6 X AR
5	6	VERTICAL SUPPORT	"	2 X 4 X 53 5/8
4	1	HORIZ SUPPORT	DETAIL A	2 X 8 X TW 1
3	2	HORIZ SUPPORT	"	2 X 8 X TW-1
2	2	HORIZ SUPPORT		2 X 8 X 79
1	3	VERTICAL SUPPORT	DETAIL A	2 X 4 X 71

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

1 THE LOADING PLANS BELOW ARE FOR FTL SHIPMENTS (40FT THRU 48FT VANS)


2 WHEN REQUIRED TO SHIP LESS THAN TRUCKLOAD REFER TO NOTES 5-7 ON PAGE 2 AND THE BLOCKING AND BRACING TECHNIQUES AND DETAILS AS SHOWN ON PAGES 5 7 & 8 AND THE GENERAL DOCUMENT MIL STD-1320 (NAVY)

3 THE LTL PLAN SHOWN ON PAGE 5 IS A TYPICAL LTL LAYOUT PLAN THIS DOES NOT LIMIT SHIPMENTS TO THIS QUANTITY SINCE LTL SHIPMENTS MAY CONSIST OF A GREATER OR LESSER NUMBER OF UNIT LOADS

NO OF UNIT LOADS


40FT

20




42FT

22




44FT

22




45FT

22




48FT

24




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

NOTE THE LTL BLOCKING AND BRACING TECHNIQUES SHOWN HERE ARE TYPICAL FOR VARIOUS TRAILER LENGTHS. A 42 FT TRAILER IS SHOWN IN THIS VIEW FOR DEMOSTRATION PURPOSES. SEE PAGE 4 FOR VARIOUS LOADING PATTERNS

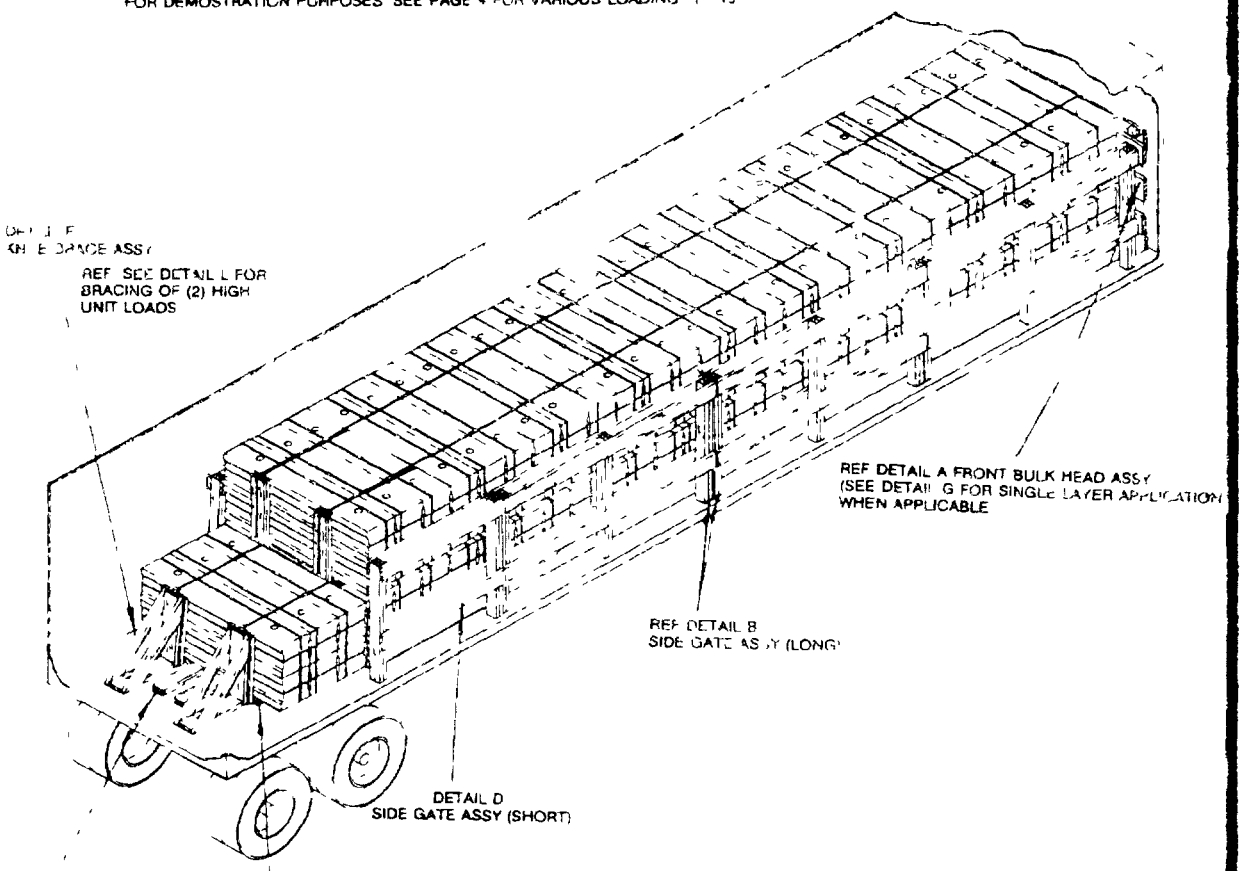


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

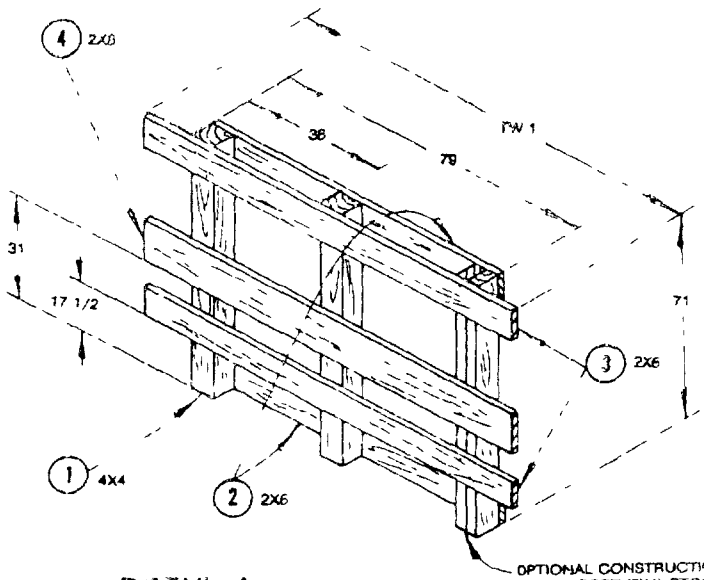

OPTIONAL CONSTRUCTION IN LIEU OF 4X4 POST (2X4) STOCK JOINED TOGETHER WITH 4 10d NAILS

DETAIL A BULK HEAD ASSY

ASSEMBLE TOGETHER W/2 10d NAILS / JOINT

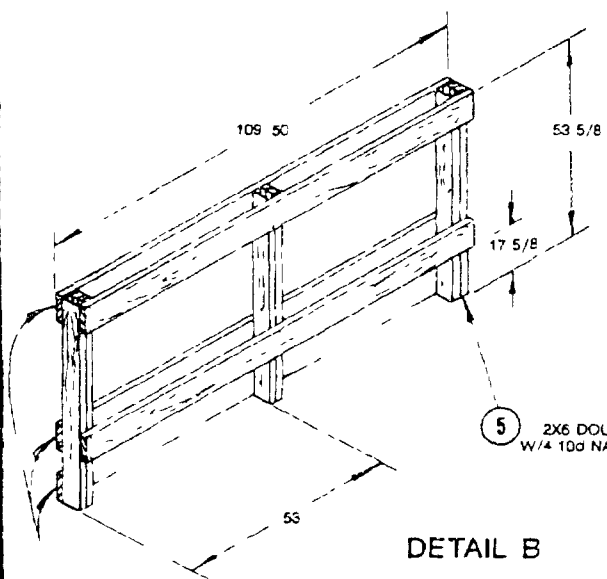


5 2X6 DOUBLED JOIN TOGETHER W/4 10d NAILS 3PL

DETAIL B

SIDE GATE ASSY (8 REQ'D) / 40FT VAN


6 2X6 JOIN TO ITEM 5 W/2 10d NAILS PER JOINT

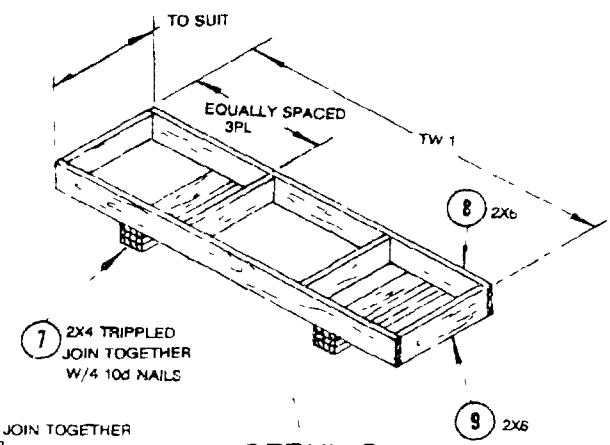

DETAIL C

REAR BLOCKING ASSY


ASSEMBLE TOGETHER W/2 10d NAILS / JOINT

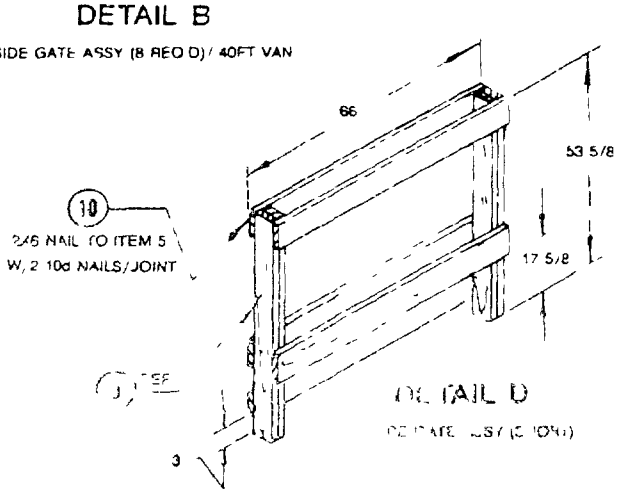

10 2X6 NAIL TO ITEM 5 W/ 2 10d NAILS/JOINT


DETAIL D

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

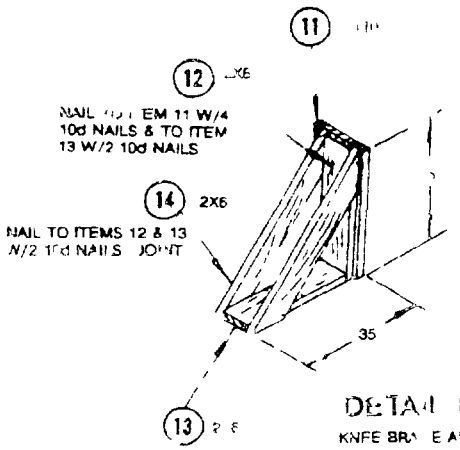

DETAIL E

KNEE BRACE ASSY

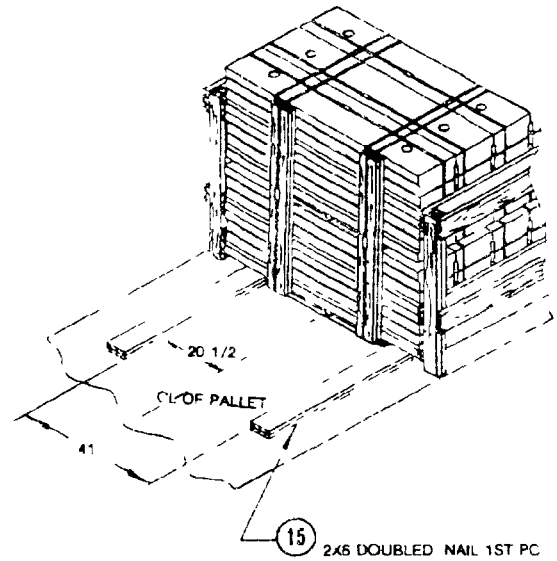


15 2X6 DOUBLED NAIL 1ST PC TO TRAILER FLOOR W/6 16d NAILS NAIL 2ND PC TO 1ST IN LIKE MANNER 2PL

DETAIL F

PREPOSITION BLOCKING


(THIS BLOCKING LAYOUT CAN ALSO BE USED WHEN SHIPPING ANY COMBINAT ON OF SINGLE LAYER HIGH UNIT LOADS)

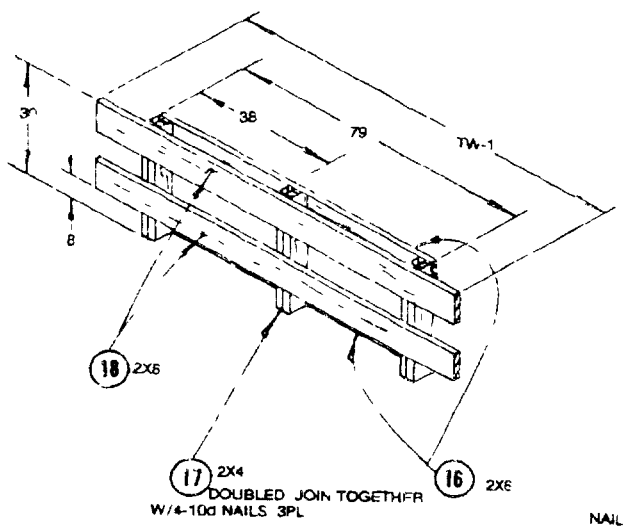

DETAIL G

BULK HEAD ASSY
(FOR SINGLE LAYER HIGH UNIT LOADS)

ASSEMBLE ITEMS 16 & 18 TO ITEM 17 W/2 10d NAILS PER JOINT

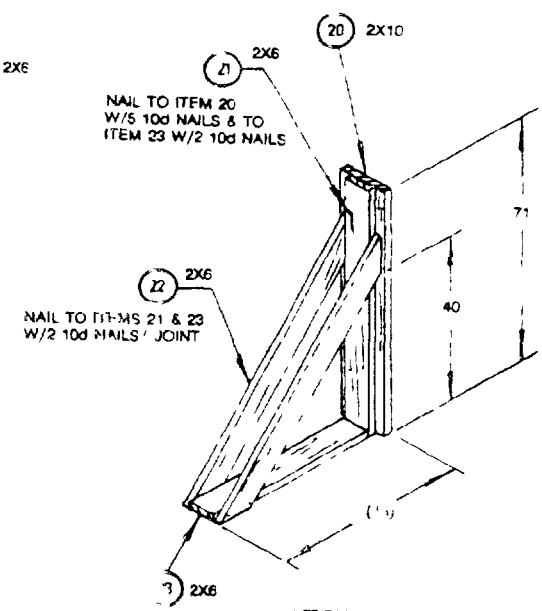

DETAIL H

BRACE

(FOR 2 HIGH UNIT [illegible] WITH BUFFER ITEM [illegible] FOR BOARD)

[illegible] TO TRAILER FLOOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

(NAVY)

UNITIZING PROCEDURE


1 USING A FORK LIFT TRUCK CAREFULLY STACK ONE UNIT LOAD ON TOP OF ANOTHER

2 ALIGN THE JOINED 2X6'S ITEM 24 IN POSITION SHOWN

3 THREAD STRAPPING ITEM 25 THRU THE PALLET LEGS AND OVER ITEM 24 AND ENTIRE UNIT LOAD

4 TENSION AND DOUBLE NOTCH SEAL ITEM 26

5 AFTER STRAPPING IS SECURED STAPLE IN PLACE TO ITEM 24 WITH ITEM 27 3PL AS SHOWN

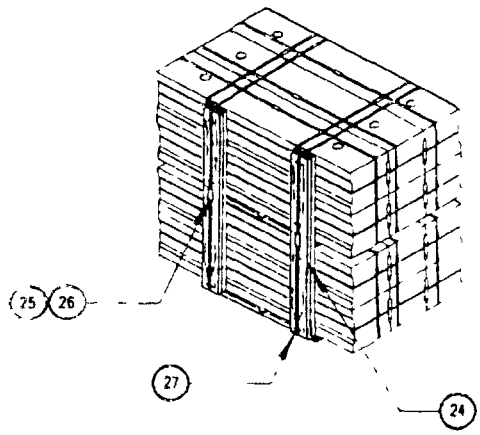


DETAIL J

UNITIZING PROCEDURE

DEUNITIZING PROCEDURE


1 CUT AND REMOVE STRAPPING AND BACK UP BOARDS

2 REMOVE UNIT LOAD

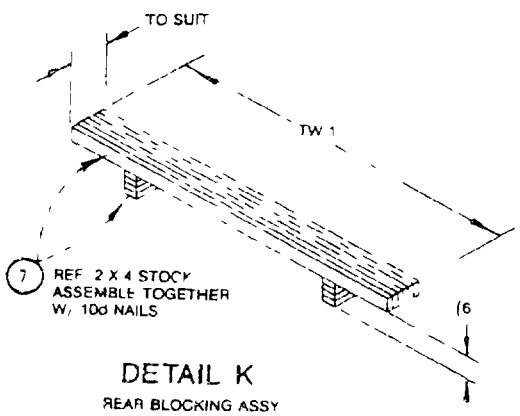

DETAIL K

REAR BLOCKING ASSY

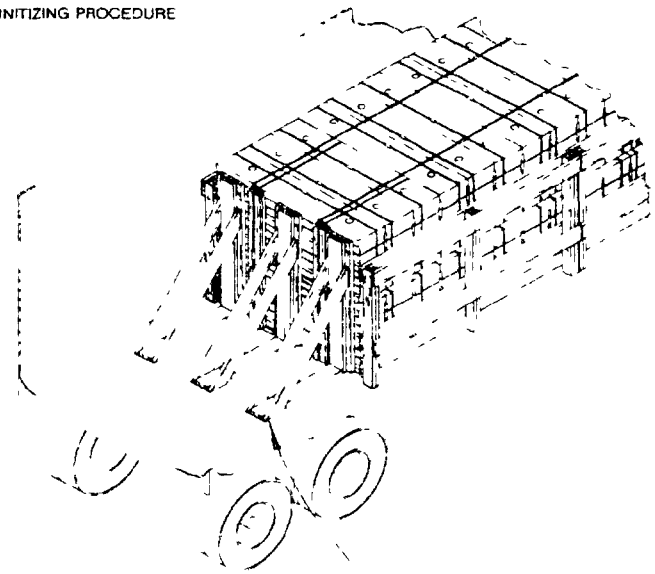

REF DETAIL H
NAIL TO TRAILER FLOOR
W/8 10d NAILS/BRACE 3PL

DETAIL L

BRACE (NAILING PROCEDURE)

REVIEW ACTIVITY
NAVY OS AS

PREPARING ACTIVITY
NAVY-OS
(PROJECT NO N990)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle
Attn: Code 502
Colts Neck, New Jersey 07722-5000

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-1320-261 - HELLFIRE Missile in Container CNU-448/E

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.