MILITARY STANDARD

MIL-STD-1320-269

(NAVY)


30 MARCH 1992

TRUCKLOADING

MIXED TRUCKLOAD FOR GUIDED MISSILE, AGM-84-E AND ATM-84-E (SLAM) IN CONTAINER MK 724 MODS 0 & 1 OR WOOD BOX # SC1943AS0100-501MH AND GUIDED MISSILE, AGM-84-F AND ATM-84F-1C (BLOCK ID) IN CONTAINER CNU-495/E OR WOOD BOX #SC1657AS2100-501MH

CONTAINER DATA -- SEE SHEET 2

FOR HAZARD CLASSIFICATIONS SEE NAVSEA OP 2165

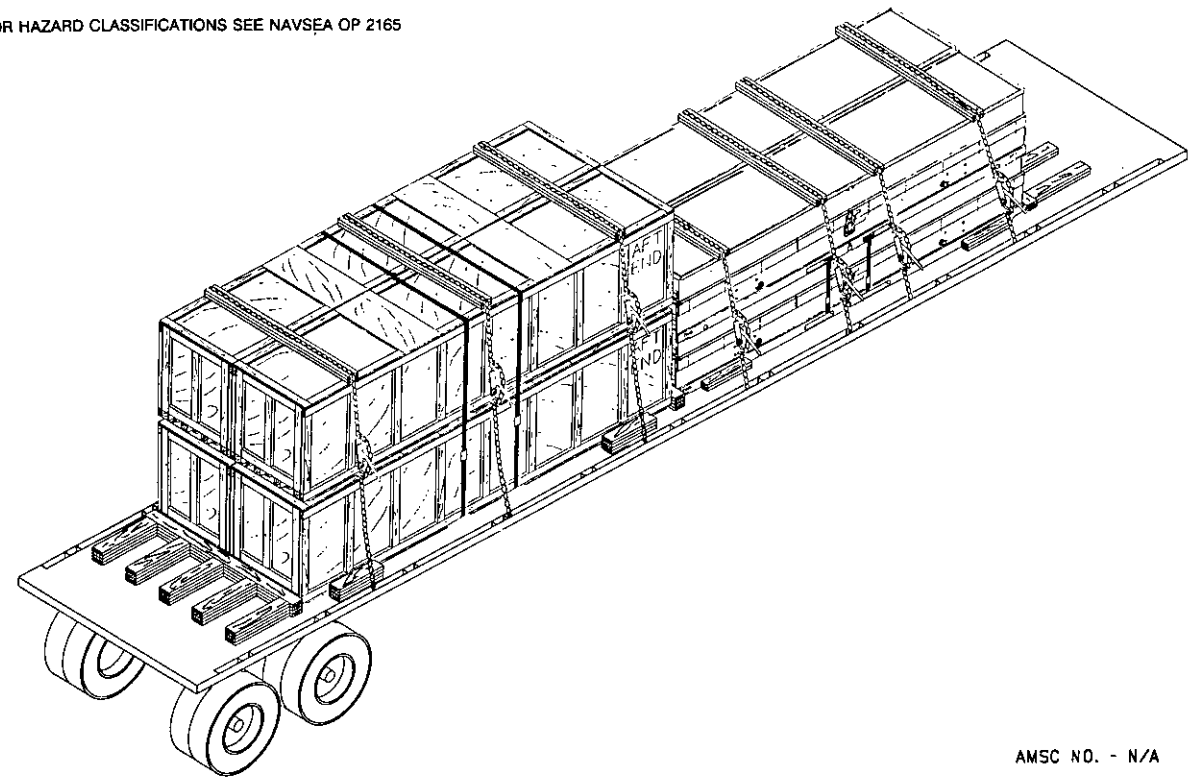

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

C. Rinaldi 3/30/92
SIGNATURE TDA, WPNSTA EARLE DATE


K Carungi 3/30/92
SIGNATURE AIRSYSCOM BY DIRECTION DATE

ORIGINATOR 3/30/92
DATE

WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

CONTAINER DATA

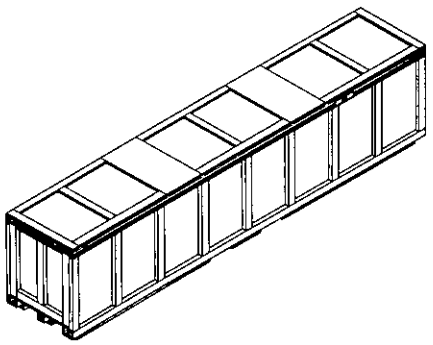


SLAM WOOD BOX

LENGTH = 202
WIDTH = 39
HEIGHT = 46 3/4
TARE WEIGHT = 1,290 LBS
GROSS WEIGHT = 2,650 LBS
NUMBER OF MISSILES PER CONTAINER = 1

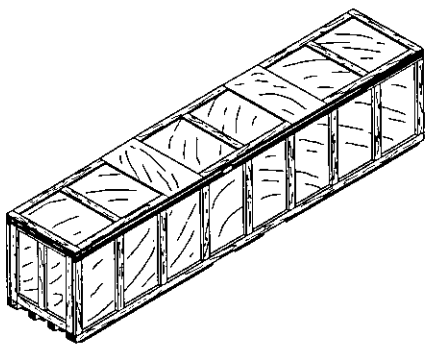

BLOCK ID WOOD BOX

LENGTH = 199 1/4
WIDTH = 39 1/2
HEIGHT = 47 3/4
TARE WEIGHT = 1,336 LBS
GROSS WEIGHT = 2,700 LBS
NUMBER OF MISSILES PER CONTAINER = 1

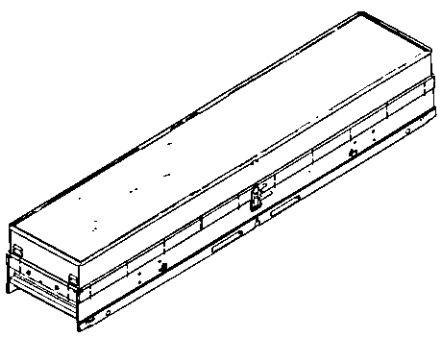

CNU-495/E
MK 724 MOD 0 & 1

DIMENSIONS----------L=186 W=37.58 H=30.2
NO. OF ITEMS PER CONTAINER----------2

CONTAINER	GROSS WT. (LBS) △	TARE WT. (LBS) △
MK 724 MOD 0	3,831	1,107
MK 724 MOD 1	3,924	1,197
CNU-495/E		1,232
- 1 MISSILE	2,651	
- 2 MISSILES	4,070	

△ DO NOT USE FOR SHIPPING WEIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

GENERAL NOTES:

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR MIXED TRUCKLOADING OF THE SLAM (AGM-84-E & ATM-84-E) MISSILES AND THE BLOCK ID (AGM-84-F & AGM-84F-1C) MISSILES. THE SLAM MISSILE IS PACKED IN THE MK 724 CONTAINER OR WOOD BOX #SC1943AS0100-501MH. THE BLOCK ID MISSILE IS PACKED IN THE CNU-495/E CONTAINER OR WOOD BOX #SC1657AS2100-501MH.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT OR LONGER FLATBED TRAILERS. DO NOT USE TRAILERS WITH ALL METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY), EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIEDOWNS. WHEN USING STEEL STRAPPING, THE STRAPS SHALL BE SECURED TO THE PROTECTOR BOARD USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
7. THE MAXIMUM NUMBER OF CONTAINERS THAT CAN BE LOADED ONTO A TRAILER IS:

   40 THRU 48 FT TRAILERS - 16 WOOD BOXES
   40 THRU 48 FT TRAILERS - 8 WOOD BOXES + 8 METAL CONTAINERS


   WHEN SHIPPING ONLY METAL CONTAINERS, USE LATEST REVISION OF MIL-STD-1320-251 (NAVY).
8. WOOD BOXES AND METAL CONTAINERS MAY NOT BE LOADED ON TOP OF OR ADJACENT TO ONE ANOTHER (IN THE SAME STACK).
9. IT IS PERMISSIBLE TO LOAD SLAM WOOD BOXES ADJACENT TO BLOCK ID WOOD BOXES. PROTECTOR BOARDS AND END BLOCKING FOR SUCH ARRANGEMENT SHALL BE AS SHOWN ON PAGE 9.
10. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR, AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
11. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
12. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
13. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIEDOWNS AND THE PROTECTOR BOARDS.
14. AFTER THE TARPAULINS ARE IN PLACE, ATTACH THE PROPER EXPLOSIVES PLACARDS TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER, AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
15. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).

CAUTION

DUE TO THEIR EXCESSIVE HEIGHT, WOOD BOXES MAY BE REQUIRED TO BE STACKED ONLY ONE HIGH ON THE TRAILER. BEFORE STACKING TWO HIGH, MEASURE THE GROUND TO TRAILER BED HEIGHT AND CALCULATE THE TOTAL HEIGHT FROM GROUND TO TOP OF LOAD. CHECK FEDERAL, STATE, AND LOCAL LAWS ON MAXIMUM LOAD HEIGHT BEFORE SHIPPING.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

FTL MIXED LOAD
40 THRU 48 FT TRAILER (FLATBED)

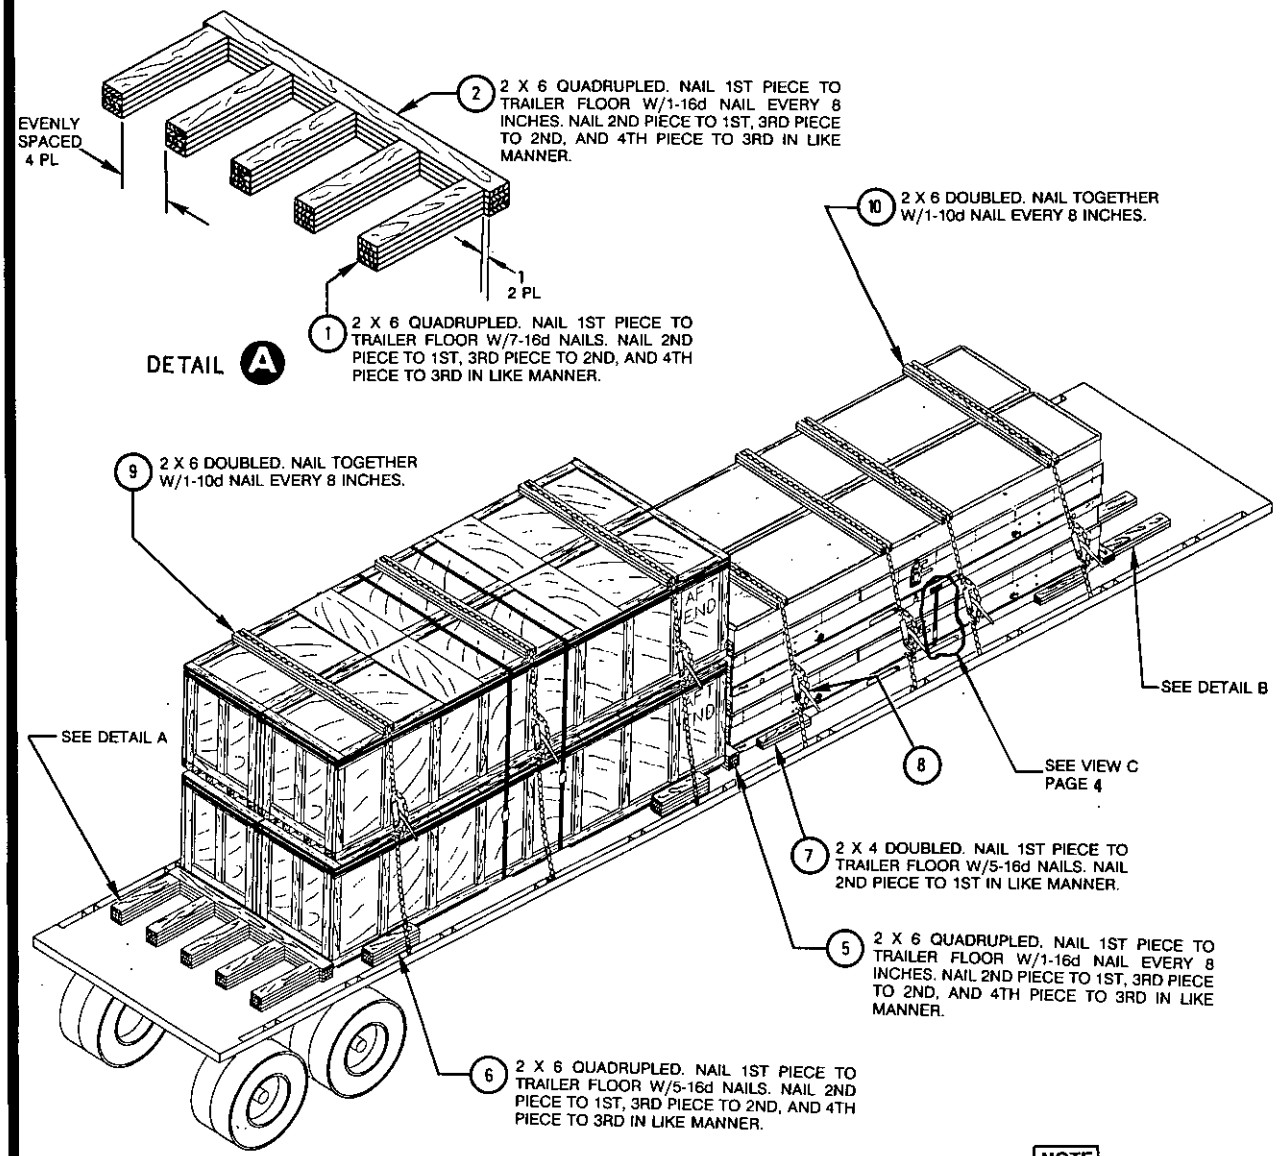

NOTE

ALL WOOD BOXES SHALL BE LOADED WITH THEIR AFT ENDS FORWARD.

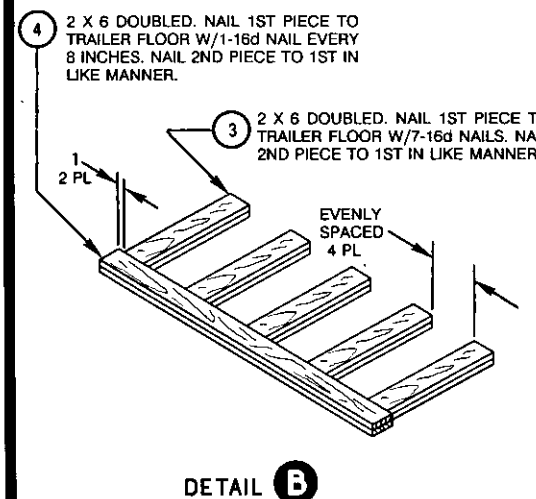

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
8	10	PROTECTOR BOARD	WOOD	2 X 6 X 75
6	9	PROTECTOR BOARD	WOOD	2 X 6 X 80
7	8	CHAIN & LOADBINDER	STEEL	
8	7	SLEEPER	WOOD	2 X 4 X 24
16	6	SLEEPER	WOOD	2 X 6 X 30
4	5	CROSSMEMBER	WOOD	2 X 6 X 82
2	4	CROSSMEMBER	DETAIL B	2 X 6 X 77
10	3	BACKUP CLEAT	DETAIL B	2 X 6 X 30
4	2	CROSSMEMBER	DETAIL A	2 X 6 X 82
20	1	BACKUP CLEAT	DETAIL A	2 X 6 X 30


LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

FTL 40 THRU 48 FT TRAILER (FLATBED)
WOOD BOXES ONLY

NOTE

ALL WOOD BOXES SHALL BE LOADED WITH THEIR AFT ENDS FORWARD.

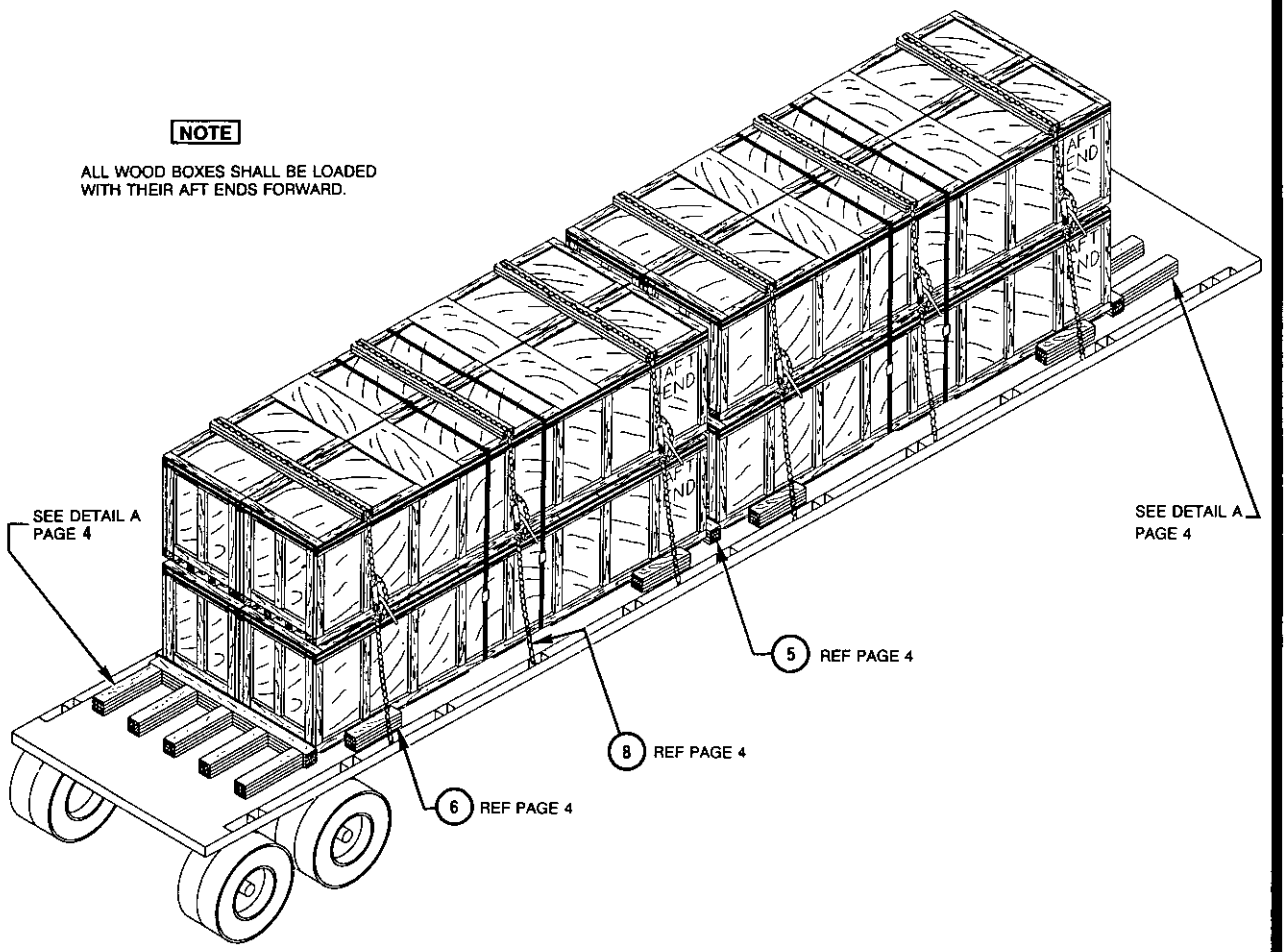

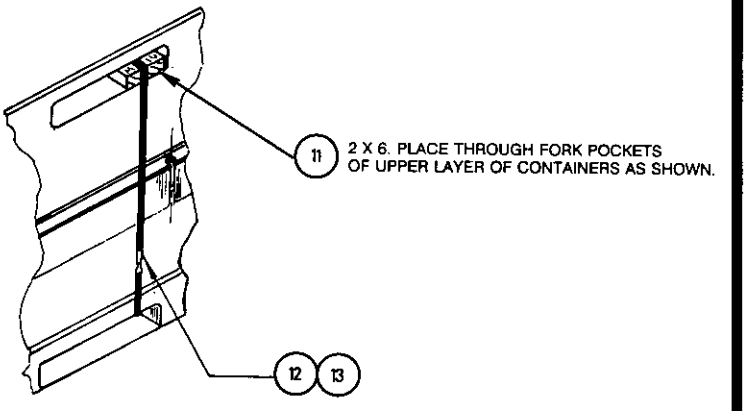


VIEW C

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	13	SEAL	VIEW C	1 1/4 SIZE
1	12	STRAP	VIEW C	1 1/4 X .035 X 20 FT
1	11	PROTECTOR BOARD	VIEW C	2 X 6 X 75


LIST OF MATERIALS PAGE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.


LTL BLOCKING VARIATIONS

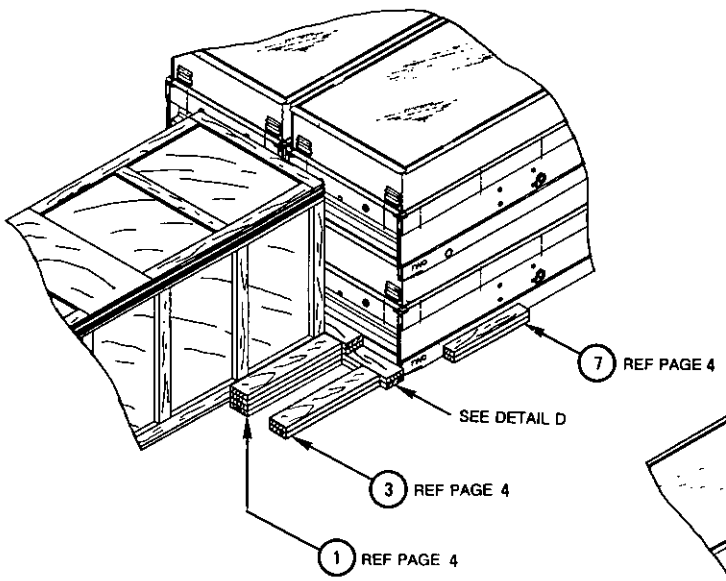


INTERFACE BLOCKING BETWEEN 2-WIDE STACK OF METAL CONTAINERS AND 1-WIDE STACK OF WOOD BOXES

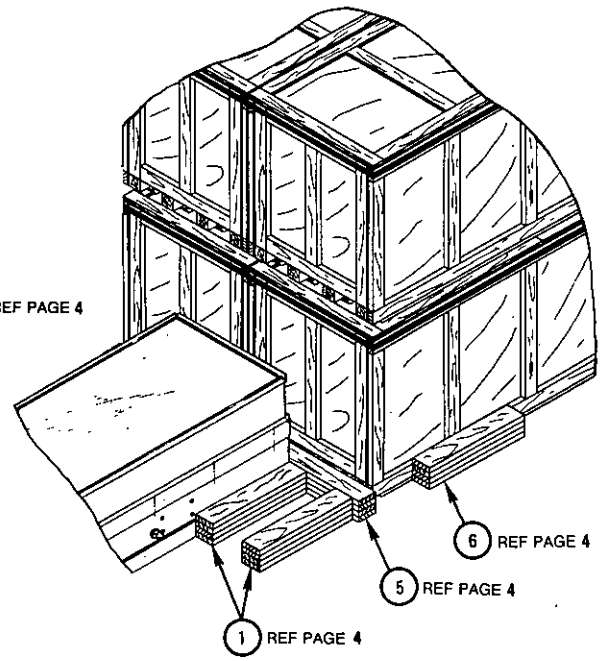


INTERFACE BLOCKING BETWEEN 2-WIDE STACK OF WOOD BOXES AND 1-WIDE STACK OF METAL CONTAINERS

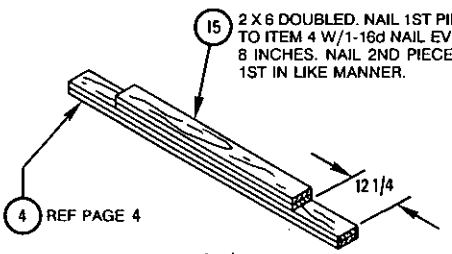

DETAIL D

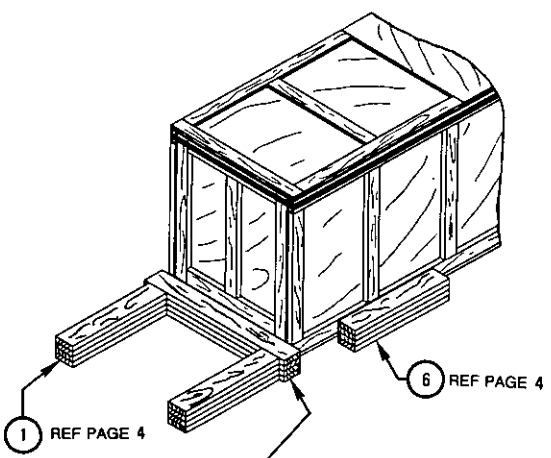

END BLOCKING FOR 1-WIDE STACK OF WOOD BOXES

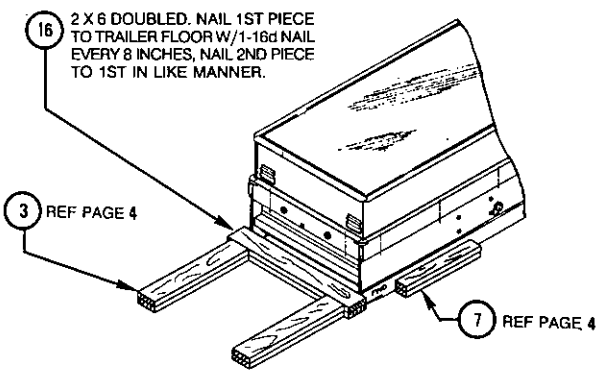

END BLOCKING FOR 1-WIDE STACK OF METAL CONTAINERS


LIST OF MATERIALS

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
AR	16	CROSSMEMBER	WOOD	2 X 6 X 40
2	15	CROSSMEMBER	DETAIL D	2 X 6 X 52 1/2
AR	14	CROSSMEMBER	WOOD	2 X 6 X 42


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE FOR BLOCK ID WOOD BOX


1. ATTACH STACKING BLOCKS TO COVER OF ONE WOOD BOX AS SHOWN IN DETAIL F AND SECTION G-G.
2. POSITION ANOTHER WOOD BOX ON TOP OF THE FIRST, MAKING SURE TO ALIGN TOP BOX ON THE STACKING BLOCKS.
3. APPLY STRAPS, ITEM 22, AS SHOWN IN DETAIL E.

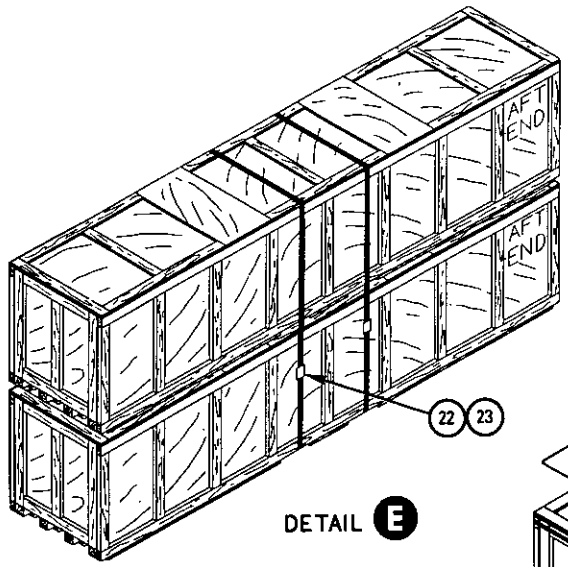

DETAIL E

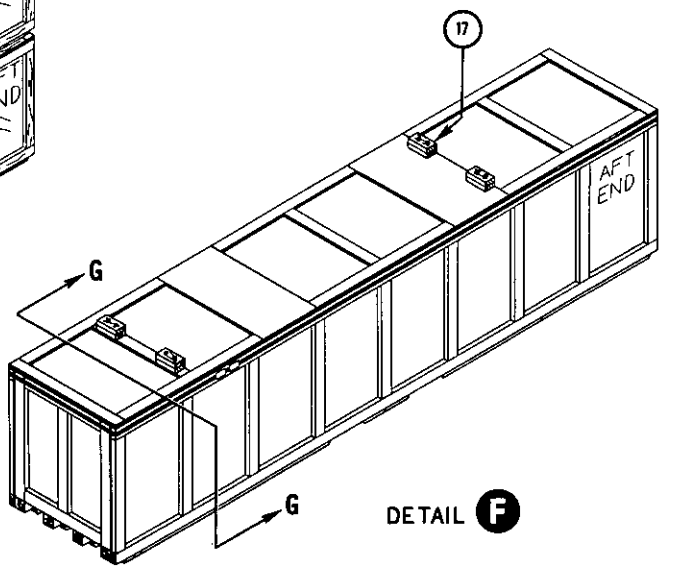

DETAIL F

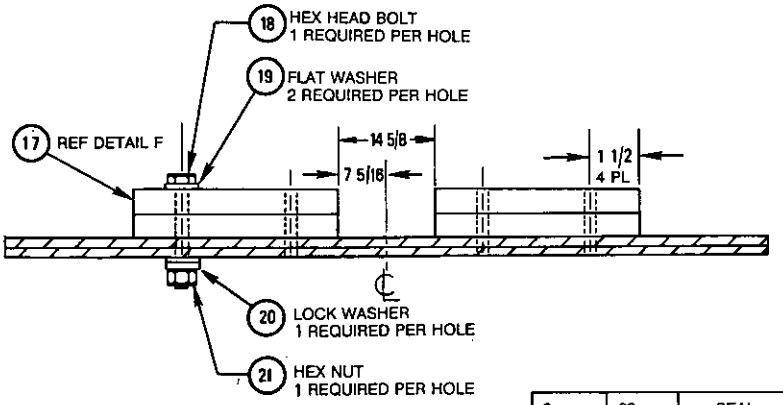

SECTION G-G

NOTE

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS TWO (2) HIGH IS AUTHORIZED FOR THE LOADING AND UNLOADING OF TRAILERS ONLY. ANY MOVEMENT OF THESE UNIT LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.


LIST OF MATERIALS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	23	SEAL	DETAIL E	1 1/4 SIZE
2	22	UNITIZING STRAP	DETAIL E	1 1/4 X .035 X 23 FT
1	21	HEX NUT	SECTION G-G	3/8" DIA
1	20	LOCK WASHER	SECTION G-G	3/8" DIA
2	19	FLAT WASHER	SECTION G-G	3/8" DIA; .625" OD MIN
1	18	HEX HEAD BOLT	SECTION G-G	3/8" DIA; 6" LONG
8	17	STACKING BLOCK	DETAIL F	2 X 4 X 6 7/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE FOR SLAM WOOD BOX


1. ATTACH STACKING BLOCKS TO COVER OF ONE WOOD BOX AS SHOWN IN SECTION J-J AND VIEW K-K.
2. POSITION ANOTHER WOOD BOX ON TOP OF THE FIRST, MAKING SURE TO ALIGN TOP BOX ON THE STACKING BLOCKS.
3. APPLY STRAPS, ITEM 22, AS SHOWN IN DETAIL H.

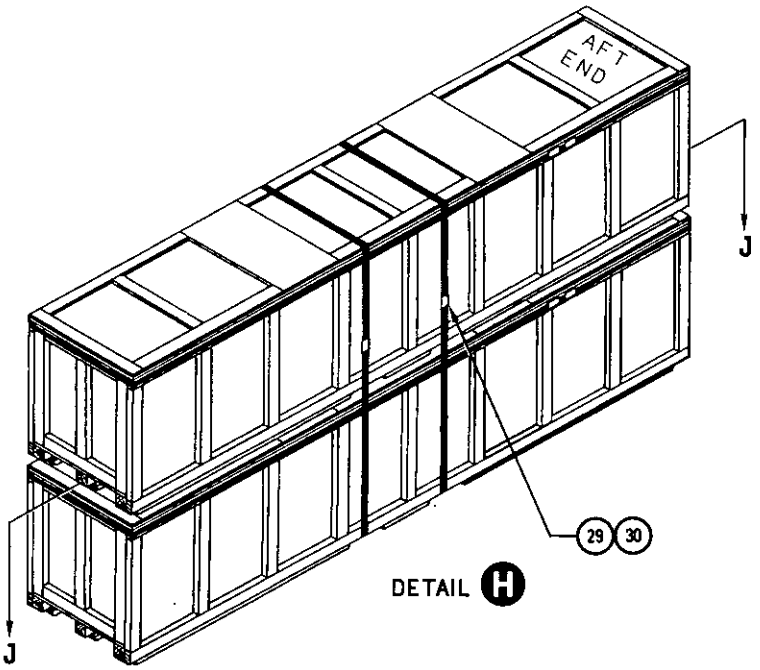


DETAIL H

NOTE

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS TWO (2) HIGH IS AUTHORIZED FOR THE LOADING AND UNLOADING OF TRAILERS ONLY. ANY MOVEMENT OF THESE UNIT LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

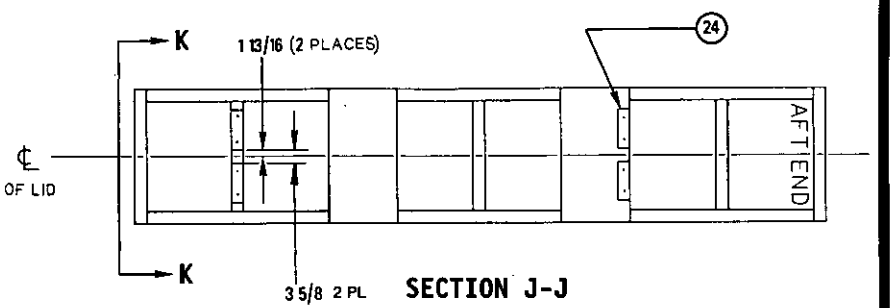

SECTION J-J

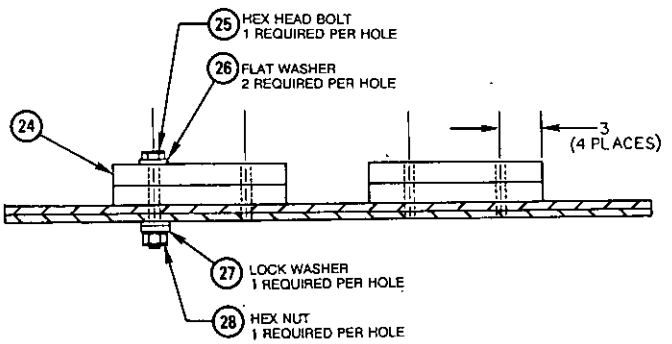



VIEW K-K

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
LIST OF MATERIALS				
2	30	SEAL	DETAIL H	1 1/4 SIZE
2	29	UNITIZING STRAP	DETAIL H	1 1/4 X .035 X 23 FT
1	28	HEX NUT	SECTION K-K	3/8" DIA
1	27	LOCK WASHER	SECTION K-K	3/8" DIA
2	26	FLAT WASHER	SECTION K-K	3/8" DIA; .625" OD MIN
1	25	HEX HEAD BOLT	SECTION J-J	3/8" DIA; 6" LONG
8	24	STACKING BLOCK	DETAIL H	2 X 4 X 11 7/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

END BLOCKING AND PROTECTOR BOARD ASSEMBLY FOR SLAM WOOD BOX AND BLOCK ID WOOD BOX IN SAME STACK

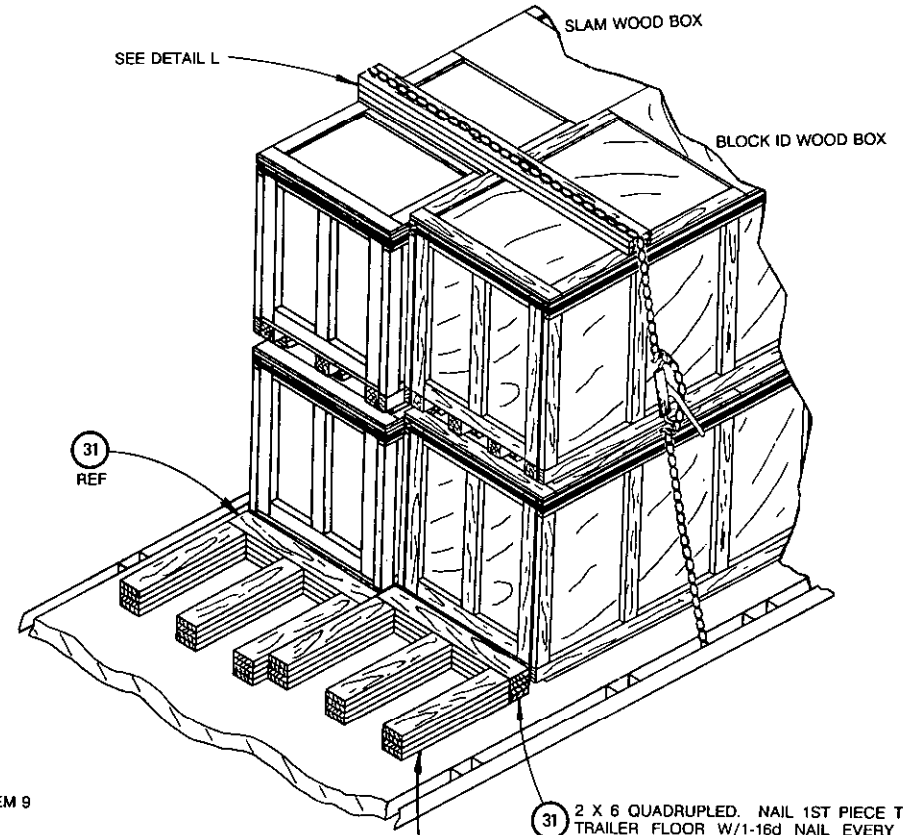

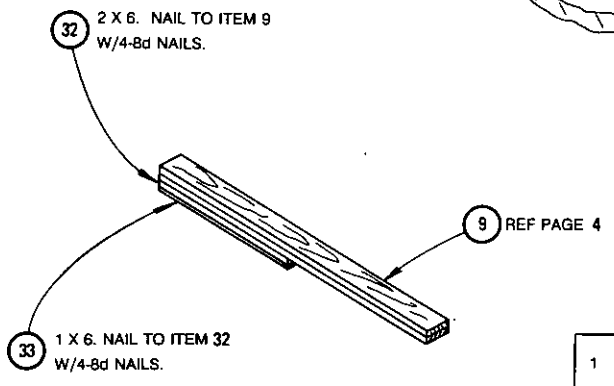

DETAIL L

NOTE

THE COMBINED THICKNESS OF ITEMS 32 AND 33 MAY BE INCREASED OR DECREASED TO ASSURE THAT THE PROTECTOR BOARDS, ITEM 9, ARE HORIZONTAL WHEN ASSEMBLY IS PUT IN PLACE.

LIST OF MATERIALS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	33	SPACER	DETAIL L	1 X 6 X 39
1	32	SPACER	DETAIL L	2 X 6 X 39
8	31	END BLOCKING	WOOD	2 X 6 X 41

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.